


Hotel Booking Agent

Summary: -


This project implements an AI-powered Hotel Booking Agent using Amazon Bedrock and other Amazon Web Services services. The system can answer queries, check room availability, and book rooms by integrating a Knowledge Base, AWS Lambda, and Amazon DynamoDB. Hotel data is stored in Amazon S3 and processed using vector search. It includes guardrails for safe interactions and a Streamlit frontend deployed on Amazon EC2, with an Application Load Balancer for scalable and reliable access. Overall, it demonstrates a complete end-to-end intelligent cloud-based booking system.

Hotel Booking Agent AWS Architecture: -

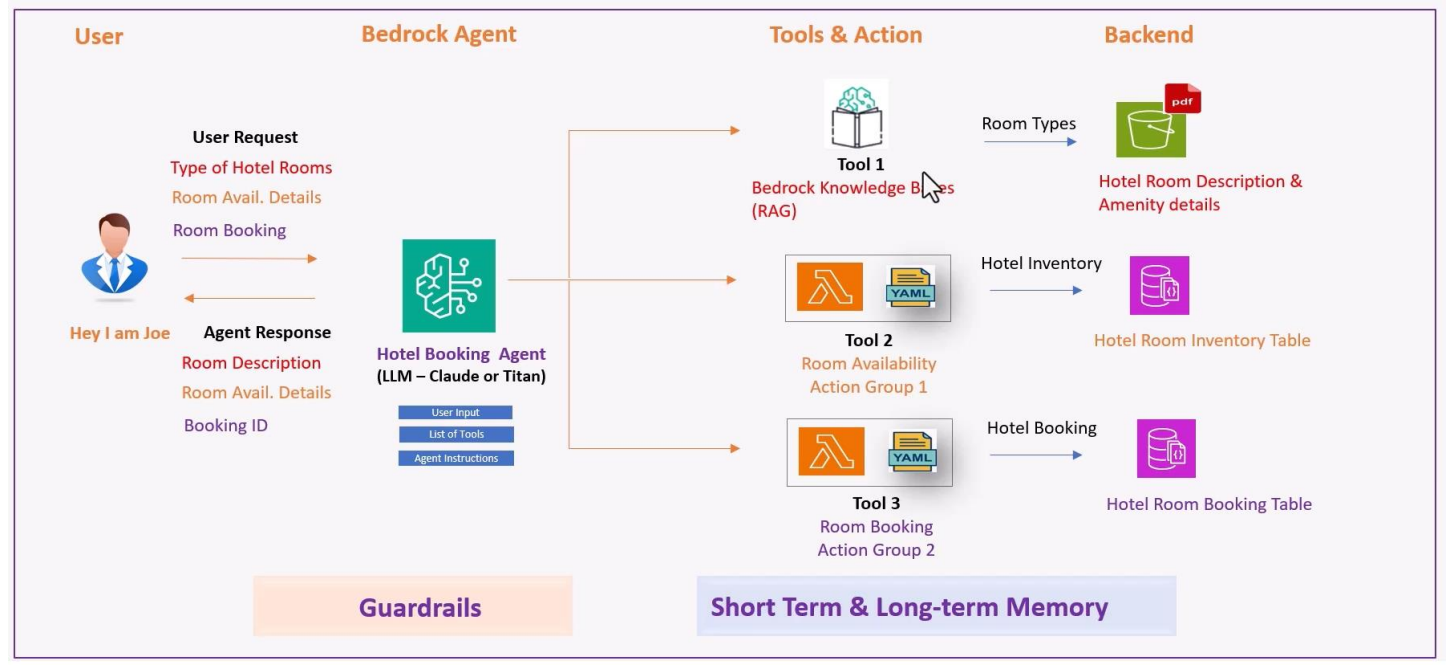

Now let's Create Our Agent: -

- Go to your AWS Console
- And search Amazon Bedrock

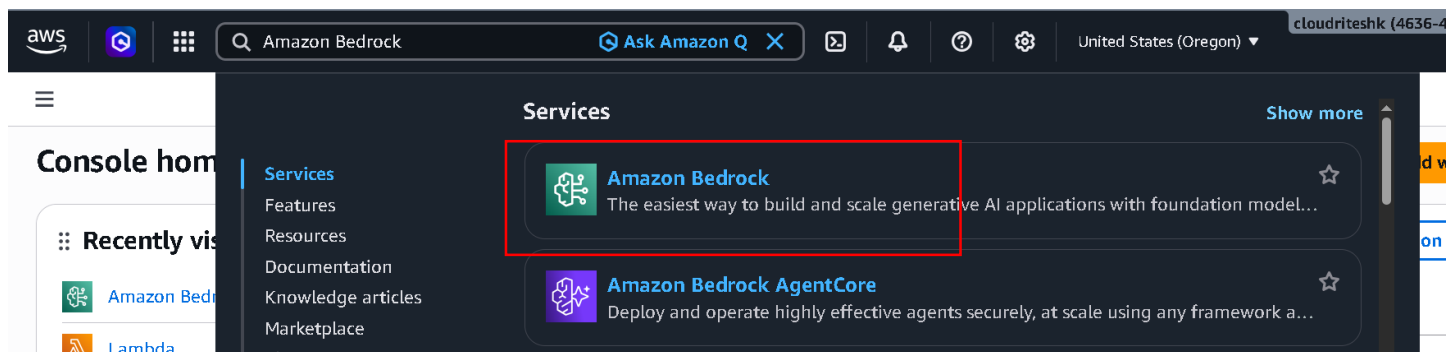

- Click on the Amazon Bedrock

Amazon Bedrock > Agents

Marketplace model deployments

▼ Build

Agents

Flows

Knowledge Bases

Automated Reasoning

Guardrails

Prompt Management

Data Automation

AgentCore

▼ Assess

Evaluations

▼ Configure and learn

Settings

Agents

▼ Overview

Prepare

Create your Agent by selecting a Foundation model, and adding Action groups. After creation you can test out the Agent in real-time and create multiple versions.

Deploy

Create and associate Aliases to deploy an Agent version in your application. Point an Alias to a specific version of your Agent to test it before deploying it to your client application.

Agents (0)

Edit Delete **Create agent**

Find Agents

- Now scroll down in navigation bar
- And click Agents under Build Section
- And now just click Create Agent.

Create agent

Name

Hotel_Room_Booking_Agent

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Description - optional

Agent to book a hotel room

The description can have up to 200 characters.

Multi-agent collaboration

[Learn more about multi-agent collaboration](#)

☐ Enable multi-agent collaboration

If you have more than one agent, multi-agent collaboration allows this agent to associate the others as agent collaborators to orchestrate responses. You can change this later.

Cancel **Create**

- Give Agent name
- And just click Create.

Agent details

Agent name

Hotel_Room_Booking_Agent

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Agent description - optional

Agent to book a hotel room

The description can have up to 200 characters.

Agent resource role

- ☒ Create and use a new service role
☐ Use an existing service role

AmazonBedrockExecutionRoleForAgents_W2A2W25POL

Select model

Select model

- Our Agent is created.
- Now click Select model.

Select model

Find available models and inference

Input Choose options

Output Choose options

☐ Bedrock Agents optimized [Learn more](#)

1. Categories

Serverless model providers

- Amazon
- Anthropic**
- Cohere
- DeepSeek
- Google
- Meta
- MiniMax

2. Models

- Claude Sonnet 4.6 v1**
Input: Text, Image
Output: Text
Max input: 1M tokens
- Claude Haiku 4.5 v1
Input: Text, Image
Output: Text
Max input: 200K tokens
- Claude Opus 4.6 v1
Input: Text, Image
Output: Text
Max input: 1M tokens
- Claude Opus 4.7 v1
Input: Text, Image

3. Inference

Inference profiles

- US Anthropic Claude Sonnet 4.6**
- Cross-region
- Global Anthropic Claude Sonnet 4.6

Cancel Apply

- Select Categories, Models and Inference
- And just click Apply.

Select model



Claude Sonnet ... v1 ⓘ
US Anthropic Claude Sonnet 4.6



Instructions for the Agent

Provide clear and specific instructions for the task the Agent will perform. You can also provide certain style and tone.

You are a hotel booking assistant for Taj Fort Aguada Resort & Spa, Goa, India
Your primary responsibilities are:

1. Greet the customer with - Welcome to Taj Fort Aguada Resort & Spa, Goa, India
2. Help customers search for room availability and inventory
3. Provide guidance on Room Type
4. Take booking details from the customer
5. Book a hotel room

Follow these guidelines when interacting with customers: - Be courteous and professional at all times - Ask for Room Type - Garden or Sea View - Provide information about Garden or Sea View from Knowledge Base - Always verify room availability before proceeding with bookings. - Validate the room inventory for Room Type from the customer check-in-date - Collect following information in below format and before booking a room and ask customer for

This instruction must have a minimum of 40 characters.

- Now give some instruction to agent means what it need to do
- This instruction is Provided in Resource.
- Now scroll down.

▼ Additional settings

Code Interpreter

Code Interpreter enables agents to handle tasks that involve writing, running, testing, and troubleshooting code in a secure environment.

- ☐ Enabled
☒ Disabled

User input

Select whether the agent can prompt additional information from the user when it does not have enough information to respond to an utterance.

- ☒ Enabled
Allow agent to ask the user clarifying questions to capture necessary inputs.
- ☐ Disabled
The selected foundation model within the Agent will make a best guess at invoking the appropriate action groups.

- Now click Additional Settings
- In which we need to enable User input.
- If we keep it disabled, then the foundation model will make the best guess on what the user intent is.

Agent builder Info

Manual

Assistant

Test

Prepare

Save

Save and exit

Agent details

Agent name

Hotel_Room_Booking_Agent

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Agent description - optional

Agent to book a hotel room

- Now scroll up
- And click save.
- After save click Prepare.
- After prepare Test.
- Now ask Question from Agent

Test Agent

Using ODT [Change](#)



hii



Welcome to Taj Fort Aguada Resort & Spa, Goa, India! 🌟

I'm delighted to assist you today. Whether you're looking to check room availability, learn about our beautiful accommodations, or make a booking, I'm here to help.

How may I assist you today? 😊



< Hide trace

Enter your message here

Trace

Session summaries

Trace (1)

Request ID 4ecc0620-2149-4a05-b03



Routing Trace


Orche

Orchestration and Knowledge


After running a prompt in the test window, to understand the linear chain of thought used knowledge base was invoked, the trace also ; were summarized to generate an observation the response.

- Our Agent is working Properly
- Now we need room Information so that we need to add Amazon Knowledge Base to our Agent.
- So before adding we need to create Amazon Knowledge Base.
- But before you are login as root user then logout.
- And login with IAM user.


- If you have not IAM account, then follow this process and create your account.
- Let's start.
- Open your AWS console in new tab.
- Then search IAM

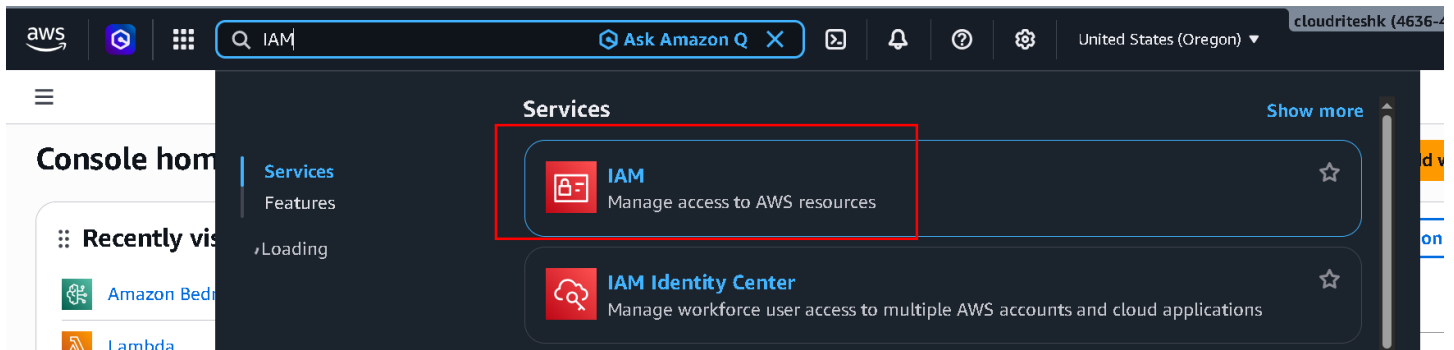

- Now click IAM.

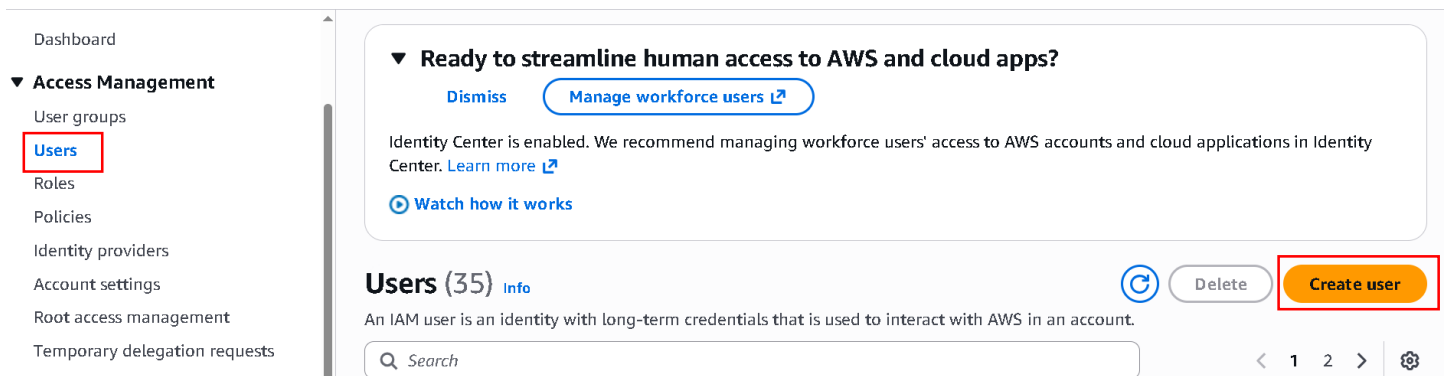

- Now click on User in left side Navigation bar.
- And then click Create User.

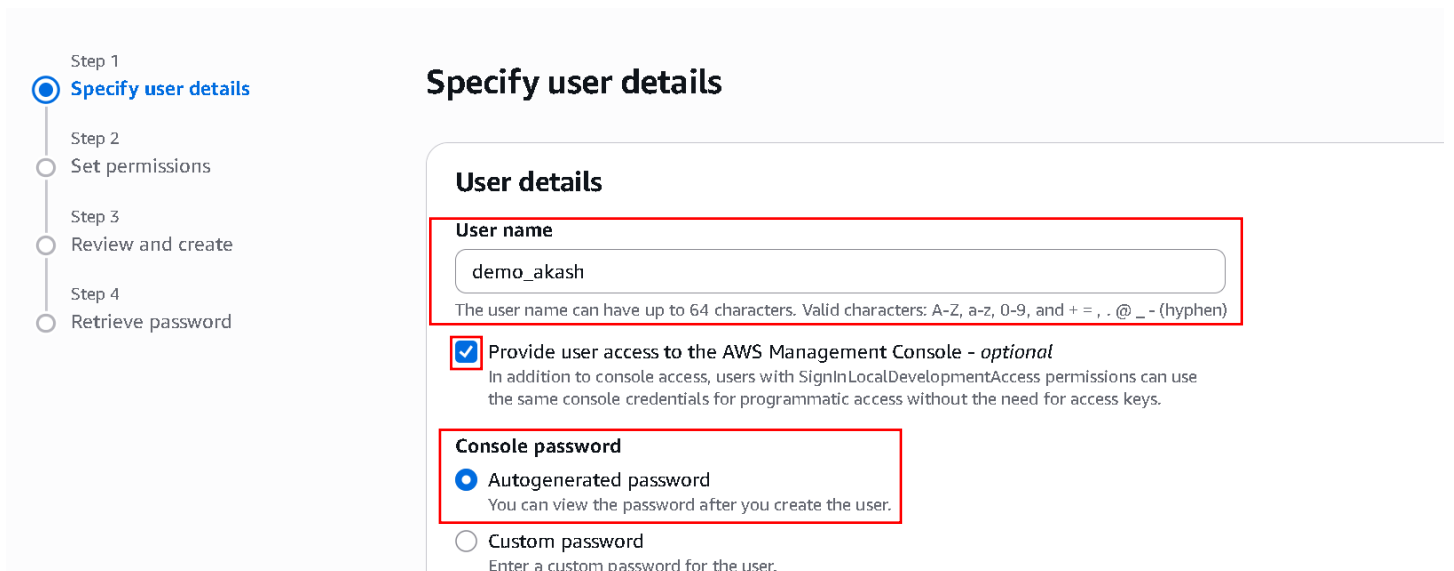

- Now give user name.
- Tick the box.
- And choose console password
 - Autogenerated password
- And now scroll down.

☒ Autogenerated password

You can view the password after you create the user.

☐ Custom password

Enter a custom password for the user.

- Must be at least 8 characters long
- Must include at least three of the following mix of character types: uppercase letters (A-Z), lowercase letters (a-z), numbers (0-9), and symbols ! @ # \$ % ^ & * () _ + - { } | ' "

☐ Show password

☒ Users must create a new password at next sign-in - Recommended

Users automatically get the [IAMUserChangePassword](#) policy to allow them to change their own password.

i If you are creating programmatic access through access keys or service-specific credentials for AWS CodeCommit or Amazon Keyspaces, you can generate them after you create this IAM user. [Learn more](#)

Cancel

Next

- Now simply click Next.

Set permissions

Add user to an existing group or create a new one. Using groups is a best-practice way to manage user's permissions by job functions.

[Learn more](#)

Permissions options

☐ Add user to group

Add user to an existing group, or create a new group. We recommend using groups to manage user permissions by job function.

☐ Copy permissions

Copy all group memberships, attached managed policies, and inline policies from an existing user.

☒ Attach policies directly

Attach a managed policy directly to a user. As a best practice, we recommend attaching policies to a group instead. Then, add the user to the appropriate group.

- Select Attach policies directly.
- Now scroll down.

Permissions policies (1/2383)



Create policy

Choose one or more policies to attach to your new user.

Filter by Type

AdministratorAccess



All types

5 matches

< 1 >



Policy name



Type



Attached entities



AdministratorAccess

AWS managed - job function

40



AdministratorAccess-A...

AWS managed

0



AdministratorAccess-A...

AWS managed

0



AWSAuditManagerAdm...

AWS managed

0



AWSManagementCons...

AWS managed - job function

0

- Now search AdministratorAccess in Permissions policies.
- Now scroll down.

► **Set permissions boundary - optional**

Cancel

Previous

Next

- Now simply click next.

Tags - optional

Tags are key-value pairs you can add to AWS resources to help identify, organize, or search for resources. Choose any tags you want to associate with this user.

No tags associated with the resource.

Add new tag

You can add up to 50 more tags.

Cancel

Previous

Create user

- Now Review and scroll down and click Create user.

Retrieve password

You can view and download the user's password below or email users instructions for signing in to the AWS Management Console. This is the only time you can view and download this password.

Console sign-in details

Email sign-in instructions ↗

Console sign-in URL

🔗 <https://463646775279.signin.aws.amazon.com/console>

User name

🔗 demo_akash

Console password

🔗 ***** [Show](#)

Cancel

Download .csv file

Return to users list

- Our IAM user is created now copy these 3 things.
- Now logout from root user.
- Open copied URL in browser
- Now paste copied user name and password.
- Now create your new password.
- And login with username and new password.
- Now let's go and create or Amazon Knowledge Base.
- Now Before creating Amazon Knowledge Base we need S3 Bucket where we store Hotel information.
- So Let's create S3 Bucket.

- Go and search S3 in console and open it.

 Amazon S3

Buckets

[General purpose buckets](#) All AWS Regions [Directory buckets](#)

General purpose buckets (137) [Info](#)

  Copy ARN  Empty  

Buckets are containers for data stored in S3.

< 1 2 > 

- Now click create.

Bucket name [Info](#)

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.



Format: s3://bucket/prefix

- Give your Bucket name and leave everything as default.
- Scroll Down.

► Advanced settings

 After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

[Cancel](#) 

- Now click create Bucket.
- Our Bucket is ready we need to upload our Room information in it

s3hotel-room-info [Info](#)

Objects

Metadata

Properties

Permissions

Metrics

Management

File systems

Objects (0)



Copy S3 URI

Copy URL

Download

Open ↗

Delete

Actions ▼

Upload

- Simply click on upload

Upload [Info](#)

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

Files and folders (0)

All files and folders in this table will be uploaded.

Remove

Add files

Add folder

- Now click Add files.
- And add the Pdf document about room information upload it.

settings, tags, and more.

Cancel

Upload

- Now just click Upload.
- Our information is uploaded.
- Now we go to create our Amazon Knowledge Base.
- Open AWS console in new tab and Go inside Amazon Bedrock.

▼ Build

Agents

Flows

Knowledge Bases

Automated Reasoning

Guardrails

Prompt Management

Data Automation

Knowledge Bases

Edit

Delete

Test Knowledge Base

Evaluate

Create ▼

You can create a Knowledge Base with a structured or unstructured data store, or with Kendra GenAI index.

Find Knowledge Base

< 1 > ⚙

- Now Scroll down in search bar and click Knowledge Base in build Section.
- And then simply click Create.

EditDeleteTest Knowledge BaseEvaluateCreate ▲

ctured or unstructured data store, or with Kendra GenAI in

Unstructured data

Knowledge Base with vector store

Kendra GenAI Index

Structured data

Structured data store

Type ▼ | Data so... ▼ | Descrip... ▼ |

No Knowledge Base

No Knowledge Base to display

Create ▼

- Now choose Knowledge Base with vector store.

Provide Knowledge Base details

Knowledge Base details

Knowledge Base name

Roominformation

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 50 characters.

- Give name to your Knowledge Base.
- leave Everything as default and scroll down.

Choose data source type

Select the data source type that you want to configure in the next step. You may add additional data sources once your Knowledge Base is created.

 Amazon S3

Object storage service that stores data as objects within general purpose buckets. Add up to 5 buckets as data sources.

- Choose Data source type Amazon S3.
- And scroll Down.

Log deliveries - Application logs - *optional*

Configure log delivery to multiple destinations.

Add ▼

You can configure up to 3 log deliveries.

Cancel

Next

- Now just click Next.

▼ Data source: demo

Delete

Data source name

demo

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Data source location

- ☒ This AWS account
- ☐ Other AWS account

S3 URI [Info](#)

Enter the S3 bucket location containing your source files. To enhance search relevance and filtering capabilities, you can include metadata by adding a .metadata.json file for each source file.

🔍 s3://bucket-name/prefix/object

View ↗

Browse S3

- Give Data source name optional (by Default given).
- And now click Browse S3
- Here we need our created S3 Bucket.

Choose an archive in S3



S3 buckets

Buckets (1/1)



🔍 Find S3 bucket

< 1 >

Name



Creation date



s3hotel-room-info

2026-04-22T10:18:56.000Z

Cancel

Choose

- Select your Created S3 Bucket.

- And then simply click Choose.
- Now simply Scroll Down and Leave Everything as default.

► **Transformation function** - *optional*

► **Advanced settings** - *optional*

Cancel

Previous

Next

- Now simply click Next.

Configure data storage and processing

Choose an embeddings model to convert the data that you will provide in the next step, and provide details for a vector data store in which Bedrock can store, manage, and update your embeddings. The embeddings model and vector store cannot be changed after creation of Knowledge Base.

Embeddings model

Select an embeddings model to convert your data into an embedding. Your selection may limit vector stores and embedding types that are available. Pricing depends on the model. [Learn more](#)

Select model

- Now simply Click Select Model.

Select model



Find available models and inference

1. Categories

Serverless model providers

Amazon

Cohere

2. Models

Titan Embeddings G1 - Text v1.2
Embedding model | 8k tokens

Titan Text Embeddings V2 v2.0
Embedding model | 8k tokens

3. Inference

On demand

On-demand

Cancel

Apply

- Now choose Model Provider, Models, Inference.
- And then click Apply.
- Now simply scroll down.

Vector store [Info](#)

Let Amazon create a vector store on your behalf or select a previously created store to allow Bedrock to store, update and manage embeddings. You will be billed directly from the vector store provider. [Learn more](#) 

Vector store creation method

- ☒ **Quick create a new vector store - Recommended**
A vector store will be created on your behalf in this AWS account during Knowledge Base creation.

- ☐ **Use an existing vector store**
Connect to an existing vector store to store, update, and manage embeddings.

Vector store type - new [Info](#)

A vector store holds the vector embeddings representation of your data. This choice cannot be changed later. Not all vector stores support binary vector embeddings.

-  **Amazon OpenSearch Serverless**
Select to optimize and provide contextually relevant responses across billions of vectors in millise... 

- And choose Vector Store type as Amazon OpenSearch Serverless.
- And simply scroll Down.

-  **Amazon OpenSearch Serverless**
Select to optimize and provide contextually relevant responses across billions of vectors in millise... 

► Additional configurations

Cancel

Previous

Next

- Now just click Next.

Multimodal storage destination

S3 URI
-

Cancel

Previous

Create Knowledge Base

- And in Review and Create check Everything.
- And simply scroll down to End.
- And click Create Knowledge Base.

Data source (1)

Sync

Stop sync

Add

Add documents from S3

Data sources contain information returned when querying a Knowledge Base.

<

1

>

☒	Data so...	Status	Data sour...	Account ID	Source Link	Last sync ...	Last sync ...	Text ch
☒	demo	Available	S3	46364677...	s3://s3hot...	-	-	Default

- Our Knowledge Base is Created Now Simply scroll down.
- And in Data Source Section Tick your Data source.
- And click Sync so all uploaded data in s3 is Sync in data Source.
- It takes time depend on your data.
- And when Synced is completed then Scroll up.

Roominformation-KB

Test Knowledge Base

Delete

Knowledge Base overview

Edit

Knowledge Base name

Roominformation-KB

Knowledge Base ID

O5YW3ZQ5WC

Knowledge Base description

Tool for Hotel Room Agent

Status

Available

Service role

AmazonBedrockExecutionRoleForKnowledgeBase_8kuzl

Created date

April 22, 2026, 16:38 (UTC+05:30)

Log Deliveries

Configure log deliveries and event logs in the Edit page.

Retrieval-Augmented Generation (RAG) type

Vector store

- Now Just click Test Knowledge Base

Retrieval and response generation

Retrieval only: data sources

Query and retrieve information from data sources in a single Knowledge Base.

Retrieval and response generation: data sources and model

Query the data sources and generate responses based on the retrieved results by using the specified foundation model.

Model

Select model

- Now just click Select Model.

- Its properly working.
- Now close this and go back to your Knowledge Base.

Roominformation-KB

Test Knowledge Base

Delete

Knowledge Base overview

Edit

Knowledge Base name
Roominformation-KB

Knowledge Base ID
O5YW3ZQ5WC

Knowledge Base description
Tool for Hotel Room Agent

Status
Available

Service role
AmazonBedrockExecutionRoleForKnowledgeBase_8k
uzl

Created date
April 22, 2026, 16:38 (UTC+05:30)

Log Deliveries
Configure log deliveries and event logs in the Edit page.

Retrieval-Augmented Generation (RAG) type
Vector store

- Now just copy the Knowledge Base Id
- Now go back to your Agent tab.

Knowledge Bases (0) Info

Delete

Add

Find Knowledge Base

< 1 > ⚙

Name



State



Instruction

No Knowledge Base

No Knowledge Base to display

Add

- Now scroll down and in Knowledge Base Section Click ADD.

Add knowledge base

Knowledge Base: Roominformation-KB

[Clear](#)

Select Knowledge Base

Select a previously created Knowledge Base or create a new one by visiting Knowledge Base. [Learn more about](#)

[Knowledge Bases.](#)

Roominformation-KB



Knowledge Base instructions for Agent

Specify instructions based on the design and type of information of the Knowledge Base. This will impact how the Knowledge Base interacts with the agent.

As an Agent route any Question by the user related to room type, amenities, room description, hotel location to the Knowledge Bases.

The instruction can have up to 200 characters.

[Cancel](#)[Add](#)

- Select your Created Knowledge Base.
- And then Give Instruction and simply click ADD.

[Amazon Bedrock](#) > [Agents](#) > [Agent Details](#) > [Agent builder](#)

Agent builder [Info](#)

[Manual](#)[Assistant](#)[Test](#)[Prepare](#)[Save](#)[Save and exit](#)

Agent details

Agent name

Hotel_Room_Booking_Agent

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Agent description - optional

Agent to book a hotel room

- Our Knowledge Base is added.
- Now Save it.
- Then after save click Prepare.
- Then click Test.
- Now ask Some Question related to hotel.

Test Agent

Using ODT [Change](#)



What are my dinning Option at Taj?




Welcome to Taj Fort Aguada Resort & Spa, Goa!

Here's a summary of the ****dining options**** available at Taj Fort Aguada: --- ### 📄

Restaurants 1. ****Morisco**** – A seafood specialty restaurant offering: - Authentic Goan Thali experience for lunch - Expansive Goan & Continental à la carte menu by night - Features an interactive kitchen overlooking the Candolim Beach, Calangute beach stretch 2

Enter your message here

- So you see it's Properly working.
- Now Let's say the user want to book a hotel room for a particular date and he wants to know the availability details
- So for this we need to create a lambda function and Open API Schema.
- When the user sends the request then it receives by the lambda function and it's going to retrieve the data from the hotel room inventory table that we have to create in DynamoDB.
- So fist we create DynamoDB
- Open AWS console in new tab.
- And search DynamoDB

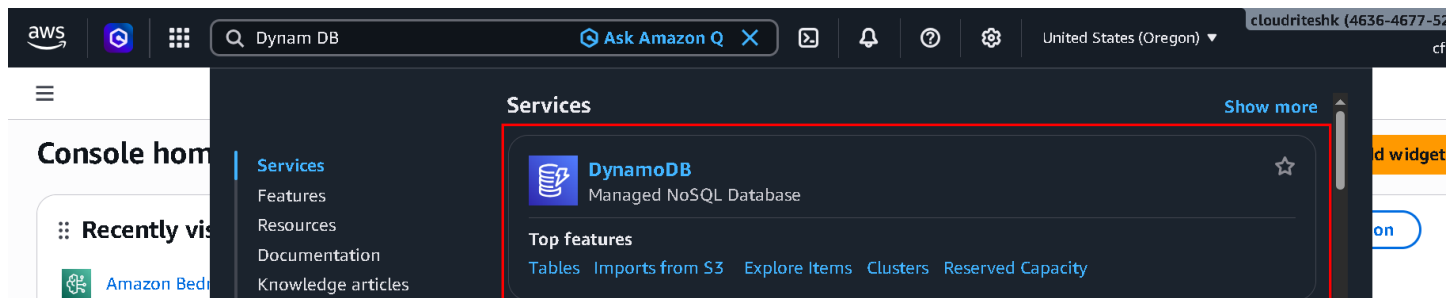

- Click on that DynamoDB

Amazon DynamoDB

A fast and flexible NoSQL database service for any scale

DynamoDB is a fully managed, key-value, and document database that delivers single-digit-millisecond performance at any scale.

Get started

Create a new table to start exploring DynamoDB.

Create table

- Now in Right Side Navigation Click Create Table.

Table details [Info](#)

DynamoDB is a schemaless database that requires only a table name and a primary key when you create the table.

Table name

This will be used to identify your table.

hotelRoomAvailabilityTable

Between 3 and 255 characters, containing only letters, numbers, underscores (_), hyphens (-), and periods (.).

Partition key

The partition key is part of the table's primary key. It is a hash value that is used to retrieve items from your table and allocate data across hosts for scalability and availability.

date

String

1 to 255 characters and case sensitive.

- Enter table name.
- Partition Key date.

No tags are associated with the resource.

Add new tag

You can add 50 more tags.

Cancel

Create table

- Now click Create table.
- Our table is created.

General information

Get live item count

Partition key

date (String)

Sort key

-

Capacity mode

On-demand

Table status

Active

Alarms

No active alarms

Point-in-time recovery (PITR)

Off

Item count

0

Table size

0 bytes

- Now Click Explore table items.

Table: hotelRoomAvailavilityTable - Items returned (0)

Actions

Create item

Scan started on April 22, 2026, 17:48:43

< 1 >

date (String)

No items

- Now scroll down and click Create item

Attributes

Add new attribute

Attribute name

Value

Type

Remove

date - Partition key

2025-12-25

String

sea view

0

String

Remove

Garden view

d

String

Remove

Cancel

Create item

- Now Add attribute and click create item

Table: hotelRoomAvailavilityTable - Items returned (1)

Actions

Create item

Scan started on April 22, 2026, 17:55:58

< 1 >

date (String)

Garden view

sea view

2025-12-25

0

0

- Our first item is created.
- Now open this for simplicity to create others.

Edit item

Form

JSON view

You can add, remove, or edit the attributes of an item. You can nest attributes inside other attributes up to 32 levels deep. [Learn more](#)

✓ Copied

Copy

Attributes

☒ View DynamoDB JSON

```
1 {
2   "date": {
3     "S": "2025-12-25"
4   },
5   "Garden view": {
6     "S": "0"
7   },
8   "sea view": {
9     "S": "0"
```

- Now simply click on Jason and Copy it so it's become easy in other item creation.
- Now go back and click create item then in Jason paste and change date done.
- Create 4-5 entries.

Table: hotelRoomAvailavilityTable - Items returned (5)



Actions

Create item

Scan started on April 24, 2026, 14:00:08

< 1 > ⚙

☐	date (String)	Garden view	sea view
☐	2025-12-25	0	0
☐	2025-12-31	10	6
☐	2025-12-24	2	6
☐	2025-12-29	20	10
☐	2025-12-28	12	5

- Now 5 Entries is Added.
- Now we focus on Lambda Creation for this task.
- Open Aws console in new tab.
- And search Lambda Function and open it.

AWS Lambda

Run code without managing servers.

Focus on your application, not your infrastructure. Lambda automatically provisions, scales, and monitors while you build.

Get started

Bring your own code, or choose a ready-to-deploy example.

Create a function

- Now just click Create a function.

Basic information

Function name

Enter a name that describes the purpose of your function.

hotelRoomAvailability function

Function name must be 1 to 64 characters, must be unique to the Region, and can't include spaces. Valid characters are a-z, A-Z, 0-9, hyphens (-), and underscores (_).

Runtime [Info](#)

Choose the language to use to write your function. Note that the console code editor supports only Node.js, Python, and Ruby.

Python 3.13

- Give Function Name.
- And choose Runtime as Python 3.13
- And Leave Everything Default.
- Now scroll down.

► Additional settings

Customize your function architecture, execution role, HTTP(S) endpoints, tenant isolation mode, VPC, code signing, KMS key, and tags.

✕ Cannot add or remove after creation

Cancel

Create function

- Now just click Create Function.

Code

Test

Monitor

Configuration

Aliases

Versions

Configuration

General configuration

Triggers

Permissions

Destinations

General configuration [Info](#)

Edit

Description

-

Memory

128 MB

Ephemeral storage

512 MB

Timeout

0 min 3 sec

SnapStart [Info](#)

None

Timeout

1

min

3

sec

Execution role

To access other AWS services and resources your function needs an IAM role. Choose a role with the right permissions for your function.

hotelRoomAvailabilityFunction-role-...



Create new role

[View role details in IAM](#)

Cancel

Save

- Now simply scroll down and increase time from 3sec to 1min 3sec and click Save.

Code Test Monitor **Configuration** Aliases Versions

Configuration

General configuration

Triggers

Permissions

Destinations

Function URL

Execution role

Role name
[hotelRoomAvailabilityFunction-role-iamxghra](#)

Resource summary

To view the resources and actions that your function has permission to access, choose a service.

Amazon CloudWatch Logs
 3 actions, 2 resources

- Now go inside Permission (by click on Left Navigation bar).
- In Permission click Role name.

Permissions Trust relationships Tags Last Accessed Revoke sessions

Permissions policies (1) Info

You can attach up to 10 managed policies.

Search Filter by Type All types

☐	Policy name	Type	Attached e...
☐	AWSLambdaBasicExecutionRole-9b27aee9-...	Customer managed	1

Buttons: Add permissions, Attach policies, Create inline policy

- Now you see this lambda function has only basic Permission to write to CloudWatch logs.
- Now this Lambda Function will also interact with the Agent, Access the DynamoDB tables so it needs all those Permissions.
- So simply Click Add permissions.
- And Click Attach Policies.

Filter by type


Search AdministratorAccess All types 5 matches

☐	Policy name	Type	Description
☒	AdministratorAccess	AWS managed - job function	Provides full access to AWS services an...
☐	AdministratorAccess-Amplify	AWS managed	Grants account administrative permissi...
☐	AWSAuditManagerAdminist...	AWS managed	Provides administrative access to enab...
☐	AWSManagementConsoleA...	AWS managed - job function	Provides full access to configure and c...

Buttons: Cancel, Add permissions

- Now just give Admin Access.
- Probably in Production environment you should not do this.
- You should give some granular access but for now we give AdministratorAccess.
- Now just scroll down.

- Now just click Add Permission.
- Permission is added now go back to Lambda function tab.

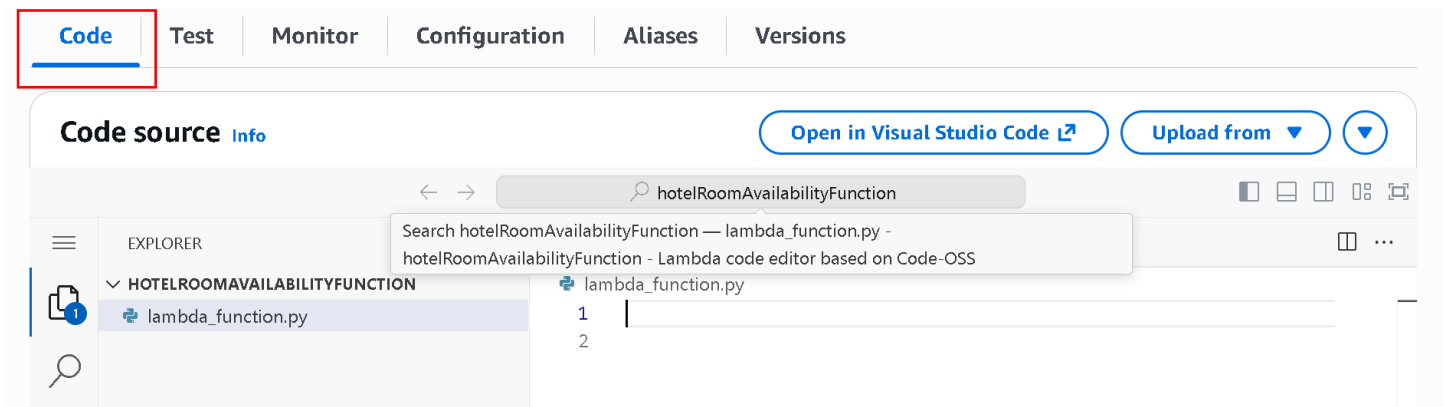

- Now go inside code Section
- Here we write some python code so that our lambda function will do is it will receive the date as input or event.
- And then do some processing and retrieve the inventory information from the DynamoDB table.
- Now we write Lambda Function
- So the code is this: -

```
#1 imports
import json
import boto3

#2 Create a client connection -
https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/dynamodb.html
client = boto3.client('dynamodb')

def lambda_handler(event, context):

#3 Store the user input - date to check room availability
    print(f"The user input is {event}")
    user_input_date = event['parameters'][0]['value']

#4 Reference the dynamodb table and retrieve data -
https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/dynamodb/client/get\_item.html
    response = client.get_item (TableName='hotelRoomAvailabilityTable', Key={'date': {'S':
user_input_date}})
    #print(response)
    room_inventory_data = response['Item']
    print(room_inventory_data)

#5 Format the response as per the requirement of Bedrock Agent Action Group -
https://docs.aws.amazon.com/bedrock/latest/userguide/agents-lambda.html
    agent = event['agent']
    actionGroup = event['actionGroup']
    api_path = event['apiPath']
    # get parameters
    get_parameters = event.get('parameters', [])
```

```

response_body = {
    'application/json': {
        'body': json.dumps(room_inventory_data)
    }
}

print(f"The response to agent is {response_body}")

action_response = {
    'actionGroup': event['actionGroup'],
    'apiPath': event['apiPath'],
    'httpMethod': event['httpMethod'],
    'statusCode': 200,
    'responseBody': response_body
}

session_attributes = event['sessionAttributes']
prompt_session_attributes = event['promptSessionAttributes']

api_response = {
    'messageVersion': '1.0',
    'response': action_response,
    'sessionAttributes': session_attributes,
    'promptSessionAttributes': prompt_session_attributes
}

return api_response
print(f"The final response is {api_response}")

```

- Now simply Deploy it.
- And our Room Availability Lambda Function is ready.
- Now we create openAPI Schema and integrate with our Agent.
- Go back to your Agent tab.
- And simply scroll down.

Action groups (0) [Info](#)

[Delete](#)[Add](#)< 1 > 

Name ▼

Description

State 

Last updated ▼

No action groups

No actions group to display

[Add](#)

- Now simply scroll down and click ADD inside Action Group Section.

Create Action group

Action group details

Enter Action group name**Description - optional**

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). This description can have up to 200 characters.

- Enter action group name.
- And scroll down.

Action group type

Select what type of action group to create

☐ Define with function details
Specify functions and define parameters as JSON objects that will be associated to the action group invocation.

☒ Define with API schemas
Specify a Lambda or API Gateway and define a schema to specify the APIs that the agent can invoke to carry out its tasks.

- Choose Action group type as Define with API schemas.
- Scroll down.

Action group invocation

Specify a Lambda function that will be invoked based on the action group identified by the Foundation model during orchestration.

Select how to define the Lambda function

☐ Quick create a new Lambda function - *recommended*
An Amazon Lambda function will be created in your account on your behalf. No further configurations are necessary.

☒ Select an existing Lambda function
Use an existing Lambda function for this action group.

☐ Return control
Agent responses in the test window will prompt the user for function details to generate a response. No further configurations are necessary.

- Choose Action group invocation as select an existing Lambda function.
- Now scroll down.

Select Lambda function

Select a previously created Lambda function or visit [AWS Lambda](#) to create a new function.

hotelRoomAvailabilityFunction ▼

Function version

\$LATEST ▼

[View](#)



- Now choose your created Lambda function.

Action group schema

Select an existing schema or create a new one via the in-line editor to define the APIs that the agent can invoke to carry out its tasks.

☐ Select an existing API schema
Select from an existing S3 or define a schema

☒ Define via in-line schema editor
Use provided sample code or import and edit from S3

In-line OpenAPI schema

Import schema

Reset ↺

YAML ▼

```
1  openapi: 3.0.0
2  info:
3    title: Hotel Room Inventory API
4    version: 1.0.0
```


- Now in Action Group Schema choose Define via in-line schema.
- And remove already written YAML code and Replace with it.

```
openapi: 3.0.0
info:
  title: Hotel Room Inventory API
  version: 1.0.0
  description: API for checking hotel room inventory


paths:
  /getRoomInventory/{date}:
    get:
      summary: Get overall hotel room inventory summary
      description: Returns summary of all room types and their availability
      operationId: getInventorySummary
      parameters:
        - name: date
          in: path
          description: date of booking
          required: true
          schema:
            type: string
      responses:
        "200":
          description: Room Inventory details
          content:
            application/json:
              schema:
                type: Object
```

```
properties:
  gardenViewInventory:
    type: integer
    description: Garden view inventory
  seaViewInventory:
    type: integer
    description: Sea view inventory
```

- Now scroll down.

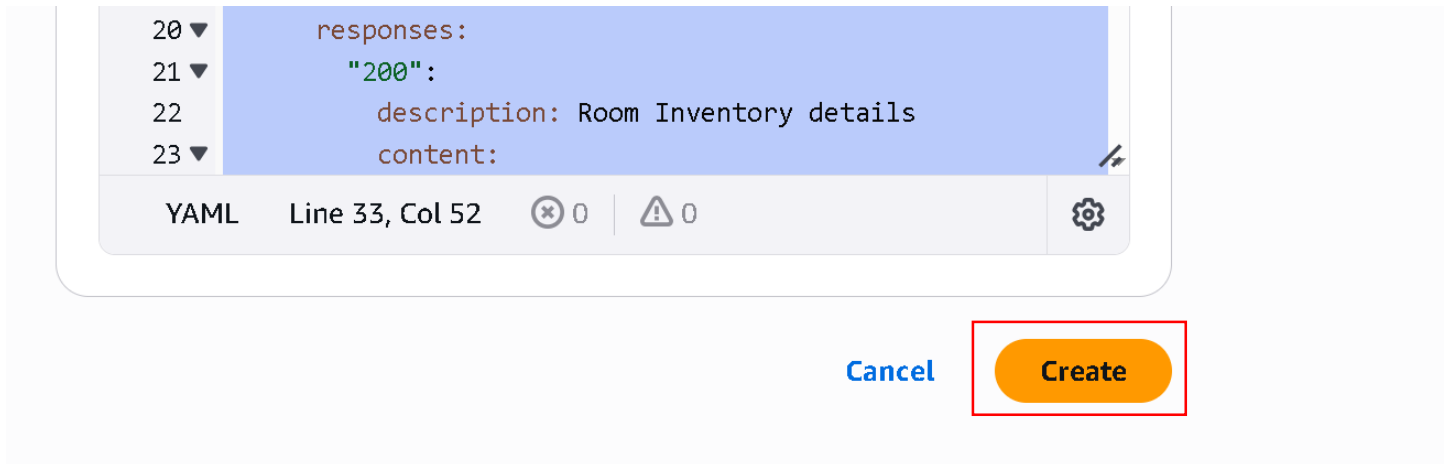

- Now simply click Create
- Our Action Group is created.
- Now go to your Lambda Function and Add Some Permission.

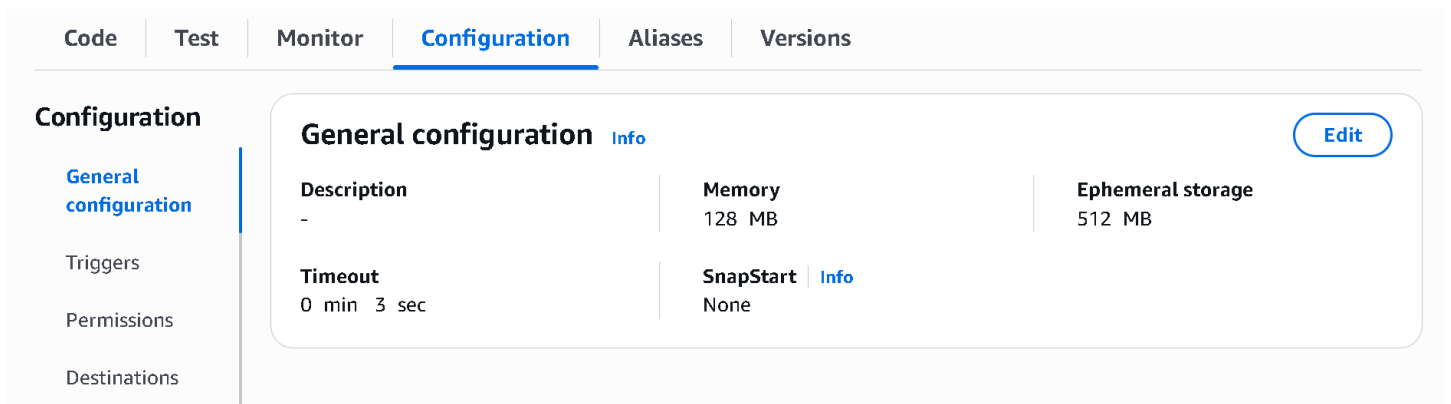

- Go inside configuration.
- And scroll down.

Resource-based policy statements [Info](#)

[View policy](#)[Edit](#)[Delete](#)[Add permissions](#)

Resource-based policies grant other AWS accounts and services permissions to access your Lambda resources.

[<](#) 1 [>](#)

Statement ID ▼

Principal ▲

PrincipalOrgID ▼

Conditions

Ac

No policy statements

[Add permissions](#)

- Click on ADD permission.

Edit policy statement

☐ AWS account

Grant permissions to another AWS account, user, or role.

☒ AWS service

Grant permissions to another AWS service.

☐ Function URL

Grant permissions to invoke your function through the function URL.

Service

The AWS service to grant permissions to.

- Choose Edit policy statement as AWS service.
- Now in service Select Other.
- Scroll down.

Statement ID

Enter a unique statement ID to differentiate this statement within the policy.

Principal

The service principal for this AWS service. [Learn more](#) [↗](#)

Source ARN

The ARN for a resource. Find the ARN in the related service console.

Action

Choose an action to allow.

- Statement ID like you want.
- Principle as bedrock. amazonaws.com
- Now For Source ARN go to your Agent tab and Click SaveAndExit.

Agent overview

Name

Hotel_Room_Boking_Agent

ID

EYBHGEJQJS

Description

Agent to book a hotel room

Status

✔ PREPARED

Creation date

April 23, 2026, 10:24 (UTC+05:30)

Last prepared

April 23, 2026, 11:17 (UTC+05:30)

Permissions

[arn:aws:iam::463646775279:role/service-role/AmazonBedrockExecutionRoleForAgents_BTDFJRDMGSL](#)

Agent ARN

arn:aws:bedrock:us-west-2:463646775279:agent/EYBHGEJQJS

- Then in Agent Overview Copy Agent ARN
- And go to Lambda tab and paste in Source ARN.
- Now In Action choose lambda: InvokeFunction.
- And simply scroll down.
- And click Save.
- Now permission saved.
- Got back to Agent and test it.

Hotel_Room_Boking_Agent

Create Alias

Test

Edit in Agent Builder

Agent overview

Name

Hotel_Room_Boking_Agent

ID

EYBHGEJQJS

Description

Agent to book a hotel room

Status

✔ PREPARED

Creation date

April 23, 2026, 10:24 (UTC+05:30)

Last prepared

April 23, 2026, 11:17 (UTC+05:30)

- Now click Test.

Test Agent

Using ODT [Change](#)



please provide me availability for both room garden and sea on 2025-12-24



Here is the ****Room Availability for December 24, 2025****: | Room Type | Available Rooms | |---|-----| | 🌿 ****Garden View**** | 2 Rooms | | 🌊 ****Sea View**** | 6 Rooms | [\[1\]](#) ****Garden View Room**** Located on the ground floor of the east wing of the main building,

Enter your message here

[Trace](#)

Trace (1)

Request ID 3



Rou

Orchestrat

After running a understand the knowledge base were summarized the response.

- It's properly working.
- You see I ask Question check Availability on 2025-12-24
- It provides result from DynamoDB Garden view 2 rooms and see View 6 Rooms.
- Now we work on how the user Books the room
- For this we create an action group when user try to book it checks availability from Hotel Room Inventory(DynamoDB) and if available then it generates the booking ID and store along with user details in Hotel Room Booking table(DynamoDB).
- If not available, it simply returns user Room Not available for that date.
- Now Let's we create first our Hotel Room Booking table(DynamoDB).
- Like Previously we create our hotelRoomAvailability table.
- Open DynamoDB in new tab click create table.

Create table

Table details [info](#)

DynamoDB is a schemaless database that requires only a table name and a primary key when you create the table.

Table name

This will be used to identify your table.

hotelRoomBookingTable

Between 3 and 255 characters, containing only letters, numbers, underscores (_), hyphens (-), and periods (.).

Partition key

The partition key is part of the table's primary key. It is a hash value that is used to retrieve items from your table and allocate data across hosts for scalability and availability.

bookingID

String

1 to 255 characters and case sensitive.

- Write table name
- Partition Key as bookingID String type.
- And leave Everything as default.
- Scroll down and click Create table.
- Our table is created now.
- Now let's we create our lambda function.
- So Open Lambda function in new tab.
- And like previously you create Lambda function click new lambda function like that.
- And increase time in configuration 3sec to 1min 3sec like previously.
- Then go in permission and add permission of AdministratorAccess to the function like we give in previously function.
- And then go to code section in lambda function and remove previous code with this code

```
#1 imports - For room booking - Boto3, json and uuid
import json
import boto3
import uuid

#2 Create a client connection
- https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/dynamodb.html
client = boto3.client('dynamodb')

#3 Store the user input - Print the event details from agent
def lambda_handler(event, context):
    print(f"The user input from Agent is {event}")
    input_data = event

#4 Retrieve the data from event- guestName, checkInDate, numberOfNights and roomType (print
out event if required)
input_data = event['requestBody']['content']['application/json']['properties']
print(type(input_data))
print(input_data)
for item in input_data:
    if item['name'] == 'guestName':
        guestName = item['value']
    elif item['name'] == 'checkInDate':
        checkInDate = item['value']
    elif item['name'] == 'numberOfNights':
        numberOfNights = item['value']
    elif item['name'] == 'roomType':
        roomType = item['value']
print(guestName)

#5. Get Room Availability from hotelRoomAvailabilityTable using get_item method
https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/dynamodb/client/get\_item.html
response = client.get_item (TableName='hotelRoomAvailabilityTable', Key={'date': {'S':
checkInDate}})
print(response)
room_inventory_data = response['Item']
print(room_inventory_data)
```

```

#6. Get room inventory data for SeaView Rooms and GardenView rooms, convert to string and
print values
current_gardenViewInventory = int (room_inventory_data['Garden view']['S'])
current_seaViewInventory = int(room_inventory_data['sea view']['S'])
print(f"The garden view inventory is : {current_gardenViewInventory}")
print(f"Sea view inventory is : {current_seaViewInventory}")

#7 If inventory for gardenview and seaview = 0; send error message to user - No rooms
available for the specified date
if current_gardenViewInventory == 0 and current_seaViewInventory == 0:
    response = {
        'statusCode': 404,
        'body': json.dumps({'error': 'No rooms available for the specified date'})}
    print(response)
    return response

else:
    #8 Generate unique booking ID to store in dynamodb table along with booking and send back
    booking id to user
    bookingID = str(uuid.uuid4())

    #9 Create booking record by inserting this data into hotelRoomBookingTable using boto3
    put_item method -
https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/dynamodb/client/put\_item.html
    response_booking = client.put_item(
        TableName='hotelRoomBookingTable',
        Item={
            'bookingID':{"S" : bookingID},
            'checkInDate':{"S" : checkInDate},
            'roomType': {"S" : roomType},
            'guestName': {"S" : guestName},
            'numberOfNights':{"S" : numberOfNights}})

    #10 Print return bookingID
    print(f"The response from Lambda is {bookingID}")

    #11 Add attributes the Bedrock Agents expects
    - https://docs.aws.amazon.com/bedrock/latest/userguide/agents-lambda.html
    agent = event['agent']
    actionGroup = event['actionGroup']
    api_path = event['apiPath']

    # post parameters
    post_parameters = event['requestBody']['content']['application/json']['properties']

    response_body = {
        'application/json': {
            'body': json.dumps(bookingID)
        }
    }

```

```

    }


    action_response = {
        'actionGroup': event['actionGroup'],
        'apiPath': event['apiPath'],
        'httpMethod': event['httpMethod'],
        'httpStatusCode': 200,
        'responseBody': response_body
    }

    session_attributes = event['sessionAttributes']
    prompt_session_attributes = event['promptSessionAttributes']

    api_response = {
        'messageVersion': '1.0',
        'response': action_response,
        'sessionAttributes': session_attributes,
        'promptSessionAttributes': prompt_session_attributes
    }

    return api_response

```

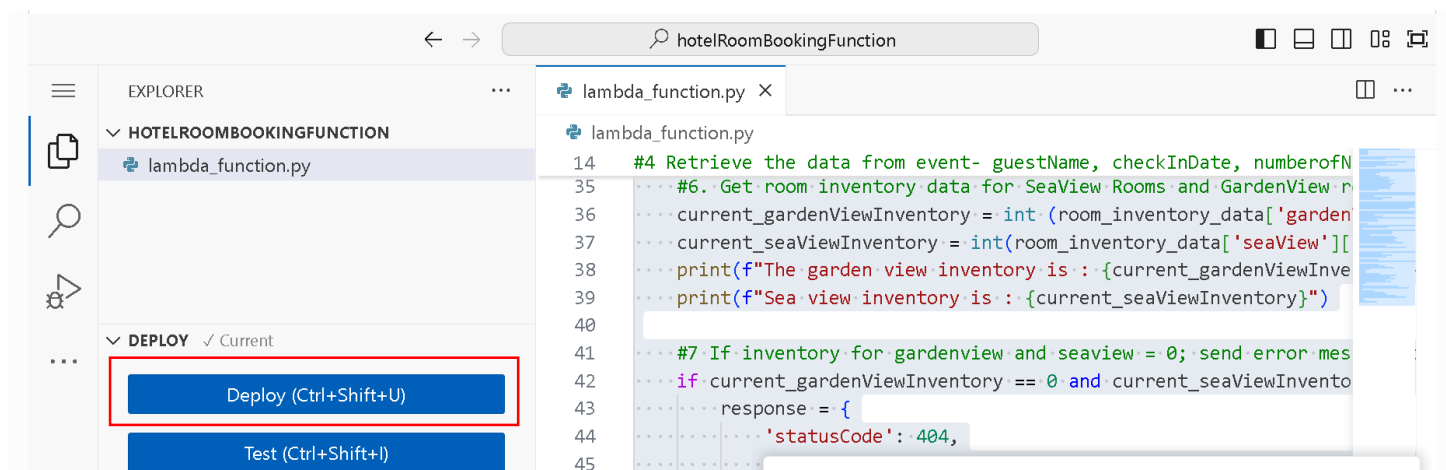

- Check and change Both table name according to your table name in this code.
- In my case my 1st table is 'hotelRoomAvailabilityTable' and 2nd is 'hotelRoomBookingTable'.
- 1st table name if you want to change according to your DB name go in line 30.
- For 2nd go in line 55.
- And also check line no 36 and line no 37 your attribute name is same as table attribute (like Garden view, sea view) and no difference like no space difference no letter difference.
- Now Simply click Deploy.
- Now go to Agent tab and create new Action Group.

Create Action group

Action group details

Enter Action group name

action_group_roomBooking

Description - *optional*

book a hotel room base on user information

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). This description can have up to 200 characters.

- Enter your Action group name.
- Scroll down.

Action group type

Select what type of action group to create



Define with function details

Specify functions and define parameters as JSON objects that will be associated to the action group invocation.



Define with API schemas

Specify a Lambda or API Gateway and define a schema to specify the APIs that the agent can invoke to carry out its tasks.

- Choose Action group type Define with API schemas.
- Scroll down.

Action group invocation

Specify a Lambda function that will be invoked based on the action group identified by the Foundation model during orchestration.

Select how to define the Lambda function

- ☐ Quick create a new Lambda function - *recommended*
An Amazon Lambda function will be created in your account on your behalf. No further configurations are necessary.
- ☒ Select an existing Lambda function
Use an existing Lambda function for this action group.
- ☐ Return control
Agent responses in the test window will prompt the user for function details to generate a response. No further configurations are necessary.

- Select Action group invocation as select an existing Lambda function.

Select Lambda function

Select a previously created Lambda function or visit [AWS Lambda](#) to create a new function.

hotelRoomBookingFunction



Function version

\$LATEST ▼

View ↗



- Select your Created Lambda.

Action group schema

Select an existing schema or create a new one via the in-line editor to define the APIs that the agent can invoke to carry out its tasks.

☐ Select an existing API schema
Select from an existing S3 or define a schema

☒ Define via in-line schema editor
Use provided sample code or import and edit from S3

In-line OpenAPI schema

Import schema

Reset ↺

YAML ▼

```
1 openapi: 3.0.0
2 ▼ info:
3   title: Insurance Claims Automation API
```

- Choose Action group schema as Define via in-line schema editor.
- Then remove previous Written YAML file and replace with this code.

```
openapi: 3.0.0
info:
  title: Hotel Booking API
  version: 1.0.0
  description: APIs for booking of hotel room
paths:
  /bookHotelRoom:
    post:
      summary: API to book hotel room with checkInDate, roomType, guestName and
        numberOfNights
      description: API to book hotel room with checkInDate, roomType, guestName and
        numberOfNights
      operationId: bookHotelRoom
      requestBody:
        required: true
        content:
          application/json:
            schema:
              type: object
              properties:
                checkInDate:
                  type: string
                  description: Date of room check-in
                guestName:
                  type: string
                  description: Name of the guest
                roomType:
```

```

      type: string
      description: Type of room - Garden View or Sea View
    numberOfNights:
      type: integer
      description: Planned stay for number of nights
    required:
      - guestName
      - checkInDate
      - roomType
      - numberOfNights
  responses:
    "200":
      description: Return Booking ID
      content:
        application/json:
          schema:
            type: object
            properties:
              returnBookingID:
                type: string
                description: Your booking is confirmed. Booking Confirmation ID

    "400":
      description: Bad request. One or more required fields are missing or invalid.

```

The screenshot shows a REST client interface with a code editor. The editor contains the following YAML content:

```

20 ▼   responses:
21 ▼     "200":
22       description: Room Inventory details
23 ▼     content:

```

The status bar at the bottom of the editor shows 'YAML', 'Line 33, Col 52', and two error/warning icons with a count of 0. Below the editor, there are two buttons: 'Cancel' and 'Create'.

- Now simply scroll down and click Create.
- Our Action Group2 is created.
- Now like previously we add Permission in our Lambda function again we will do.
- Now go to your Lambda Function and Add Some Permission.

CodeTestMonitorConfigurationAliasesVersions

Configuration

General configuration

Triggers

Permissions

Destinations

General configuration Info

Edit

Description-

Timeout0 min 3 sec

Memory128 MB

SnapStartNone Info

Ephemeral storage512 MB

- Go inside configuration.
- And scroll down.

Resource-based policy statements Info

View policy

Edit

Delete

Add permissions

Resource-based policies grant other AWS accounts and services permissions to access your Lambda resources.

Search Resource-based policy statements

< 1 >

Statement ID

Principal

PrincipalOrgID

Conditions

Ac

No policy statements

Add permissions

- Click on ADD permission.

Edit policy statement

AWS account

Grant permissions to another AWS account, user, or role.

AWS service

Grant permissions to another AWS service.

Function URL

Grant permissions to invoke your function through the function URL.

Service

The AWS service to grant permissions to.

Other

- Choose Edit policy statement as AWS service.
- Now in service Select Other.
- Scroll down.

Statement ID

Enter a unique statement ID to differentiate this statement within the policy.

hotel-booking-inventory

Principal

The service principal for this AWS service. [Learn more](#) 

bedrock.amazonaws.com

Source ARN

The ARN for a resource. Find the ARN in the related service console.

arn:aws:bedrock:us-west-2:463646775279:agent/EYBHGEJQJS

Action

Choose an action to allow.

lambda:InvokeFunction 

- Statement ID like you want.
- Principle as bedrock. amazonaws.com
- Now For Source ARN go to your Agent tab and Click SaveAndExit.

Agent overview

Name

Hotel_Room_Boking_Agent

ID

EYBHGEJQJS

Description

Agent to book a hotel room

Status

 PREPARED

Creation date

April 23, 2026, 10:24 (UTC+05:30)

Last prepared

April 23, 2026, 11:17 (UTC+05:30)

Permissions

[arn:aws:iam::463646775279:role/service-role/AmazonBedrockExecutionRoleForAgents_BTDFJRDMSGSL](#)

Agent ARN

arn:aws:bedrock:us-west-2:463646775279:agent/EYBHGEJQJS

- Then in Agent Overview Copy Agent ARN
- And go to Lambda tab and paste in Source ARN.
- Now In Action choose lambda: InvokeFunction.
- And simply scroll down.
- And click Save.
- Now permission saved.

- Got back to Agent and test it.

Test Agent

Using ODT [Change](#)



i want to book a room - Details-
Name:- Akash, Date of booking:-
2025-12-24, number of days: - 2, and
room type: - sea view

[Trace](#)

Session summaries

Trace (2)

 [Copy all](#)

Request ID cdea9b00-6d2e-472e-9d35-7c532853c120 

- I tell my Agent to book a room in following details.

Test Agent

Using ODT [Change](#)



Great news! We have **6 Sea View rooms** available on **2025-12-24**. Before I confirm your booking, let me summarize the details:

 **Booking Summary:**

Detail	Information
Guest Name	Akash
Check-in Date	2025-12-24
Room Type	Sea View
Number of Nights	2
Hotel	Taj Fort Aguada Resort & Spa, Beach Sinquerim, Candolim, Goa 403515

- Now Agent gives Booking summary and tells Please confirm Details.

Test Agent

Using ODT [Change](#)



yes



🔔 ****Booking Confirmed!**** Your room has been successfully booked. Here are your booking details: --- ✅
****Booking Confirmation**** | Detail | Information | |---|---| |
****Booking ID**** | a1f2edbe-c52b-407b-88f2-f5462017e7e5
| ****Guest Name**** | Akash | ****Check-in Date**** | 2025-12-24 | ****Room Type**** | Sea View | ****Number of Nights**** | 2 | ****Check-out Date**** | 2025-12-26 | ****Hotel**** | Taj Fort Aguada Resort & Spa, Beach Sinquerim, Candolim, Goa 403515 | --- Please save your ****Booking ID**** for future reference. We look forward to welcoming you to ****Taj Fort Aguada Resort & Spa, Goa****! 🌍🏖️ If you need any further assistance, feel free to ask. Have a wonderful stay!

- Now our Booking is confirmed.
- Now we go and check our hotelRoomBookingtable(DynamoDB).
- Check for our details is stored or not.
- Go to new tab and open DynamoDB.

DynamoDB

Dashboard
Tables
Explore items
 PartiQL editor
Backups
Exports to S3
Imports from S3
Integrations
Reserved capacity
Settings

Tables (4) Info

Last updated
April 24, 2026, 11:11 (UTC+5:30)

Actions

Delete

Create table

Find tables

Filter by tag

Any tag key

Filter by tag value

Any tag value

< 1 > ⚙️

☐	Name	Status	Partition key	Sort key	Indexes	Replication Regions
☐	CountriesData	Active	CountryId (N)	-	0	0
☐	hotelRoomAvailabilityTable	Active	date (S)	-	0	0
☐	hotelRoomBookingTable	Active	bookingID (S)	-	0	0
☐	SnpUsers	Active	UserId (N)	-	0	0

- Now click Tables in left side navigation bar.
- And then click to open hotelRoomBookingTable to check.

>

hotelRoomBookingTable

Last updated
April 24, 2026, 11:15 (UTC+5:30)

Actions ▾

Explore table items

<

Settings

Indexes

Monitor

Global tables

Backups

Exports and streams

>

General information [Info](#)

Get live item count

Partition key
bookingID (String)

Alarms

✓

 No active alarms

Average item size
0 bytes

Sort key
-

Point-in-time recovery (PITR) [Info](#)

⊖

 Off

Resource-based policy [Info](#)

⊖

 Not active

Capacity mode
On-demand

Item count
0

Table status

✓

 Active

Table size
0 bytes

- Now click DB Explore table items.

Table: hotelRoomBookingTable - Items returned (1)

Actions ▾

Create item

Scan started on April 24, 2026, 11:17:37

<

1

>

☐

bookingID (String) ▾

checkInDate ▾

guestNa... ▾

numberOfNights ▾

roomType ▾

☐

[a1f2edbe-c52b-407b-...](#)

2025-12-24

Akash

2

Sea View

- Now we see one detail is added with booking Added,
- And when you see properly these details is that details we give our agent in booking time.
- Now we are going to create Guardrails.
- So it will be for guest privacy.
- Now Let's create our Guardrails,
- Open AWS console in new tab and go in Amazon Bedrock.

▼ Build

Agents

Flows

Knowledge Bases

Automated Reasoning

Guardrails

Prompt Management

Data Automation

AgentCore [↗](#)

▼ Assess

Guardrails (0)

Edit

Delete

Create guardrail

Find guardrail

<

1

>

Name ▾

Status ▾

Description ▾

Creation time (UTC+05:30) ▾

Last edit

No guardrails

No guardrails to display

Create guardrail

- Now scroll down in navigation bar and click Guardrails under Build Section.

- Then click Create guardrail.

Provide guardrail details

Guardrail details

Name

HotelBookingGuardrail

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 50 characters.

Description - *optional*

Guest Privacy - Dont reveal any personal information related to guest such as guest name.

The description can have up to 200 characters.

- Now give your guardrail name and description if you want.
- And then simply scroll down.

Messaging for blocked prompts

Enter a message to display if your guardrail blocks the user prompt.

Sorry, the model cannot answer this question to maintain the guest privacy.

The message can have up to 500 characters.

☒ Apply the same blocked message for responses

- Default message is present but if you want to add more you add or want to change then change it.
- Then simply scroll down.

► KMS key selection - *optional*

► Tags - *optional*

Cancel

Next

- Now simply click next.

Configure content filters - *optional*

Content filters can detect and filter harmful inputs and model responses. You can configure thresholds to adjust the degree of filtering across based on your use cases and block content that violates your usage policies. The costs of using guardrails is based on which guardrails policies are enabled, and the volume of text and images processed. [Learn more](#) 

Harmful categories

Enable detection and blocking of harmful user inputs and model responses. Use a higher filter strength to help improve the filtering of harmful content in each category.

 Configure harmful categories filters

- Now simply on the harmful categories.

Filters for prompts

[Reset thresholds](#)

☒ Use the same harmful categories filters for responses

☐ Enable ⓘ	Category	Guardrail action	Set threshold
☐ Enable all			
☒ Text ☐ Image	Hate	Block ▼	
☐ Enable all			
☒ Text ☐ Image	Insults	Block ▼	
☐ Enable all			
☒ Text ☐ Image	Sexual	Block ▼	
☐ Enable all			
☒ Text ☐ Image	Violence	Block ▼	

- We on the harmful categories so that
- If any one type prompt to our agent and in that prompt any of these categories is present then block action is performed.
- Now simply scroll.

Content filters tier

Choose your preferred model tier to balance performance, accuracy, and compatibility with your existing workflows. Selecting a tier gives you control over when to adopt new capabilities or maintain consistency with your current setup.

☒ **Classic**

An established solution supporting English, French, and Spanish languages. This tier does not require you to opt into cross-Region inference.

☐ **Standard**

An improved, more robust solution offering higher accuracy supporting over 50 languages. This tier requires you to opt into cross-Region inference.

Cancel

Skip to Review and create

Previous

Next

- And click Next.

Add denied topics - optional

Add up to 30 denied topics to block user inputs or model responses associated with the topic.

Denied topics (0)

Edit

Delete ▼

Add denied topic

Find topics

< 1 >



☐ Name ▼ Definition ▼ Sample phrases ▼ Input action ▼ Output action ▼ Status ▼

No denied topics added

Add denied topic

- Click on Add denied topic if you want to add its optional.
- So I am going to add some denied topic.
- So simply click Add denied topic.

Name

Any Question related to hotel guest

Valid characters are a-z, A-Z, 0-9, underscore (_), hyphen (-), space, exclamation point (!), question mark (?), and period (.). The name can have up to 100 characters.

Definition

Provide a clear definition to detect and block user inputs and FM responses that fall into this topic. Avoid starting with "don't".

A user may ask Question related to guest name corresponding to a particular bookingID. Dont answer such Question

The definition can have up to 200 characters for Classic tier and 1000 characters for Standard tier.

- Now simply give name and Definition of denied topic.
- Simply scroll down and click confirm.

Content filters tier

Choose your preferred model tier to balance performance, accuracy, and compatibility with your existing workflows. Selecting a tier gives you control over when to adopt new capabilities or maintain consistency with your current setup.

☒ Classic

An established solution supporting English, French, and Spanish languages. This tier does not require you to opt into cross-Region inference.

☐ Standard

An improved, more robust solution offering higher accuracy supporting over 50 languages. This tier requires you to opt into cross-Region inference.

Cancel

Skip to Review and create

Previous

Next

- Now simply scroll down and click Next.

Add word filters - *optional*

Use these filters to block certain words and phrases in user inputs and model responses.

Profanity filter

☒ Filter profanity

Enable this feature to block profane words in user inputs and model responses. The list of words is based on the global definition of profanity and is subject to change.

Input

☒ Enable

Input action

Choose what action the guardrail should take on user inputs before they reach the model

Block

- If you want enable filter profanity you enable.
- In my case I enable it.
- Now scroll down.

Add custom words and phrases

Specify up to 10,000 words or phrases (max 100 characters per) to be blocked by the guardrail. A blocked message will show if user input or model responses contain these words or phrases.

☒ Add words and phrases manually

Manually add words and phrases to the following table.

☐ Upload from a local file

Populate the following table with words and phrases from a .txt or .csv file from your computer.

☐ Upload from S3 object

Populate the following table with words and phrases from an S3 object.

- If you want to add custom work that ask by the user, then they are blocked.
- You upload from local file, enter manually, or upload from S3 bucket totally depends on you.
- I prefer to write manually.
- Now simply scroll down.

View and edit words and phrases (0)

Find words and phrases

Show all

< 1 >

⚙️

☐

Word or phrase

☒ Enable input

Input action

☒ Enable output

Output action

Status

No words or phrases added

Upload from file or add manually in the console

Add a word or phrase

- Now click on Add word and phrase so you enter manually.

View and edit words and phrases (1)

Find words and phrases

Show all

< 1 >

⚙️

☐

Word or phrase

☒ Enable input

Input action

☒ Enable output

Output action

Status

☐ Religion

☒

Block

☒

Block

Valid

Add a word or phrase

Cancel

Skip to Review and create

Previous

Next

- So I add one-word Religion if anyone write in prompt it will have blocked.
- Then simply click next.

Add sensitive information filters - optional

Use these filters to handle any data related to privacy.

Personally Identifiable Information (PII) types

Specify the types of PII to be filtered and the desired guardrail behavior.

PII types

Edit

Delete

Add new PII

Find PII types

< 1 >

⚙️

☐

Choose PII type

Input action

Output action

No PII types added.

- If you want to add sensitive information filters then add.

- In my case I am not adding.
- Now scroll down simply click next.

Add contextual grounding check - optional [Info](#)

Use this policy to validate if model responses are grounded in the reference source and relevant to user's query to filter model hallucination.

Grounding

Validate if the model responses are grounded and factually correct based on the information provided in the reference source, and block responses that are below the defined threshold of grounding.

☐ Enable grounding check

Relevance

Validate if the model responses are relevant to the user's query and block responses that are below the defined threshold of relevance.

☐ Enable relevance check

[Cancel](#)

[Skip to Review and create](#)

[Previous](#)

[Next](#)

- If you want to add contextual grounding check, then add.
- In my case I am not adding.
- And simply click Next.

Add Automated Reasoning check - optional

Use a policy to perform an Automated Reasoning policy check.

Automated Reasoning policy

Add an Automated Reasoning policy to the guardrail. This can be added later. [Click here to create an Automated Reasoning policy.](#) [↗](#)

☐ Enable Automated Reasoning policy

[Cancel](#)

[Previous](#)

[Next](#)

- If you want to add automated Reasoning check, then add.
- In my case I am not adding and simply click Next.

Step 7: Add Automated Reasoning check

[Edit](#)

Automated Reasoning check

Policy enabled

☐ Disabled

[Cancel](#)[Previous](#)[Create guardrail](#)

- Now simply review all details and scroll down.
- And then click create guardrail.

HotelBookingGuardrail

[Delete](#)[Test](#)

Guardrail overview

[Edit](#)

Name

HotelBookingGuardrail

ID

50ehb2r8rtz4

Description

Guest Privacy - Dont reveal any personal information related to guest such as guest name.

Status

✓ Ready

KMS key

-

Create date (UTC+05:30)

April 24, 2026, 12:42

ARN

arn:aws:bedrock:us-west-2:463646775279:guardrail/50ehb2r8rtz4

Cross-Region inference

-

- Our guardrail is created now simply click Test.

Test



Working draft ▼



Select model

☐ Use ApplyGuardrail API

Assess any content using your pre-configured Amazon Bedrock Guardrails, without invoking the foundation models. [Learn more](#)

Prompt

Type a prompt

Model response

Choose RUN to test guardrail

- Now click Select model.

Select model

Input
Choose options ▼

Output
Choose options ▼

1. Categories

Serverless model providers ▼

Amazon

Anthropic

Cohere

DeepSeek

Google

Meta

MiniMax

Mistral AI

2. Models

Input: Text, Image
Output: Text
Max input: 200k tokens

Claude Haiku 4.5 v1
Input: Text, Image
Output: Text
Max input: 200K tokens

Claude Sonnet 4.6 v1
Input: Text, Image
Output: Text
Max input: 1M tokens

Claude Opus 4.6 v1
Input: Text, Image
Output: Text
Max input: 1M tokens

3. Inference

Inference profiles ▼

Cross-region

US Anthropic Claude Sonnet 4.6

Global Anthropic Claude Sonnet 4.6

Cancel

Apply

- Now select model provider, model, and inference and then apply.
- Now ask Question with our guardrail.



Claude Sonnet ... v1 ⓘ
US Anthropic Claude Sonnet 4.6



☐ Use ApplyGuardrail API

Assess any content using your pre-configured Amazon Bedrock Guardrails, without invoking the foundation models. [Learn more](#) ↗

Prompt

who is the guest staying corresponding to bookingID a1f2edbe-c52b-407b-88f2-f5462017e7e5



- I give this prompt let's see what they tell us.
- Now simply scroll down and click run.

Guardrail action

⚠ Intervened (1 instance)

[View trace](#)

Final response

Sorry, the model cannot answer this question to maintain the guest privacy.

▶ Run

- Now you see response.
- Our guardrail is properly working.
- Now add this to your agent.
- Go to your Agent tab.

Guardrail details

[Edit](#)

Guardrail name

-

Guardrail version

-

- Now simply scroll down and click edit in Guardrail details.

Edit guardrails

Guardrail details

Select guardrail

Select a previously created guardrail function or create a new [guardrail](#)

HotelBookingGuardrail

Guardrail version

Working draft

[View](#)

[Clear](#)

[Cancel](#)[Save](#)[Save and exit](#)

- Now simply select your created guardrail.
- And click Save and exit.
- Our guardrail is added with the agent.
- Now again scroll down in agent builder.

Memory - New

Memory allows an agent to retain conversational contexts across multiple sessions and recall past actions and behaviors. [See supported models](#)

Enable session summarization

Enabling session summarization will generate a summary of each test session. [View session summaries](#)

- ☒ Enabled
- ☐ Disabled

Memory duration

Set the maximum duration (in days) for which session summaries can be included in the agent's prompt context. Session summaries older than this limit will not be included.

days

Specify a duration between 1 and 365 days.

Maximum number of recent sessions

Set the maximum number of recent session summaries to include in the agent's prompt context. Session summaries beyond this limit will not be included. Limiting the number of sessions helps maintain prompt relevance and manage processing costs.

sessions

Minimum number of sessions is 1.

- In memory section Enable it so that it will store long time data and recall past actions.
- Now scroll up.

Agent builder [Info](#)

[Manual](#)[Assistant](#)[Test](#)[Prepare](#)[Save](#)[Save and exit](#)

Agent details

Agent name

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Agent description - *optional*

The description can have up to 200 characters.

- Click save, then prepare.
- And in last click save and exit.
- Now our Agent is ready,
- And we are ready to publish baseline version of this agent.

Aliases (0) [Info](#)

[Delete](#)[Edit](#)[Create](#)

An alias points to a specific version of your Agent. Once you create and associate a version with an alias, you can test it. With an alias, you can also update the Agent version that your client applications use.

< 1 > 

Alias ID ▾

Alias name

Description ▾

Associated version ▾

Throughput ▾

Creation date ▾

No aliases

[Create](#)

- Now scroll down and see Aliases.
- In aliases click on create.

Create alias

Alias name

dev

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Description - *optional*

This is the initial version

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 200 characters.

Associate a version

☒ Create a new version and associate it to this alias.

☐ Use an existing version to associate this alias.

Select throughput

☒ On-demand (ODT)

☐ Provisioned Throughput (PT)

Cancel

Create alias

- Give Alias name.
- And simply click create alias.
- Our Alias is created

Versions (1)
[Info](#)

Delete

< 1 >

⚙️

	Version name	Status	Creation date
☐	Version 1	✓ PREPARED	April 24, 2026, 13:19 (UTC+05:30)

Aliases (1)
[Info](#)

Delete
Edit
Create

An alias points to a specific version of your Agent. Once you create and associate a version with an alias, you can test it. With an alias, you can also update the Agent version that your client applications use.

< 1 >

⚙️

Alias ID	Alias name	Description	Associated version	Throughput	Creation date
2AM2EM9GPB	dev	This is the initial version	Version 1	-	April 24, 2026, 13:19 (UTC+05:30)

- Our Alias is created
- Our Agent creation work is totally completed.
- Now we focus on Frontend part.

Front End: -

Some Requirements: -

- Install Vs code: - [Link](#)(windows)
- Install python: - [Link](#)(windows)
- Install Anaconda: - [Link](#)(windows)
- Install AWS CLI: - [Link](#)
- Now open Anaconda


 Anaconda Navigator
 File Help



Home
Environments
Learning
Community

All applications
ON
base (root)
Channels


Qt Console
5.7.0
PyQt GUI that supports inline figures, proper multiline editing with syntax highlighting, graphical calltips, and more.


Spyder
6.1.0
Scientific Python Development Environment. Powerful Python IDE with advanced editing, interactive testing, debugging and introspection features


VS Code
1.117.0
Streamlined code editor with support for development operations like debugging, task running and version control.


EduBlocks
Web-based coding platform from Anaconda designed for students. Learn Python coding through an interactive, block-based visual environment.

- And from Anaconda Launch your VS Code.
- Now your VS Code is open.
- So before you go to your VS Code open AWS console in your Browser.

- And search IAM and open it.

▼ Access Management


User groups

Users

Roles

Policies

Identity providers

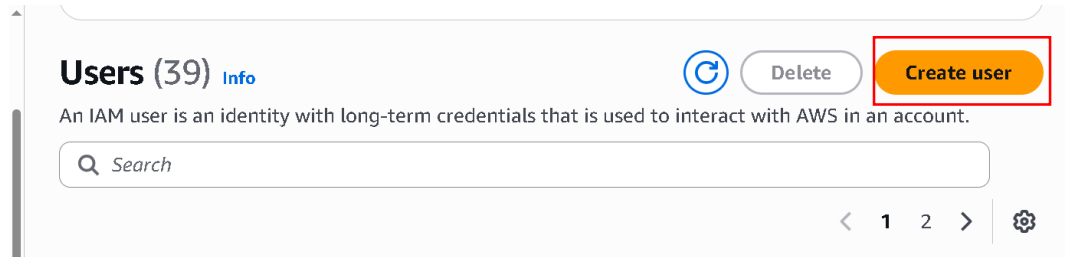

- Now in Navigation bar of IAM under Access Management click User.
- Then click Create User.

Specify user details

User details

User name

agent_ai

The user name can have up to 64 characters. Valid characters: A-Z, a-z, 0-9, and + = , . @ _ - (hyphen)

- ☐ Provide user access to the AWS Management Console - *optional*
In addition to console access, users with `SignInLocalDevelopmentAccess` permissions can use the same console credentials for programmatic access without the need for access keys.

i If you are creating programmatic access through access keys or service-specific credentials for AWS CodeCommit or Amazon Keyspaces, you can generate them after you create this IAM user. [Learn more](#)

Cancel

Next

- Now Enter User name.
- And not tick the box and simply click Next.

Set permissions

Add user to an existing group or create a new one. Using groups is a best-practice way to manage user's permissions by job functions. [Learn more](#)

Permissions options

☐ Add user to group
Add user to an existing group, or create a new group. We recommend using groups to manage user permissions by job function.

☐ Copy permissions
Copy all group memberships, attached managed policies, and inline policies from an existing user.

☒ Attach policies directly
Attach a managed policy directly to a user. As a best practice, we recommend attaching policies to a group instead. Then, add the user to the appropriate group.

- Now in Set permissions select Attach policies directly.

Permissions policies (1/2441)

[Create policy ↗](#)

Choose one or more policies to attach to your new user.

Filter by Type				
AdministratorAccess	X	All types	v	5 matches
< 1 > Settings				
− Policy name ↗	▲	Type	▼	Attached entities
☒ +  AdministratorAccess		AWS managed - job function		41
☐ +  AdministratorAccess-A...		AWS managed		0
☐ +  AdministratorAccess-A...		AWS managed		0

- Now in Permission Policies search and select AdministratorAccess.
- Now scroll down.

► Set permissions boundary - optional

[Cancel](#)[Previous](#)[Next](#)

- Now simply click next.

Tags - optional

Tags are key-value pairs you can add to AWS resources to help identify, organize, or search for resources. Choose any tags you want to associate with this user.

No tags associated with the resource.

[Add new tag](#)

You can add up to 50 more tags.

[Cancel](#)[Previous](#)[Create user](#)

- Now review all thing and simply scroll down.
- And click Create user.

agent_ai [Info](#)

[Delete](#)

Summary

ARN

 arn:aws:iam::463646775279:user/agent_ai

Created

April 24, 2026, 14:38 (UTC+05:30)

Console access

Disabled

Last console sign-in

-

Access key 1

[Create access key](#)

[Permissions](#)[Groups](#)[Tags](#)[Security credentials](#)[Last Accessed](#)

- Now our user is created.

- Now go in Security credentials.

Access keys (0)

[Create access key](#)

Use access keys to send programmatic calls to AWS from the AWS CLI, AWS Tools for PowerShell, AWS SDKs, or direct AWS API calls. You can have a maximum of two access keys (active or inactive) at a time. [Learn more](#)

No access keys. As a best practice, avoid using long-term credentials like access keys. Instead, use tools which provide short term credentials. [Learn more](#)

[Create access key](#)

- Now simply scroll down and search Access keys.
- Now in access keys click Create access key.

Access key best practices & alternatives [Info](#)

Avoid using long-term credentials like access keys to improve your security. Consider the following use cases and alternatives.

Use case



Command Line Interface (CLI)

You plan to use this access key to enable the AWS CLI to access your AWS account.



Local code

You plan to use this access key to enable application code in a local development environment to access your AWS account.



Application running on an AWS compute service

You plan to use this access key to enable application code running on an AWS compute service like Amazon EC2, Amazon ECS, or AWS Lambda to access your AWS account.

- Now simply select use case as CLI
- Then simply scroll down.

Confirmation



I understand the above recommendation and want to proceed to create an access key.

[Cancel](#)[Next](#)

- Now tick the confirmation box and simply click Next.

Set description tag - *optional* [Info](#)

The description for this access key will be attached to this user as a tag and shown alongside the access key.

Description tag value

Describe the purpose of this access key and where it will be used. A good description will help you rotate this access key confidently later.

Maximum 256 characters. Allowed characters are letters, numbers, spaces representable in UTF-8, and: _ . : / = + - @

Cancel

Previous

Create access key

- Now Simply click Create Access Key.

🟢 This is the only time that the secret access key can be viewed or downloaded. You cannot recover it later. However, you can create a new access key any time. ✕

Step 1

Access key best practices & alternatives

Step 2 - optional

Set description tag

Step 3

Retrieve access keys

Retrieve access keys [Info](#)

Access key

If you lose or forget your secret access key, you cannot retrieve it. Instead, create a new access key and make the old key inactive.

Access key



AKIAWX44AK7X7PPA7LO5

Secret access key



***** [Show](#)

- Our Access Key is created.
- Now go to your VS Code that you open by Anaconda.


```
PROBLEMS  OUTPUT  DEBUG CONSOLE  TERMINAL  PORTS  CODE REFERENCE LOG
PS C:\Users\Akash Kumar> aws --version
aws-cli/2.34.36 Python/3.14.4 Windows/10 exe/AMD64
PS C:\Users\Akash Kumar> aws configure

Tip: You can deliver temporary credentials to the AWS CLI using your AWS Console session by running the command 'aws login'.


AWS Access Key ID [None]: AKIAWX44AK7X7PPA7LO5
AWS Secret Access Key [None]: nHl3UEPeYDS0cPtyXy7c+c0uTM7jJv6ezja/fiXc
Default region name [None]: us-west-2
Default output format [None]:
PS C:\Users\Akash Kumar>
```

- Now firstly check python is install correctly or not by python --version
- Now check AWS cli is properly installed by aws --version
- Now all thing done then configure your Aws cli role in your VS Code
- Now write aws configure.
- Then they ask Access Key (copy access key from user that you created and paste it) then click Enter
- Now ask Secret Access Key (copy secret access key from user that you created and paste it) then click Enter.
- Then they ask region name: - give region in which you perform your all agent work


- In my case us-west-2
- Now they ask output format leave it and click Enter.
- Now configuration is done.

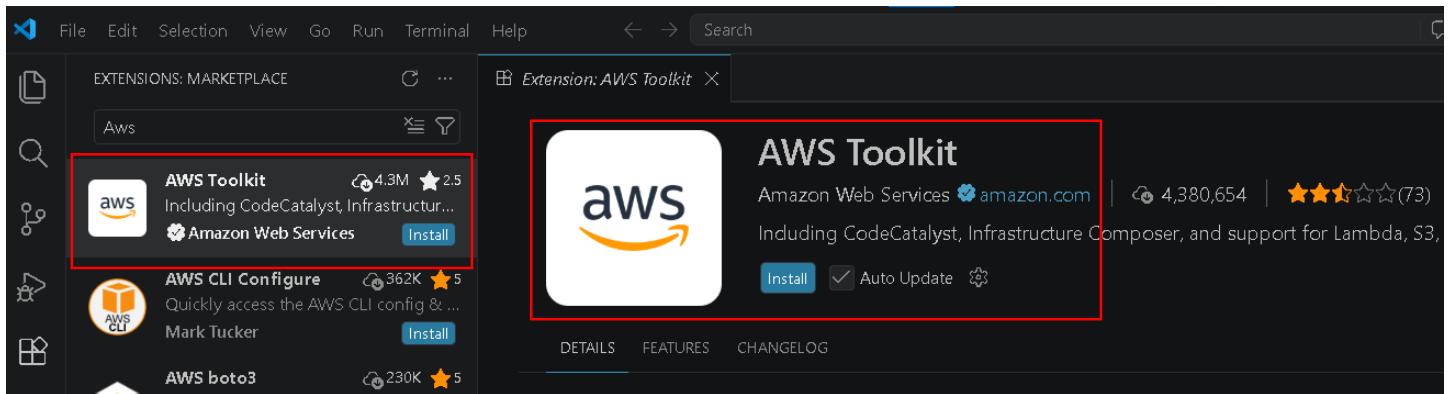

- Now click 5th icon in left from top.
- And search Aws toolkit and click Install.
- Then search Aws boto3 and also install it.

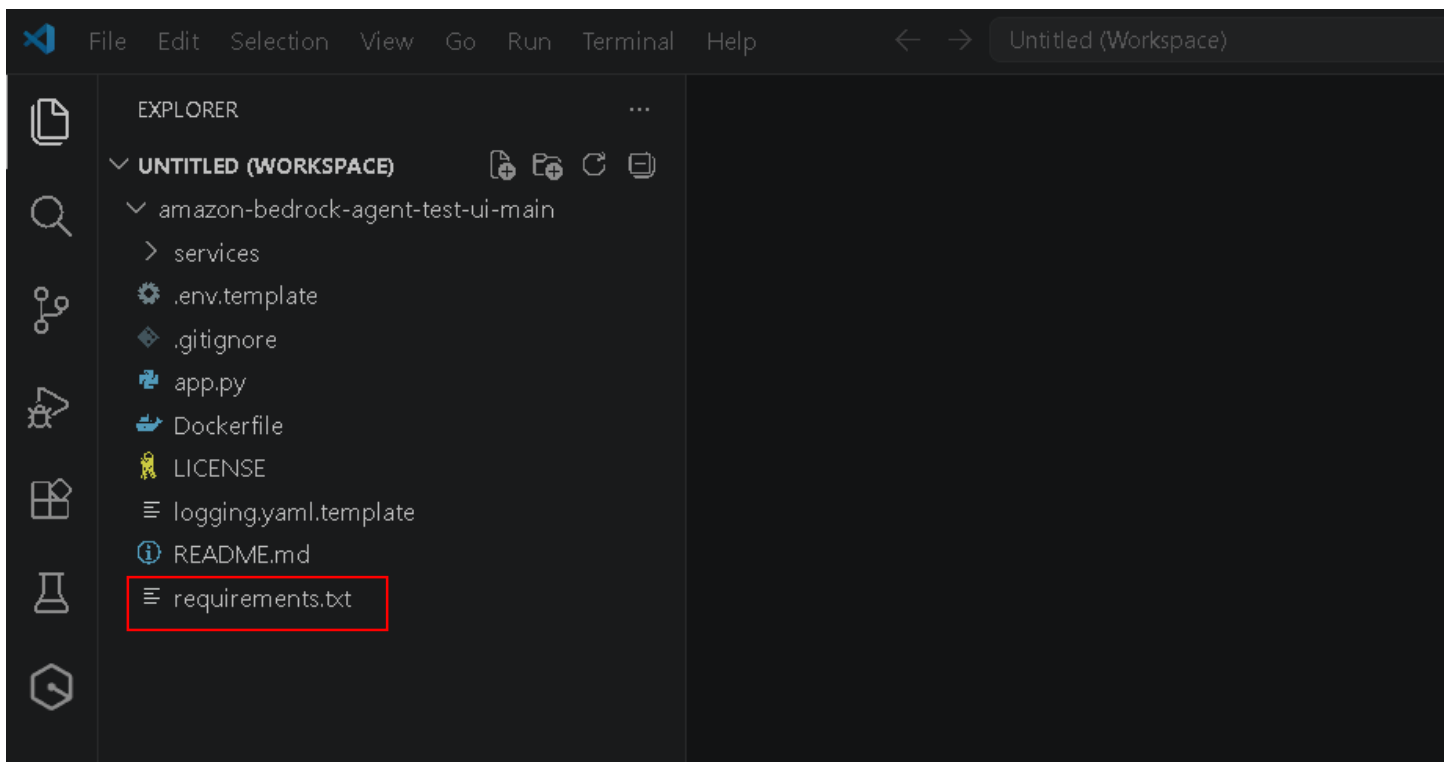


- Open UI_Local file on the VS Code.
- And in UI_Local open amazon-bedrock-agent-test-ui-main
- This file is present in resource
- Now open requirements.

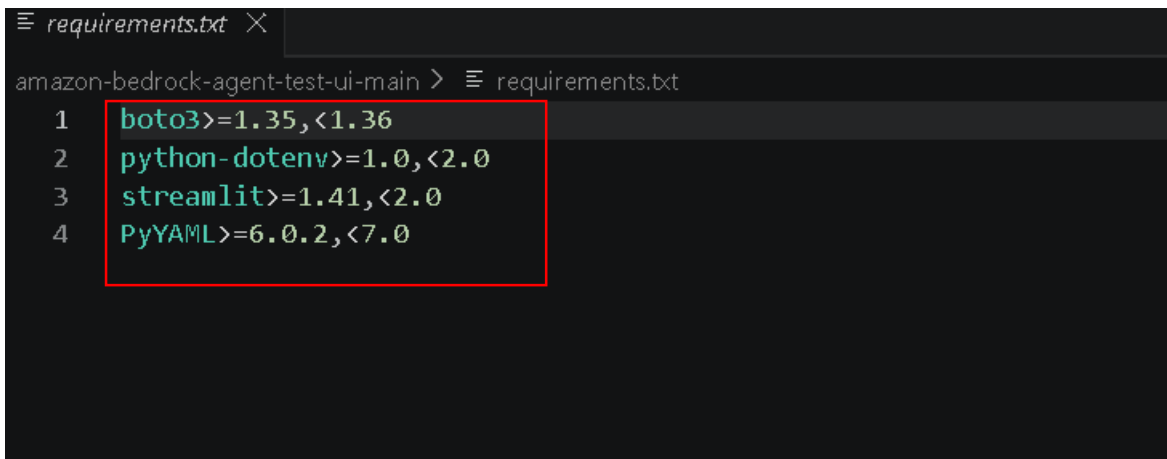


```
requirements.txt
amazon-bedrock-agent-test-ui-main > requirements.txt
1 boto3>=1.35,<1.36
2 python-dotenv>=1.0,<2.0
3 streamlit>=1.41,<2.0
4 PyYAML>=6.0.2,<7.0
```

- We need to install these requirements.
- Now we go to our terminal and install these things.

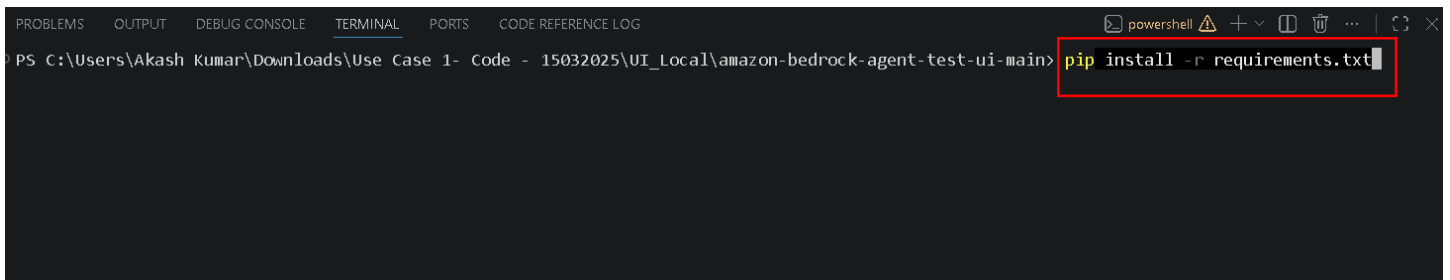


```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS CODE REFERENCE LOG
PS C:\Users\Akash Kumar\Downloads\Use Case 1- Code - 15032025\UI_Local\amazon-bedrock-agent-test-ui-main> pip install -r requirements.txt
```

- Now in console type `pip install -r requirements.txt`
- And click Enter then all requirements are installed

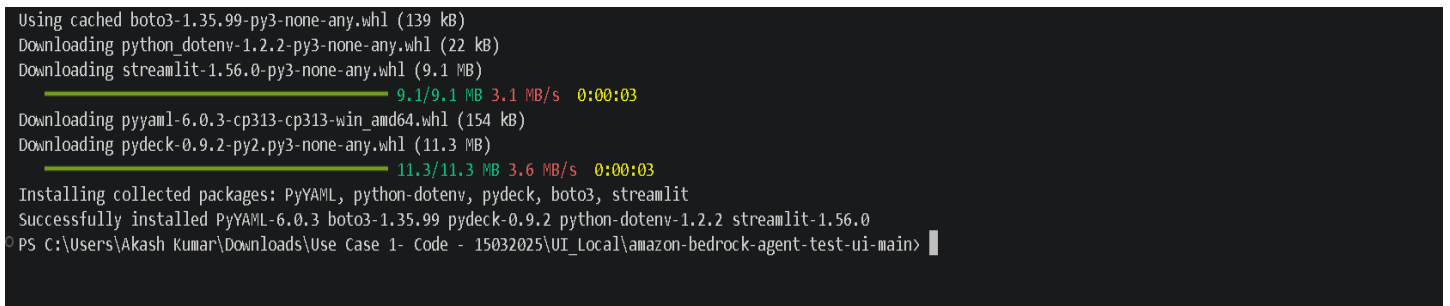

```
Using cached boto3-1.35.99-py3-none-any.whl (139 kB)
Downloading python_dotenv-1.2.2-py3-none-any.whl (22 kB)
Downloading streamlit-1.56.0-py3-none-any.whl (9.1 MB)
9.1/9.1 MB 3.1 MB/s 0:00:03
Downloading pyyaml-6.0.3-cp313-cp313-win_amd64.whl (154 kB)
Downloading pydeck-0.9.2-py2.py3-none-any.whl (11.3 MB)
11.3/11.3 MB 3.6 MB/s 0:00:03
Installing collected packages: PyYAML, python-dotenv, pydeck, boto3, streamlit
Successfully installed PyYAML-6.0.3 boto3-1.35.99 pydeck-0.9.2 python-dotenv-1.2.2 streamlit-1.56.0
PS C:\Users\Akash Kumar\Downloads\Use Case 1- Code - 15032025\UI_Local\amazon-bedrock-agent-test-ui-main>
```

- Now you see all requirements is downloaded.

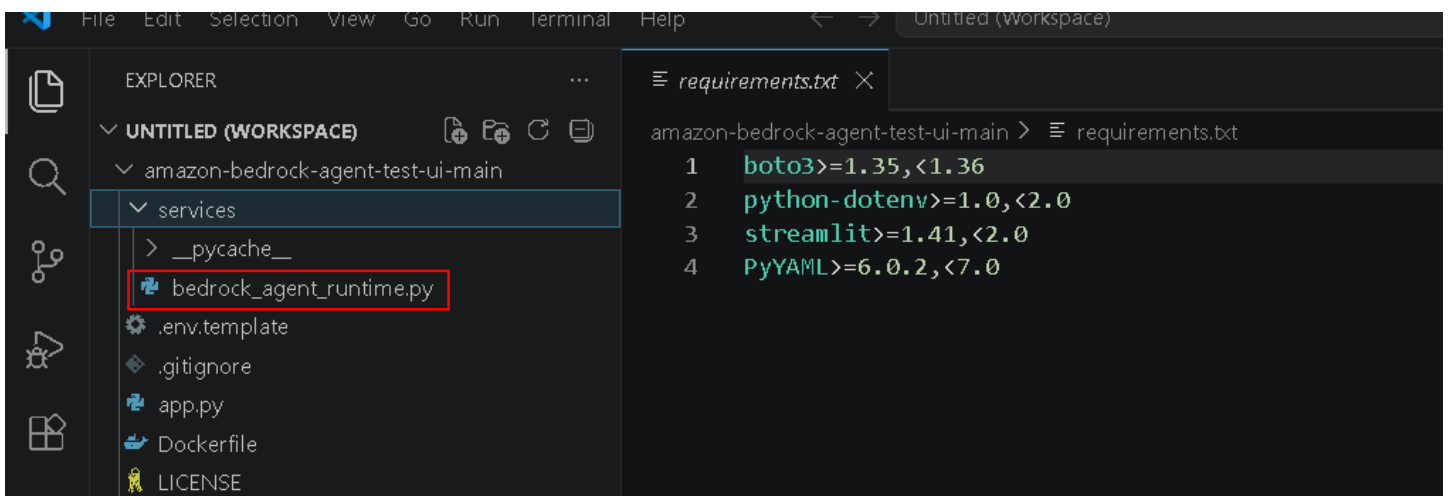

```
File Edit Selection View Go Run Terminal Help
EXPLORER
UNTITLED (WORKSPACE)
amazon-bedrock-agent-test-ui-main
services
  __pycache__
  bedrock_agent_runtime.py
  .env.template
  .gitignore
  app.py
  Dockerfile
  LICENSE
```

- Now inside service folder open `bedrock_agent_runtime.py`

```
bedrock_agent_runtime.py X
amazon-bedrock-agent-test-ui-main > services > bedrock_agent_runtime.py > ...
1 import boto3
2 from botocore.exceptions import ClientError
3 import logging
4
5 logger = logging.getLogger(__name__)
6
7
8 def invoke_agent(agent_id, agent_alias_id, session_id, prompt):
9     try:
10         client = boto3.session.Session().client(service_name="bedrock-agent-runtime")
11         # See https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/bedrock-agent-runtime/client/
12         response = client.invoke_agent(
13             agentId='RRMFRCGXG4',
14             agentAliasId='2CT1RDHYH0',
15             enableTrace=True,
16             sessionId=session_id,
17             inputText=prompt
18         )
19
```

- Now in line 13 and 14 change agentId and agentAliasId with your ID.
- Now go to your Agent tab,

Hotel_Room_Boking_Agent

Create AliasTestEdit in Agent Builder

Agent overview

Name Hotel_Room_Boking_Agent	ID QJELMFH20A
Description Agent to book a hotel room	Status ✔ PREPARED
Creation date April 24, 2026, 09:57 (UTC+05:30)	Last prepared April 24, 2026, 13:15 (UTC+05:30)
Permissions arn:aws:iam::463646775279:role/service-role/AmazonBedrockExecutionRoleForAgents_1QVMHHOR4H3	Agent ARN arn:aws:bedrock:us-west-2:463646775279:agent/QJELMFH20A

- Now copy this Id and paste in agent ID

Aliases (1) [Info](#)

Delete
Edit
Create

An alias points to a specific version of your Agent. Once you create and associate a version with an alias, you can test it. With an alias, you can also update the Agent version that your client applications use.

< 1 >
⚙️

Alias ID	Alias name	Description	Associated version	Throughput	Creation date
2AM2EM9GPB	dev	This is the initial version	Version 1	-	April 24, 2026, 13:19 (UTC+05:30)

- No copy this alias ID and paste alias ID.

```

1 # The ID of the agent.
2 BEDROCK_AGENT_ID='QJELMFH20A'
3
4 # The ID of the agent alias. The default `TSTALIASID` will be used if it is not set.
5 BEDROCK_AGENT_ALIAS_ID='2AM2EM9GPB'
6
7 # The page title. The default `Agents for Amazon Bedrock Test UI` will be used if it is not set.
  
```

- Now open .env.template
- And paste agent Id and Alias ID also here
- Now simply open your VS Code terminal.

```

PS C:\Users\Akash Kumar\Downloads\Use Case 1- Code - 15032025\UI_Local\amazon-bedrock-agent-test-ui-main> streamlit run app.py
  
```

- And type streamlit run app.py
- and press Enter.

```

PS C:\Users\Akash Kumar\Downloads\Use Case 1- Code - 15032025\UI_Local\amazon-bedrock-agent-test-ui-main> streamlit run app.py

You can now view your Streamlit app in your browser.
Local URL: http://localhost:8501
Network URL: http://172.29.190.75:8501

INFO:botocore.credentials:Found credentials in shared credentials file: ~/.aws/credentials
  
```

- Now you get local URL.
- Copy and open it in your browser.

Reset Session

Trace

Pre-Processing

> Trace Step 1

Orchestration

> Trace Step 2

Post-Processing

> Trace Step 3

Citations

None

Deploy

Welcome to Hotel Booking Agent

 hii

 Welcome to Taj Fort Aguada Resort & Spa, Goa, India! 🌍🌿

I'm delighted to assist you today. Whether you're looking to explore our beautiful rooms, check availability, or make a booking, I'm here to help.

How may I assist you today? Here's what I can help you with:

1. 🏠 **Room Information** - Learn about our Garden View or Sea View rooms
2. 📅 **Check Availability** - Find available rooms for your preferred dates
3. ✅ **Make a Booking** - Reserve your perfect room at our resort

Please feel free to ask anything, and let's make your stay at Taj Fort Aguada an unforgettable experience! 😊



- Now our Frontend is ready.
- And Agent is working Perfectly.
- Now try to book room with our frontend.

 Book a hotel room for Date of Booking - 2025-12-24, Name - Ritesh, Number of Days - 2, Room Type - sea view

 I have checked the availability and room details. Here's a summary of your booking request before I proceed:



Booking Summary

Detail	Information
Guest Name	Ritesh
Check-in Date	2025-12-24
Room Type	Sea View
Number of Nights	2
Hotel	Taj Fort Aguada Resort & Spa, Beach Sinquerim, Candolim, Goa 403515

- I tell him to book room with details.



yes



Your booking is **confirmed**, Ritesh! Here are your booking details:



Booking Confirmation

Detail	Information
Booking ID	a3469400-cfe3-412e-aafd-3df678e28c17
Guest Name	Ritesh
Hotel	Taj Fort Aguada Resort & Spa, Goa
Address	Beach Sinquerim, Candolim, Goa 403515
Check-in Date	2025-12-24

- Now booking is confirmed.
- Agent with Frontend perfectly working.
- Now we deploy our code on an EC2 instance along with an application load balancer.
- So Let's start
- Open Aws console in new tab and search and open Ec2.

Instances

Instances

Instance Types

Launch Templates

Spot Requests

Savings Plans

Reserved Instances

Dedicated Hosts

Capacity Reservations

Capacity Manager [New](#)

Instances [Info](#)



Connect

Instance state ▼

Actions ▼

Launch instances ▼

Saved filter sets

Choose filter set ▼



Find Instance by attribute or tag (case-sensitive)



1



Name [✎](#)



Instance ID



Instance state



Instance type



Select an instance



- Now just click instance.
- And then click Launch instance.

Launch an instance [Info](#)

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags [Info](#)

Name

hotel_agent

[Add additional tags](#)

- Give instance name.

▼ Application and OS Images (Amazon Machine Image) [Info](#)

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose **Browse more AMIs**.

 Search our full catalog including 1000s of application and OS images

Quick Start

Amazon Linux


macOS


Ubuntu


Windows


Red Hat


SUSE



[Browse more AMIs](#)
Including AMIs from AWS, Marketplace and the Community

- Choose OS in my case I choose Amazon Linux.
- Scroll down

▼ Instance type [Info](#) | [Get advice](#)

Instance type

t3.micro

Free tier eligible

Family: t3 2 vCPU 1 GiB Memory Current generation: true
On-Demand SUSE base pricing: 0.0104 USD per Hour
On-Demand Ubuntu Pro base pricing: 0.0139 USD per Hour
On-Demand RHEL base pricing: 0.0392 USD per Hour
On-Demand Windows base pricing: 0.0196 USD per Hour
On-Demand Linux base pricing: 0.0104 USD per Hour

☐ All generations

[Compare instance types](#)

[Additional costs apply for AMIs with pre-installed software](#)

- Choose t3.micro this is Free tier eligible.
- Scroll down.

▼ Key pair (login) [Info](#)

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - *required*

Select

 [Create new key pair](#)

- Click Create new key pair.

Create key pair

Key pair name

Key pairs allow you to connect to your instance securely.

Demo_agent

The name can include up to 255 ASCII characters. It can't include leading or trailing spaces.

Key pair type

☒ RSA
RSA encrypted private and public key pair

☐ ED25519
ED25519 encrypted private and public key pair

Private key file format

☒ .pem
For use with OpenSSH

☐ .ppk
For use with PuTTY

Cancel

Create key pair

- Enter key name.
- Key pair type as RSA
- And .pem file
- And last click Create key pair
- Now your keypair is downloaded save it.

Software Image (AMI)
Amazon Linux 2023 AMI 2023.11.....[read more](#)
ami-0cc96c4cd98401dae

Cancel

Launch instance

[Preview code](#)

- Now leave remaining setting as it is.
- And simply scroll down and click Launch instance.
- Our EC2 instance is created.

```

1 import boto3
2 from botocore.exceptions import ClientError
3 import logging
4
5 logger = logging.getLogger(__name__)
6
7
8 def invoke_agent(agent_id, agent_alias_id, session_id, prompt):
9     try:
10         client = boto3.session.Session().client(service_name="bedrock-agent-runtime", region_name='us-west-2')
11         # See https://boto3.amazonaws.com/v1/documentation/api/latest/reference/services/bedrock-agent-runtime/
12         response = client.invoke_agent(
13             agentId='QJELMFH20A', #2 Add Agent ID
14             agentAliasId='YPTNUYUPI1', #3 Add Agent Alias ID

```

- Now open the file EC2Deployment in your VS Code(file in Resource).
- Now in file open services in Services open bedrock_agent_runtime.py file.
- And paste your agent Id in line 13.
- And Agent alias id in line 14.
- Also change region name according to you in line 10.

```

1 from dotenv import load_dotenv
2 import json
3 import logging
4 import logging.config
5 import re
6 from services import bedrock_agent_runtime
7 import streamlit as st
8 import uuid
9 import yaml
10
11 # Get config from environment variables
12 agent_id = 'QJELMFH20A' #4 Add Agent ID
13 agent_alias_id = 'YPTNUYUPI1' #5 Add Agent Alias ID
14 ui_title = "Welcome to Hotel Booking Agent"
15 ui_icon = "BEDROCK_AGENT_TEST_UI_ICON"

```

- Now open app.py
- And in line 12 and 13 paste agent id and agent alias id.
- Now open your Browser EC2 tab.

Instances (1) Info Refresh Connect Instance state Actions Launch instances

Saved filter sets: Choose filter set Find Instance by attribute or tag (case-sensitive) < 1 > Settings

☐	Name	Instance ID	Instance state	Instance type	Status check	Alarm status
☐	hotel_agent	i-00571d6dd33458e81	Running	t3.micro	3/3 checks passed	View alarms

Select an instance

- Now our Ec2 is created status check 3/3 passed.
- Now click on instance ID.

Info



[Connect](#)

Instance state ▼

Actions ▼

Instance ID

IPv6 address

IP name: ip-172-31-51-105.us-west-2.compute.internal

Public IPv4 address

[open address](#) ↗

Instance state

Running

Private IPv4 addresses

Public DNS

ec2-35-95-50-227.us-west-2.compute.amazonaws.com | [open address](#) 

Private IP DNS name (IPv4 only)

ip-172-31-51-105.us-west-2.compute.int
ernal

- Now click Connect.

Username

Enter the username defined in the AMI used to launch the instance. If you didn't define a custom username, use the default username, `ec2-user`.

Note: In most cases, the default username, `ec2-user`, is correct. However, read your AMI usage instructions to check if the AMI owner has changed the default AMI username.

Cancel

Connect

- Now simply scroll not do anything.
- And click Connect.

```

#
~\###_ Amazon Linux 2023
~~\#####\
~~\###|
~~\#/ https://aws.amazon.com/linux/amazon-linux-2023
~~V~'-'>
~~~
~~~.
~~~\_/
~~~/_m/'
[ec2-user@ip-172-31-51-105 ~]$

```

- Now I am connected to EC2 instance Amazon Linux 2023.
- Now I need to push my code on GitHub and then clone it and push it in Ec2.

EC2Demo / amazon-bedrock-agent-test-ui-main /

riteshbehal
Add files via upload

a8dd229 · now History

Name	Last commit message	Last commit date
..		
services	Add files via upload	now
Dockerfile	Add files via upload	now
LICENSE	Add files via upload	now
README.md	Add files via upload	now
app.py	Add files via upload	now
logging.yaml.template	Add files via upload	now
requirements.txt	Add files via upload	now

- In my GitHub I upload all Files (amazon-bedrock-agent-test-ui-main).
- Now in our EC2 instance run some commands.

Deployment to EC2 guide

```

.....#1 Create an EC2 and update.....
sudo su
sudo yum update -y

.....#2 Create GitHub repo and upload code to repo.....
yum install git
git clone https://github.com/Rahul1981/demo11.git

.....Update and install pre-req.....
cd into folder
sudo yum remove python3-requests
sudo yum install python3 -y
sudo yum -y install python-pip
python3 -m pip install -r requirements.txt
EC2 IAM role
streamlit run app.py
nohup streamlit run app.py
Change to Security Group - Open port 8501 to all traffic

.....ALB Deployment.....
Streamlit port - 8501

.....Test Questions.....

```

What is the room availability for 2025-12-26 ?

Book a hotel room for Date of Booking - 2025-12-27, Name - John Doe K, Number of days - 2, Room type - Sea view

- Follow these steps.

```
[root@ip-172-31-51-105 ec2-user]# git clone https://github.com/riteshbehal/EC2Demo.git
Cloning into 'EC2Demo'...
remote: Enumerating objects: 14, done.
remote: Counting objects: 100% (14/14), done.
remote: Compressing objects: 100% (14/14), done.
remote: Total 14 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (14/14), 12.00 KiB | 3.00 MiB/s, done.
[root@ip-172-31-51-105 ec2-user]#
```

- Follow step 1
- Then clone git.
- After cloning go type ls
- Then go to your repository that showing by cd repository name.
- After Entering in repository again to file.

```
[root@ip-172-31-51-105 EC2Demo]# ls
amazon-bedrock-agent-test-ui-main
[root@ip-172-31-51-105 EC2Demo]# cd amazon-bedrock-agent-test-ui-main
[root@ip-172-31-51-105 amazon-bedrock-agent-test-ui-main]#
```

- Now in image you see we are in Repository EC2Demo
- Then we enter our file Amazon-bedrock-agent-test-ui-main.
- Now we do these steps one by one.
 - sudo yum remove python3-requests
 - sudo yum install python3 -y
 - sudo yum -y install python-pip
 - python3 -m pip install -r requirements.txt
- Now EC2 IAM role
- For this open AWS console in new tab and Open IAM

▼ Access Management

User groups

Users

Roles

Policies

Identity providers

Roles (987) [Info](#)



Delete

Create role

An IAM role is an identity you can create that has specific permissions with credentials that are valid for short durations. Roles can be assumed by entities that you trust.

Search

< 1 2 3 4 5 6 7 ... 50 > ⚙

- Now go in roles
- And click create role.

Trusted entity type



AWS service

Allow AWS services like EC2, Lambda, or others to perform actions in this account.



AWS account

Allow entities in other AWS accounts belonging to you or a 3rd party to perform actions in this account.



Web identity

Allows users federated by the specified external web identity provider to assume this role to perform actions in this account.



SAML 2.0 federation

Allow users federated with SAML 2.0 from a corporate directory to perform actions in this account.



Custom trust policy

Create a custom trust policy to enable others to perform actions in this account.

- Choose AWS service.
- Scroll down.

Use case

Allow an AWS service like EC2, Lambda, or others to perform actions in this account.

Service or use case

EC2



Choose a use case for the specified service.

Use case



EC2

Allows EC2 instances to call AWS services on your behalf.



EC2 Role for AWS Systems Manager

Allows EC2 instances to call AWS services like CloudWatch and Systems Manager on your behalf.



EC2 Spot Fleet Role

Allows EC2 Spot Fleet to request and terminate Spot Instances on your behalf.



EC2 - Spot Fleet Auto Scaling

Allows Auto Scaling to access and update EC2 spot fleets on your behalf.



EC2 - Spot Fleet Tagging

Allows EC2 to launch spot instances and attach tags to the launched instances on your behalf.



EC2 - Spot Instances

- Now use case select EC2
- Scroll down

- ☐ EC2 - Spot Fleet
Allows EC2 Spot Fleet to launch and manage spot fleet instances on your behalf.
- ☐ EC2 - Scheduled Instances
Allows EC2 Scheduled Instances to manage instances on your behalf.

Cancel

Next

- Now simply click next.

Add permissions [Info](#)

Permissions policies (1/2106) [Info](#)

Choose one or more policies to attach to your new role.

Filter by Type

AmazonBedrockfull

All types

1 match

< 1 >



☒	Policy name ↗	Type	Description
☒	AmazonBedrockFull...	AWS managed	Provides full access to Amazon Bedroc...

► Set permissions boundary - optional

Cancel

Previous

Next

- Now simply search AmazonBedrockFull and add it.
- Then simply click Next.

Role details

Role name

Enter a meaningful name to identify this role.

Ec2_Bedrockk

Maximum 64 characters. Use alphanumeric and '+,.,@-_' characters.

Description

Add a short explanation for this role.

Allows EC2 instances to call AWS services on your behalf.

Maximum 1000 characters. Use letters (A-Z and a-z), numbers (0-9), tabs, new lines, or any of the following characters: _+=,.,@-/[0]!#\$%^&*()';:"'`

- Give role name
- And scroll down.

Step 3: Add tags

Add tags - optional [Info](#)

Tags are key-value pairs that you can add to AWS resources to help identify, organize, or search for resources.

No tags associated with the resource.

Add new tag

You can add up to 50 more tags.

Cancel

Previous

Create role

- Click create role.
- Now back to Ec2 instance not console.

Instance summary for i-00571d6dd33458e81 (hotel_agent) [Info](#)

Updated about 1 hour ago

Instance ID

i-00571d6dd33458e81

IPv6 address

—

Hostname type

IP name: ip-172-31-51-105.us-west-2.compute.internal

Answer private resource DNS name

IPv4 (A)

Public IPv4 address

35.95.50.227 | [open address](#)

Instance state

Running

Private IP DNS name (IPv4 only)

ip-172-31-51-105.us-west-2.compute.internal

Instance type

t3.micro

Private IPv4 address

172.31.51.105

Elastic IP addresses

—



Connect

Instance state ▼

Actions ▲

Instance diagnostics

Instance settings ▶

Networking ▶

Security ▶

Image and templates ▶

Storage ▶

Monitor and troubleshoot ▶

Change security groups

Modify IAM role

Get Windows password

- Now click on Action.
- Then in Action Security.
- And simply click Modify role

Modify IAM role [Info](#)

Attach an IAM role to your instance.

Instance ID

i-00571d6dd33458e81 (hotel_agent)

IAM role

Select an IAM role to attach to your instance or create a new role if you haven't created any. The role you select replaces any roles that are currently attached to your instance.

Ec2_Bedrockk



Create new IAM role

Cancel

Update IAM role

- Now search your created role.
- And just click Update IAM role.
- Now go back to Ec2 Terminal.
- And Run Next steps.
 - streamlit run app.py
 - nohup streamlit run app.py

```
[root@ip-172-31-51-105 amazon-bedrock-agent-test-ui-main]# streamlit run app.py

Collecting usage statistics. To deactivate, set browser.gatherUsageStats to false.

You can now view your Streamlit app in your browser.

Local URL: http://localhost:8501
Network URL: http://172.31.51.105:8501
External URL: http://35.95.50.227:8501
```

- Now currently we run this url it's not working.
- So we need to fix out security group attachment.
- Go back to your Ec2

i-00571d6dd33458e81 (hotel_agent)

Details | Status and alarms | Monitoring | **Security** | Networking | Storage | Tags

▼ Security details

IAM role
Ec2_Bedrockk

Owner ID
463646775279

Security groups
sg-0401b164a82d97bb4 (launch-wizard-3)

- Now scroll down and click Security.
- And then go in Security group.

Inbound rules | Outbound rules | Sharing | VPC associations | Related resources - new | Tags

Inbound rules (1)

Search

Manage tags Edit inbound rules

Name	Security group rule ID	IP version	Type	Protocol	Port range
-	sgr-0b90ff02fbde7e1e8	IPv4	SSH	TCP	22

- Now scroll down and click Edit Inbound rules.

Edit inbound rules [Info](#)

Inbound rules control the incoming traffic that's allowed to reach the instance.

Inbound rules [Info](#)

Security group rule ID	Type Info	Protocol Info	Port range Info	Source Info	Description - optional Info	
sgr-0b90ff02fbde7e1e8	SSH	TCP	22	Cu...		Delete
-	Custom TCP	TCP	8501	An...		Delete

[Add rule](#)

[Cancel](#) [Preview changes](#) [Save rules](#)

- Now simply click Add rule
- Then choose custom TCP
- Then port range 8501(Streamlit).
- Then choose source Anywhere Ipv4
- Then simply click save rule.
- Our rule is saved.
- Now go back and open External Link.



- Now see its working.

Welcome to Hotel Booking Agent



What is the room availability for 2025-12-24 ?



Welcome to Taj Fort Aguada Resort & Spa, Goa, India! 🌴


Here is the room availability for **December 24, 2025**:

Room Type	Available Rooms
 Garden View	2 Rooms
 Sea View	6 Rooms

We have a limited number of **Garden View** rooms available, so I'd recommend booking soon! The **Sea View** rooms have a better availability with 6 rooms open.

Would you like more information about any of these room types, or would you like to proceed with a booking? 😊

- Now you see its working perfectly.
- Now I am going to deploy front end code on EC2 instance with an application load balancer so that you have fixed hostname.
- Open EC2

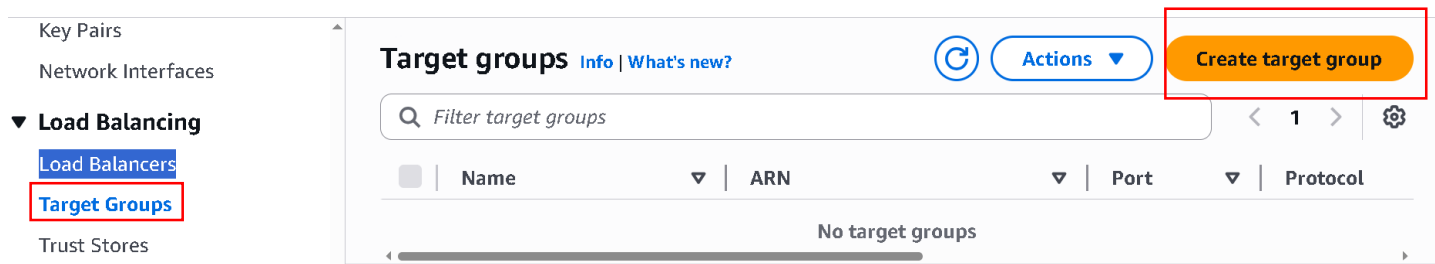

The screenshot shows the AWS Management Console 'Target groups' page. On the left sidebar, 'Load Balancing' is expanded, and 'Target Groups' is selected. The main content area shows a table with columns: Name, ARN, Port, and Protocol. The table is currently empty, displaying 'No target groups'. A red box highlights the 'Create target group' button in the top right corner.

- Now go to target group.
- In target group click create target group.

Settings - immutable

Choose a target type and the load balancer and listener will route traffic to your target. These settings can't be modified after target group creation."

Target type

Indicate what resource type you want to target. Only the selected resource type can be registered to this target group.



Instances

Supports load balancing to instances in a VPC. Integrate with Auto Scaling Groups or ECS services for automatic management.

Suitable for: **ALB** **NLB** **GWLB**



IP addresses

Supports load balancing to VPC and on-premises resources. Facilitates routing to IP addresses and network interfaces on the same instance. Supports IPv6 targets.

Suitable for: **ALB** **NLB** **GWLB**



Lambda function

Supports load balancing to a single Lambda function. ALB required as traffic source.

Suitable for: **ALB**



Application Load Balancer

Allows use of static IP addresses and PrivateLink with an Application Load Balancer. NLB required as traffic source.

Suitable for: **NLB**

- Choose target type instances

Target group name

Name must be unique per Region per AWS account.

demoagent

Accepts: a-z, A-Z, 0-9, and hyphen (-). Can't begin or end with hyphen. 1-32 total characters; Count: 9/32

Protocol

Protocol for communication between the load balancer and targets.

HTTP

Port

Port number where targets receive traffic. Can be overridden for individual targets during registration.

8501

1-65535

- Now give target group name.
- The give port 8501

Attributes

i Certain default attributes will be applied to your target group. You can view and edit them after creating the target group.

► Tags - optional

Consider adding tags to your target group. Tags enable you to categorize your AWS resources so you can more easily manage them.

Cancel

Next

- Now leave everything as it is.
- And click Next.

☒	Instance ID	Name	State	Security groups
☒	i-00571d6dd33458e81	hotel_agent	Running	launch-wizard-3

1 selected

Ports for the selected instances
Ports for routing traffic to the selected instances.

8501

1-65535 (separate multiple ports with commas)

Include as pending below

- Now click Include as pending below.

Review targets

Targets (1)

Remove all pending

Show only pending

< 1 > ⚙

Instance ID	Name	Port	State	Security groups	Zone	P
i-00571d6dd33458e81	hotel_agent	8501	Running	launch-wizard-3	us-west-2d	1

1 pending

CancelPreviousNext

- Now simply click next.

Step 2: Register targets

Edit

Targets (1)

Instance ID	Name	Port	Zone
i-00571d6dd33458e81	hotel_agent	8501	us-west-2d

CancelPreviousCreate target group

- Now review and scroll down.
- And simply click Create target group.
- Now open Ec2 in New tab

Key Pairs

Network Interfaces

▼ Load Balancing

Load Balancers

Target Groups

Trust Stores

▼ Auto Scaling

Load balancers

What's new?

Actions

Create load balancer

Elastic Load Balancing scales your load balancer capacity automatically in response to changes in incoming traffic.

< 1 > ⚙

	Name	State	Type	Scheme	IF
0 load balancers selected					


- And simply click create a load balancer

Compare and select load balancer type


A complete feature-by-feature comparison along with detailed highlights is also available. [Learn more](#)

Load balancer types

Application Load Balancer [Info](#)

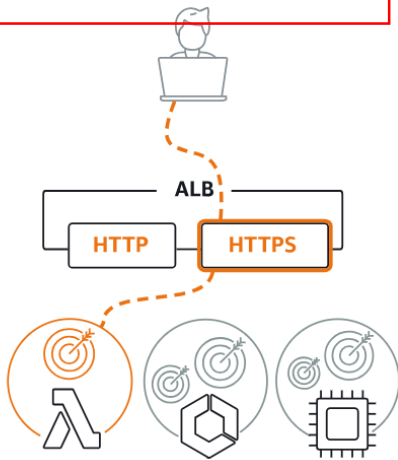

Network Load Balancer [Info](#)

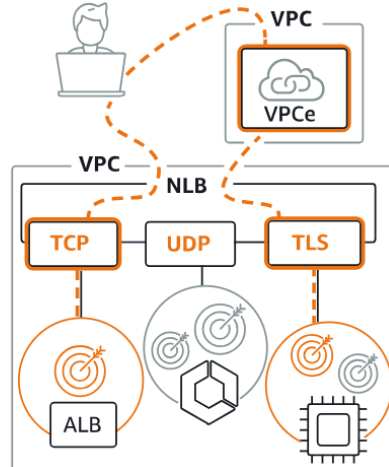

Gateway Load Balancer [Info](#)



- Now choose Application load Balancer

Basic configuration

Load balancer name

Name must be unique within your AWS account and can't be changed after the load balancer is created.

agentDemo

A maximum of 32 alphanumeric characters including hyphens are allowed, but the name must not begin or end with a hyphen.

- Now give agent name.

Availability Zones and subnets [Info](#)

Select at least two Availability Zones and a subnet for each zone. A load balancer node will be placed in each selected zone and will automatically scale in response to traffic. The load balancer routes traffic to targets in the selected Availability Zones only.

☒ us-west-2c (usw2-az3)

Subnet

Only CIDR blocks corresponding to the load balancer IP address type are used. At least 8 available IP addresses are required for your load balancer to scale efficiently. Selected subnets must have Network ACL inbound and outbound ALLOW rules, and internet gateway (IGW) routes configured to allow traffic.

subnet-05f27f74a66b5c77f

172.31.0.0/20

Network ACL ALLOW rules: Inbound (1) Outbound (1) | Route table: IGW (✓)

☒ us-west-2d (usw2-az4)

Subnet

Only CIDR blocks corresponding to the load balancer IP address type are used. At least 8 available IP addresses are required for your load balancer to scale efficiently. Selected subnets must have Network ACL inbound and outbound ALLOW rules, and internet gateway (IGW) routes configured to allow traffic.

- And scroll down and choose all availability zones you see.

Default action [Info](#)

The default action is used if no other rules apply. Choose the default action for traffic on this listener.

Routing action

☒ Forward to target groups

☐ Redirect to URL

☐ Return fixed response

Forward to target group [Info](#)

Choose a target group and specify routing weight or [create target group](#).

Target group

demoagent

HTTP

Target type: Instance, IPv4 | Target stickiness: Off



Weight

1

0-999

Percent

100%

- Now scroll down and in default action
- Choose Target group that you created.

Creation workflow and status

► Server-side tasks and status

After completing and submitting the above steps, all server-side tasks and their statuses become available for monitoring.

[Cancel](#)

[Create load balancer](#)

- Now leave everything as it is and scroll down.
- And click create Load Balancer.

Load balancer ARN

`arn:aws:elasticloadbalancing:us-west-2:463646775279:loadbalancer/app/agentDemo/279ef48d29c31a9b`

DNS name [Info](#)

`agentDemo-2009547956.us-west-2.elb.amazonaws.com (A Record)`

- Now our load Balancer is ready simply scroll down
- And copy DNS.
- And open in new tab
- It will currently not working.

Registered targets (1) [Info](#)

[Anomaly mitigation: Not applicable](#)



[Deregister](#)

[Register targets](#)

Target groups route requests to individual registered targets using the protocol and port number specified. Health checks are performed on all registered targets according to the target group's health check settings. Anomaly detection is automatically applied to HTTP/HTTPS target groups with at least 3 healthy targets.

< 1 >



☐	Instance ID	Name	Port	Zone	Health status	Health s
☐	i-00571d6dd33458e81	hotel_agent	8501	us-west-2d (us...	Unused	Target g

- When our target group health status is not green it will not work.
- So its automatically done wait some time and its working properly.

← → ↻ ⚠ Not secure agentdemo-2009547956.us-west-2.elb.amazonaws.com 🔍 ☆ 📄 📄 📄

Reset Session

Trace

Pre-Processing

> Trace Step 1

Orchestration

> Trace Step 2

Post-Processing

> Trace Step 3

Citations

Welcome to Hotel Booking Agent

 hii



Welcome to Taj Fort Aguada Resort & Spa, Goa, India! 🌟

I'm delighted to assist you today. Whether you're looking to:

- 🏠 Book a room
- 🌿 Explore our room types (Garden View or Sea View)
- 📅 Check room availability
- ⓘ Get information about our amenities and services

How may I assist you today?

Your message ➤

- Now see its working perfectly.