


Travel Agent

Summary: -

You created a smart travel assistant using Amazon Bedrock that helps users find restaurants, hotels, and Airbnb stays based on their needs. The assistant can understand user requests, suggest places from your uploaded data, and guide users to the right options for food and accommodation. It works like a complete travel helper that gives personalized recommendations automatically.

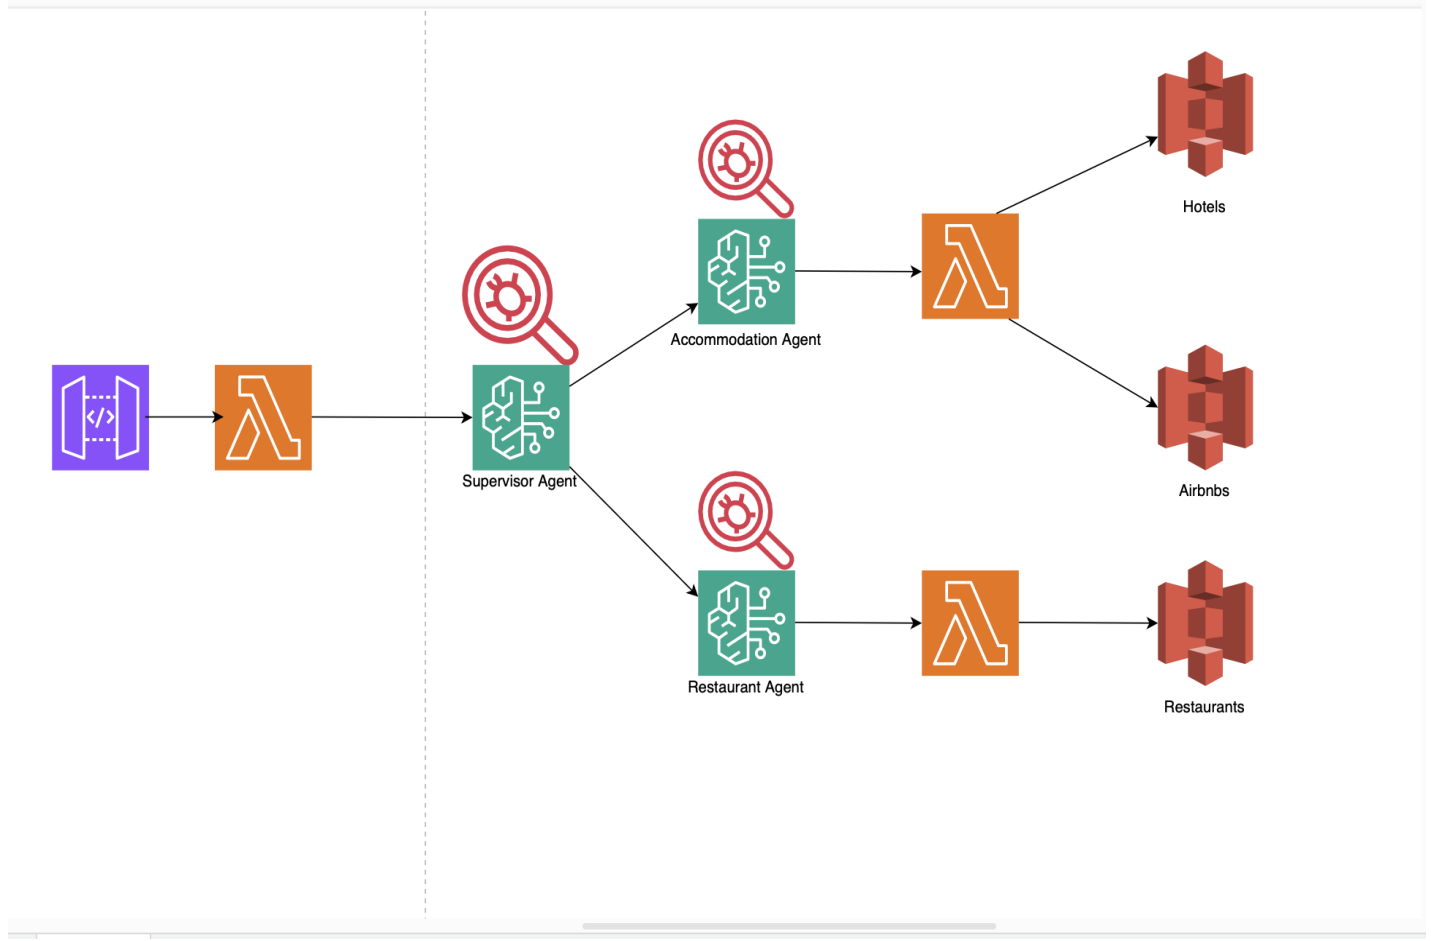


- This is our workflow we create a Travel Agent.
- We have a supervisor Agent who is going to have access to additional agents.
- Such as the Accommodation Agent and the Restaurant Agent and based off the conversations with the user, the supervisor agent will know which agent to call whether the user want to stay overnight somewhere or whether they want to dine somewhere and depending on that it will pass it to the appropriate Agent.
- The Appropriate Agent will have action Group right now their Lambda functions, and they can invoke other API.
- Our data is going to located in S3 bucket.


Restaurant Agent

Now let's Create Our Agent: -

- Go to your AWS Console
- And search Amazon Bedrock

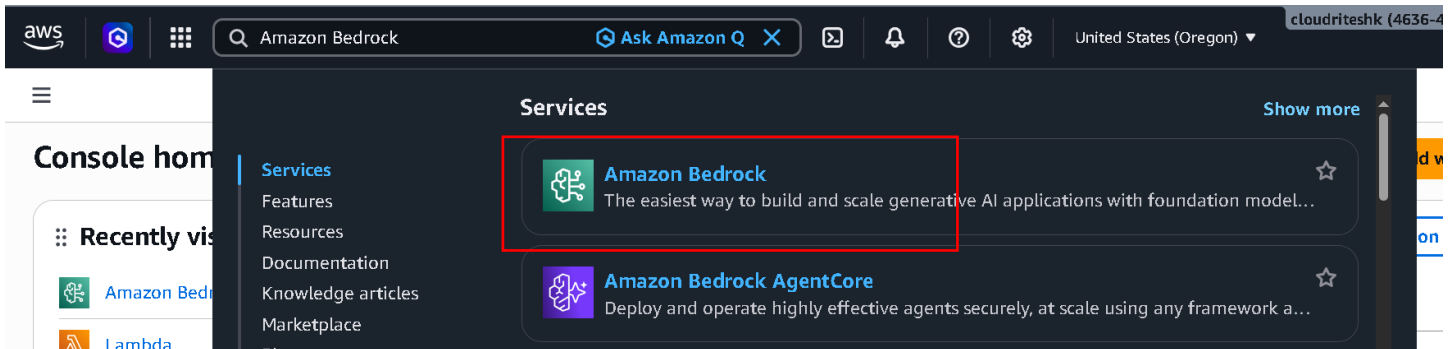

- Click on the Amazon Bedrock

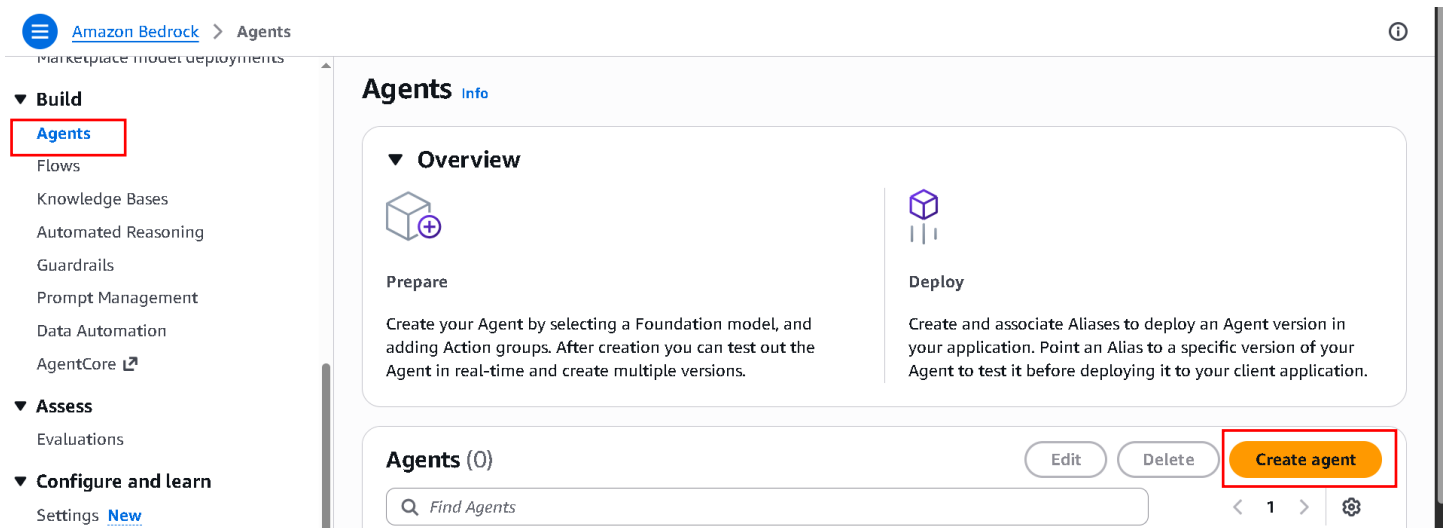

- Now scroll down in navigation bar
- And click Agents under Build Section
- And now just click Create Agent.

Create agent

Name

bedrock-restaurant-agent

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Description - optional

Enter description

The description can have up to 200 characters.

Multi-agent collaboration

[Learn more about multi-agent collaboration](#)

☐ Enable multi-agent collaboration

If you have more than one agent, multi-agent collaboration allows this agent to associate the others as agent collaborators to orchestrate responses. You can change this later.

Cancel

Create

- Give Agent name bedrock-restaurant-agent
- And just click Create.

Agent details

Agent name

bedrock-restaurant-agent

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Agent description - optional

Enter description

The description can have up to 200 characters.

Agent resource role

☒ Create and use a new service role

☐ Use an existing service role

AmazonBedrockExecutionRoleForAgents_21WYL87GFNF

Select model

Select model

- Our Agent is created.
- Now click Select model.

✓ Agent: bedrock-restaurant-agent was successfully created.



Agent builder Info

Manual

Assistant

Test

Prepare

Save

Save and exit

Agent details

Agent name

bedrock-restaurant-agent

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Agent description - optional

Enter description

The description can have up to 200 characters.

- Now scroll up
- And click save.
- After save click Prepare.
- After prepare Test.
- Now ask Question from Agent

Test Agent

Using ODT [Change](#)



city you want to dine in



I'd be happy to help you find a restaurant! I need a couple of details from you. Let me ask! Could you please tell me:

1. **Which city** would you like to dine in?
2. Are you looking for a **fine dining experience**, or something more casual?



[Show trace >](#)

- Our Agent is working properly.

- Now Add Action Groups.
- Scroll down.

Action groups (0) [Info](#)

[Delete](#)[Add](#)

< 1 > 

Name ▼	Description	State 	Last updated ▼
No action groups			
No actions group to display			
Add			

- click ADD inside Action Group Section.

Create Action group

Action group details

Enter Action group name

restaurant-action-group

Description - *optional*

Enter description

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). This description can have up to 200 characters.

- Enter action group name.
- And simply scroll down.

Action group type

Select what type of action group to create

- ☒ **Define with function details**
Specify functions and define parameters as JSON objects that will be associated to the action group invocation.

- ☐ **Define with API schemas**
Specify a Lambda or API Gateway and define a schema to specify the APIs that the agent can invoke to carry out its tasks.

Action group invocation

Specify a Lambda function that will be invoked based on the action group identified by the Foundation model during orchestration.

Select how to define the Lambda function

- ☒ **Quick create a new Lambda function - *recommended***
An Amazon Lambda function will be created in your account on your behalf. No further configurations are necessary.
- ☐ **Select an existing Lambda function**
Use an existing Lambda function for this action group.
- ☐ **Return control**
Agent responses in the test window will prompt the user for function details to generate a response. No further configurations are necessary.

- Action group type same as the image.
- Action group invocation same as the image.
- Noe scroll down.

▼ Action group function 1 : list-resta

Delete

Table

JSON Editor

A function specifies the business logic for this action group using the defined parameters. Create functions using the form builder or via JSON editor. Up to 3 functions can be created per action group.

Name

list-restaurants

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). This description can have up to 100 characters.

Description - *optional*

Enter description

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). This description can have up to 1200 characters.

- Enter Name list-restaurants.
- And scroll down

Enable confirmation of action group function - *optional*

Request confirmation before user invokes the action group's function. Enabling this may safeguard your end user from malicious prompt injection.

- ☐ Enabled
- ☒ Disabled

Parameters (0)

Parameters allow you do define object relationships within the action group function.

Name 	Description 	Type 	Required 	Delete
--	---	--	--	--------

No parameters

Add parameter

- Confirmation disabled.
- And then click Add parameter.

Parameters (2)

Parameters allow you do define object relationships within the action group function.

Name 	Description 	Type 	Required 	Delete
--	---	--	--	--------

City	the city where the user wants to dine.	String	True	
fine_dine	whether the user wants to fine dine or not	String	True	

Add parameter

Add action group function

Cancel

Create

- Added two parameters
- City , the city where the user wants to dine., String, True.
- fine_dine, whether the user wants to fine dine or not, String, True.
- Now simply click Create.

Action groups (1) Info Delete Add				
Find action groups < 1 > ⚙️				
	Name	Description	State	Last updated
☐	restaurant-action-group		Enabled	May 08, 2026, 16:22 (UTC+05:30)

- Now our Action group is created.
- Click on it and open it.

Action group invocation

Specify a Lambda function that will be invoked based on the action group identified by the Foundation model during orchestration.

Select how to define the Lambda function

- ☐ Quick create a new Lambda function - *recommended*
An Amazon Lambda function will be created in your account on your behalf. No further configurations are necessary.
- ☒ Select an existing Lambda function
Use an existing Lambda function for this action group.
- ☐ Return control
Agent responses in the test window will prompt the user for function details to generate a response. No further configurations are necessary.

Select Lambda function

Select a previously created Lambda function or visit [AWS Lambda](#) to create a new function. ([\\$opens in new tab](#))

restaurant-action-group-oau2o

Function version

\$LATEST View

- Now scroll down and see in Action Group invocation Our lambda function is created.
- Now click on View to open it.
- Before we work on our Lambda function we create S3 bucket where we store our restaurant CSV File.
- So Let's create S3 Bucket.
- Go and search S3 in console and open it.

Buckets

General purpose buckets

All AWS Regions

Directory buckets

General purpose buckets (137) [Info](#)



Copy ARN

Empty

Delete

Create bucket

Buckets are containers for data stored in S3.

Find buckets by name

< 1 2 >



- Now click create.

Bucket type [Info](#)

☒ General purpose

Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ Directory

Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket namespace

Choose the namespace where you want to create your bucket. [Learn more](#)

☒ Global namespace

By default, S3 creates general purpose buckets in the global namespace.

☐ Account Regional namespace (recommended)

General purpose buckets created in your account Regional namespace are unique to your account. These buckets can never be created by another AWS account.

Bucket name [Info](#)

bedrock-restaurant-agent-Bucket

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-).

[Learn more](#)

Copy settings from existing bucket - optional

Only the bucket settings in the following configuration are copied.

Choose bucket

- Enter the Bucket Name bedrock-restaurant-aggent-bucket23
- and simply scroll down and leave else default.

► Advanced settings

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Cancel

Create bucket

- Simply click Create Bucket.

bedrock-restaurant-agent-bucket23 [Info](#)

Objects

Metadata

Properties

Permissions

Metrics

Management

File systems - new

Access Points

Objects (0)

[Copy S3 URI](#) [Copy URL](#) [Download](#) [Open](#) [Delete](#) [Actions](#) [Create folder](#) [Upload](#)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

[No objects](#)

You don't have any objects in this bucket.

[Upload](#)

- Now click on upload.

Files and folders (0)

All files and folders in this table will be uploaded.

[Remove](#) [Add files](#) [Add folder](#)

[No files or folders](#)

You have not chosen any files or folders to upload.

- Now click on Add files.
- And your restaurant.csv file provided in Resource.

Permissions

Grant public access and access to other AWS accounts.

Properties

Specify storage class, encryption settings, tags, and more.

[Cancel](#) [Upload](#)

- Now scroll down and click Upload.

[Upload succeeded](#)

For more information, see the [Files and folders](#) table.

Summary

Destination

s3://bedrock-restaurant-agent-bucket23

Succeeded

[1 file, 906.0 B \(100.00%\)](#)

Failed

[0 files, 0 B \(0%\)](#)

Files and folders

Configuration

Files and folders (1 total, 906.0 B)

Name	Folder	Type	Size	Status	Error
restaurant.csv	-	text/csv	906.0 B	Succeeded	-

- Our File is uploaded.

1	Restaurant Name	City	Fine Dining
2	The Gourmet Table	New York	Yes
3	Burger Palace	Los Angeles	No
4	Urban Grill	Chicago	No
5	Sushi Zen	Houston	Yes
6	Pasta Fresca	Phoenix	Yes
7	The Golden Fork	Philadelphia	Yes
8	Taco Fiesta	San Antonio	No
9	Crimson Plate	San Diego	Yes
10	Steakhouse Royale	Dallas	Yes

- Basically our CSV file look like this in which Restaurant name, City, Fine Dining
- Now go to Lambda Function that created by action group.

☰ [Lambda](#) > [Functions](#) > restaurant-action-group-oau2o ⓘ 🔍

restaurant-action-group-oau2o

Throttle
📄 Copy ARN
Actions ▼

▼ Function overview Info

Diagram | Template


restaurant-action-group-oau2o


 Layers (0)

+ Add trigger
+ Add destination


Export to Infrastructure Composer
Download ▼

Function ARN
 📄 `arn:aws:lambda:us-west-2:463646775279:function:restaurant-action-group-oau2o`


Description
 -

Last modified
 1 hour ago

- Now scroll down.

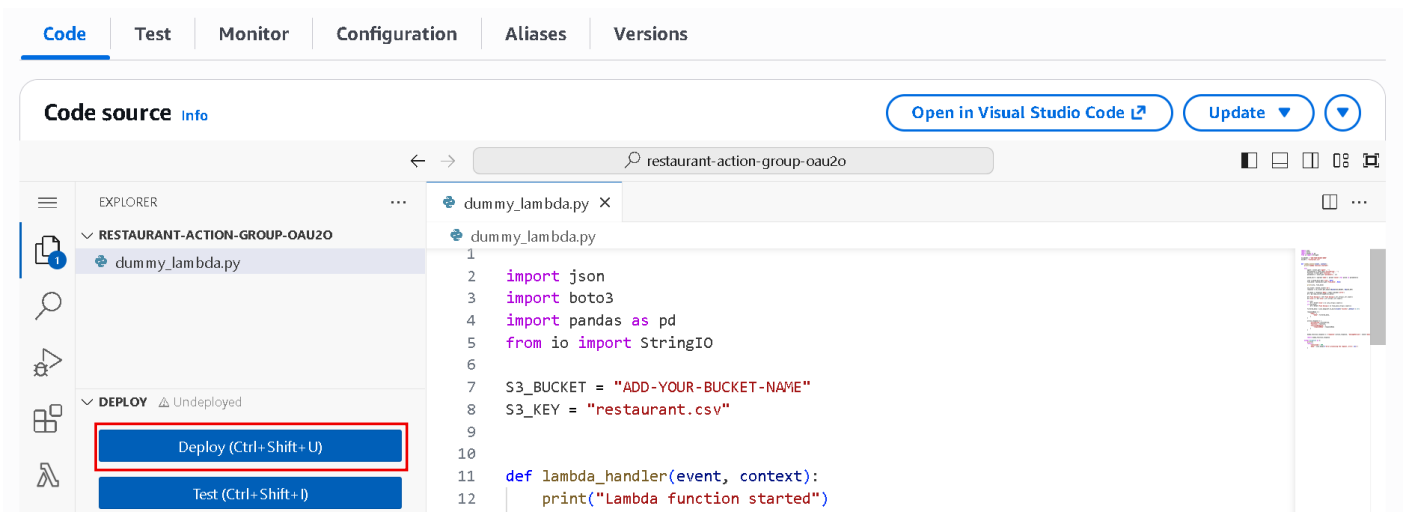


- And in code Section replace the code that will provided in resource.
- Now in line no 7 give your Bucket name.
- And in line 8 S3_key = [restaurant.csv](#)
- And click deploy.

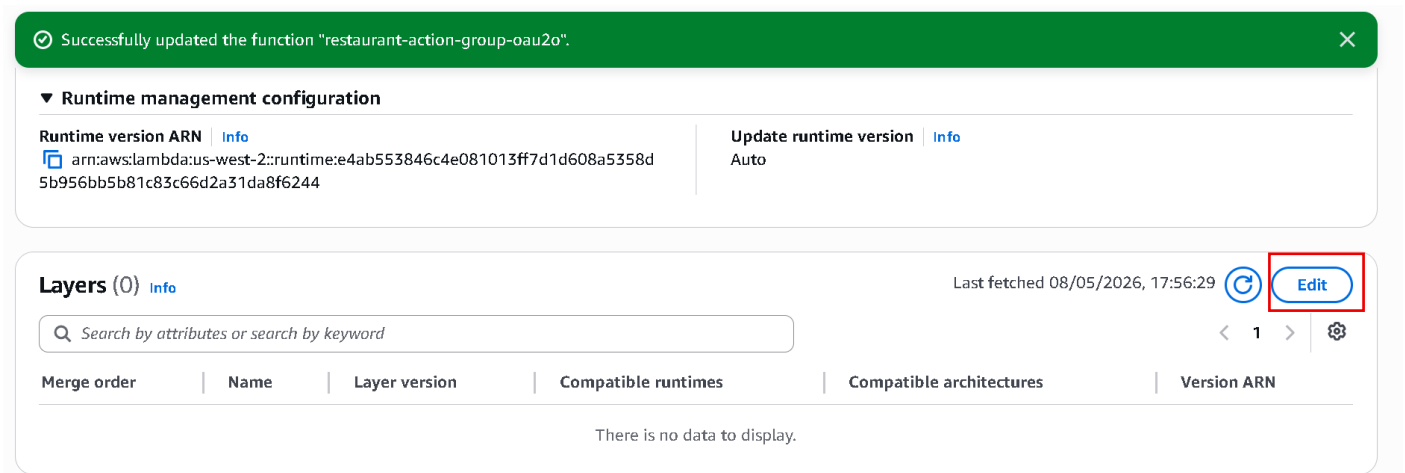

- Now our code is deploy and we need to add a layer.
- Because we added Pandas package in our Lambda function and right now this lambda function is serverless so amazon doesn't add big packages to it.
- So scroll down.
- And in Layer Click Edit.

Edit layers

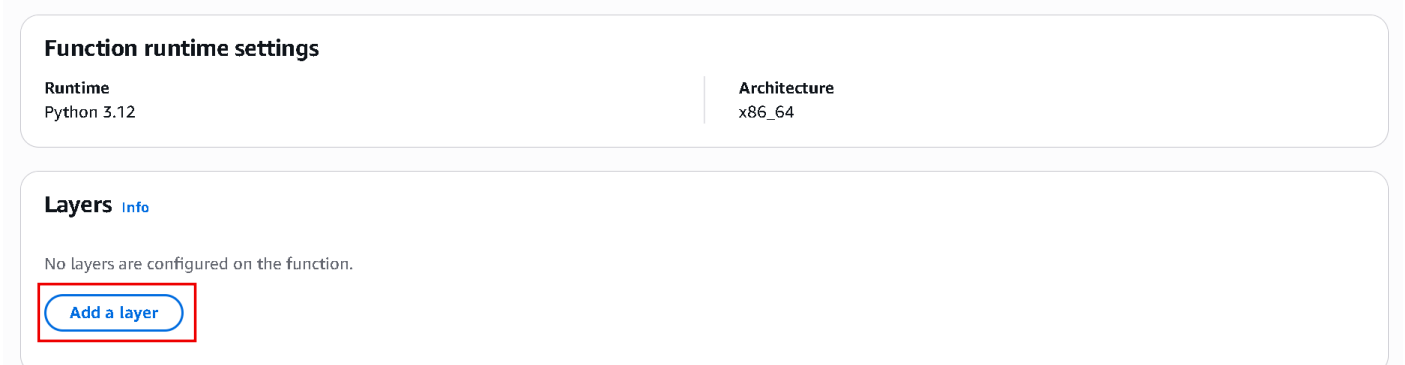

- Click Add a layer.

Layer source [Info](#)

Choose from layers with a compatible runtime and instruction set architecture or specify the Amazon Resource Name (ARN) of a layer version. You can also [create a new layer](#).

☒ AWS layers

Choose a layer from a list of layers provided by AWS.

☐ Custom layers

Choose a layer from a list of layers created by your AWS account.

☐ Specify an ARN

Specify a layer by providing the ARN.

AWS layers

Layers provided by AWS.

AWSSDKPandas-Python312

Version

24

Description

AWS SDK for pandas Lambda Layer - 3.16.0 (Python 3.12)

Compatible runtimes

Python 3.12

Compatible architectures

x86_64

Cancel

Add

- Layer Source – AWS Layers
- AWS layers – AWSSDKPandas-Python312
- Version - 24
- Then click ADD.

Layers [Info](#)

AWSSDKPandas-Python312

arn:aws:lambda:us-west-2:336392948345:layer:AWSSDKPandas-Python312:24

Add a layer

Some Lambda layers may not be compatible with functions running on Lambda Managed Instances. Verify layer compatibility and remove any incompatible layers from your function configuration. Layer compatibility depends on the runtime and architecture of your EC2 instance.

Cancel

Save

- Now click Save.

Successfully updated the function "restaurant-action-group-oau2o".

Runtime management configuration

Runtime version ARN [Info](#)

arn:aws:lambda:us-west-2::runtime:e4ab553846c4e081013ff7d1d608a5358d5b956bb5b81c83c66d2a31da8f6244

Update runtime version [Info](#)

Auto

Layers (1) [Info](#)

Last fetched 08/05/2026, 18:15:12

< 1 >

Edit

Search by attributes or search by keyword

Merge order	Name	Layer version	Compatible runtimes	Compatible architectures	Version ARN
1	AWSSDKPandas-Python312	24	python3.12	x86_64	arn:aws:lambda:us-west-2:336392948345:layer:AWSSDKPandas-Python312:24

- Our Layer is added.
- Now Scroll Up.

Code Test Monitor **Configuration** Aliases Versions

Configuration

General configuration
Triggers
Permissions
Destinations
Function URL

Execution role [View role document](#) [Edit](#)

Role name
[restaurant-action-group-oau2o-role-1OR92OGTSI](#)

Resource summary
To view the resources and actions that your function has permission to access, choose a service.

Amazon CloudWatch Logs
3 actions 2 resources

- Now click on Configuration.
- And in Configuration Go inside Permission.
- And click Role name.

restaurant-action-group-oau2o-role-1OR92OGTSI [Info](#) [Delete](#)

Summary [Edit](#)

Creation date
May 08, 2026, 16:22 (UTC+05:30)

ARN
 arn:aws:iam::463646775279:role/service-role/restaurant-action-group-oau2o-role-1OR92OGTSI

Last activity
-

Maximum session duration
1 hour

Permissions Trust relationships Tags Last Accessed Revoke sessions

Permissions policies (1) [Info](#) [Simulate](#) [Remove](#) [Attach policies](#) [Create inline policy](#) [Add permissions](#)

You can attach up to 10 managed policies.

- Now click Add permissions and select Attach policies.

Other permissions policies (1/2162) [Refresh](#)

[X](#) **Filter by Type** All types 1 match

☒	Policy name	Type	Description
☒	AmazonS3FullAccess	AWS managed	Provides full access to all buckets via t...

[Cancel](#) [Add permissions](#)

- Search AmazonS3FullAccess and select it.
- And click Add permissions.
- Now Permission is added close this tab.
- And go to Lambda function tab.

Code Test Monitor **Configuration** Aliases Versions

Configuration

General configuration [Info](#) [Edit](#)

Description -	Memory 128 MB	Ephemeral storage 512 MB
Timeout 0 min 3 sec	SnapStart Info None	

- In Lambda function go inside General configuration and click Edit.

Timeout

2

 min

3

 sec

Execution role

To access other AWS services and resources your function needs an IAM role. Choose a role with the right permissions for your function.

restaurant-action-group-oau2o-role-1OR92O...

Create new role

[View role details in IAM](#)

Cancel

Save

- Scroll down and set Timeout 2 min 3 sec.
- And click Save.
- Now Our lambda function work is done go to your Agent.

Agent builder

Manual | Assistant | Test | Prepare | Save | Save and exit

Agent details

Agent name

bedrock-restaurant-agent

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Agent description - optional

Enter description

The description can have up to 200 characters.

- Now Simply click Save and exit.

bedrock-restaurant-agent

Create Alias | Test | Edit in Agent Builder

Agent overview

Name bedrock-restaurant-agent	ID RVNUJUJBHB
Description -	Status PREPARED
Creation date May 08, 2026, 15:08 (UTC+05:30)	Last prepared May 08, 2026, 21:52 (UTC+05:30)
Permissions arn:aws:iam::463646775279:role/service-role/AmazonBedrockExecutionRoleForAgents_21WYL87GFNF	Agent ARN arn:aws:bedrock:us-west-2:463646775279:agent/RVNUJUJBHB
User Input DISABLED	Memory Disabled

- Click on Create Alias.

Create alias

×

Alias name

restaurant-alias

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Description - optional

Enter description

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 200 characters.

Associate a version

☒ Create a new version and associate it to this alias.
 ☐ Use an existing version to associate this alias.

Select throughput

☒ On-demand (ODT)
 ☐ Provisioned Throughput (PT)

Cancel

Create alias

- Enter Alias name restaurant-alias.
- Now click Create alias.

Amazon Bedrock > Agents > Agent Details

bedrock-restaurant-agent

Create Alias

Test

Edit in Agent Builder

Agent overview

Name bedrock-restaurant-agent	ID RVNUJJJBHB
Description -	Status ✓ PREPARED
Creation date May 08, 2026, 15:08 (UTC+05:30)	Last prepared May 08, 2026, 15:37 (UTC+05:30)
Permissions arn:aws:iam::463646775279:role/service-role/AmazonBedrockExecutionRoleForAgents_21WYL87GFNF	Agent ARN arn:aws:bedrock:us-west-2:463646775279:agent/RVNUJJJBHB
User Input DISABLED	Memory Disabled

Test

TestAlias: Working draft Info Using ODT Chan

Prepare the Agent to test the latest changes.

Prepare

Enter your message here

⋮

Run

- Now Simply click Prepare.
- And test the agent

Test

Using ODT [Change](#)

TestAlias: Working draft ▼

[Info](#)



hii



Hello! Welcome! I'm here to help you find the perfect restaurant. 😊

Could you please tell me:

1. **Which city** are you looking to dine in?
2. Are you looking for a **fine dining experience** or something more casual?



[Show trace >](#)

- Our Agent is Replying.

Test

Using ODT [Change](#)

TestAlias: Working draft ▼

[Info](#)




[Show trace >](#)



i want to eat something in Houston



Are you looking for a **fine dining experience** or something more casual in Houston?



[< Hide trace](#)

Test

Using ODT [Change](#)

TestAlias: Working draft ▼

[Info](#)



i want to fine dine



Great news! Here's a **fine dining** restaurant in Houston for you:



Sushi Zen

- 📍 City: Houston
- ✨ Fine Dining: Yes

Enjoy your **fine dining** experience at Sushi Zen!

Let me know if you need any more help. 😊




[Show trace >](#)

- Now its give result from CSV File.


Accommodation Agent

Now let's Create Our Agent: -

- Go to your AWS Console
- And search Amazon Bedrock

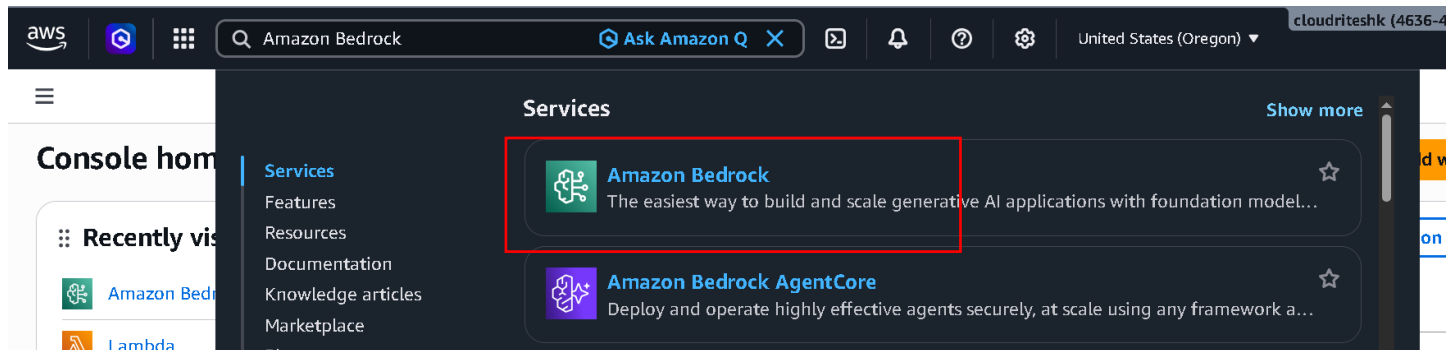

- Click on the Amazon Bedrock

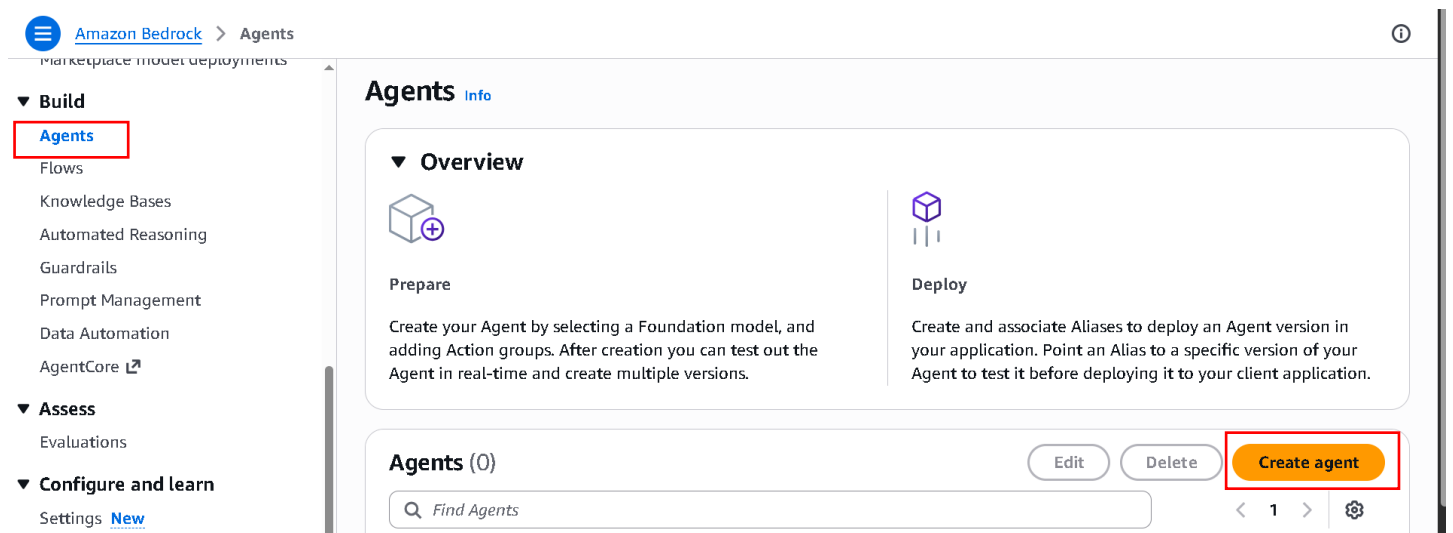

- Now scroll down in navigation bar
- And click Agents under Build Section
- And now just click Create Agent.

Agent details

Agent name

bedrock-accommodation-agent

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Agent description - optional

Enter description

The description can have up to 200 characters.

Agent resource role

☒ Create and use a new service role

☐ Use an existing service role

AmazonBedrockExecutionRoleForAgents_1IGYIFGBM79

Select model

Select model

- Our Agent is created.
- Now click Select model.

Select model

Find available models and inference

Input: Choose options

Output: Choose options

☐ Bedrock Agents optimized [Learn more](#)

1. Categories

Serverless model providers

- Amazon
- Anthropic**
- Cohere
- DeepSeek
- Google
- Meta
- MiniMax

2. Models

- Claude Sonnet 4.6 v1**
Input: Text, Image
Output: Text
Max input: 1M tokens
- Claude Haiku 4.5 v1
Input: Text, Image
Output: Text
Max input: 200K tokens
- Claude Opus 4.6 v1
Input: Text, Image
Output: Text
Max input: 1M tokens
- Claude Opus 4.7 v1
Input: Text, Image

3. Inference

Inference profiles

- US Anthropic Claude Sonnet 4.6**
- Cross-region
- Global Anthropic Claude Sonnet 4.6

Cancel Apply

- Select Categories, Models and Inference
- And just click Apply.



Claude Sonnet ... v1 ⓘ
US Anthropic Claude Sonnet 4.6



Instructions for the Agent

Provide clear and specific instructions for the task the Agent will perform. You can also provide certain style and tone.

You are the Accommodation Agent.

You receive user requests from the Main Agent when they want to find a place to stay.

You need to determine if they want a hotel or an Airbnb:

- If hotel: you must know the city.
- If Airbnb: you must know the city, whether pets are allowed, and if a sauna or pool is needed. You must convert all responses of the user to either "Yes" or "No". This is very important.

Once you have these details, forward them to the "Accommodation Collaborator."

It will call the right function:

- "listHotels" for hotels.
- "listAirbnbs" for Airbnbs.

When you get the collaborator's response (function result), pass it back to the Main Agent.

If any details are missing, prompt the user for more info before calling the collaborator.

- Now give some instruction to agent means what it need to do
- This instruction is Provided in Resource.

Agent builder [Info](#)

Manual

Assistant

Test

Prepare

Save

Save and exit

Agent details

Agent name

bedrock-accommodation-agent

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Agent description - optional

Enter description

The description can have up to 200 characters.

Agent resource role

- ☒ Create and use a new service role
- ☐ Use an existing service role

- Now scroll up
- And click save.
- After save click Prepare.
- Now Add Action Groups.
- Scroll down.

Action groups (0) [Info](#)

[Delete](#)[Add](#)< 1 > 

Name ▼

Description

State 

Last updated ▼

No action groups

No actions group to display

[Add](#)

- click ADD inside Action Group Section.

Create Action group

Action group details

Enter Action group name

Description - *optional*

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). This description can have up to 200 characters.

- Enter the Action Group name accommodation-action-group.

Action group type

Select what type of action group to create

- ☒ **Define with function details**
Specify functions and define parameters as JSON objects that will be associated to the action group invocation.

- ☐ **Define with API schemas**
Specify a Lambda or API Gateway and define a schema to specify the APIs that the agent can invoke to carry out its tasks.

Action group invocation

Specify a Lambda function that will be invoked based on the action group identified by the Foundation model during orchestration.

Select how to define the Lambda function

- ☒ **Quick create a new Lambda function - *recommended***
An Amazon Lambda function will be created in your account on your behalf. No further configurations are necessary.
- ☐ **Select an existing Lambda function**
Use an existing Lambda function for this action group.
- ☐ **Return control**
Agent responses in the test window will prompt the user for function details to generate a response. No further configurations are necessary.

- Action group type same as the image.
- Action group invocation same as the image.
- Now scroll down.

▼ Action group function 1 : list-hotel

Delete

Table

JSON Editor

A function specifies the business logic for this action group using the defined parameters. Create functions using the form builder or via JSON editor. Up to 3 functions can be created per action group.

Name

list-hotels

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). This description can have up to 100 characters.

Description - *optional*

Enter description

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). This description can have up to 1200 characters.

- Enter Action group function 1 name list-hotels
- Now scroll down.

Enable confirmation of action group function - *optional*

Request confirmation before user invokes the action group's function. Enabling this may safeguard your end user from malicious prompt injection.

- ☐ Enabled
- ☒ Disabled

Parameters (0)

Parameters allow you do define object relationships within the action group function.

Name	Description	Type	Required	Delete
------	-------------	------	----------	--------

No parameters

Add parameter

- Disable the confirmation of action group.
- Now click Add parameter.

Parameters (1)

Parameters allow you do define object relationships within the action group function.

Name	Description	Type	Required	Delete
------	-------------	------	----------	--------

location	location of the hotel	String	True	
----------	-----------------------	--------	------	--

Add parameter

Add action group function

- Parameters are added.
- Location, location of the hotel, String, True
- Now add one more action group function click add action group function.

▼ Action group function 2 : list-airbn

Delete

Table

JSON Editor

A function specifies the business logic for this action group using the defined parameters. Create functions using the form builder or via JSON editor. Up to 3 functions can be created per action group.

Name

list-airbnbs

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). This description can have up to 100 characters.

Description - *optional*

Enter description

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). This description can have up to 1200 characters.

- Enter Action group function 2 name list-airbnbs
- Now scroll down.

Enable confirmation of action group function - *optional*

Request confirmation before user invokes the action group's function. Enabling this may safeguard your end user from malicious prompt injection.

- ☐ Enabled
☒ Disabled

Parameters (0)

Parameters allow you to define object relationships within the action group function.

Name 	Description 	Type 	Required 	Delete
--	---	--	--	--------

No parameters

Add parameter

- Disable the confirmation of action group.
- Now click Add parameter.

Parameters (4)

Parameters allow you to define object relationships within the action group function.

Name 	Description 	Type 	Required 	Delete
--	---	--	--	--------

location	location of the airbnbs	String	True	
pets	whether pets are allowed	String	True	
pool	whether a pool is available	String	True	
sauna	whether a sauna is available	String	True	

Add parameter

Add action group function

Cancel

Create

- Add 4 parameters.
 1. location, location of the airbnbs, String, True
 2. pets, whether pets are allowed, String, True
 3. pool, whether a pool is available, String, True
 4. sauna, whether a sauna is available, String, True
- Now simply click Create.

Action groups (1) Info

DeleteAdd

Find action groups

< 1 >

⚙️

Name	Description	State	Last updated
accommodation-action-group		✔ Enabled	May 09, 2026, 13:22 (UTC+0)

- action group are created.
- Now click on it so they can open.

- Now you see our Lambda function is created.
- Now click on View for open Lambda function.

- Lambda function is created
- Now before we working on lambda function we upload hotel and Airbnb's csv file in our S3 Bucket that we created previously.

bedrock-restaurant-agent-bucket23 [Info](#)

[Objects](#)

[Metadata](#)

[Properties](#)

[Permissions](#)

[Metrics](#)

[Management](#)

[File systems - new](#)

[Access Points](#)

Objects (1)



Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

< 1 > ⚙

☐	Name	Type	Last modified	Size	Storage class
☐	restaurant.csv	csv	May 8, 2026, 17:34:34 (UTC+05:30)	906.0 B	Standard

- Now click Upload.

Upload [Info](#)

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

Files and folders (0)

Remove

Add files

Add folder

All files and folders in this table will be uploaded.

- Now click Add files.

► Permissions

Grant public access and access to other AWS accounts.

► Properties

Specify storage class, encryption settings, tags, and more.

Cancel

Upload

- Now scroll down and click upload.

✓ Upload succeeded
For more information, see the **Files and folders** table.

Files and folders (2 total, 1.9 KB)

Find by name

< 1 >

Name	Folder	Type	Size	Status	Error
airbnb.csv	-	text/csv	1.1 KB	✓ Succeeded	-
hotel.csv	-	text/csv	830.0 B	✓ Succeeded	-

- Our file is uploaded.

1	Name	Location	Pets	Pool	Sauna
2	The Urban Oasis	New York	Yes	Yes	Yes
3	Seaside Retreat	Los Angeles	No	Yes	No
4	Mountain Getaway	Chicago	Yes	No	No
5	City Lights Loft	Houston	No	Yes	No
6	Desert Haven	Phoenix	Yes	No	Yes
7	The Cozy Cottage	Philadelphia	No	No	No
8	Rustic Retreat	San Antonio	Yes	Yes	No
9	Luxury Villa	San Diego	No	Yes	Yes
10	Treehouse Escape	Dallas	Yes	No	Yes

- Our airbnbs.csv file looks like this.

1	Hotel	Location
2	The Grand Escape	New York
3	Sunrise Suites	Los Angeles
4	Oceanview Inn	San Francisco
5	The Velvet Rose	Houston
6	Majestic Horizon	Phoenix
7	The Alpine Lodge	Philadelphia
8	Azure Bliss	San Antonio
9	Golden Sands Resort	San Diego
10	Emerald Retreat	Dallas

- Our hotel.csv file looks like this.
- Now open the tab where your lambda function is opened now.

The screenshot shows the AWS Lambda console interface. At the top, there are tabs for Code, Test, Monitor, Configuration, Aliases, and Versions. The 'Code source' tab is selected, displaying the code for the lambda function 'accommodation-action-group-f4wug'. On the left, the 'EXPLORER' pane shows the file structure with 'dummy_lambda.py' selected. Below the explorer, the 'DEPLOY' section is visible, with a 'Deploy (Ctrl+Shift+U)' button highlighted by a red rectangle. The code editor on the right shows the following Python code:

```

1 import json
2 import boto3
3 import pandas as pd
4 import json
5 from io import StringIO
6
7 S3_BUCKET = 'bedrock-restaurant-agent-bucket23'
8 HOTEL_CSV_KEY = 'hotel.csv'
9 AIRBNB_CSV_KEY = 'airbnb.csv'
10
11 def lambda_handler(event, context):
12     print('Lambda function started')
13     try:

```

- Now in code section replace code with resource code.
- Now in code line 7 give your bedrock-restaurant-agent-bucket23
- Now simply deploy it.

✓ Successfully updated the function "restaurant-action-group-oau2o".

▼ Runtime management configuration

Runtime version ARN [Info](#)

 arn:aws:lambda:us-west-2::runtime:e4ab553846c4e081013ff7d1d608a5358d5b956bb5b81c83c66d2a31da8f6244

Update runtime version [Info](#)

Auto

Layers (0) [Info](#)

Last fetched 08/05/2026, 17:56:29 

[Edit](#)

 Search by attributes or search by keyword

< 1 >



Merge order

Name

Layer version

Compatible runtimes

Compatible architectures

Version ARN

There is no data to display.

- Now our code is deploy and we need to add a layer.
- Because we added Pandas package in our Lambda function and right now this lambda function is serverless so amazon doesn't add big packages to it.
- So scroll down.
- And in Layer Click Edit.

Edit layers

Function runtime settings

Runtime
Python 3.12

Architecture
x86_64

Layers [Info](#)

No layers are configured on the function.

[Add a layer](#)

- Click Add a layer.

Layer source [Info](#)

Choose from layers with a compatible runtime and instruction set architecture or specify the Amazon Resource Name (ARN) of a layer version. You can also [create a new layer](#).

☒ AWS layers

Choose a layer from a list of layers provided by AWS.

☐ Custom layers

Choose a layer from a list of layers created by your AWS account.

☐ Specify an ARN

Specify a layer by providing the ARN.

AWS layers

Layers provided by AWS.

AWSSDKPandas-Python312 



Version

24 



Description

AWS SDK for pandas Lambda Layer - 3.16.0 (Python 3.12)

Compatible runtimes

Python 3.12

Compatible architectures

x86_64

[Cancel](#)

[Add](#)

- Layer Source – AWS Layers
- AWS layers – AWSSDKPandas-Python312
- Version - 24

- Then click ADD.

Layers [Info](#)

AWSSDKPandas-Python312

Q

arn:aws:lambda:us-west-2:336392948345:layer:AWSSDKPandas-Python312:24

X

Add a layer

Some Lambda layers may not be compatible with functions running on Lambda Managed Instances. Verify layer compatibility and remove any incompatible layers from your function configuration. Layer compatibility depends on the runtime and architecture of your EC2 instance.

Cancel

Save

- Now click Save.

Successfully updated the function "restaurant-action-group-oau2o".

X

Runtime management configuration

Runtime version ARN [Info](#)

arn:aws:lambda:us-west-2::runtime:e4ab553846c4e081013ff7d1d608a5358d5b956bb5b81c83c66d2a31da8f6244

Update runtime version [Info](#)

Auto

Layers (1) [Info](#)

Last fetched 08/05/2026, 18:15:12 [Refresh](#) [Edit](#)

Q Search by attributes or search by keyword

< 1 > [Settings](#)

Merge order	Name	Layer version	Compatible runtimes	Compatible architectures	Version ARN
1	AWSSDKPandas-Python312	24	python3.12	x86_64	arn:aws:lambda:us-west-2:336392948345:layer:AWSSDKPandas-Python312:24

- Our Layer is added.
- Now Scroll Up.

Code | Test | Monitor | **Configuration** | Aliases | Versions

Configuration

General configuration

Triggers

Permissions

Destinations

Function URL

Execution role [Refresh](#) [View role document](#) [Edit](#)

Role name

accommodation-action-group-f4wug-role-FBOSO9D6656 [Link](#)

Resource summary

To view the resources and actions that your function has permission to access, choose a service.

Amazon CloudWatch Logs

3 actions 2 resources

▼

- Now click on Configuration.
- And in Configuration Go inside Permission.
- And click Role name.

accommodation-action-group-f4wug-role-FBOSO9D6656 [Info](#)

[Delete](#)

Summary [Edit](#)

Creation date

May 09, 2026, 13:22 (UTC+05:30)

ARN

 arn:aws:iam::463646775279:role/service-role/accommodation-action-group-f4wug-role-FBOSO9D6656

Last activity

-

Maximum session duration

1 hour

[Permissions](#)[Trust relationships](#)[Tags](#)[Last Accessed](#)[Revoke sessions](#)[Attach policies](#)[Create inline policy](#)[Add permissions](#) ▲

Permissions policies (1) [Info](#)

You can attach up to 10 managed policies.

[Simulate](#) ↗[Remove](#)

Other permissions policies (1/2162) [Info](#)



Filter by Type

1 match

< 1 >



☒	Policy name	Type	Description
☒	  AmazonS3FullAccess	AWS managed	Provides full access to all buckets via t...

[Cancel](#)[Add permissions](#)

- Search AmazonS3FullAccess and select it.
- And click Add permissions.
- Now Permission is added close this tab.
- And go to Lambda function tab.

[Code](#)[Test](#)[Monitor](#)[Configuration](#)[Aliases](#)[Versions](#)

Configuration

[General configuration](#)[Triggers](#)[Permissions](#)[Destinations](#)

General configuration [Info](#)

[Edit](#)**Description**

-

Memory

128 MB

Ephemeral storage

512 MB

Timeout

0 min 3 sec

SnapStart [Info](#)

None

- In Lambda function go inside General configuration and click Edit.

Timeout

2 min 3 sec

Execution role

To access other AWS services and resources your function needs an IAM role. Choose a role with the right permissions for your function.

accommodation-action-group-f4wug-role-FB...

Create new role

[View role details in IAM](#)

Cancel

Save

- Scroll down and set Timeout 2 min 3 sec.
- And click Save.
- Now Our lambda function work is done go to your Agent.

Agent builder Info

Manual

 |

Assistant

Test

Prepare

Save

Save and exit

Agent details

Agent name

bedrock-accommodation-agent

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Agent description - optional

Enter description

The description can have up to 200 characters.

- Now click Save and exit.

bedrock-accommodation-agent

Create Alias

Test

Edit in Agent Builder

Agent overview

Name

bedrock-accommodation-agent

ID

HQQYAUJVHU

Description

-

Status

✓ PREPARED

Creation date

May 09, 2026, 12:33 (UTC+05:30)

Last prepared

May 09, 2026, 14:21 (UTC+05:30)

Permissions

arn:aws:iam::463646775279:role/service-role/AmazonBedrockExecutionRoleForAgents_1IGYIFGBM79

Agent ARN

arn:aws:bedrock:us-west-2:463646775279:agent/HQQYAUJVHU

- Click Create Alias.

Create alias

Alias name

accommodation-alias

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Description - optional

Enter description

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 200 characters.

Associate a version

☒ Create a new version and associate it to this alias.

☐ Use an existing version to associate this alias.

Select throughput

☒ On-demand (ODT)

☐ Provisioned Throughput (PT)

Cancel Create alias

- Enter an Alias name as accommodation-alias.
- And click create alias.

bedrock-accommodation-agent

Create Alias Test Edit in Agent Builder

Agent overview

Name bedrock-accommodation-agent	ID HQQYAUJVHU
Description -	Status NOT_PREPARED
Creation date May 09, 2026, 12:33 (UTC+05:30)	Last prepared -
Permissions arn:aws:iam::463646775279:role/service-role/AmazonBedrockExecutionRoleForAgents_1IGYIFGBM79	Agent ARN arn:aws:bedrock:us-west-2:463646775279:agent/HQQYAUJVHU
User Input	Memory

Test

TestAlias: Working draft Info Using ODT Change

Prepare the Agent to test the latest changes.

Prepare

Enter your message here

Run

- Click on prepare.

Test

Using ODT [Change](#)

TestAlias: Working draft ▼

[Info](#)



hi



Hello! I'm the Accommodation Agent, here to help you find the perfect place to stay. 😊
Are you looking for a **hotel** or an **Airbnb**? And which **city** are you looking in?



[Show trace >](#)

- Our Agent is working perfectly.

Test

Using ODT [Change](#)

TestAlias: Working draft ▼

[Info](#)



i want to stay in a hotel chicago



I searched for hotels in Chicago, but unfortunately no available hotels were found at the moment. Please try again later or consider exploring other accommodation options like an Airbnb. Let me know how I can help! 😊



[Show trace >](#)



what about a hotel in boston



Great news! I found a hotel in Boston for you:
 The Monarch Manor - Boston
Would you like more information or help with anything else?


Enter your message here

- Its taking data from our S3 Bucket and reply.


Supervisor Agent

Now let's Create Our Agent: -

- Go to your AWS Console
- And search Amazon Bedrock

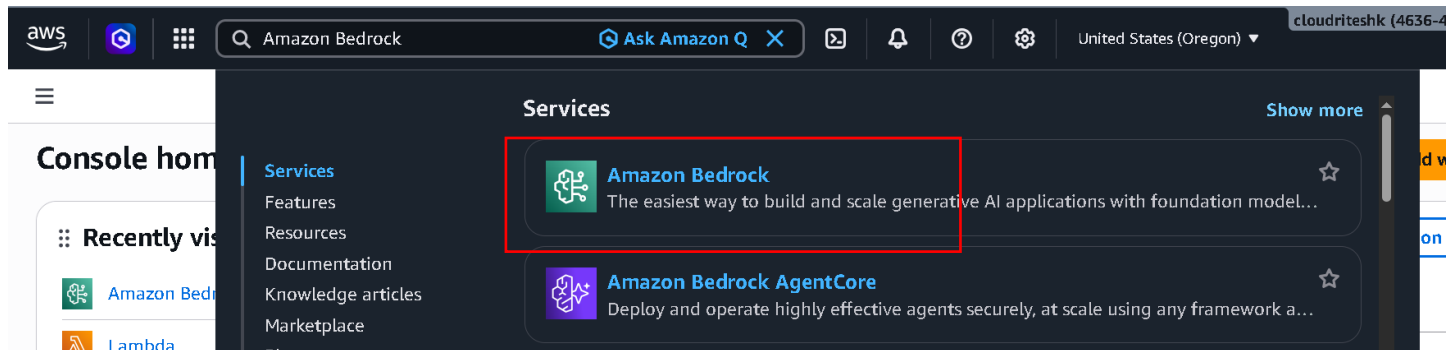

- Click on the Amazon Bedrock

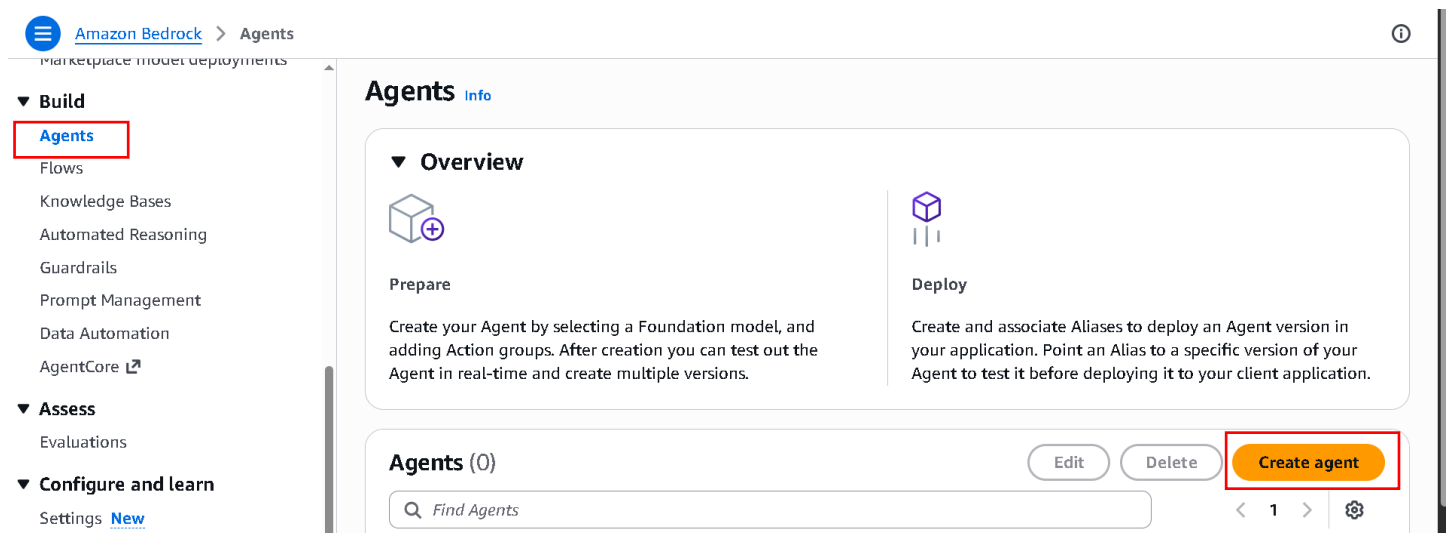

- Now scroll down in navigation bar
- And click Agents under Build Section
- And now just click Create Agent.

Create agent



Name

bedrock-supervisor-agent

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Description - optional

Enter description

The description can have up to 200 characters.

Multi-agent collaboration

[Learn more about multi-agent collaboration](#) 

☒ Enable multi-agent collaboration

If you have more than one agent, multi-agent collaboration allows this agent to associate the others as agent collaborators to orchestrate responses. You can change this later.

Cancel

Create

- Enter a name bedrock-supervisor-agent
- And Enable multi-agent collaboration.
- Since this agent is going to be collaborating with two other agents' restaurant and accommodation Agent.
- Now click Create.

Agent name

bedrock-supervisor-agent

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Agent description - optional

Enter description

The description can have up to 200 characters.

Agent resource role

- ☒ Create and use a new service role
- ☐ Use an existing service role

AmazonBedrockExecutionRoleForAgents_RYZAKJZDORL ▼

Select model

Select model

- Our Agent is created.
- Now click Select model.

Select model

Find available models and inference

☐ Bedrock Agents optimized [Learn more](#)

1. Categories

Serverless model providers

- Amazon
- Anthropic**
- Cohere
- DeepSeek
- Google
- Meta
- MiniMax

2. Models

Claude Haiku 4.5 v1
Input: Text, Image
Output: Text
Max input: 200K tokens

Claude Sonnet 4.6 v1
Input: Text, Image
Output: Text
Max input: 1M tokens

Claude Opus 4.6 v1
Input: Text, Image
Output: Text
Max input: 1M tokens

Claude Opus 4.7 v1
Input: Text, Image

3. Inference

Inference profiles

Cross-region

US Anthropic Claude Sonnet 4.6

Global Anthropic Claude Sonnet 4.6

Cancel **Apply**

- Select Categories, Models and Inference
- And just click Apply.

Select model

Claude Sonnet ... v1 ⓘ

US Anthropic Claude Sonnet 4.6

Instructions for the Agent

Provide clear and specific instructions for the task the Agent will perform. You can also provide certain style and tone.

Your job is to assess the user's question and pass it to the appropriate agent for further handling. If the user's question is not about accommodation or restaurants, reply back with I can't help you, I can only help with restaurants and accommodation.

This instruction must have a minimum of 40 characters.

- Now give some instruction to agent means what it need to do
- This instruction is Provided in Resource.

✓ Agent: bedrock-restaurant-agent was successfully created.



Agent builder Info

Manual

Assistant

Test

Prepare

Save

Save and exit

Agent details

Agent name

bedrock-restaurant-agent

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Agent description - optional

Enter description

The description can have up to 200 characters.

- Now scroll up
- And click save.
- After save click Prepare.
- Now Scroll down.

Multi-agent collaboration

View collaborators

Edit

Multi-agent collaboration allows this agent to delegate tasks to other collaborator agents. When you enable this, the agent becomes a supervisor agent that coordinates responses from agent collaborators.

Status

Enabled

Agent collaborators

0



No agent collaborators found

When you enable multi-agent collaboration, to test this agent, it must be associated with other agent collaborators.

- Now Click Edit in Multi-agent collaboration.

► Agent collaborator



An agent in the multi-agent collaboration that orchestrates and returns a final response.

Add collaborator

- Now scroll down.
- And click Agent collaborator.

▼ Agent collaborator : bedrock-accommodation-agent



An agent in the multi-agent collaboration that orchestrates and returns a final response.

Collaborator agent

bedrock-accommodation-agent ▼

Agent alias

accommodation-alias ▼

[View ↗](#)

Collaborator name

An alternate name that appears only in collaboration instructions. It doesn't replace the original agent name.

accommodation-collaborator

Valid characters are a-z, A-Z, 0-9, _ (underscore), and - (hyphen). Collaborator name must be 1–50 characters.

- Select your collaborator agent.
- Select created alias.
- Enter name of your Collaborator accommodation-collaborator.
- Scroll down.

Collaborator instruction

Describes the task that the agent performs within the multi-agent collaboration. We recommend that you provide clear, specific scenarios. You can also provide style and tone. Refer to the agent using its collaborator name.

You are the Accommodation Collaborator.

You have access to two functions:

1. listHotels(city) - Returns a list of hotels for the specified city.
2. listAirbnbs(city, petsAllowed, sauna, pool) - Returns a list of Airbnbs with the specified attributes.

The Accommodation Agent will tell you:

- Whether the user wants a hotel or an Airbnb.
- The necessary parameters (city, petsAllowed, sauna, pool, etc.).

Collaboration instruction must be 40–2,000 characters.



Enable conversation history sharing

When enabled, in future invocations, the supervisor agent can share context from previous responses with this collaborator agent.

[Add collaborator](#)

- Enter Collaborator instruction given in resource.
- Enable conversation history sharing.
- Now simply click Add collaborator so we add our second agent also.

▼ Agent collaborator : bedrock-restaurant-agent



An agent in the multi-agent collaboration that orchestrates and returns a final response.

Collaborator agent

bedrock-restaurant-agent ▼

Agent alias

restaurant-alias ▼

[View](#) ↗

Collaborator name

An alternate name that appears only in collaboration instructions. It doesn't replace the original agent name.

restaurant-collaborator

Valid characters are a-z, A-Z, 0-9, _ (underscore), and - (hyphen). Collaborator name must be 1–50 characters.

- Select your 2nd collaborator agent.
- Select created alias.
- Enter name of your 2nd Collaborator accommodation-collaborator.
- Scroll down.

Collaborator instruction

Describes the task that the agent performs within the multi-agent collaboration. We recommend that you provide clear, specific scenarios. You can also provide style and tone. Refer to the agent using its collaborator name.

You are the Restaurant Collaborator

You have access to one function:

1. list-restaurants - Returns a list of restaurants for the given parameters such as city and whether the restaurant is a fine dine restaurant or not.

The Restaurant Agent will tell you:

- Whether the user wants a fine dining option for the restaurant or not and in which city.

Collaboration instruction must be 40–2,000 characters.

☒ Enable conversation history sharing

When enabled, in future invocations, the supervisor agent can share context from previous responses with this collaborator agent.

[Add collaborator](#)

- Enter 2nd Collaborator instruction given in resource.
- Enable conversation history sharing.
- Now scroll up.

Multi-agent collaboration (2)

[Collapse all](#)[Expand all](#)[Save](#)[Save and exit](#)

Multi-agent collaboration allows this agent to delegate tasks to collaborator agents. As a supervisor agent, this agent will coordinate responses from collaborator agents.[Learn more](#) [↗](#)

Collaboration status

☒ Multi-agent collaboration

Turn on multi-agent collaboration to appoint this agent as a supervisor agent. A supervisor agent can designate one or more collaborator agents, delegate responses, and can also be used as an collaborator in another multi-agent collaboration.

- Click Save and Exit.

Agent builder [Info](#)

[Manual](#)[Assistant](#)[Test](#)[Prepare](#)[Save](#)[Save and exit](#)

Agent details

Agent name

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Agent description - *optional*

The description can have up to 200 characters.

- Now our Multi Agent are added now click Save and Exit.

bedrock-supervisor-agent

[Create Alias](#)[Test](#)[Edit in Agent Builder](#)

Agent overview

Name

bedrock-supervisor-agent

ID

FR23ECO7CA

Description

-

Status

✓ PREPARED

Creation date

May 09, 2026, 15:51 (UTC+05:30)

Last prepared

May 09, 2026, 15:58 (UTC+05:30)

Permissions

arn:aws:iam::463646775279:role/service-role/AmazonBedrockExecutionRoleForAgents_5XH
D1HIRMS7

Agent ARN

arn:aws:bedrock:us-west-2:463646775279:agent/FR23ECO7CA

User Input

DISABLED

Memory

Disabled

- Now click Create Alias.

Create alias

Alias name

bedrock-supervisor-agent-alias

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Description - optional

Enter description

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 200 characters.

Associate a version

- ☒ Create a new version and associate it to this alias.
- ☐ Use an existing version to associate this alias.

Select throughput

- ☒ On-demand (ODT)
- ☐ Provisioned Throughput (PT)

[Cancel](#)[Create alias](#)

- Enter Alias Name.
- Then click Create alias.

Test

Using ODT [Change](#)

TestAlias: Working draft ▼

Info




hii



Hi there! Welcome! 😊

I'm here to help you with **restaurants** and **accommodation** (hotels or Airbnbs). How can I assist you today?



< [Hide trace](#)



i want to fine dine in Budapest

- Ask some Questions with our supervisor Agent.
- I ask I want to fine dine in Budapest.

Test

Using ODT [Change](#)

TestAlias: Working draft ▼

Info



I'm sorry, but it seems there are **no fine dining restaurants** currently available in our system for **Budapest** at the moment. Here are a couple of suggestions:

- I can look up **casual dining** options in Budapest instead.
- You can check back later as listings are regularly updated.

Would you like me to search for casual dining options, or is there anything else I can help you with? 😊



[Show trace >](#)



so any fine dine in Austin

- So its reply no any fine dining restaurants currently available in their system for Budapest.

Test

Using ODT [Change](#)

TestAlias: Working draft ▼

Info



Show trace >



so any fine dine in Austin



Great news! Here is a fine dining restaurant available in Austin:

#	Restaurant Name	City	Fine Dining
1	The Velvet Spoon	Austin	☒ Yes

Would you like more details or help with anything else? 😊



Show trace >

- Now I ask for Austin.
- It reply Available.
- It's going to restaurant agent and taken answers and reply us.

Deploying our Multi Agent

- Now lets start Creating our API gateway and Lambda function for it.
- So, this lambda function invoke the supervisor Agent and the agent does its job and then it send back the response through the lambda and this turn give response through API gateway
- So lets create the lambda function.
- Open Aws console in new tab.
- And search Lambda Function and open it.

AWS Lambda

Run code without managing servers.

Focus on your application, not your infrastructure. Lambda automatically provisions, scales, and monitors while you build.

Get started

Bring your own code, or choose a ready-to-deploy example.

Create a function

- Now just click Create a function.

Create function [Info](#)

Choose one of the following options to create your function.

☒ **Author from scratch**

Start with a simple Hello World example.

☐ **Use a blueprint**

Build a Lambda application from sample code and configuration presets for common use cases.

☐ **Container image**

Select a container image to deploy for your function.

Basic information

Function name

Enter a name that describes the purpose of your function.

invoke-supervisor-agent

Function name must be 1 to 64 characters, must be unique to the Region, and can't include spaces. Valid characters are a-z, A-Z, 0-9, hyphens (-), and underscores (_).

Runtime [Info](#)

Choose the language to use to write your function. Note that the console code editor supports only Node.js, Python, and Ruby.

Python 3.13

- Give Function Name invoke-supervisor-agent.
- And choose Runtime as Python 3.13
- And Leave Everything Default.
- Now scroll down.

► Additional settings

Customize your function architecture, execution role, HTTP(S) endpoints, tenant isolation mode, VPC, code signing, KMS key, and tags.

✖ Cannot add or remove after creation

Cancel

Create function

- Now just click Create Function.

Code

Test

Monitor

Configuration

Aliases

Versions

Code source [Info](#)

[Open in Visual Studio Code](#)

← →

invoke-supervisor-agent

EXPLORER

INVOKE-SUPERVISOR-AGENT

lambda_function.py

lambda_function.py

lambda_function.py

```
1 import json
2 import boto3
```

```
3
4 def lambda_handler(event, context):
5     data = event['body']
6     client = boto3.client('bedrock-agent-runtime')
7
```

- Now function is created scroll down.
- In code section replace code with the code that will provided in resource.
- In line 14 paste supervisor Agent id.
- And in line 15 paste supervisor Alias id.

Code | Test | Monitor | **Configuration** | Aliases | Versions

Configuration

- General configuration
- Triggers
- Permissions**
- Destinations
- Function URL

Execution role [View role document](#) [Edit](#)

Role name
[invoke-supervisor-agent-role-4v4gqxnp](#)

Resource summary
 To view the resources and actions that your function has permission to access, choose a service.

Amazon CloudWatch Logs
 3 actions 2 resources

- Now click on Configuration.
- And in Configuration Go inside Permission.
- And click Role name.

invoke-supervisor-agent-role-4v4gqxnp [info](#) [Delete](#)

Summary [Edit](#)

Creation date
May 09, 2026, 16:24 (UTC+05:30)

ARN
 arn:aws:iam::463646775279:role/service-role/invoke-supervisor-agent-role-4v4gqxnp

Last activity
-

Maximum session duration
1 hour

Permissions | Trust relationships | Tags | Last Accessed | Revoke sessions

Permissions policies (1) [info](#) [Simulate](#) [Remove](#) [Add permissions](#) [Attach policies](#) [Create inline policy](#)

You can attach up to 10 managed policies.

- Now click Add permissions and select Attach policies.

Other permissions policies (1/2173) [Filter by Type](#)

[X](#) 5 matches

☐	Policy name	Type	Description
☒	AdministratorAccess	AWS managed - job function	Provides full access to AWS services a...
☐	AdministratorAccess-Amplify	AWS managed	Grants account administrative permiss...
☐	AdministratorAccess-AWSElasticBeanstalk	AWS managed	Grants account administrative permiss...
☐	AWSAuditManagerAdministratorAccess	AWS managed	Provides administrative access to ena...
☐	AWSManagementConsoleAdministratorAcc...	AWS managed - job function	Provides full access to configure and c...

[Cancel](#) [Add permissions](#)

- Search AdministratorAccess and select it.
- And click Add permissions.
- Now Permission is added close this tab.
- And go to Lambda function tab.

Code | Test | Monitor | **Configuration** | Aliases | Versions

Configuration

- General configuration**
- Triggers
- Permissions
- Destinations

General configuration Info

Description
-

Memory
128 MB

Ephemeral storage
512 MB

Timeout
0 min 3 sec

SnapStart Info
None

[Edit](#)

- In Lambda function go inside General configuration and click Edit.

Timeout

2 min 3 sec

Execution role

To access other AWS services and resources your function needs an IAM role. Choose a role with the right permissions for your function.


invoke-supervisor-agent-role-4v4gqxn

[Create new role](#)

[View role details in IAM](#)

[Cancel](#)
[Save](#)

- Scroll down and set Timeout 2 min 3 sec.
- And click Save.
- Now work of our Lambda function is finished.
- Now we create our API gateway.
- Open Aws console in new tab and search API gateway.

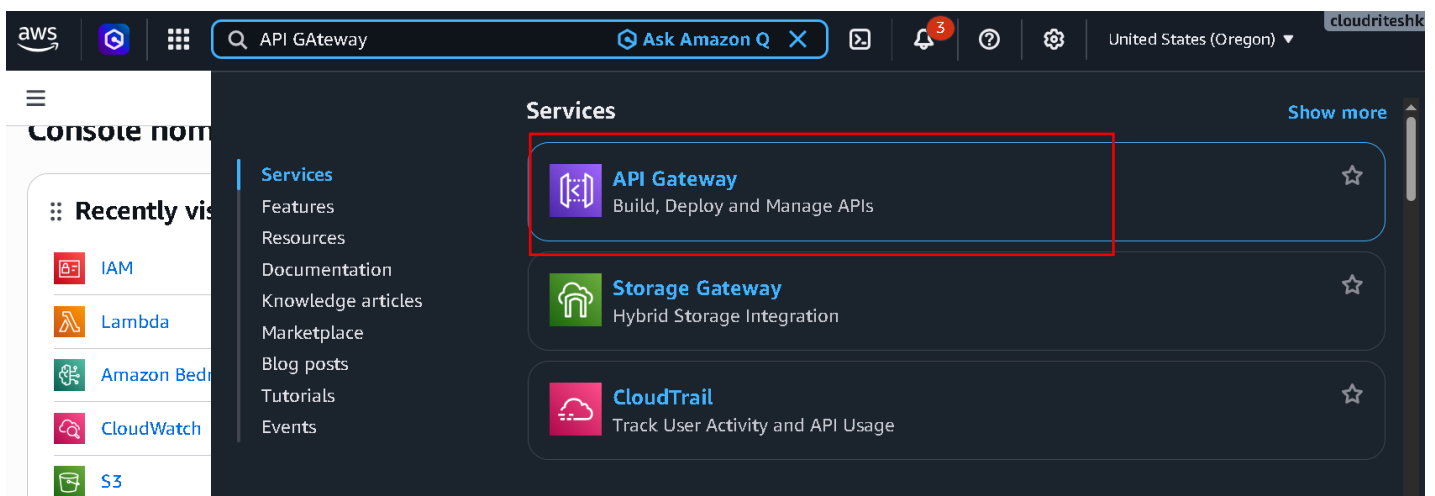

- Open it API Gateway.

API Gateway > APIs

APIs (2/2)

[Find APIs](#)

[Delete](#)
[Create API](#)

Name	Description	ID	Protocol	API endpoint type	Created	Security policy	API status
1							

- Now click on create API.

Choose an API type [Info](#)

HTTP API

Build low-latency and cost-effective REST APIs with built-in features such as OIDC and OAuth2, and native CORS support.

Works with the following:

Lambda, HTTP backends

[Import](#)

Build

- Now click Build.

API details

API name

An HTTP API must have a name. The name is a non-unique value you use to identify and organize your APIs. To programmatically refer to this API, use the API ID that API Gateway generates for you.

bedrock-agents-api

IP address type [Info](#)

Select the type of IP addresses that can invoke the default endpoint for your API. You don't need to redeploy your API for the update to take effect.

☒ IPv4

Includes only IPv4 addresses.

☐ Dualstack

Includes IPv4 and IPv6 addresses.

Integrations (0) [Info](#)

Specify the backend services that your API will communicate with. These are called integrations. For a Lambda integration, API Gateway invokes the Lambda function and responds with the response from the function. For an HTTP integration, API Gateway sends the request to the URL that you specify and returns the response from the URL.

[Add integration](#)

[Cancel](#)

Review and create

Next

- Enter name and simply click Review and Create.

Stages

[Edit](#)

Stages

- \$default (Auto-deploy: enabled)

[Cancel](#)

[Previous](#)

Create

- Now simply click Create.

API Gateway > APIs > Routes - bedrock-agents-api (e7heztd2i5)

API: bedrock-agents-... (e7heztd2i5)

Develop

Routes

Authorization

Integrations

CORS

Reimport

Export

Successfully created API bedrock-agents-api (e7heztd2i5).

Routes

Routes for bedrock-agents-api

Create

Search

Choose a route.

Stage: - Deploy

- Now our Api Created.
- Now Click Create.

Create a route

Route and method [Info](#)

Route name eg. /pets

Choose a method and enter a path to create a route. You can also specify one \$default route per API. The \$default route is invoked when the request to the API matches no other routes.

POST

/get-agents-response

Cancel

Create

- Now Choose Post.
- And then Enter /get-agents-response
- And click Create.

✓ Successfully created route POST /get-agents-response.

Routes

Stage: - ▼

Deploy

Routes for bedrock-agents-api

Create

Search

POST

Choose a route.

- Now click POST.

Routes for bedrock-agents-api

Create

Search

POST

Route details

Delete

Edit

POST /get-agents-response (ID: 7f4ow3q)

ARN

arn:aws:apigateway:us-west-2::apis/e7heztd2i5/routes/7f4ow3q

Authorization

Authorizers protect your API against unauthorized requests. Routes with no authorization attached are open.

No authorizer attached to this route.

Attach authorization

Integration

The integration is the backend resource that this route calls when it receives a request.

No integration attached to this route.

Attach integration

- Choose Attach integration.

Integrations

Stage: - ▼

Deploy

Attach integrations to routes

Manage integrations

Routes for bedrock-agents-api

Search

▼ /get-agents-response

Integration details

POST /get-agents-response (ID: 7f4ow3q)

You have no integrations configured for this API. Create an integration to attach it.

Create and attach an integration

- Click Create and Attach an integration

Create an integration

Attach this integration to a route

Q POST /get-agents-response



Integration target

Integration type

Lambda function



- Integration target Lambda function.

Integration details

Integration target

Choose the Lambda function that API Gateway invokes when the route receives a request.

AWS Region

us-west-2



Lambda function

Q arn:aws:lambda:us-west-2:463646775279:function:in



► Advanced settings

Description - *optional*

- Now select invoke-supervisor-agent.

Invoke permissions

API Gateway requests permission to invoke your Lambda function by granting this API permission in your Lambda function's resource policy. If you don't want to modify the resource policy, you can provide an invoke role instead. API Gateway uses this role to invoke the Lambda function.

☒ Grant API Gateway permission to invoke your Lambda function

Cancel

Create

- Now scroll down.
- And click Create.

API Gateway > APIs > bedrock-agents-api (e7heztd2i5) > Integrations

API Gateway

- APIs
- Custom domain names
- Domain name access associations
- VPC links

API: bedrock-agents-... (e7heztd2i5)

▼ Develop

- Routes
- Authorization
- Integrations

Successfully updated 1 routes.

Integrations

Attach integrations to routes | Manage integrations

Routes for bedrock-agents-api

Search

▼ /get-agents-response

Integration details for route

Detach integration | Manage integration

POST /get-agents-response (7f4ow3q)

Lambda function
invoke-supervisor-agent (us-west-2)

Integration ID
kdam7f4

- Now open the API-bedrock-agents in nav bar.

Stages for bedrock-agents-api (1)

Find resources

Stage name	Invoke URL	Attached deployment	Auto deploy
\$default	https://e7heztd2i5.execute-api.us-west-2.amazonaws.com	bclli5	enabled

- Now scroll down and copy Invoke URL.

Home Akash's Workspace

Search

POST https://e7heztd2i5.execute-api.us-west-2.amazonaws.com

Save Share

POST https://e7heztd2i5.execute-api.us-west-2.amazonaws.com Send

Docs Params Authorization Headers 8 Body Scripts Settings Cookies

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		

- Now open the postman in new tab
- and Paste the invoke URL.
- And change into POST.



▼ Develop

Routes

Authorization

Integrations

CORS

Reimport

Export

▼ Deploy


Routes for bedrock-agents-api

Create

Search

▼ /get-agents-response

- Now got to Api Gateway tab and click Routes
- And cope this /get-agents-response
- And append in the invoke Url.

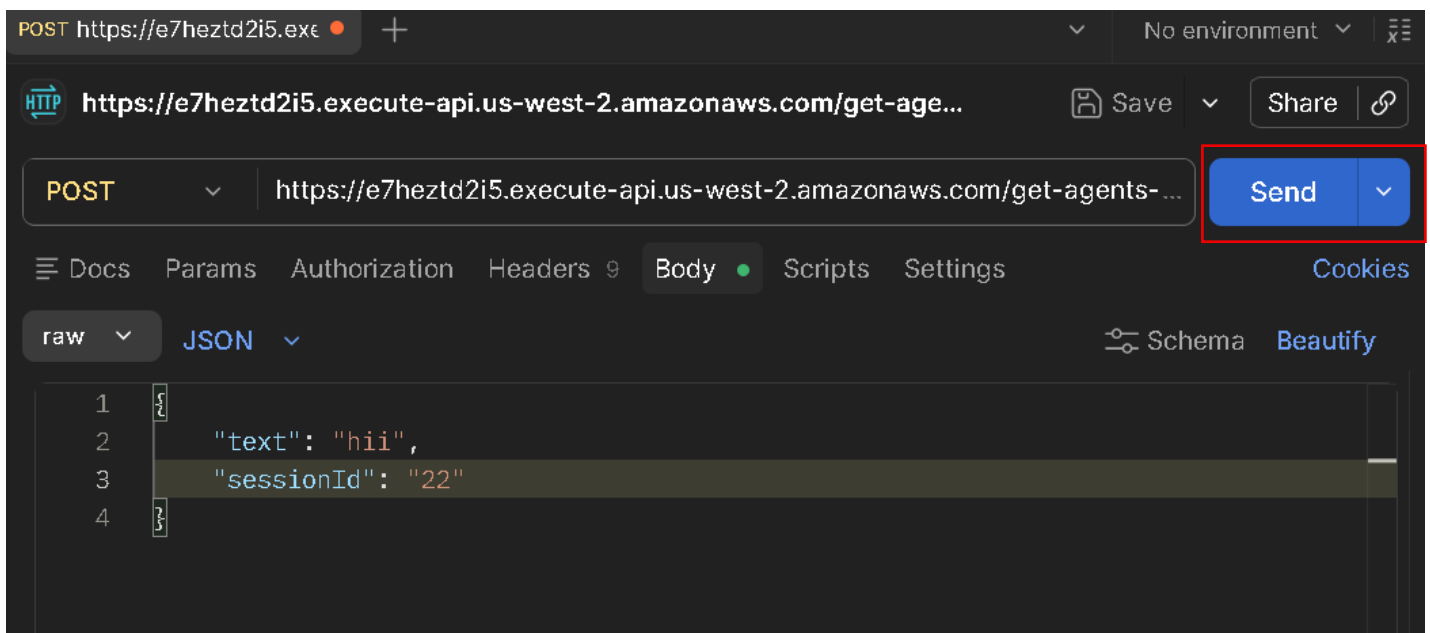

- Now go to postman.
- And go inside body and paste.

```
{
  "text": "hii",
  "sessionId": "22"
}
```

- Now simply click Send.

POST https://e7heztd2i5.execute-api.us-west-2.amazonaws.com/get-age...

Save Share

POST https://e7heztd2i5.execute-api.us-west-2.amazonaws.com/get-agents-... Send

Docs Params Authorization Headers 9 Body Scripts Settings Cookies

raw JSON Schema Beautify

```
1 {
2   "text": "hi",
3   "sessionId": "22"
4 }
```

Body 200 OK • 5.97 s • 344 B

Raw Preview Visualize

```
1 {"response": "Hi there! Welcome! \ud83d\ude0a\n\nI'm here to help you with
  **restaurants** and **accommodation** (hotels or Airbnbs). \n\nHow can I
  assist you today?"}
```

- Now See its Working.
- Now give another text.

POST https://e7heztd2i5.execute-api.us-west-2.amazonaws.com/get-age...

Save Share

POST https://e7heztd2i5.execute-api.us-west-2.amazonaws.com/get-agents-... Send

Docs Params Authorization Headers 9 Body Scripts Settings Cookies

raw JSON Schema Beautify

```
1 {
2   "text": "I want a pet friendly airbnb in Austin, i dont care about any
  amenities",
3   "sessionId": "22"
4 }
```

Body 200 OK • 21.02 s • 564 B

Raw Preview Visualize

```
1 {"response": "I found a great option for you and your furry friend!
  \ud83d\udc3e\n\nHere's the pet-friendly Airbnb available in
  Austin:\n\n\ud83c\udfe0 **Penthouse Paradise**\n- \ud83d\udccd **Location:**
  Austin\n- \ud83d\udc3e **Pets Allowed:** Yes\n- \ud83c\udfca **Pool:** No\n-
  \ud83e\udd66 **Sauna:** No\n\nWould you like more details or need help with
  anything else? \ud83d\ude0a"}
```

- Its working in this scenario also.