


Travel Agent

Summary: -

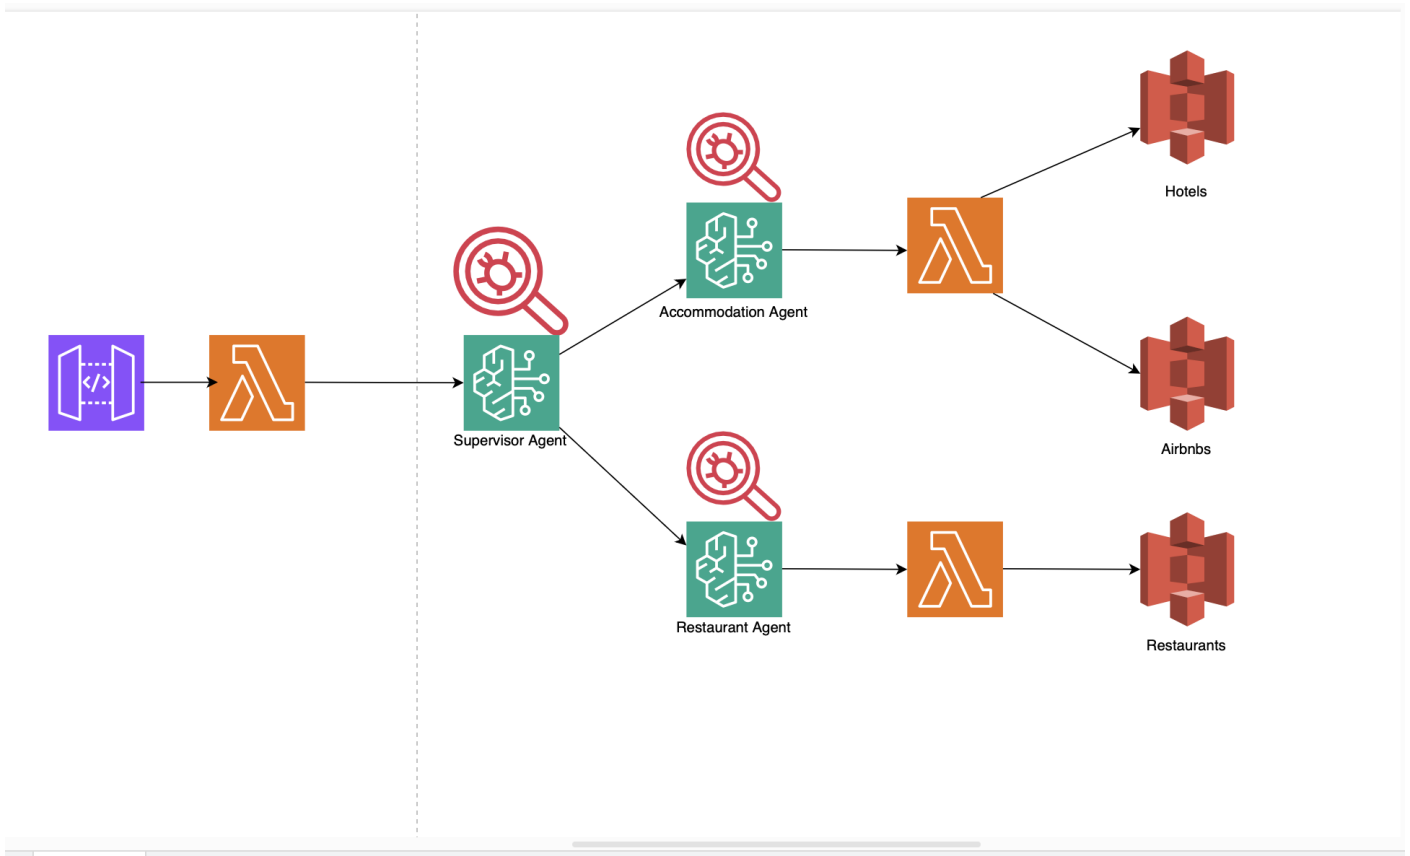


- This is our workflow we create a Travel Agent.
- We have a supervisor Agent who is going to have access to additional agents.
- Such as the Accommodation Agent and the Restaurant Agent and based off the conversations with the user, the supervisor agent will know which agent to call whether the user want to stay overnight somewhere or whether they want to dine somewhere and depending on that it will pass it to the appropriate Agent.
- The Appropriate Agent will have action Group right now their Lambda functions, and they can invoke other API.
- Our data is going to located in S3 bucket.


Restaurant Agent

Now let's Create Our Agent: -

- Go to your AWS Console
- And search Amazon Bedrock

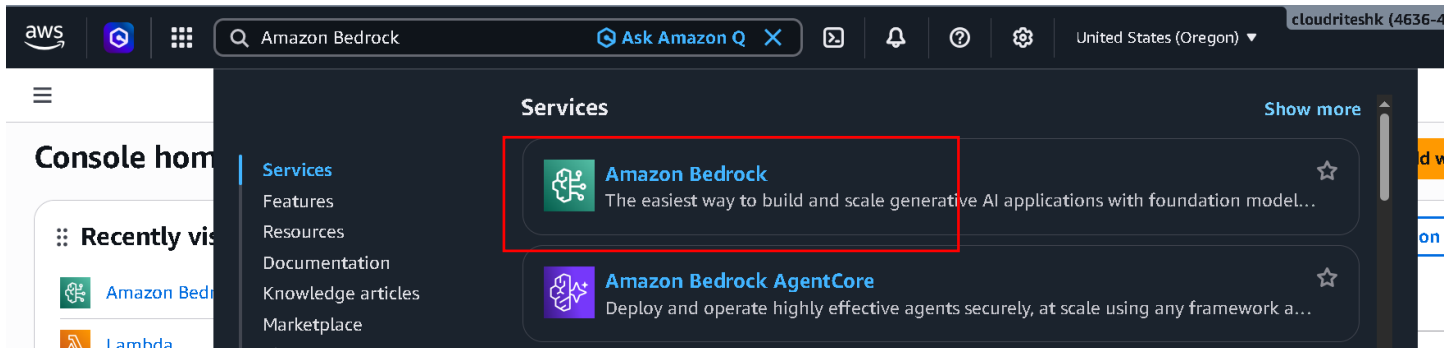

- Click on the Amazon Bedrock

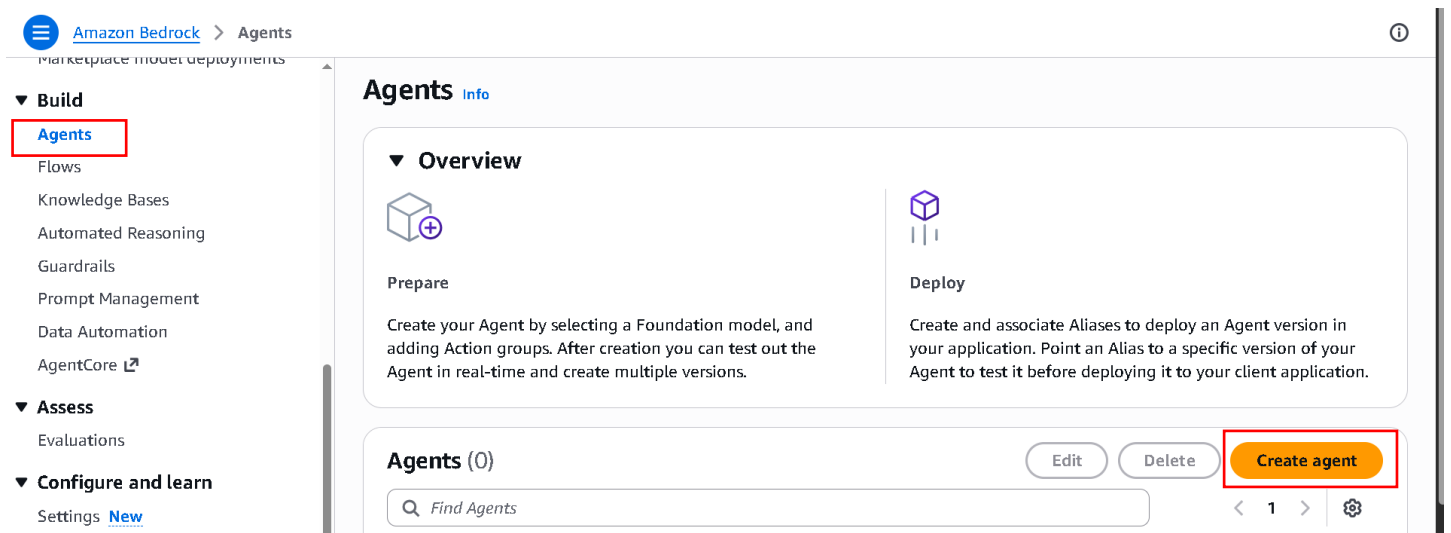

- Now scroll down in navigation bar
- And click Agents under Build Section
- And now just click Create Agent.

Create agent

Name

bedrock-restaurant-agent

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Description - optional

Enter description

The description can have up to 200 characters.

Multi-agent collaboration

[Learn more about multi-agent collaboration](#)

☐ Enable multi-agent collaboration

If you have more than one agent, multi-agent collaboration allows this agent to associate the others as agent collaborators to orchestrate responses. You can change this later.

Cancel

Create

- Give Agent name bedrock-restaurant-agent
- And just click Create.

Agent details

Agent name

bedrock-restaurant-agent

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Agent description - optional

Enter description

The description can have up to 200 characters.

Agent resource role

☒ Create and use a new service role

☐ Use an existing service role

AmazonBedrockExecutionRoleForAgents_21WYL87GFNF

Select model

Select model

- Our Agent is created.
- Now click Select model.

✓ Agent: bedrock-restaurant-agent was successfully created.



Agent builder Info

Manual

Assistant

Test

Prepare

Save

Save and exit

Agent details

Agent name

bedrock-restaurant-agent

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Agent description - optional

Enter description

The description can have up to 200 characters.

- Now scroll up
- And click save.
- After save click Prepare.
- After prepare Test.
- Now ask Question from Agent

Test Agent

Using ODT [Change](#)



city you want to dine in



I'd be happy to help you find a restaurant! I need a couple of details from you. Let me ask! Could you please tell me:

1. **Which city** would you like to dine in?
2. Are you looking for a **fine dining experience**, or something more casual?



[Show trace >](#)

- Our Agent is working properly.

- Now Add Action Groups.
- Scroll down.

Action groups (0) [Info](#)

[Delete](#)[Add](#)

< 1 > 

Name ▼	Description	State 	Last updated ▼
No action groups			
No actions group to display			
Add			

- click ADD inside Action Group Section.

Create Action group

Action group details

Enter Action group name

restaurant-action-group

Description - *optional*

Enter description

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). This description can have up to 200 characters.

- Enter action group name.
- And simply scroll down.

Action group type

Select what type of action group to create



Define with function details

Specify functions and define parameters as JSON objects that will be associated to the action group invocation.



Define with API schemas

Specify a Lambda or API Gateway and define a schema to specify the APIs that the agent can invoke to carry out its tasks.

Action group invocation

Specify a Lambda function that will be invoked based on the action group identified by the Foundation model during orchestration.

Select how to define the Lambda function



Quick create a new Lambda function - *recommended*

An Amazon Lambda function will be created in your account on your behalf. No further configurations are necessary.



Select an existing Lambda function

Use an existing Lambda function for this action group.



Return control

Agent responses in the test window will prompt the user for function details to generate a response. No further configurations are necessary.

- Action group type same as the image.
- Action group invocation same as the image.
- No scroll down.

▼ Action group function 1 : list-resta

Delete

Table

JSON Editor

A function specifies the business logic for this action group using the defined parameters. Create functions using the form builder or via JSON editor. Up to 3 functions can be created per action group.

Name

list-restaurants

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). This description can have up to 100 characters.

Description - *optional*

Enter description

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). This description can have up to 1200 characters.

- Enter Name list-restaurants.
- And scroll down

Enable confirmation of action group function - *optional*

Request confirmation before user invokes the action group's function. Enabling this may safeguard your end user from malicious prompt injection.

- ☐ Enabled
- ☒ Disabled

Parameters (0)

Parameters allow you do define object relationships within the action group function.

Name 	Description 	Type 	Required 	Delete
--	---	--	--	--------

No parameters

Add parameter

- Confirmation disabled.
- And then click Add parameter.

Parameters (2)

Parameters allow you do define object relationships within the action group function.

Name 	Description 	Type 	Required 	D
--	---	--	--	---

City	the city where the user wants to dine.	String	True	
fine_dine	whether the user wants to fine dine or not	String	True	

Add parameter

Add action group function

Cancel

Create

- Added two parameters
- City , the city where the user wants to dine., String, True.
- fine_dine, whether the user wants to fine dine or not, String, True.
- Now simply click Create.

- Now scroll down and see in Action Group invocation Our lambda function is created.
- Now click on View to open it.
- Before we work on our Lambda function we create S3 bucket where we store our restaurant CSV File.
- So Let's create S3 Bucket.
- Go and search S3 in console and open it.

Buckets

General purpose buckets

All AWS Regions

Directory buckets

General purpose buckets (137) [Info](#)



Copy ARN

Empty

Delete

Create bucket

Buckets are containers for data stored in S3.

Find buckets by name

< 1 2 >



- Now click create.

Bucket type [Info](#)



General purpose

Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.



Directory

Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket namespace

Choose the namespace where you want to create your bucket. [Learn more](#)

☒ Global namespace

By default, S3 creates general purpose buckets in the global namespace.

☐ Account Regional namespace (recommended)

General purpose buckets created in your account Regional namespace are unique to your account. These buckets can never be created by another AWS account.

Bucket name [Info](#)

bedrock-restaurant-agent-Bucket

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - optional

Only the bucket settings in the following configuration are copied.

Choose bucket

- Enter the Bucket Name bedrock-restaurant-aggent-bucket23
- and simply scroll down and leave else default.

Advanced settings

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Cancel

Create bucket

- Simply click Create Bucket.

bedrock-restaurant-agent-bucket23 [Info](#)

[Objects](#)

[Metadata](#)

[Properties](#)

[Permissions](#)

[Metrics](#)

[Management](#)

[File systems - new](#)

[Access Points](#)

Objects (0)



Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder

Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

< 1 > ⚙

	Name	Type	Last modified	Size	Storage class
--	------	------	---------------	------	---------------

No objects

You don't have any objects in this bucket.

Upload

- Now click on upload.

Files and folders (0)

All files and folders in this table will be uploaded.

Remove

Add files

Add folder

Find by name

< 1 >

	Name	Folder	Type	Size
--	------	--------	------	------

No files or folders

You have not chosen any files or folders to upload.

- Now click on Add files.
- And your restaurant.csv file provided in Resource.

Permissions

Grant public access and access to other AWS accounts.

Properties

Specify storage class, encryption settings, tags, and more.

Cancel

Upload

- Now scroll down and click Upload.

Upload succeeded

For more information, see the [Files and folders](#) table.

Summary

Destination

s3://bedrock-restaurant-agent-bucket23

Succeeded

✓ 1 file, 906.0 B (100.00%)

Failed

✗ 0 files, 0 B (0%)

[Files and folders](#)

[Configuration](#)

Files and folders (1 total, 906.0 B)

Find by name

< 1 >

Name	Folder	Type	Size	Status	Error
restaurant.csv	-	text/csv	906.0 B	✓ Succeeded	-

- Our File is uploaded.

1	Restaurant Name	City	Fine Dining
2	The Gourmet Table	New York	Yes
3	Burger Palace	Los Angeles	No
4	Urban Grill	Chicago	No
5	Sushi Zen	Houston	Yes
6	Pasta Fresca	Phoenix	Yes
7	The Golden Fork	Philadelphia	Yes
8	Taco Fiesta	San Antonio	No
9	Crimson Plate	San Diego	Yes
10	Steakhouse Royale	Dallas	Yes

- Basically our CSV file look like this in which Restaurant name, City, Fine Dining
- Now go to Lambda Function that created by action group.

☰ [Lambda](#) > [Functions](#) > restaurant-action-group-oau2o ⓘ 🔍

restaurant-action-group-oau2o

Throttle
📄 Copy ARN
Actions ▼

▼ Function overview Info

Diagram | Template


restaurant-action-group-oau2o


Layers (0)

+ Add trigger
+ Add destination

Export to Infrastructure Composer
Download ▼


Function ARN

arn:aws:lambda:us-west-2:463646775279:function:restaurant-action-group-oau2o


Description
-

Last modified
1 hour ago

- Now scroll down.

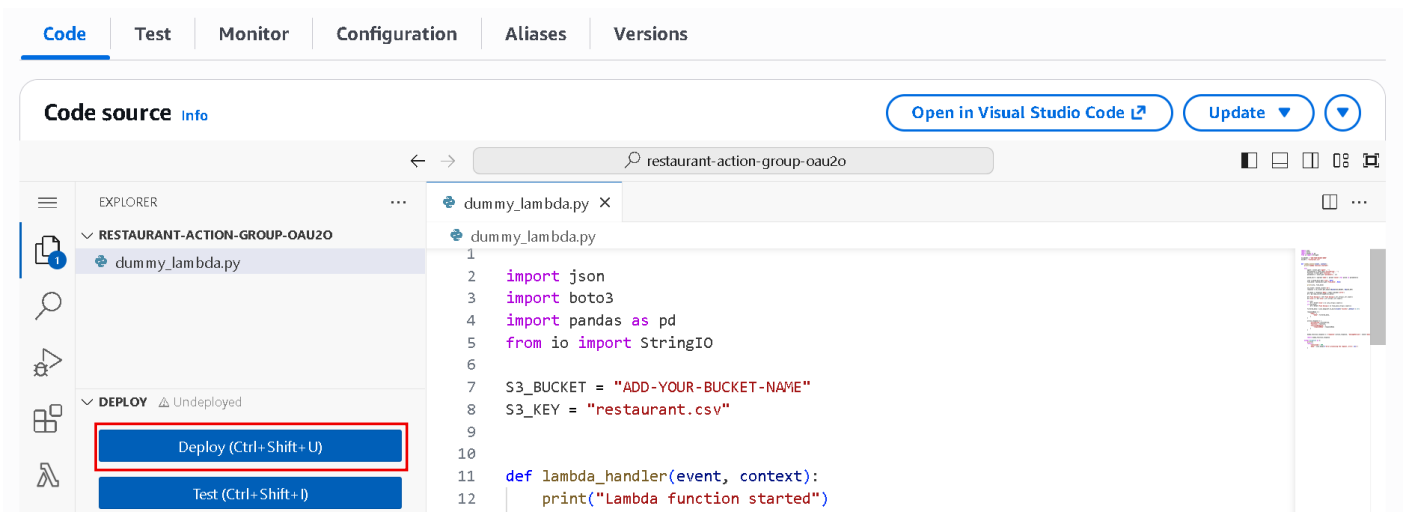


- And in code Section replace the code that will provided in resource.
- Now in line no 7 give your Bucket name.
- And in line 8 S3_key = [restaurant.csv](#)
- And click deploy.

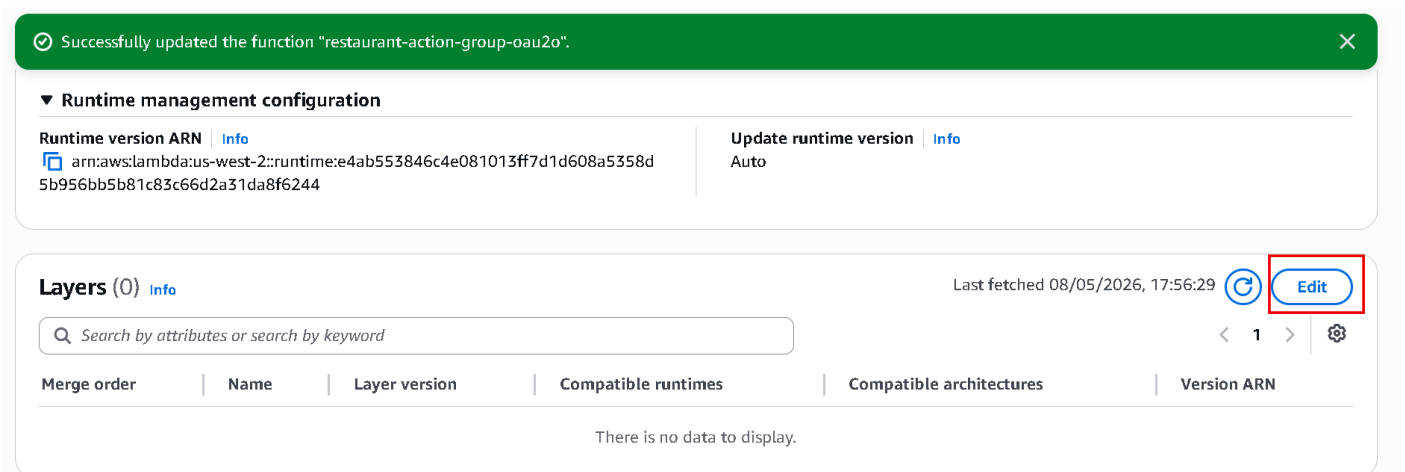

- Now our code is deploy and we need to add a layer.
- Because we added Pandas package in our Lambda function and right now this lambda function is serverless so amazon doesn't add big packages to it.
- So scroll down.
- And in Layer Click Edit.

Edit layers

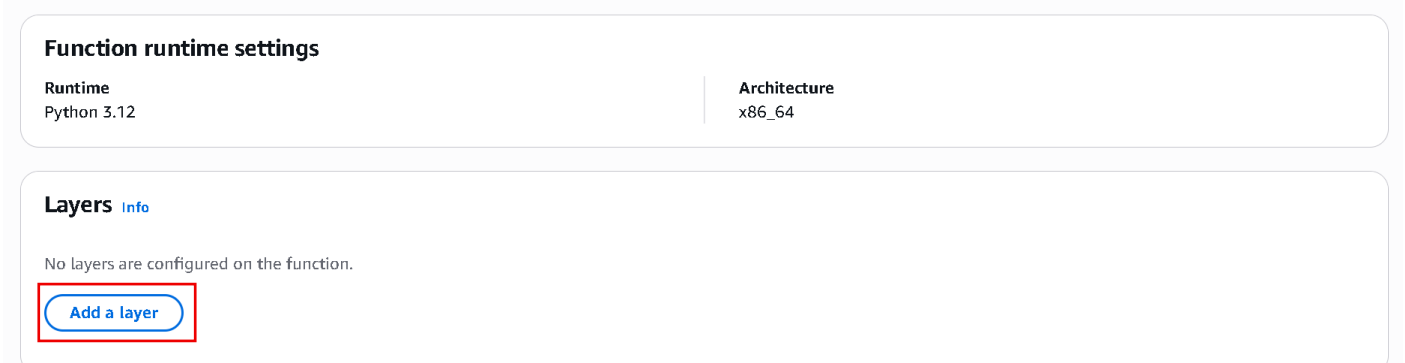

- Click Add a layer.

Layer source [Info](#)

Choose from layers with a compatible runtime and instruction set architecture or specify the Amazon Resource Name (ARN) of a layer version. You can also [create a new layer](#).

☒ AWS layers

Choose a layer from a list of layers provided by AWS.

☐ Custom layers

Choose a layer from a list of layers created by your AWS account.

☐ Specify an ARN

Specify a layer by providing the ARN.

AWS layers

Layers provided by AWS.

AWSSDKPandas-Python312

Version

24

Description

AWS SDK for pandas Lambda Layer - 3.16.0 (Python 3.12)

Compatible runtimes

Python 3.12

Compatible architectures

x86_64

Cancel

Add

- Layer Source – AWS Layers
- AWS layers – AWSSDKPandas-Python312
- Version - 24
- Then click ADD.

Layers [Info](#)

AWSSDKPandas-Python312

arn:aws:lambda:us-west-2:336392948345:layer:AWSSDKPandas-Python312:24

Add a layer

Some Lambda layers may not be compatible with functions running on Lambda Managed Instances. Verify layer compatibility and remove any incompatible layers from your function configuration. Layer compatibility depends on the runtime and architecture of your EC2 instance.

Cancel

Save

- Now click Save.

Successfully updated the function "restaurant-action-group-oau2o".

Runtime management configuration

Runtime version ARN [Info](#)

arn:aws:lambda:us-west-2::runtime:e4ab553846c4e081013ff7d1d608a5358d5b956bb5b81c83c66d2a31da8f6244

Update runtime version [Info](#)

Auto

Layers (1) [Info](#)

Last fetched 08/05/2026, 18:15:12

< 1 >

Edit

Search by attributes or search by keyword

Merge order	Name	Layer version	Compatible runtimes	Compatible architectures	Version ARN
1	AWSSDKPandas-Python312	24	python3.12	x86_64	arn:aws:lambda:us-west-2:336392948345:layer:AWSSDKPandas-Python312:24

- Our Layer is added.
- Now Scroll Up.

Code Test Monitor **Configuration** Aliases Versions

Configuration

General configuration
Triggers
Permissions
Destinations
Function URL

Execution role [View role document](#) [Edit](#)

Role name
[restaurant-action-group-oau2o-role-1OR92OGTSI](#)

Resource summary
To view the resources and actions that your function has permission to access, choose a service.

Amazon CloudWatch Logs
3 actions 2 resources

- Now click on Configuration.
- And in Configuration Go inside Permission.
- And click Role name.

restaurant-action-group-oau2o-role-1OR92OGTSI [Info](#) [Delete](#)

Summary [Edit](#)

Creation date
May 08, 2026, 16:22 (UTC+05:30)

ARN
 arn:aws:iam::463646775279:role/service-role/restaurant-action-group-oau2o-role-1OR92OGTSI

Last activity
-

Maximum session duration
1 hour

Permissions Trust relationships Tags Last Accessed Revoke sessions

Permissions policies (1) [Info](#) [Simulate](#) [Remove](#) [Attach policies](#) [Create inline policy](#) [Add permissions](#)

You can attach up to 10 managed policies.

- Now click Add permissions and select Attach policies.

Other permissions policies (1/2162) [Refresh](#)

[X](#) **Filter by Type** All types 1 match

☒	Policy name	Type	Description
☒	AmazonS3FullAccess	AWS managed	Provides full access to all buckets via t...

[Cancel](#) [Add permissions](#)

- Search AmazonS3FullAccess and select it.
- And click Add permissions.
- Now Permission is added close this tab.
- And go to Lambda function tab.

Code Test Monitor **Configuration** Aliases Versions

Configuration

General configuration [Info](#) [Edit](#)

Description -	Memory 128 MB	Ephemeral storage 512 MB
Timeout 0 min 3 sec	SnapStart Info None	

- In Lambda function go inside General configuration and click Edit.

Timeout

2 min 3 sec

Execution role

To access other AWS services and resources your function needs an IAM role. Choose a role with the right permissions for your function.

restaurant-action-group-oau2o-role-1OR92O...  [Create new role](#)

[View role details in IAM](#)

[Cancel](#) [Save](#)

- Scroll down and set Timeout 2 min 3 sec.
- And click Save.
- Now Our lambda function work is done go to your Agent.

Agent builder [Info](#)

[Manual](#) | [Assistant](#) [Test](#) [Prepare](#) [Save](#) [Save and exit](#)

Agent details

Agent name

bedrock-restaurant-agent

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Agent description - optional

Enter description

The description can have up to 200 characters.

- Now Simply click Save and exit.

[Amazon Bedrock](#) > [Agents](#) > Agent Details

bedrock-restaurant-agent

[Create Alias](#) [Test](#) [Edit in Agent Builder](#)

Agent overview

Name	bedrock-restaurant-agent	ID	RVNUJJBHB
Description	-	Status	✓ PREPARED
Creation date	May 08, 2026, 15:08 (UTC+05:30)	Last prepared	May 08, 2026, 15:37 (UTC+05:30)
Permissions	arn:aws:iam::463646775279:role/service-role/AmazonBedrockExecutionRoleForAgents_21WYL87GFNF		
User Input	DISABLED		
	Memory	Disabled	

Test

[TestAlias: Working draft](#) [Info](#) Using ODT [Chan](#)

 Prepare the Agent to test the latest changes.

[Prepare](#)

Enter your message here

[Run](#)

- Now Simply click Prepare.
- And test the agent

Test

Using ODT [Change](#)

TestAlias: Working draft ▼

[Info](#)



hii



Hello! Welcome! I'm here to help you find the perfect restaurant. 😊

Could you please tell me:

1. **Which city** are you looking to dine in?
2. Are you looking for a **fine dining experience** or something more casual?



[Show trace >](#)

- Our Agent is Replying.

Test

Using ODT [Change](#)

TestAlias: Working draft ▼

[Info](#)




[Show trace >](#)



i want to eat something in Houston



Are you looking for a **fine dining experience** or something more casual in Houston?



[< Hide trace](#)

Test

Using ODT [Change](#)

TestAlias: Working draft ▼

[Info](#)



i want to fine dine



Great news! Here's a **fine dining** restaurant in Houston for you:



Sushi Zen

- 📍 City: Houston
- ✨ Fine Dining: Yes

Enjoy your **fine dining** experience at Sushi Zen!

Let me know if you need any more help. 😊



[Show trace >](#)

- Now its give result from CSV File.