


Collaborator Agent 1 - HR Agent (Backend and Agent Creation)

To Begin with the Lab


Summary of the Lab

This lab walks you through creating an HR backend and AI agent using AWS services. First, in Amazon DynamoDB, create a table named **leaveBalanceHRTTable** with **empId** as the numeric partition key, then add sample employee leave records. Next, in Amazon Bedrock, create an agent named **HR_Agent**, choose the **Amazon Nova Pro** model, configure recommended settings, and add instructions. Finally, prepare the agent and test it with a greeting like “Hi.”


- Create DynamoDB table

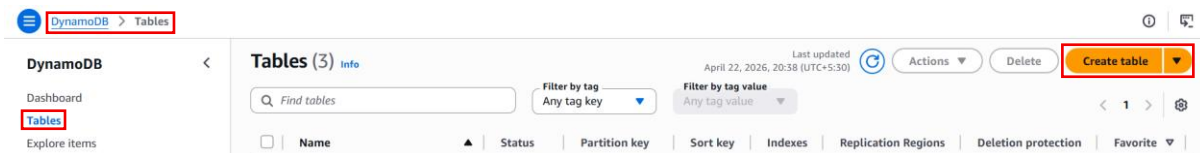


- Create the Backend (DynamoDB Table)
- Open AWS Console.
- Search for Amazon Web Services DynamoDB.
- Click Create Table.
- Enter:
 - Table Name: leaveBalanceHRTTable
 - Partition Key: empId
 - Type: Number
- Leave Sort Key empty.
- Click Create Table.

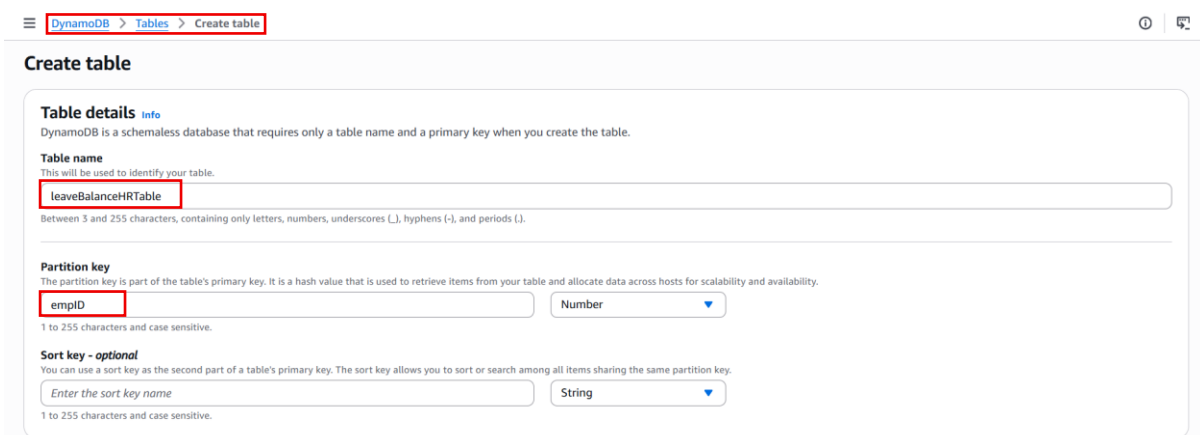


- Open the created table.
- Go to Explore Table Items.




- Click Create Item.

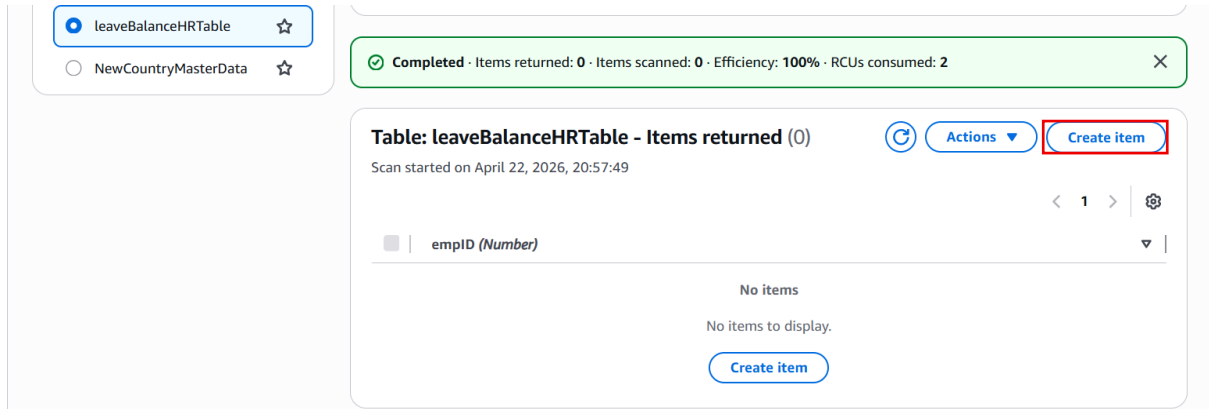


- Add some sample records

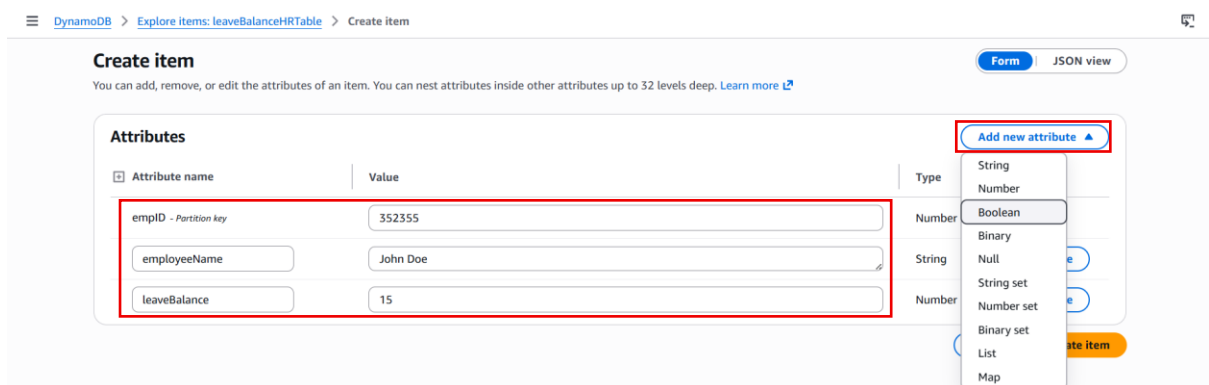


- Like this you can add more items.

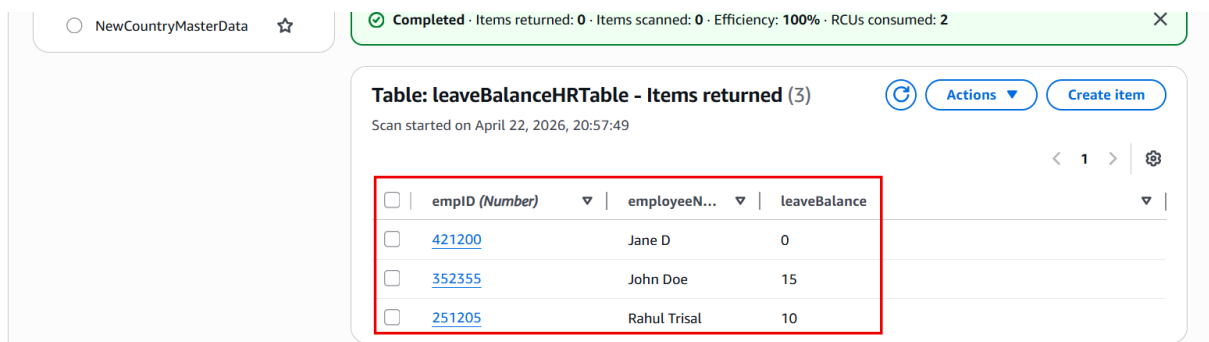

- Create the AI Agent in Amazon Bedrock
- Search for Amazon Bedrock.
- Open Agents.
- Click Create Agent.

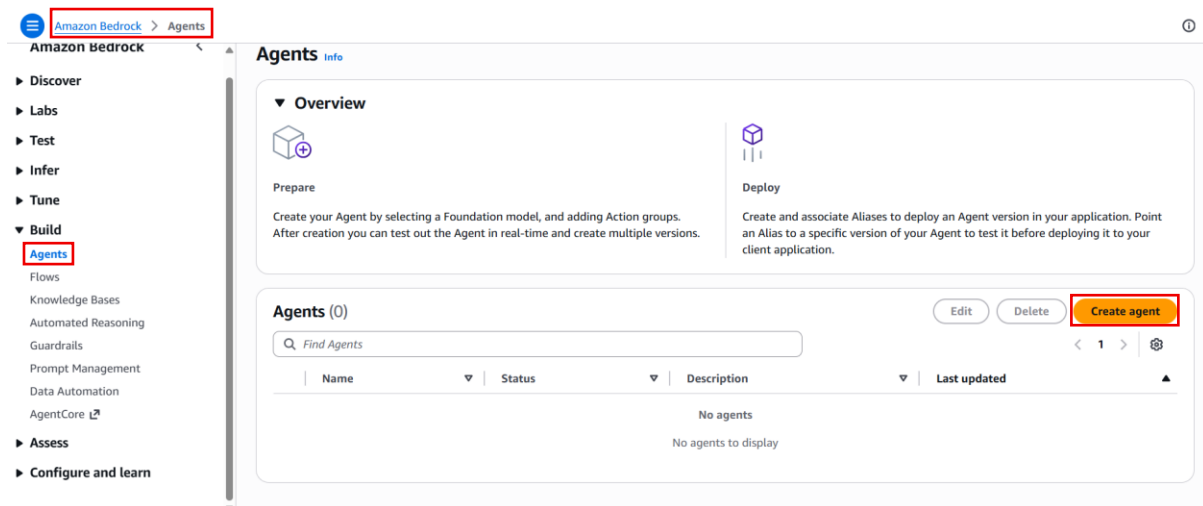

- Provide:
 - Agent Name: HR_Agent
- Description (optional)

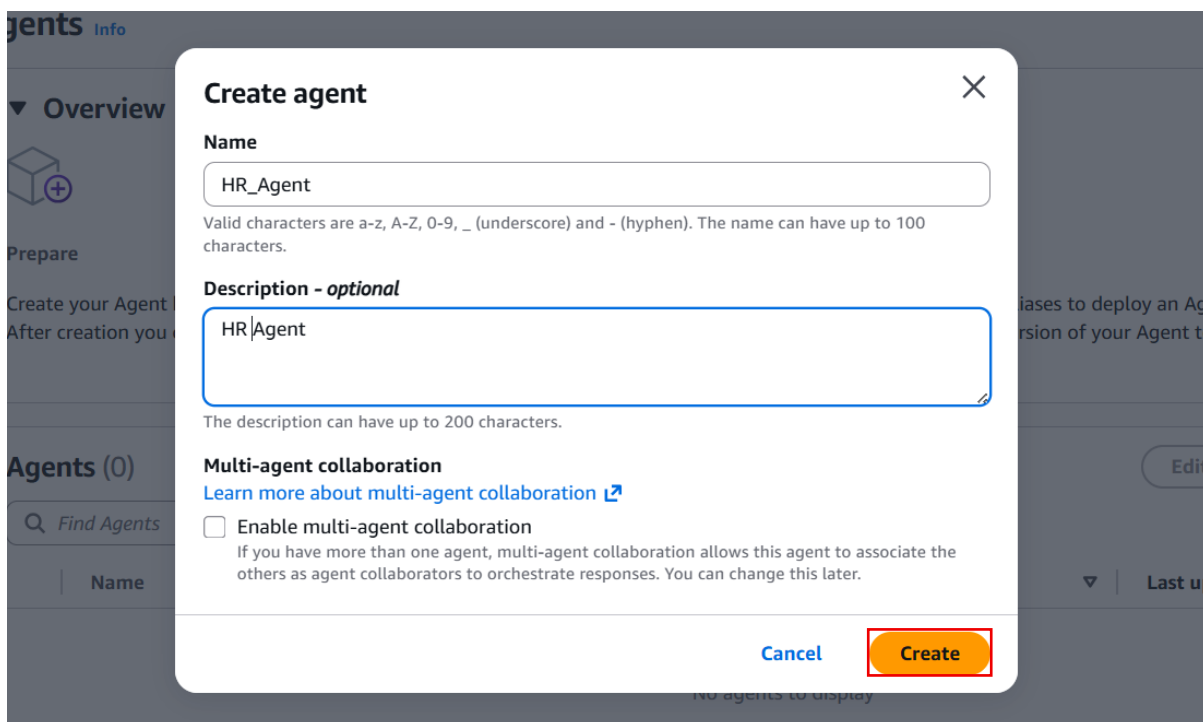

- Click Select Model.
- Choose:
 - Provider: Amazon
 - Model: Nova Pro
- Apply changes.

Find available models and inference

Input

Choose options

Output

Choose options

☒ Bedrock Agents optimized
 [Learn more](#)

Serverless model providers

Amazon

Anthropic

2. Models

Nova Pro 1.0

Input: Text, Image, Video

Output: Text

Max input: 300K tokens

Nova Premier 1.0 Legacy

Input: Text, Image, Video

Output: Text

Max input: 1M tokens

Nova Lite 1.0

Input: Text, Image, Video

Output: Text

Max input: 300K tokens

Nova Micro 1.0

Input: Text

Output: Text

Max input: 128K tokens

3. Inference

On demand

On-demand

Cancel

Apply

Amazon Bedrock

Agents

Agent Details

Agent builder

Discover

Labs

Test

Infer

Tune

Build

Agents

Flows

Knowledge Bases

Automated Reasoning

Guardrails

Prompt Management

Data Automation

AgentCore

Assess

Configure and learn

Manual

Assistant

Test

Prepare

Save

Save and exit

Agent details

Agent name

HR_Agent

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Agent description - optional

HR Agent

The description can have up to 200 characters.

Agent resource role

☒ Create and use a new service role
 ☐ Use an existing service role

AmazonBedrockExecutionRoleForAgents_FW5514AU80N

Select model

Amazon

Nova Pro 1.0

On-demand

Test Agent

Enter your message here

Run

• Add Agent Instructions

Instructions for the Agent

Provide clear and specific instructions for the task the Agent will perform. You can also provide certain style and tone.

You are an HR Agent can be used for following

- Answer questions about your leave policy

- Query and display leave balances for employee based on employee id

- Answer frequently asked questions (FAQs) about HR policies

This instruction must have a minimum of 40 characters.

Additional settings

- Use these recommended settings:
- Code Interpreter: Disabled
- User Input: Enabled
- Idle Timeout: Default (600 sec)

▼ Additional settings

Code Interpreter

Code Interpreter enables agents to handle tasks that involve writing, running, testing, and troubleshooting code in a secure environment.

☐ Enabled

☒ Disabled

User input

Select whether the agent can prompt additional information from the user when it does not have enough information to respond to an utterance.

☒ Enabled

Allow agent to ask the user clarifying questions to capture necessary inputs.

☐ Disabled

The selected foundation model within the Agent will make a best guess at invoking the appropriate action groups.

KMS key selection | [Info](#)

Your data is encrypted by default with a key that AWS owns and manages for you. To choose a different key, customize your encryption settings.

☐ Customize encryption settings (advanced)

To use the default key, clear this option.

Idle session timeout

You can configure how long a session is maintained when the user does not provide any input and the session is idle. Amazon Bedrock retains context information until a session ends.

By default, session idle timeout is 10 minutes, but you can specify any duration between 1 and 60 minutes.

- Memory: Disabled
- Knowledge Base: None
- Guardrails: Default
- Then click Save and Exit.

≡

Amazon Bedrock > Agents > Agent Details > Agent builder

✔ Agent: HR_Agent was successfully created.

✕

Agent builder [Info](#)

Manual

Assistant

Test

Prepare

Save

Save and exit

- Prepare and Test the Agent
- Click Prepare.
- Once ready, test with:
 - Hi
- The agent should respond

► Discover

► Labs

► Test

► Infer

► Tune

✔ Agent: HR_Agent was successfully created.

✔ Agent: HR_Agent was successfully updated. Prepare the agent to keep its details up to date.

HR_Agent

Create Alias

Test

Edit in Agent Builder

Agent overview

Test

TestAlias: Working draft

Info

Using ODT Chan

① Prepare the Agent to test the latest changes.

Prepare

Amazon Bedrock

Discover

Labs

Test

Infer

Tune

Build

Agents

Flows

Knowledge Bases

Automated Reasoning

Guardrails

Prompt Management

Data Automation

AgentCore

Assess

Agent: HR_Agent was successfully prepared.

Agent builder

Info

Manual

Assistant

Test

Prepare

Save

Save and exit

Agent details

Agent name

HR_Agent

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Agent description - optional

HR Agent

The description can have up to 200 characters.

Agent resource role

☐ Create and use a new service role

☒ Use an existing service role

Test Agent

Using ODT [Change](#)



Hello! How can I assist you today?
If you have questions about our
leave policy, need to check your
leave balance, or have any HR-
related inquiries, feel free to ask.



[Show trace >](#)

Enter your message here


Collaborator Agent 1 - HR Agent (Lambda and Agent Integration)

To Begin with the Lab


Summary of the Lab

This lab explains how to integrate an AWS Lambda function with the previously created Bedrock HR Agent. Create a Lambda function in the **US East (N. Virginia)** region using Python runtime, configure timeout settings, and attach DynamoDB access permissions. Then edit the Bedrock agent, add an action group, connect the Lambda function, and define an OpenAPI schema. If access is denied, update Lambda resource-based permissions to allow Bedrock invocation. Finally, test the agent and review CloudWatch logs.

- Go to AWS Console
- Open AWS Lambda
- Make sure region is:
 - US East (N. Virginia)
- **Create Lambda Function**
- Click:
 - Create Function

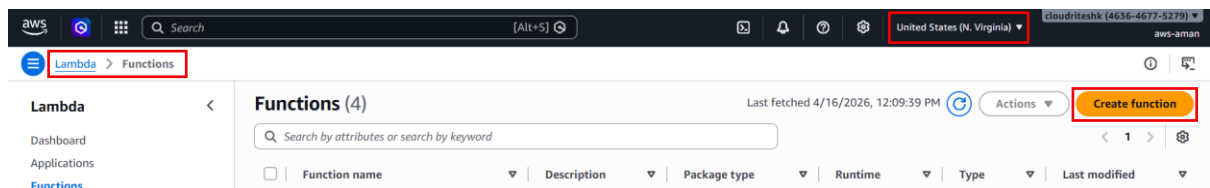

- Choose:
- Author from scratch
- Function Name
 - demo inference optimization
- Runtime
 - Python 3.14
- Click Create function

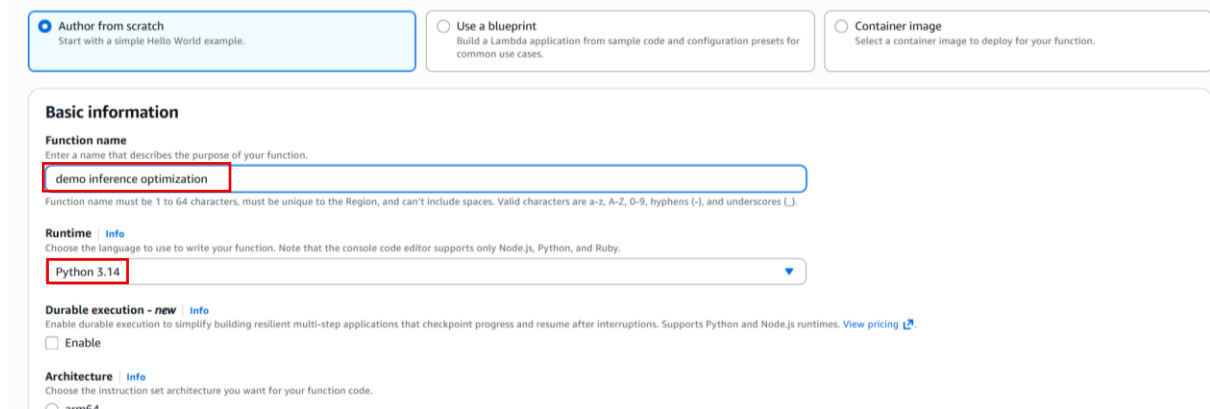

- Go to:
- Configuration → General Configuration → Edit

The screenshot shows the AWS Lambda console's 'General configuration' page. The 'Configuration' tab is active. On the left, the 'General configuration' link is highlighted with a red box. On the right, the 'General configuration' section is highlighted with a red box. The 'Edit' button in the top right corner is also highlighted with a red box.

- Set:
 - 1 minute
- Click Save

The screenshot shows the AWS Lambda console's 'SnapStart' configuration page. The 'Timeout' field is set to 1 minute and 3 seconds, highlighted with a red box. The 'Save' button at the bottom right is also highlighted with a red box.

- **Grant Bedrock Permissions**
- Go to:
 - Configuration → **Permissions**

The screenshot shows the AWS Lambda console's 'Permissions' page. The 'Permissions' tab is active. The 'Execution role' section is highlighted with a red box. The 'Role name' field is also highlighted with a red box.

- Open IAM Role attached to Lambda.
- Click:
 - Add Permissions → Attach Policies
- For demo:
- Attach:
 - AmazonDynamoDBFullAccess
- Production should use least-privilege IAM permissions.

Search IAM

Dashboard

▼ Access Management

- User groups
- Users
- Roles
- Policies
- Identity providers
- Account settings
- Root access management
- Temporary delegation requests

Summary

Creation date
April 16, 2026, 11:36 (UTC+05:30)

Last activity
-

ARN
arn:aws:iam::463646775279:role/service-role/demo_inference_optimization-role-f93w148k

Maximum session duration
1 hour

[Edit](#)

Permissions | Trust relationships | Tags | Last Accessed | Revoke sessions

Permissions policies (2) [Info](#)

You can attach up to 10 managed policies.

[Simulate](#) [Remove](#) [Add permissions](#)

- Attach this policy

☒ [AmazonDynamoDBFullAccess](#) AWS managed Provides full access to Amazon Dynam...

Permissions policies (2) [Info](#)

You can attach up to 10 managed policies.

Filter by Type

Search

All types

☐	Policy name	Type	Attached entities
☐	AmazonDynamoDBFullAccess	AWS managed	55
☐	AWSLambdaBasicExecutionRole-2401e0...	Customer managed	1

- Open previously created Bedrock Agent
- Click Edit in Agent Builder

[Amazon Bedrock](#) > [Agents](#) > Agent Details

Amazon Bedrock < **HR_Agent** [Create Alias](#) [Test](#) [Edit in Agent Builder](#)

- Scroll to Action Groups
- Click Add Action Group
- Action Group Details
 - Name: retrieveLeaveBalance
 - Description: Retrieve leave balance

Create Action group

Action group details

Enter Action group name

retrieveLeaveBalance

Description - *optional*

retrieveLeaveBalance

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). This description can have up to 200 characters.

Action group type

Select what type of action group to create

☐

Define with function details

Specify functions and define parameters as JSON objects that will be associated to the action group invocation.

☒

Define with API schemas

Specify a Lambda or API Gateway and define a schema to specify the APIs that the agent can invoke to carry out its tasks.

- Choose:
- Define with API Schema
- Select Existing Lambda Function
- Select:
 - leavebalanceHRFunction

Action group invocation

Specify a Lambda function that will be invoked based on the action group identified by the Foundation model during orchestration.

Select how to define the Lambda function

☐

Quick create a new Lambda function - *recommended*

An Amazon Lambda function will be created in your account on your behalf. No further configurations are necessary.

☒

Select an existing Lambda function

Use an existing Lambda function for this action group.

☐

Return control

Agent responses in the test window will prompt the user for function details to generate a response. No further configurations are necessary.

Select Lambda function

Select a previously created Lambda function or visit [AWS Lambda](#) to create a new function.

leavebalanceHRFunction


Function version

\$LATEST


[View](#)




- Create OpenAPI Schema
- Use Inline Schema Editor
- Define the schema

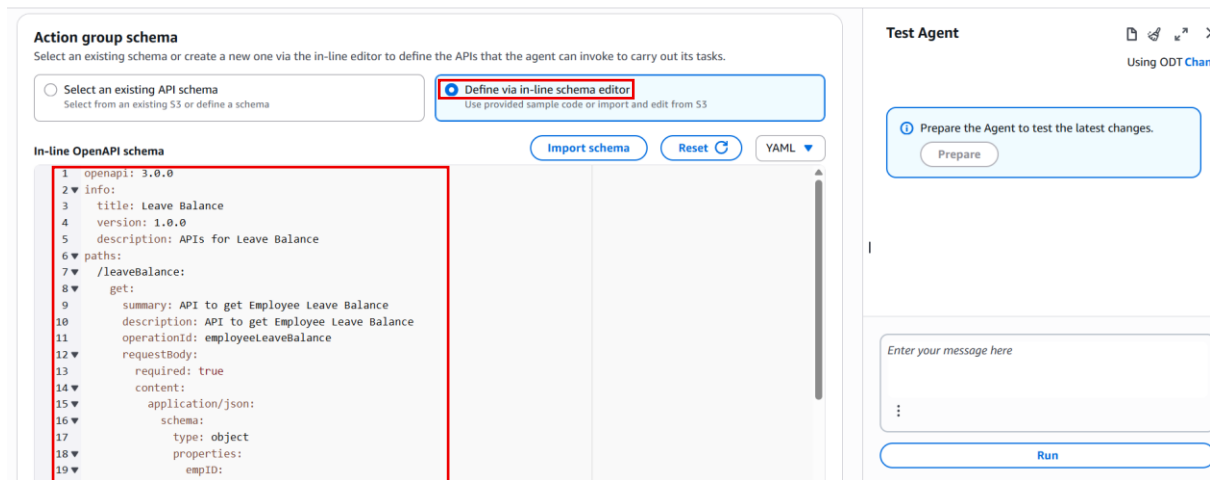

- Click Create
- Save Agent
- So before preparing the agent, give bedrock permission to Invoke Lambda. Otherwise you will get the error
- Initial test returns:
- Access Denied

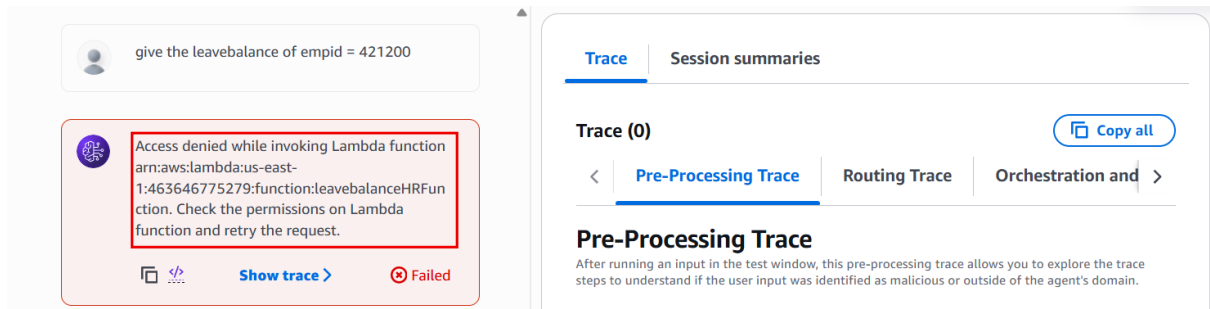

- Fix Steps
- Open Lambda
 - Go to Configuration → Permissions
- Open Resource-based Policy
- Click Add Permissions

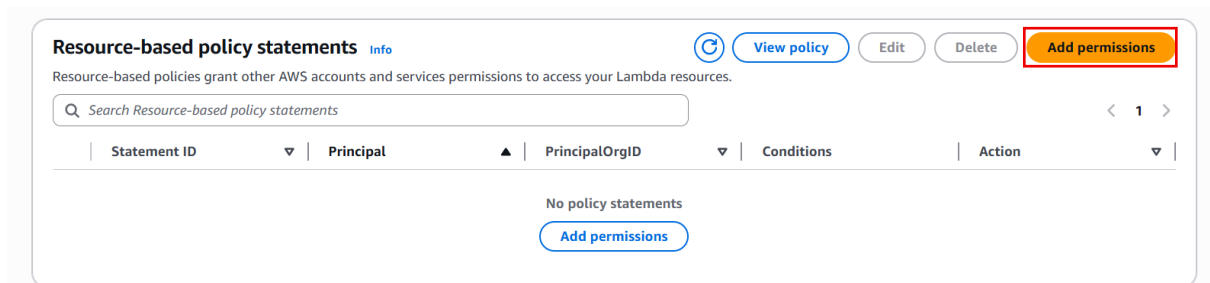

- Choose
 - AWS service
- Service:
 - Other

- Statement ID:
 - hr-agent-01
- Principal:
 - bedrock.amazonaws.com
- Action:
 - lambda:InvokeFunction
- Source ARN:
- Copy Agent ARN from Bedrock Agent
- Save.

[Lambda](#) > [Functions](#) > [leavebalanceHRFunction](#) > Add permissions

Edit policy statement

☐ AWS account
Grant permissions to another AWS account, user, or role.

☒ AWS service
Grant permissions to another AWS service.

☐ Function URL
Grant permissions to invoke your function through the function URL.

Service
The AWS service to grant permissions to.

Other

Statement ID
Enter a unique statement ID to differentiate this statement within the policy.

hr-agent-01

Principal
The service principal for this AWS service. [Learn more](#)

bedrock.amazonaws.com

Source ARN
The ARN for a resource. Find the ARN in the related service console.

arnaws:bedrockus-east-1:463646775279:agent/SSXXD5LP8X

Action
Choose an action to allow.

lambda:InvokeFunction

- Now test the agent again

Amazon Bedrock

Test

Using ODT Change

TestAlias: Working draft

What is leave balance for employee 251205?

The leave balance for employee 251205, Rahul Trisal, is 10 days.

Show trace >

Trace (0)

Pre-Processing Trace

Routing Trace

Orchestration and

Copy all

Pre-Processing Trace

After running an input in the test window, this pre-processing trace allows you to explore the trace steps to understand if the user input was identified as malicious or outside of the agent's domain.

- You can also check the CloudWatch logs


Collaborator Agent 1 - HR Agent (Bedrock KnowledgeBase)

To Begin with the Lab


Summary of the Lab

This lab shows how to build a Bedrock Knowledge Base for the HR Agent. First, create an Amazon S3 bucket and upload HR policy documents. Then, in Amazon Bedrock, create a knowledge base using Amazon S3 as the data source, Titan Text Embeddings for vector generation, and OpenSearch Serverless as the vector store. Sync the uploaded data, test with Nova Pro, attach the knowledge base to the existing HR Agent, save changes, and deploy it using a new alias named **dev**.

- Open AWS Console.
- Search for Amazon S3
- Click Create Bucket
 - Bucket Name: hrpolicyagent01
- Keep default settings.
- Click Create Bucket

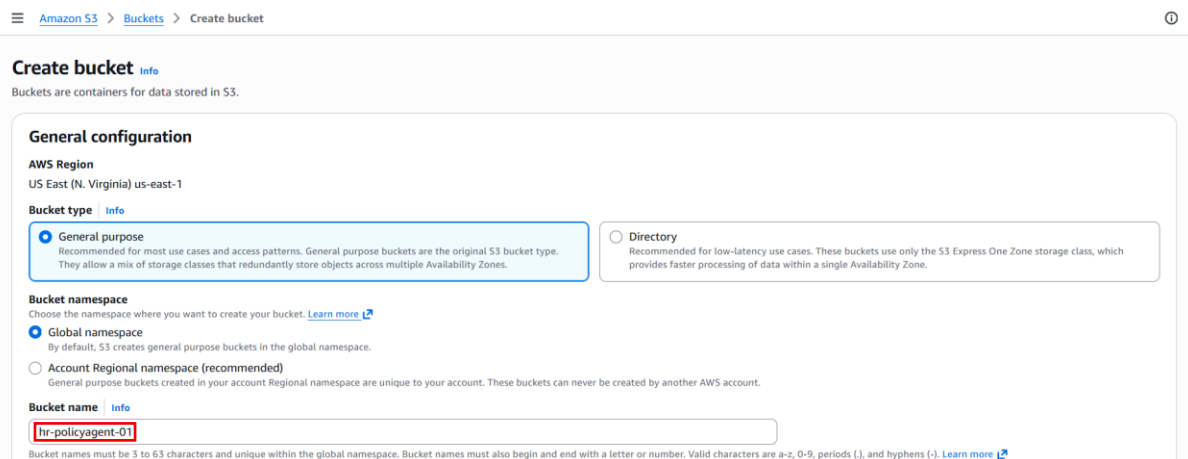

- Open created bucket.
- Click Upload
- Add HR Policy PDF/Document
- Click Upload

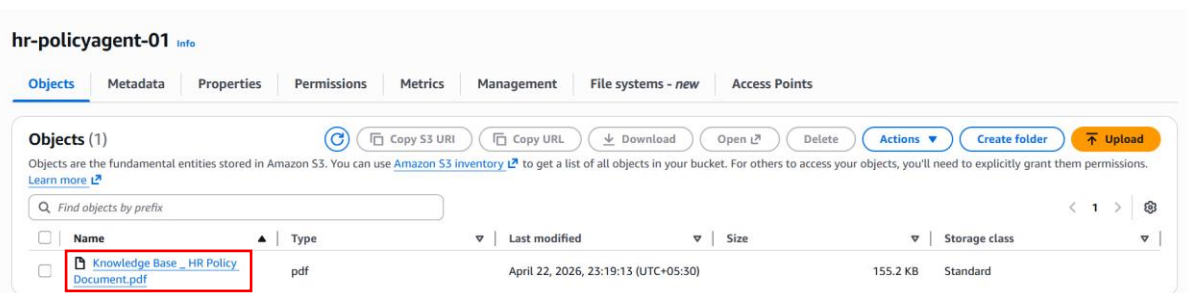

- Open AWS Console.

- Search Amazon Bedrock
- Go to:
 - Builders Tools → Knowledge Bases
- Click:
 - Create Knowledge Base with Vector Store
- Basic Details
 - Name: HR Policy Agent
 - Description: HR policy knowledge base
- Permissions
- Allow Bedrock to create required IAM service role automatically

Amazon Bedrock > Knowledge Bases > Create knowledge base with vector store

Step 1: Provide Knowledge Base details

Step 2: Configure data source

Step 3: Configure data storage and processing

Step 4: Review and create

Provide Knowledge Base details

Knowledge Base details

Knowledge Base name

hrpolicyagent01

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 50 characters.

Knowledge Base description - optional

HR Policy Agent

Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 200 characters.

IAM permissions

Certain permissions are necessary to access other services or perform actions in order to create this resource. For more information, see [service role](#) for Amazon Bedrock.

Runtime role

☒ Create and use a new service role

☐ Use an existing service role

Service role name

AmazonBedrockExecutionRoleForKnowledgeBase_n4607

- Select Data Source
- Choose:
 - Amazon S3
- Then continue.

Choose data source type

Select the data source type that you want to configure in the next step. You may add additional data sources once your Knowledge Base is created.

 Amazon S3 Object storage service that stores data as objects within general purpose buckets. Add up to 5 buckets as data sources. ☒	 Confluence - Preview Collaborative work-management tool designed for project planning, software development and product management. ☐	 Custom Create a data source directly in Amazon Bedrock. A custom data source allows the flexibility to automatically ingest documents into your vector database directly. ☐
---	--	--

- Connect S3 Bucket
 - Click Browse
- Select bucket:
 - hr-policyagent-01
- Click Choose

Amazon Bedrock > Knowledge Bases > Create knowledge base with vector store

Step 1
Provide Knowledge Base details
Step 2
Configure data source
Step 3
Configure data storage and processing
Step 4
Review and create

Configure data source

Configure for the chosen data source

Amazon S3
Provide details to connect Amazon Bedrock to your S3 data source.

▼ Data source: knowledge-base-quick-start-ydgxy-data-source Delete

Data source name
knowledge-base-quick-start-ydgxy-data-source
Valid characters are a-z, A-Z, 0-9, _ (underscore) and - (hyphen). The name can have up to 100 characters.

Data source location
☒ This AWS account
☐ Other AWS account

S3 URI Info
Enter the S3 bucket location containing your source files. To enhance search relevance and filtering capabilities, you can include metadata by adding a .metadata.json file for each source file.
 View Browse S3

☐ KMS Key for S3 data - optional
If you encrypted your S3 data, provide the KMS key here so that Bedrock can decrypt it.

- Chunking Strategy
- Use:
 - Default Chunking

Chunking strategy [Info](#)

Chunking breaks down the text into smaller segments before embedding. The chunking strategy can't be modified after you create the data source.

Default chunking

Automatically splits text into chunks of about 300 tokens in size, by default. If a document is less than or already 300 tok...

- Select Embedding Model
- Choose:
 - Titan Text Embeddings

Configure data storage and processing

Choose an embeddings model to convert the data that you will provide in the next step, and provide details for a vector data store in which Bedrock can store, manage, and update your embeddings. The embeddings model and vector store cannot be changed after creation of Knowledge Base.

Embeddings model

Select an embeddings model to convert your data into an embedding. Your selection may limit vector stores and embedding types that are available. Pricing depends on the model. [Learn more](#)



Titan Text Emb... v2.0 ⓘ

On-demand

ⓘ This embedding model is for text retrieval only. For native multimodal retrieval choose Amazon Nova Multimodal embedding model. [Learn more](#)

► Additional configurations

- Select Vector Store
- Use default:
 - OpenSearch Serverless

Vector store [Info](#)
 Let Amazon create a vector store on your behalf or select a previously created store to allow Bedrock to store, update and manage embeddings. You will be billed directly from the vector store provider.
[Learn more](#)

Vector store creation method

☒ **Quick create a new vector store - Recommended**
 A vector store will be created on your behalf in this AWS account during Knowledge Base creation.

☐ **Use an existing vector store**
 Connect to an existing vector store to store, update, and manage embeddings.

Vector store type - new [Info](#)
 A vector store holds the vector embeddings representation of your data. This choice cannot be changed later. Not all vector stores support binary vector embeddings.

Amazon OpenSearch Serverless
 Select to optimize and provide contextually relevant responses across billions of vectors in milliseconds. Combine search with text-based keywords for hybrid requests.

► **Additional configurations**

- Review settings
- Click Create Knowledge Base

Data source (1) Sync Stop sync Add :

Data sources contain information returned when querying a Knowledge Base.

Find data source

☐	Data source...	Status	Data source ty...	Account ID	Source Link	Last sync time	Last sync war...	Text chunking...	Parsing strategy
☐	knowledge-ba...	Available	S3	46364677527...	s3://hr-policya...	April 22, 2026,...	-	Default	Default

- Sync Data Source
- Important Step
- After creation:
- Open Data Source
 - Click Sync
- Wait for:
- Sync Completed

Sync completed for data source - 'knowledge-base-quick-start-ydgxy-data-source'

- Open test pane
- Select model:
 - Nova Pro

Sync completed for data source - 'knowledge-base-quick-start-ydgxy-data-source'

Test Knowledge Base: hrpolicyagent01 Close

Configurations

API

▼ **Retrieval and response generation**

☐ Retrieval only: data sources
 Query and retrieve information from data sources in a single Knowledge Base.

☒ **Retrieval and response generation: data sources and model**
 Query the data sources and generate responses based on the retrieved results by using the specified foundation model.

Model

Nova Pro 1.0 On-demand

Test Details

Preview

Number of annual leaves for full-time employee?

Full-time employees are entitled to 15 days of annual leave per annum, according to the obtained results^{[1][2]}

Write a prompt (Shift + ENTER to start a new line, and ENTER to generate a response)

- Open existing HR Agent
- Click Edit in Agent Builder
- Scroll to Knowledge Bases
- Click Add
- Select:
 - HR Policy Agent

Knowledge Bases (0) [Info](#) [Delete](#) [Add](#)

[Amazon Bedrock](#) > [Agents](#) > [Agent Details](#) > [Agent builder](#) > Add Knowledge Base

Amazon Bedrock <

- ▼ **Discover**
 - Overview
 - Quickstart [New](#)
 - Model catalog
 - API keys
- ▼ **Labs**
 - Quotas [New](#)
 - Compare models [New](#)
- ▼ **Test**
 - Playground [New](#)
 - Watermark detection

Add knowledge base

Knowledge Base: hrpolicyagent01 [Clear](#)

Select Knowledge Base
Select a previously created Knowledge Base or create a new one by visiting Knowledge Base. [Learn more about Knowledge Bases.](#)

[Refresh](#)

Knowledge Base instructions for Agent
Specify instructions based on the design and type of information of the Knowledge Base. This will impact how the Knowledge Base interacts with the agent.

The instruction can have up to 200 characters.

- Save and Prepare Agent
- Deploy Agent with Alias
- Steps
- Open Agent
- Scroll to Aliases
- Click Create Alias

Aliases (0) [Info](#) [Delete](#) [Edit](#) [Create](#)

An alias points to a specific version of your Agent. Once you create and associate a version with an alias, you can test it. With an alias, you can also update the Agent version that your client applications use.

What is leave balance for employee ID 421200?

- Details
 - Alias Name: dev
 - Description: Dev environment
- Click Create Alias

Aliases (1) [Info](#)

[Delete](#) [Edit](#) [Create](#)

An alias points to a specific version of your Agent. Once you create and associate a version with an alias, you can test it. With an alias, you can also update the Agent version that your client applications use.

< 1 > 

	Alias ID ▾	Alias name	Description ▾	Associated version ▾	Throughput ▾	Creation date
☐	GZNJLM4ZSN	dev	development	Version 1	-	April 23, 2026, 00:00 (UTC+0)


Supervisor Agent (Agent 3) - Enterprise Travel Agent

To Begin with the Lab

Summary of the Lab

The **Enterprise Travel Agent** was created in Amazon Bedrock as a **Supervisor Agent** using the **Amazon Nova Pro** model. It was configured with user input enabled, while memory, knowledge base, action groups, and code interpreter were disabled. Multi-Agent Collaboration was set to **Supervisor**, allowing it to coordinate responses by delegating subtasks. Two collaborators were added: **HR Agent** for HR-related requests and **Hotel Booking Agent** for accommodation tasks. The supervisor successfully handled requests and returned accurate final responses.

- Open AWS Console
- Search for Amazon Bedrock
- Go to Agents
- Click Create Agent
- Create Supervisor Agent
- Basic Details
 - Agent Name: Enterprise Travel Agent
 - Description: Travel agent for enterprise
- Important Option
- Then click Create

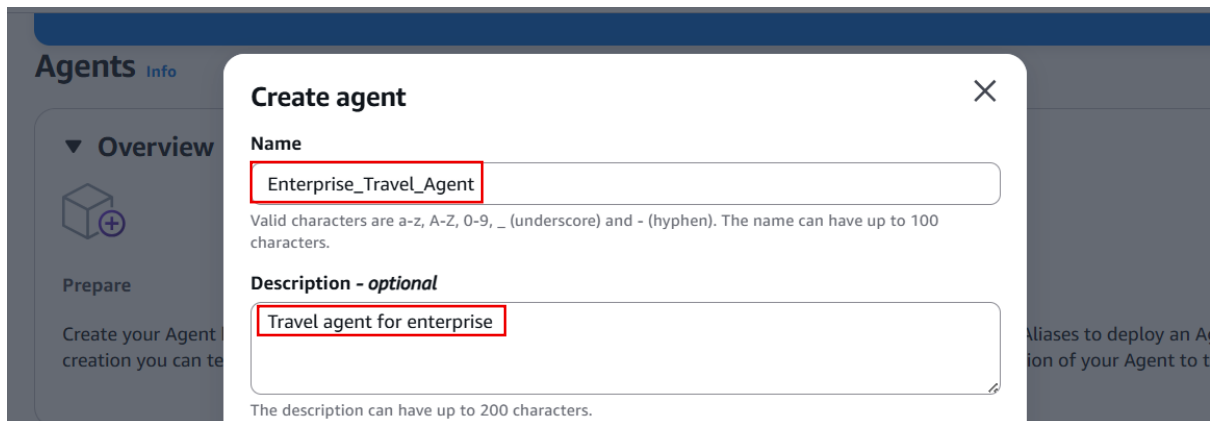

The screenshot shows the 'Create agent' dialog box in the Amazon Bedrock console. The 'Name' field contains 'Enterprise_Travel_Agent' and the 'Description - optional' field contains 'Travel agent for enterprise'. Both fields are highlighted with red boxes. The dialog box is titled 'Create agent' and has a close button (X) in the top right corner. The background shows the 'Agents Info' sidebar with 'Overview' selected.

- Choose:
 - Provider: Amazon
 - Model: Nova Pro
- Apply settings.
- Also add the instruction for the same

Agent resource role

☒ Create and use a new service role

☐ Use an existing service role

AmazonBedrockExecutionRoleForAgents_FINQCQSKTCW ▼

Select model



Nova Pro 1.0
On-demand



Instructions for the Agent

Provide clear and specific instructions for the task the Agent will perform. You can also provide certain style and tone.

You are an enterprise travel agent. You are supervisor agent and have 2 collaborator agents – HR Agents and Hotel Booking Agents. The HR Agent can be used to answer questions about your leave policy and get leave balance. The Hotel Booking Agent can be used to checking the hotel room

This instruction must have a minimum of 40 characters.

- Code Interpreter: Disabled
- User Input: Enabled
- Memory: Disabled
- Knowledge Base: None
- Guardrails: Optional (From the use case 1)
- Action Groups: None

User input

Select whether the agent can prompt additional information from the user when it does not have enough information to respond to an utterance.


☒ Enabled

Allow agent to ask the user clarifying questions to capture necessary inputs.


☐ Disabled

The selected foundation model within the Agent will make a best guess at invoking the appropriate action groups.

- Go to:
- Multi-Agent Collaboration → Edit
- Choose one:
 - Option A: Supervisor
- Always coordinates final answer
- Breaks tasks into subtasks
 - Option B: Supervisor with Routing
- Directly routes simple requests
- Lower latency
- For Lab:
 - Choose Supervisor

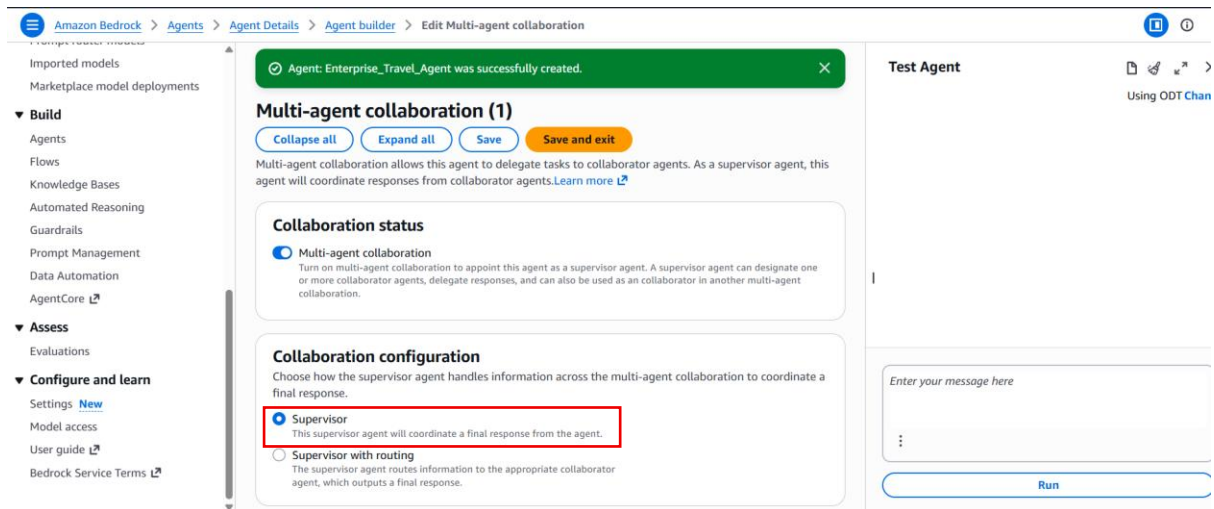

- Click Add Collaborator
- Select:
 - Agent: HR Agent
 - Alias: dev
- Name
 - HR Agent
- Also add Collaborator instruction for this agent.

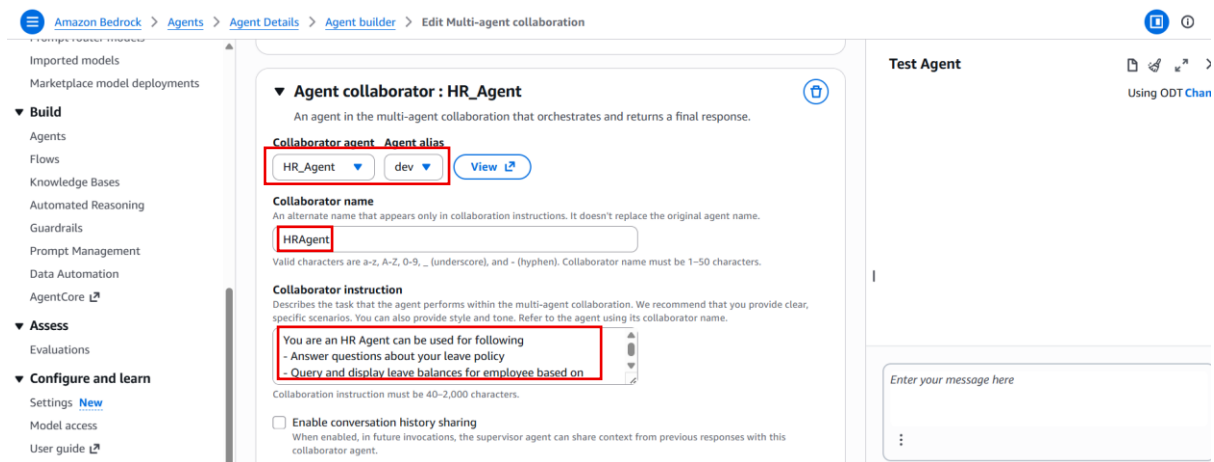

- Add Collaborator Agent 2 (Hotel Booking Agent)
- Click Add Collaborator
- Select:
 - Agent: Hotel Room Booking Agent
 - Alias: dev
- Name
 - Hotel Booking Agent
- Also add Collaborator instruction for this agent.

Amazon Bedrock > Agents > Agent Details > Agent builder > Edit Multi-agent collaboration

Imported models
Marketplace model deployments

▼ Build

- Agents
- Flows
- Knowledge Bases
- Automated Reasoning
- Guardrails
- Prompt Management
- Data Automation
- AgentCore

▼ Assess

- Evaluations

▼ Configure and learn

- Settings [New](#)
- Model access
- User guide
- Bedrock Service Terms

▼ Agent collaborator : Hotel_Room_Booking_Agent

An agent in the multi-agent collaboration that orchestrates and returns a final response.

Collaborator agent: Hotel_Room_Booking_Agent Agent alias: dev [View](#)

Collaborator name: Hotel Booking Agent

An alternate name that appears only in collaboration instructions. It doesn't replace the original agent name.

Valid characters are a-z, A-Z, 0-9, _ (underscore), and - (hyphen). Collaborator name must be 1-50 characters.

Collaborator instruction

Describes the task that the agent performs within the multi-agent collaboration. We recommend that you provide clear, specific scenarios. You can also provide style and tone. Refer to the agent using its collaborator name.

You are a Hotel Booking Agent can do following :
• Answer queries related to hotel rooms
• Query and display room availability for a particular date

Collaboration instruction must be 40-2,000 characters.

☐ Enable conversation history sharing

When enabled, in future invocations, the supervisor agent can share context from previous responses with this collaborator agent.

[Add collaborator](#)

Test Agent

Using ODT Chan

Enter your message here

[Run](#)

- I am getting all the answer from the supervisor agent perfectly.

Test

Using ODT Change

TestAlias: Working draft [Info](#)

What is leave balance for employee id 251205?

The leave balance for employee ID 251205, Rahul Trisal, is 10 days.

[Show trace >](#)

Room availability for 2025-12-25

I'm sorry, but there are no rooms available for either Sea View or Garden View on 2025-12-25.

Enter your message here

Multi-agent collaboration trace timeline

For agents with Multi-agent collaboration enabled, each subsequently invoked Agent collaborator is displayed. Each bar within the trace timeline can be clicked to show the specific breakdown for that Agent collaborator.

▼ (1)EnterpriseTravelAgent

(1.1)Hotel_Room_Booking_Agent

Time (seconds)

Time (seconds)	0.00s	1.00s	2.00s	3.00s	4.00s	5.00s	6.00s	7.00s
EnterpriseTravelAgent	0.00s							
Hotel_Room_Booking_Agent	4.26s							

Trace

Session summaries

Trace 1: EnterpriseTravelAgent (2)

[Copy all](#)

< Routing Trace **Orchestration and Knowledge Base** Post-Processing Trace >