


Meeting Notes Summarization

Summary: -


You created a smart meeting assistant using Amazon Bedrock that can read meeting notes or text files and automatically create short, clear summaries. Users can upload meeting files, and the system processes the content, generates an easy-to-understand summary, and stores the final result in Amazon S3. In short, you built a tool that saves time by turning long meeting notes into simple summaries automatically.

Now Let's Create our project: -

- Open your AWS Console With IAM User Account.

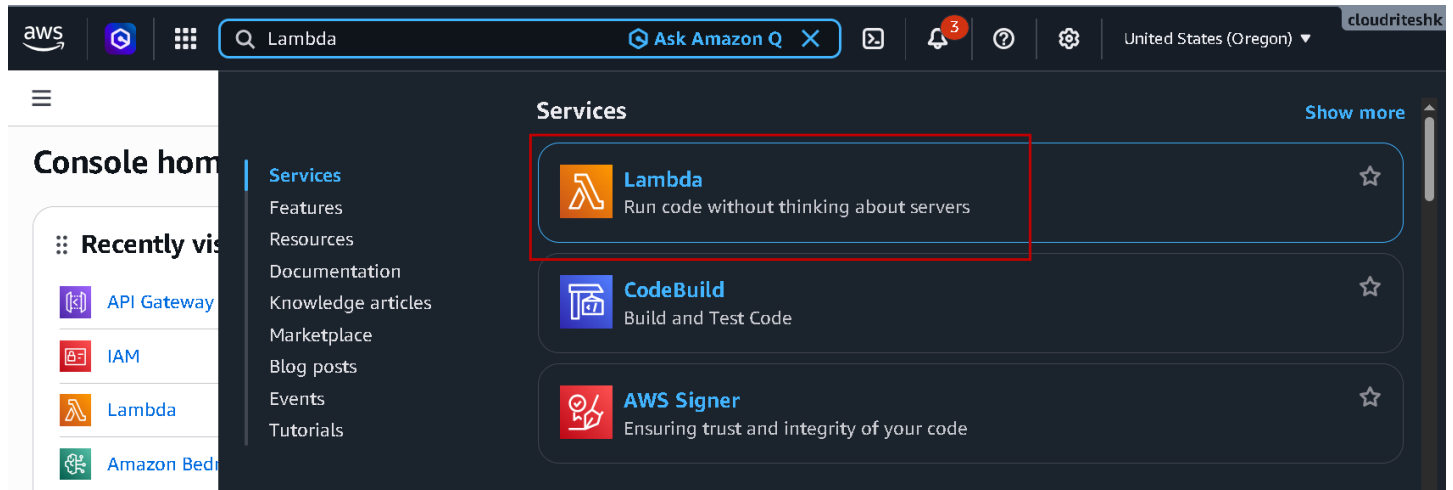

- Search and open Lambda.

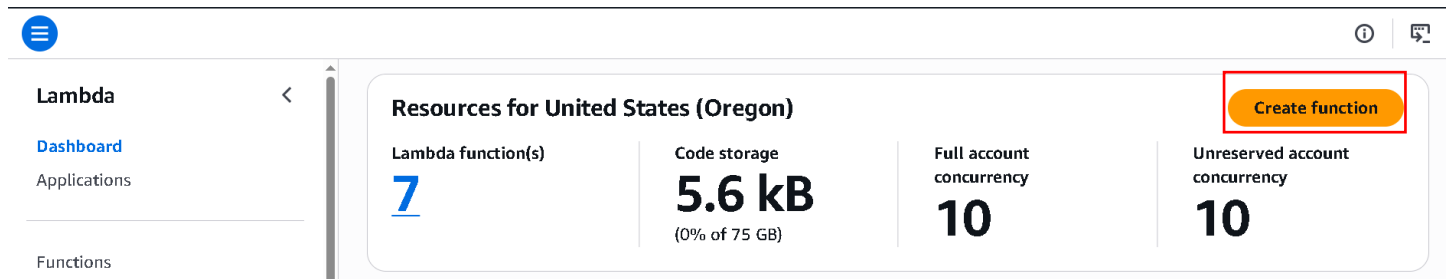

- Now just click Create a function.

Create function [Info](#)

Choose one of the following options to create your function.

☒ Author from scratch
Start with a simple Hello World example.

☐ Use a blueprint
Build a Lambda application from sample code and configuration presets for common use cases.

☐ Container image
Select a container image to deploy for your function.

Basic information

Function name

Enter a name that describes the purpose of your function.

bedrock_meeting_summary

Function name must be 1 to 64 characters, must be unique to the Region, and can't include spaces. Valid characters are a-z, A-Z, 0-9, hyphens (-), and underscores (_).

Runtime [Info](#)

Choose the language to use to write your function. Note that the console code editor supports only Node.js, Python, and Ruby.

Python 3.11

- Enter function name bedrock_code_generation.
- And select Runtime python 3.11.

► Additional settings

Customize your function architecture, execution role, HTTP(S) endpoints, tenant isolation mode, VPC, code signing, KMS key, and tags.

✖ Cannot add or remove after creation

Cancel

Create function

- Now simply scroll down and click Create function.

bedrock_meeting_summary Throttle Copy ARN Actions ▼

▼ **Function overview** [info](#)

Diagram | Template

 **bedrock_meeting_summary**

 Layers (0)

+ Add trigger + Add destination

Function ARN
 `arn:aws:lambda:us-west-2:463646775279:function:bedrock_meeting_summary`

Description
-

Last modified
21 seconds ago

Code Test Monitor **Configuration** Aliases Versions

- Our lambda function is created.
- Now click Configuration.
- And scroll down.

Code Test Monitor **Configuration** Aliases Versions

Configuration

General configuration
Triggers
Permissions
Destinations
Function URL

Execution role Refresh View role document Edit

Role name
[bedrock_meeting_summary-role-p67w15bu](#) 

Resource summary
To view the resources and actions that your function has permission to access, choose a service.

 **Amazon CloudWatch Logs**
3 actions 2 resources ▼

- In configuration select Permissions.
- And then click Role name.

Summary

[Edit](#)

Creation date

May 11, 2026, 17:57 (UTC+05:30)

ARN

[arn:aws:iam::463646775279:role/service-role/bedrock_meeting_summary-role-p67w15bu](#)

Last activity

-

Maximum session duration

1 hour

Permissions

Trust relationships

Tags

Last Accessed

Revoke sessions

[Attach policies](#)[Create inline policy](#)[Add permissions](#)Permissions policies (1) [Info](#)[Simulate](#)[Remove](#)

You can attach up to 10 managed policies.

- Now click Add permissions and then select Attach policies.

Other permissions policies (1/2181)



Filter by Type

All types

5 matches

< 1 >



☐	Policy name	Type	Description
☒	AdministratorAccess	AWS managed - job function	Provides full access to AWS services a...
☐	AdministratorAccess-Amplify	AWS managed	Grants account administrative permiss...
☐	AdministratorAccess-AWSElasticBeanstalk	AWS managed	Grants account administrative permiss...
☐	AWSAuditManagerAdministratorAccess	AWS managed	Provides administrative access to ena...
☐	AWSManagementConsoleAdministratorAcc...	AWS managed - job function	Provides full access to configure and c...

[Cancel](#)[Add permissions](#)

- Now Search Administrator Access and select it.
- If this is a Real work Environment we decide what function our function need and we give only that Access.
- And simply click Add permission.
- And close the tab and return to lambda function.

Code

Test

Monitor

Configuration

Aliases

Versions

Configuration

[General configuration](#)[Triggers](#)[Permissions](#)[Destinations](#)[Function URL](#)General configuration [Info](#)[Edit](#)

Description

-

Memory

128 MB

Ephemeral storage

512 MB

Timeout

0 min 3 sec

SnapStart [Info](#)

None

- Now click General configuration.
- And then click edit.

Timeout

4 min 3 sec

Execution role

To access other AWS services and resources your function needs an IAM role. Choose a role with the right permissions for your function.

bedrock_meeting_summary-role-p67w15bu [Create new role](#)

[View role details in IAM](#)

[Cancel](#) [Save](#)

- Now simply scroll down and make time out as 4min 3sec.
- And leave everything and simply click save.

Code Test Monitor Configuration Aliases Versions

Code source [Info](#) [Open in Visual Studio Code](#)

bedrock_meeting_summary

EXPLORER

lambda_function.py

DEPLOY Undeployed

Deploy (Ctrl+Shift+U)

Test (Ctrl+Shift+I)

TEST EVENTS [NONE SELECTED]

lambda_function.py

```

26 def generate_summary_from_bedrock(content:str) ->str:
39     try:
42         response_content = response.get('body').read().decode('utf-8')
43         response_data = json.loads(response_content)
44         summary = response_data["completion"].strip()
45         return summary
46
47     except Exception as e:
48         print(f"Error generating the summary: {e}")
49         return ""
50
51 def save_summary_to_s3_bucket(summary, s3_bucket, s3_key):
52

```

- Now go to code section
- Replace the previous written code with the code that provided in Resource.
- Now we need S3 Bucket.
- So there we can store our output.
- Open Aws console in new tab.
- Now we need S3 Bucket.
- So there we can store our output.
- Open Aws console in new tab.

aws [Ask Amazon Q](#) United States (Oregon) cloudriteshk

Services [Show more](#)

S3 Scalable Storage in the Cloud

S3 Glacier Archive Storage in the Cloud

AWS Snow Family Large Scale Data Transport

- Now search S3 and open it.

Buckets

General purpose buckets

All AWS Regions

Directory buckets

General purpose buckets (171) [Info](#)



Copy ARN

Empty

Delete

Create bucket

Buckets are containers for data stored in S3.



Find buckets by name



1

2



Name



AWS Region

Creation date



- Now click Create Bucket.

Bucket name [Info](#)

bedrock-course-bucket23

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - *optional*

Only the bucket settings in the following configuration are copied.

Choose bucket

Format: s3://bucket/prefix

- Now scroll down and Enter Bucket name.
- And leave Else default and scroll down.

Advanced settings

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Cancel

Create bucket

- Now click Create bucket.

Amazon S3 > Buckets > bedrock-course-bucket23



bedrock-course-bucket23 [Info](#)

Objects

Metadata

Properties

Permissions

Metrics

Management

File systems - new

Access Poin

Objects (0)



Copy S3 URI



Copy URL



Download

Open

Delete


Actions

Create folder




Upload

- Now copy this bucket name.
- And go back to your lambda function tab.

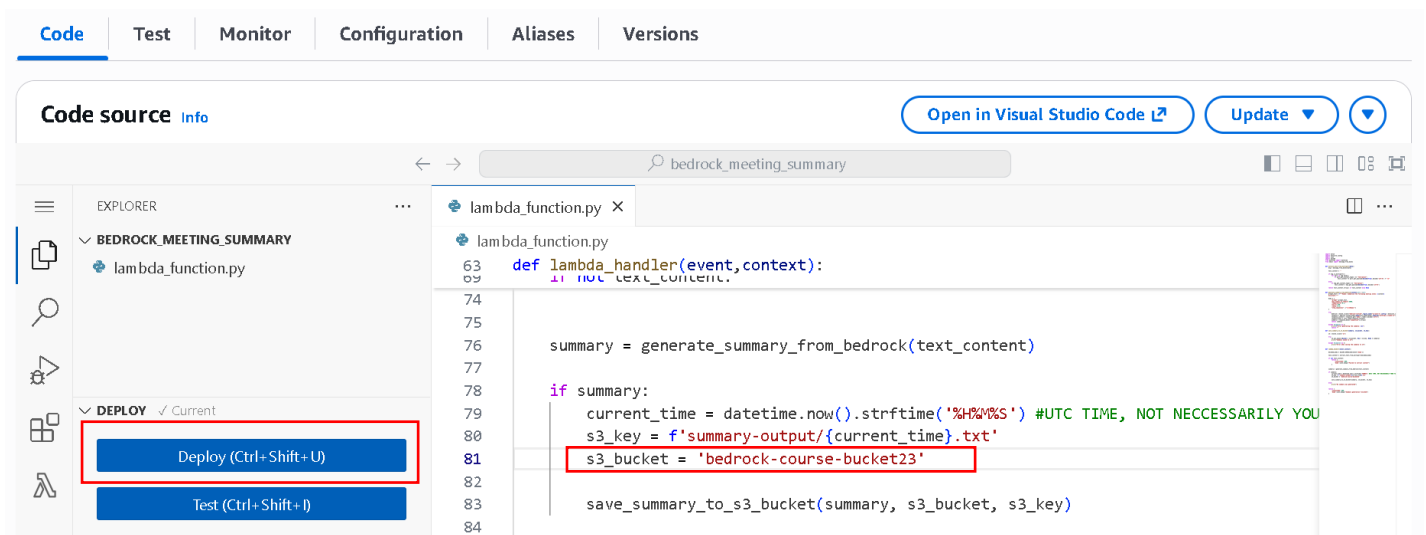

- Now in your code paste this bucket name on line no 81.
- And simply click on deploy.
- And scroll down.
- We need to add boto3 layer.
- Because we need latest version of boto3 because the current version as of now boto3 inside AWS Lambda does not support bedrock runtime.
- So that's why we are going to have create our own boto3 layer and the basically zip it and then upload it for lambda.
- Open your vs code.

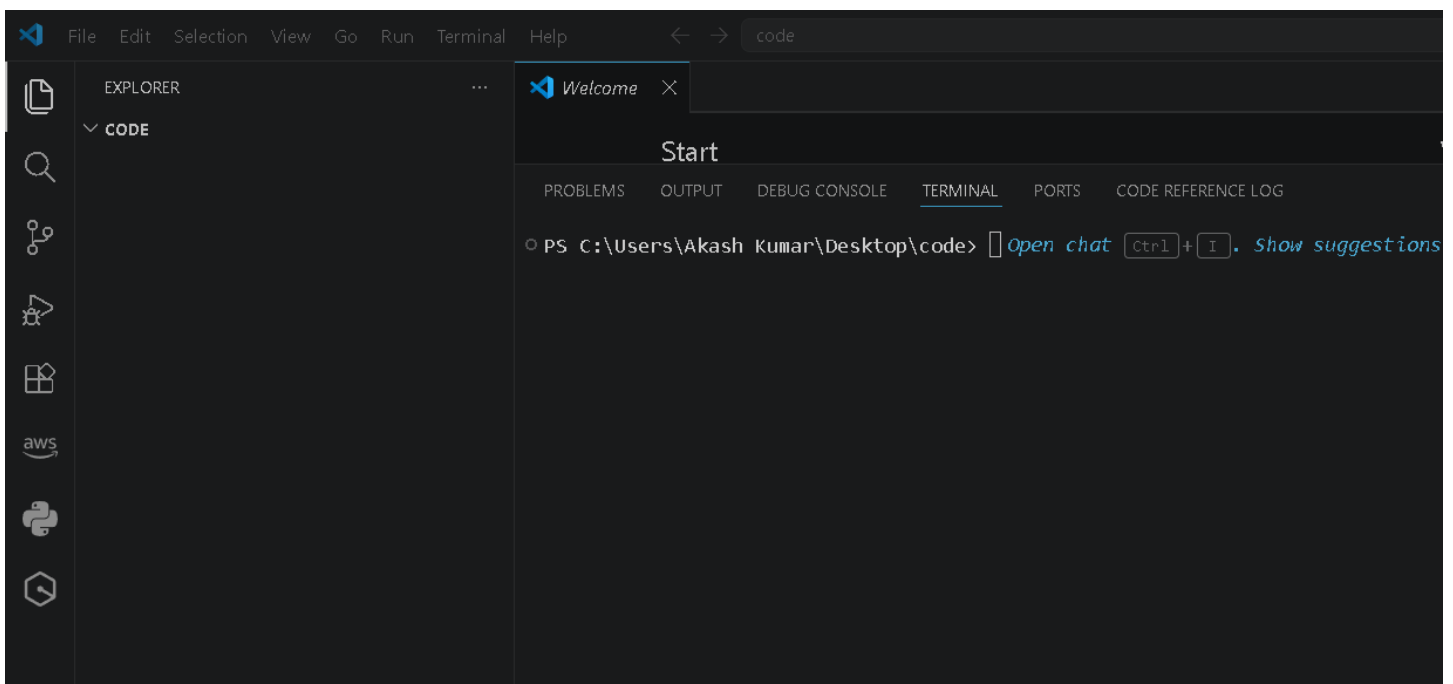

- Now create new folder in your Vs code.
- And open terminal.

The screenshot shows the VS Code interface with the Explorer panel on the left showing a folder named `boto3_layer`. The main panel displays the terminal output for the command `mkdir boto3_layer`. Below the command, a directory listing is shown for `C:\Users\Akash Kumar\Desktop\code`, indicating the successful creation of the `boto3_layer` directory. The second command, `cd boto3_layer`, is also shown in the terminal.

```
PS C:\Users\Akash Kumar\Desktop\code> mkdir boto3_layer

Directory: C:\Users\Akash Kumar\Desktop\code

Mode                LastWriteTime         Length Name
----                -
d-----          11-05-2026     15:53         boto3_layer

PS C:\Users\Akash Kumar\Desktop\code> cd boto3_layer
PS C:\Users\Akash Kumar\Desktop\code\boto3_layer>
```

- Create a new directory for the layer
 - `mkdir boto3_layer`
 - `cd boto3_layer`

The screenshot shows the VS Code interface with the Explorer panel on the left showing the `boto3_layer` folder. The terminal output shows the command `mkdir python` being executed from within the `boto3_layer` directory. A directory listing for `C:\Users\Akash Kumar\Desktop\code\boto3_layer` shows the `python` directory has been created. The prompt then moves to the next level of the directory structure.

```
PS C:\Users\Akash Kumar\Desktop\code\boto3_layer> mkdir python

Directory: C:\Users\Akash Kumar\Desktop\code\boto3_layer

Mode                LastWriteTime         Length Name
----                -
d-----          11-05-2026     15:55         python


PS C:\Users\Akash Kumar\Desktop\code\boto3_layer>
```

- Create a python directory. AWS Lambda expects Python packages in a python directory for Python runtimes
 - `mkdir python`


The screenshot shows the VS Code interface with the Explorer panel on the left showing the `boto3_layer` folder. The terminal output shows the command `python -m venv venv` being executed from within the `boto3_layer` directory. The prompt then moves to the next level of the directory structure.

```
PS C:\Users\Akash Kumar\Desktop\code\boto3_layer> python -m venv venv
PS C:\Users\Akash Kumar\Desktop\code\boto3_layer>
```


- Create a virtual environment
 - `python -m venv venv`

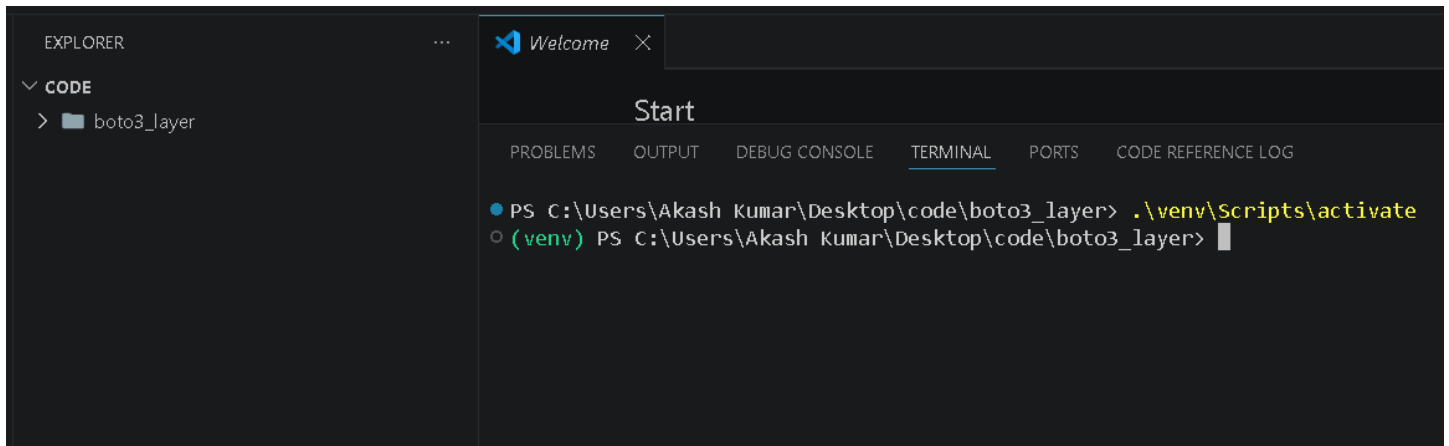

- Activate the virtual environment
 - `.\venv\Scripts\activate`

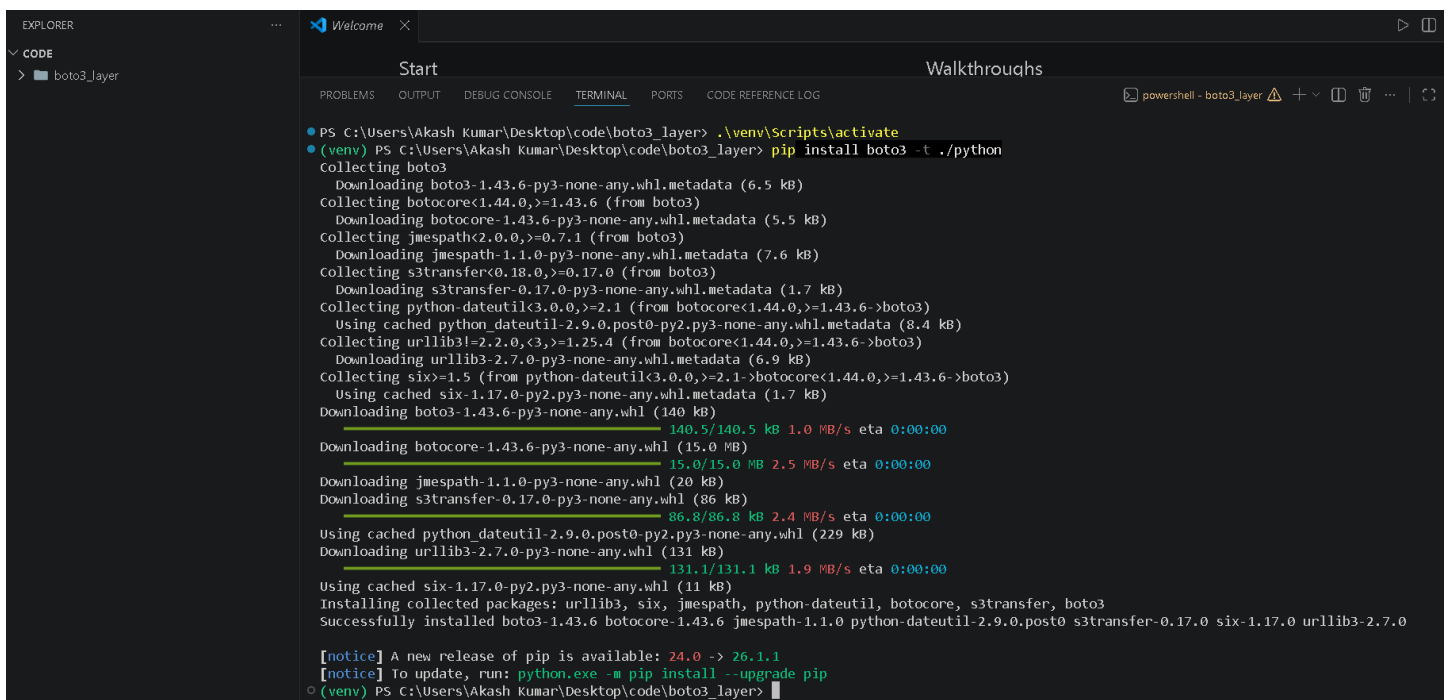


- Install the latest boto3 into the python directory
 - `pip install boto3 -t ./python`

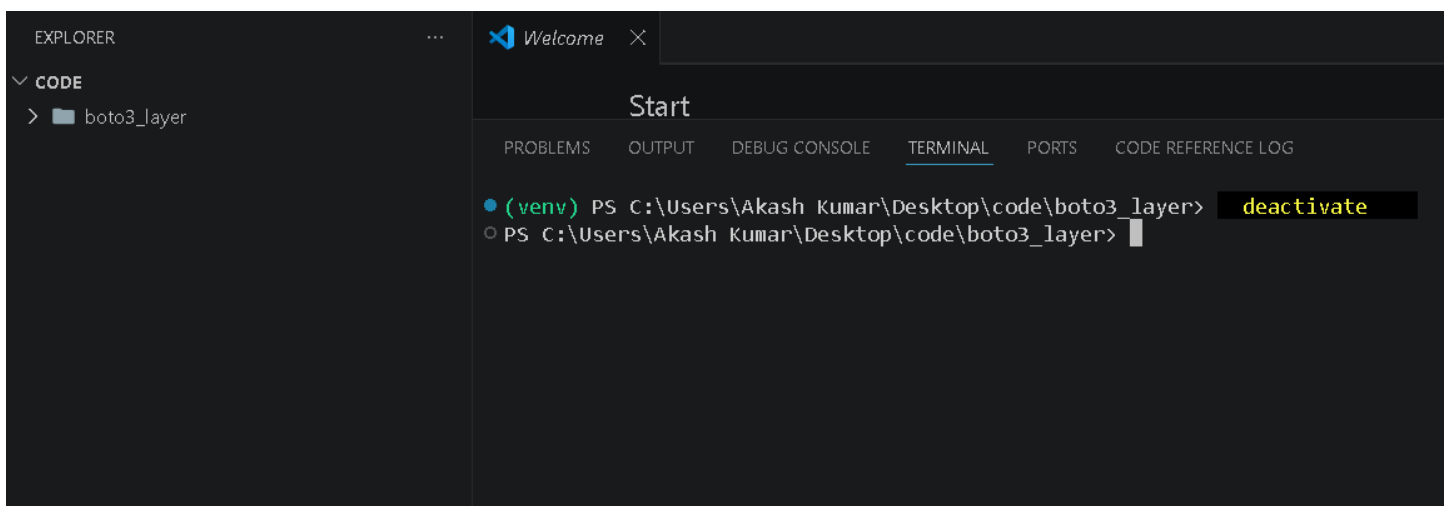


- Deactivate the virtual environment

➤ deactivate

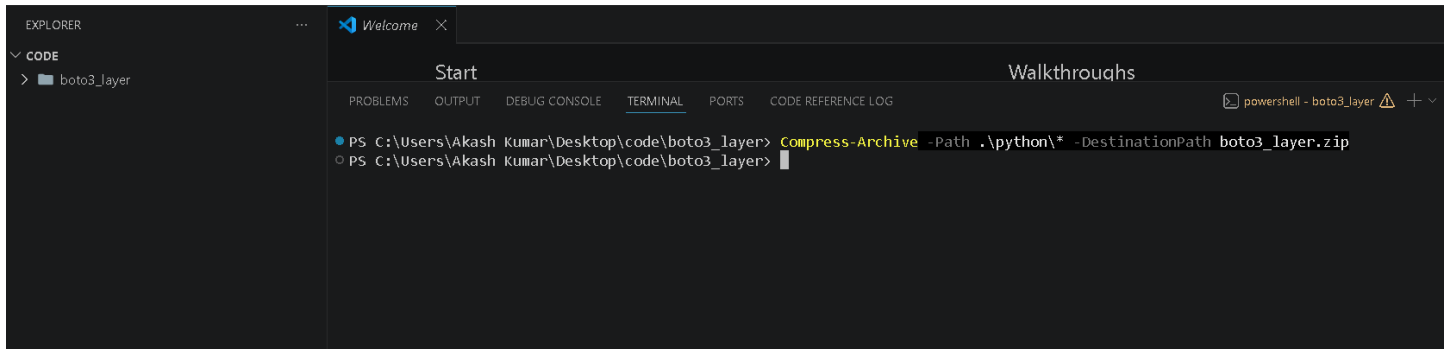


```
PS C:\Users\Akash Kumar\Desktop\code\boto3_layer> Compress-Archive -Path .\python\* -DestinationPath boto3_layer.zip
PS C:\Users\Akash Kumar\Desktop\code\boto3_layer>
```

- Zip the package
 - `Compress-Archive -Path .\python\* -DestinationPath boto3_layer.zip`

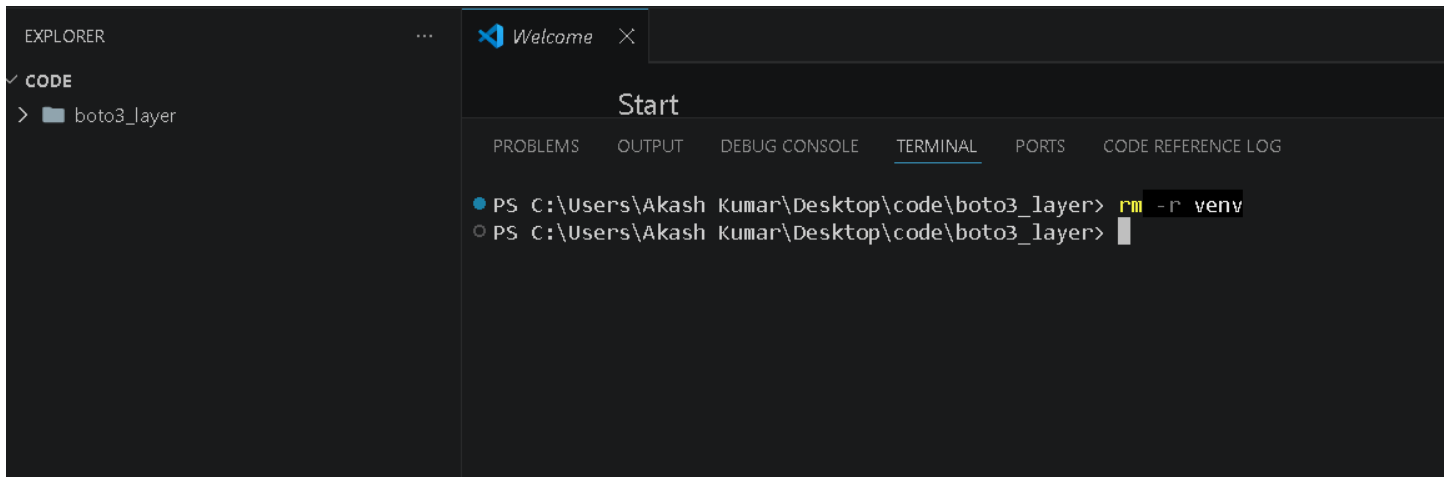


```
PS C:\Users\Akash Kumar\Desktop\code\boto3_layer> rm -r venv
PS C:\Users\Akash Kumar\Desktop\code\boto3_layer>
```

- Optionally, remove the virtual environment after packaging
 - `rm -r venv`

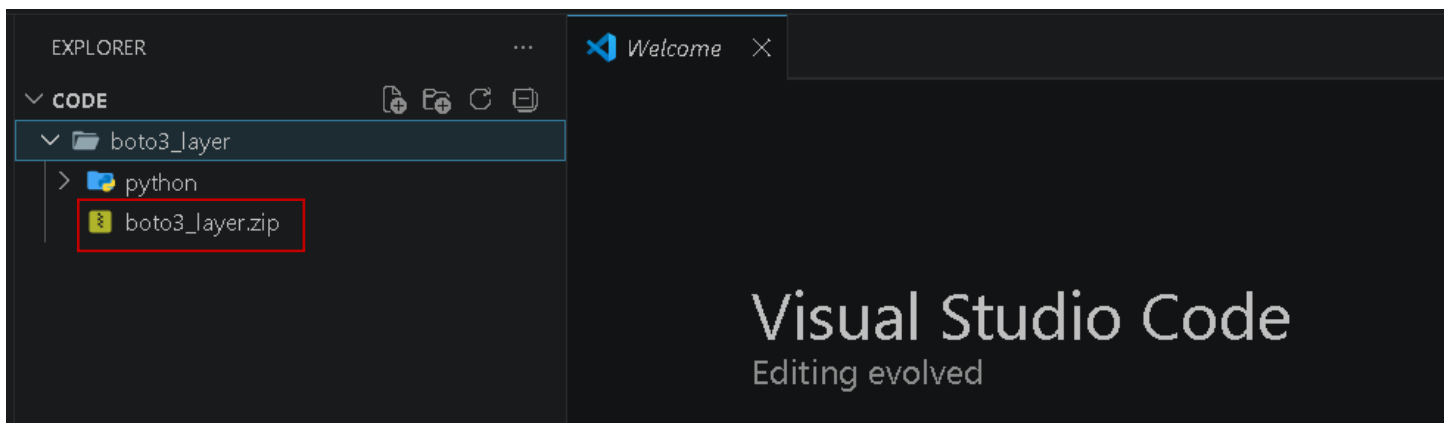

- Now our boto3 layer zip is ready we upload in our layer.
- Open your browser and got o your lambda function that you created.

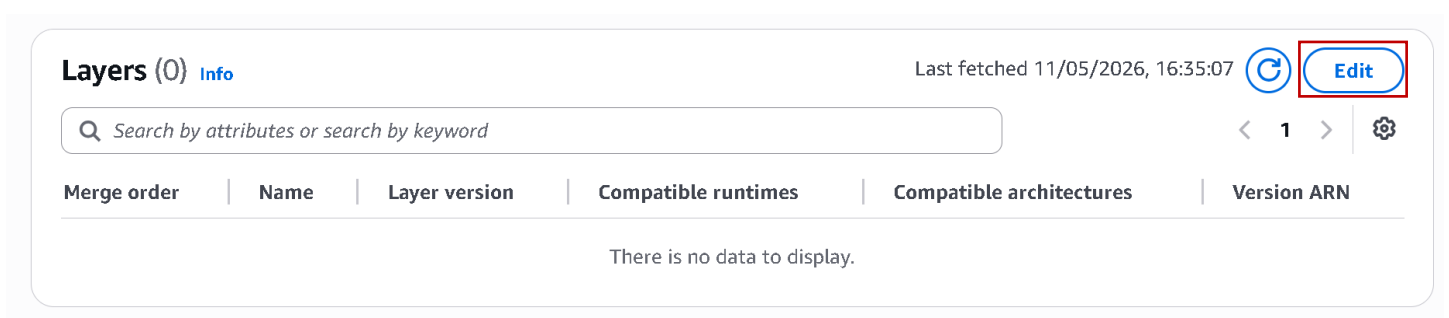

- Now scroll down and you see a layer.

- Click on Edit.

Edit layers

Function runtime settings

Runtime
Python 3.11

Architecture
x86_64

Layers [Info](#)

No layers are configured on the function.

[Add a layer](#)

- Now click on add a layer.

Choose a layer



Layer source [Info](#)

Choose from layers with a compatible runtime and instruction set architecture or specify the Amazon Resource Name (ARN) of a layer version. You can also [create a new layer](#).

☐ AWS layers

Choose a layer from a list of layers provided by AWS.

☒ Custom layers

Choose a layer from a list of layers created by your AWS account.

☐ Specify an ARN

Specify a layer by providing the ARN.

Custom layers

Layers created by your AWS account.



[Cancel](#)

[Add](#)

- Click on create a new layer.

Layer configuration

Name

Description - optional

☒ Upload a .zip file

☐ Upload a file from Amazon S3

[Choose file](#)

For files larger than 10 MB, consider uploading using Amazon S3.

- Enter a name of layer.
- And then choose a file.

Compatible runtimes - optional | [Info](#)
Choose up to 15 runtimes.

Search Compatible runtimes ▼ 

Python 3.11 ✕ Python 3.10 ✕

License - optional | [Info](#)

[Cancel](#) [Create](#)

- Now choose compatible runtimes.
- And then simply click Create.

☰ [Lambda](#) > [Layers](#) > [boto3_bedrock](#) > 1 ⓘ 

✔ Successfully created layer boto3_bedrock version 1. ✕

Version details

Version 1	Version ARN  arn:aws:lambda:us-west-2:463646775279:layer:boto3_bedrock:1	Description -
Created 1 second ago	License -	Compatible runtimes python3.11, python3.10
Compatible architectures -		

- Our layer is ready.
- Now go back to the lambda function that you created.
- In lambda function scroll down in layer click Edit.
- Then click Add a Layer.

Choose a layer ✕

Layer source | [Info](#)
Choose from layers with a compatible runtime and instruction set architecture or specify the Amazon Resource Name (ARN) of a layer version. You can also [create a new layer](#).

☐ AWS layers
Choose a layer from a list of layers provided by AWS.

☒ Custom layers
Choose a layer from a list of layers created by your AWS account.

☐ Specify an ARN
Specify a layer by providing the ARN.

Custom layers
Layers created by your AWS account.

boto3_bedrock ▼ 

Version
1 ▼ 

Description
-

[Cancel](#) [Add](#)

- Now choose Custom Layer.
- And select your created Layer and version.
- And simply click ADD.

Layers [Info](#)

boto3_bedrock

arn:aws:lambda:us-west-2:463646775279:layer:boto3_bedrock:1

X


Add a layer

Some Lambda layers may not be compatible with functions running on Lambda Managed Instances. Verify layer compatibility and remove any incompatible layers from your function configuration. Layer compatibility depends on the runtime and architecture of your EC2 instance.


Cancel

Save

- Now simply click Save.
- Open Aws console in new tab and search API gateway.

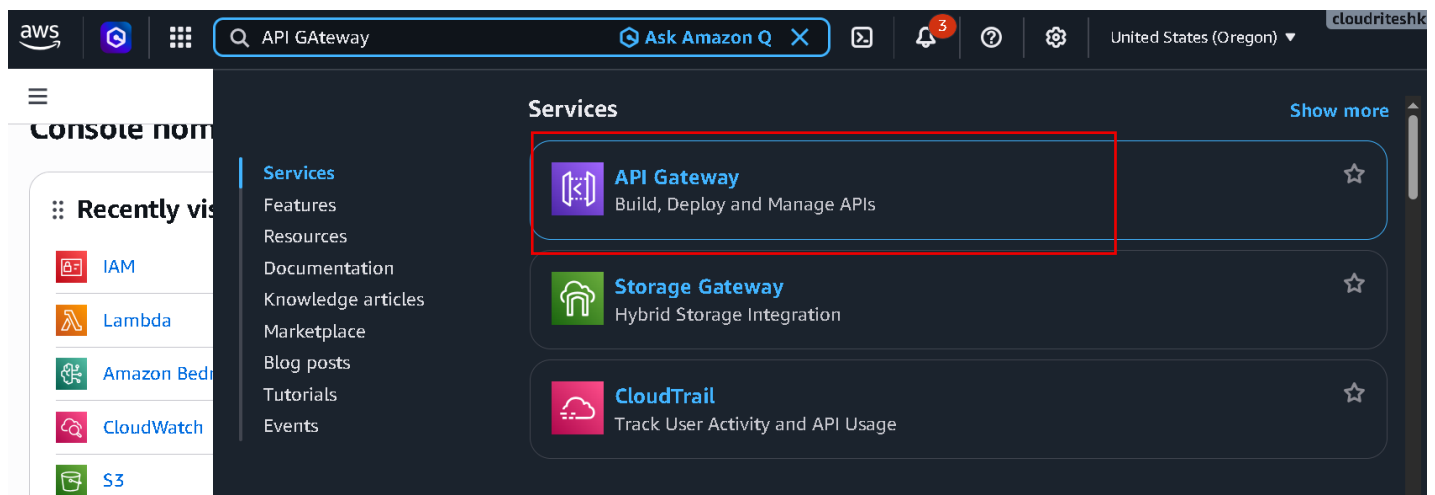

- Now search and open it API Gateway.

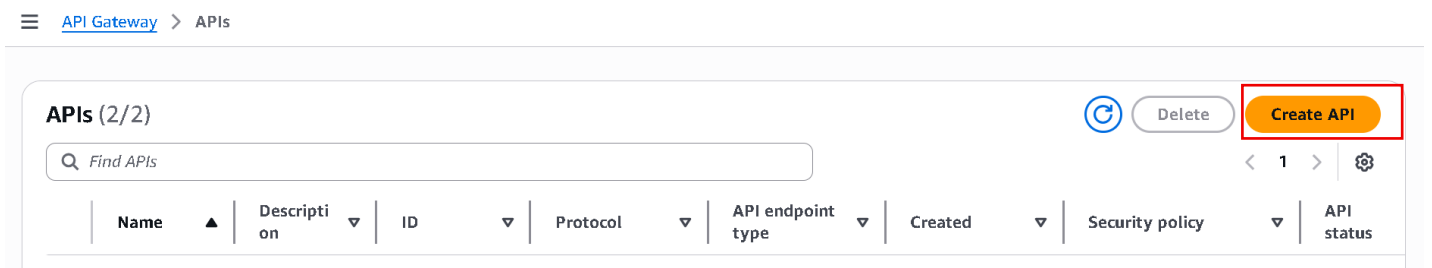

- Now click on create API.

Choose an API type [Info](#)

HTTP API

Build low-latency and cost-effective REST APIs with built-in features such as OIDC and OAuth2, and native CORS support.

Works with the following:

Lambda, HTTP backends

Import

Build

- Now click Build.

Configure API

API details

API name

An HTTP API must have a name. The name is a non-unique value you use to identify and organize your APIs. To programmatically refer to this API, use the API ID that API Gateway generates for you.

bedrock_api

IP address type [Info](#)

Select the type of IP addresses that can invoke the default endpoint for your API. You don't need to redeploy your API for the update to take effect.

☒ IPv4

Includes only IPv4 addresses.

☐ Dualstack

Includes IPv4 and IPv6 addresses.

- Enter Api name bedrock_api.
- Now simply scroll down and leave else default Everything.

Integrations (0) [Info](#)

Specify the backend services that your API will communicate with. These are called integrations. For a Lambda integration, API Gateway invokes the Lambda function and responds with the response from the function. For an HTTP integration, API Gateway sends the request to the URL that you specify and returns the response from the URL.

Add integration

Cancel

Review and create

Next

- Now simply click Review and Create.

Stages

Edit

Stages

- \$default (Auto-deploy: enabled)

Cancel

Previous

Create

- Now simply click Create.

✔ Successfully created API bedrock_api (az67be7t97).

×

Routes

Stage: - ▼

Deploy

Routes for bedrock_api

Create

Q Search

Choose a route.

- Now simply click Create.

Create a route

Route and method [Info](#)

Route name eg. /pets

Choose a method and enter a path to create a route. You can also specify one \$default route per API. The \$default route is invoked when the request to the API matches no other routes.

POST ▼

/meeting-summary

Cancel

Create

- Select POST and Enter /meeting-generation.
- And simply click Create.

Routes

Routes for bedrock_api

Create

Search

▼ /meeting-summary

POST

- Now simply click POST.

Routes

Stage: - ▼

Deploy

Routes for bedrock_api

Create

Search

▼ /meeting-summary

POST

Route details

Delete

Edit

POST /meeting-summary (ID: dd31dhr)

ARN

arn:aws:apigateway:us-west-2::apis/c0n2j0muq2/routes/dd31dhr

Authorization

Authorizers protect your API against unauthorized requests. Routes with no authorization attached are open.

No authorizer attached to this route.

Attach authorization

Integration

The integration is the backend resource that this route calls when it receives a request.

No integration attached to this route.

Attach integration

- Now click Attach Integration.

Integrations

Stage: - ▼

Deploy

Attach integrations to routes

Manage integrations

Routes for bedrock_api

Search

▼ /meeting-summary

POST

Integration details

POST /meeting-summary (ID: dd31dhr)

You have no integrations configured for this API. Create an integration to attach it.

Create and attach an integration

- Now simply click Create and attach an integration.

Create an integration

Attach this integration to a route

Q POST /get-agents-response X

Integration target

Integration type

Lambda function ▼

- Integration target Lambda function.

Integration details

Integration target

Choose the Lambda function to

AWS Region

us-west-2 ▼

► Advanced settings

Description - optional

arn:aws:lambda:us-west-2:463646775279:function:bedrock_meeting_summary

arn:aws:lambda:us-west-2:463646775279:function:bedrock_meeting_summary

Q ibda:us-west-2:463646775279:function:bedrock_meeting_summary X

- Now select your Lambda function that you created.

Invoke permissions

API Gateway requests permission to invoke your Lambda function by granting this API permission in your Lambda function's resource policy. If you don't want to modify the resource policy, you can provide an invoke role instead. API Gateway uses this role to invoke the Lambda function.

☒ Grant API Gateway permission to invoke your Lambda function

Cancel

Create

- Now scroll down.
- And click Create.

API Gateway

APIs

Custom domain names

Domain name access associations

VPC links

API: bedrock_api...(c0n2j0muq2)

▼ Develop

Integrations

Stage: - ▼ Deploy

Attach integrations to routes Manage integrations

Routes for bedrock_api

Q Search

▼ /meetinga-summary

Integration details for route

Detach integration Manage integration

POST /meeting-summary (dd31dhr)

Lambda function bedrock_meeting_summary (us-west-2) ↗	Integration ID 2rzangq
---	----------------------------------

- Now Click in left side created API.

API Gateway > APIs > bedrock_api (az67be7t97)

▼ Develop

- Routes
- Authorization
- Integrations
- CORS
- Reimport
- Export

▼ Deploy

Stages

▼ Monitor

- Metrics
- Logging

Stages for bedrock_api (1)

Find resources

Stage name	Invoke URL	Attached deployment	Auto deploy
\$default	https://az67be7t97.execute-api.us-west-2.amazonaws.com	z1m0tj	enabled

Tags (0)

Find resources

Manage tags

< 1 >

Key	Value
-----	-------

- Now this is our Invoke URL
- Now in nav bar inside Deploy click Stages.

Stages

Select a stage ▼ Deploy

Select a stage

Stages for bedrock_api

Create

Search

☐ \$default

- Now click Create.

Create Stage [Info](#)

Stage details

Name

dev

Description

Enter description

- Now enter Stage name.
- simply scroll down and leave Everything as default.

Tags

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

No tags associated with the resource.

Add tag

Cancel

Create

- Now simply click Create.
- Now stage is Created go back to routes.

API Gateway > APIs > Routes - bedrock_api (c0n2j0muq2)

Domain name access associations

VPC links

API: bedrock_api...(c0n2j0muq2)

▼ Develop

- Routes
- Authorization
- Integrations
- CORS

Routes

Routes for bedrock_api

Create

Search

▼ /meeting-summary

Stage: -

Deploy

Route details

POST /meeting-summary (ID: dd31dhr)

Delete Edit

ARN

arn:aws:apigateway:us-west-2::apis/c0n2j0muq2/routes/dd31dhr

Authorization

Authorizers protect your API against unauthorized requests. Routes with no authorization attached are open.

- Simply click Deploy.
- And click Deploy.

Deploy API

Select an existing stage or [create a new stage](#) where your API will be deployed. You can edit the stage details to change the active deployment or turn on auto-deploy for a stage. If you turn on auto-deploy, you can't manually deploy your stage.

⚠ When you deploy an API to an existing stage, you immediately overwrite the current stage configuration with a new active deployment.


Stage

dev


Deployment description

Cancel


Deploy

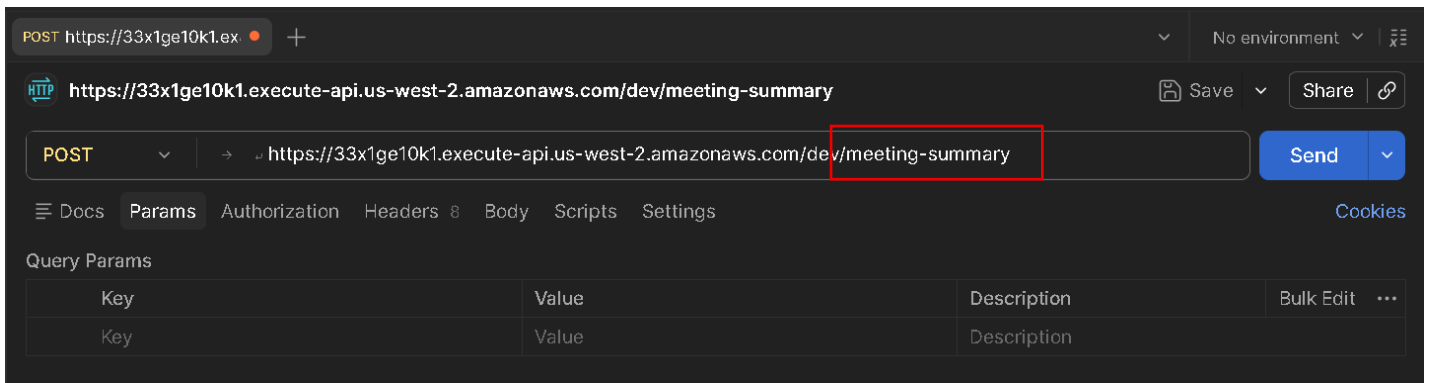

- Now append this on dev invoke URL .

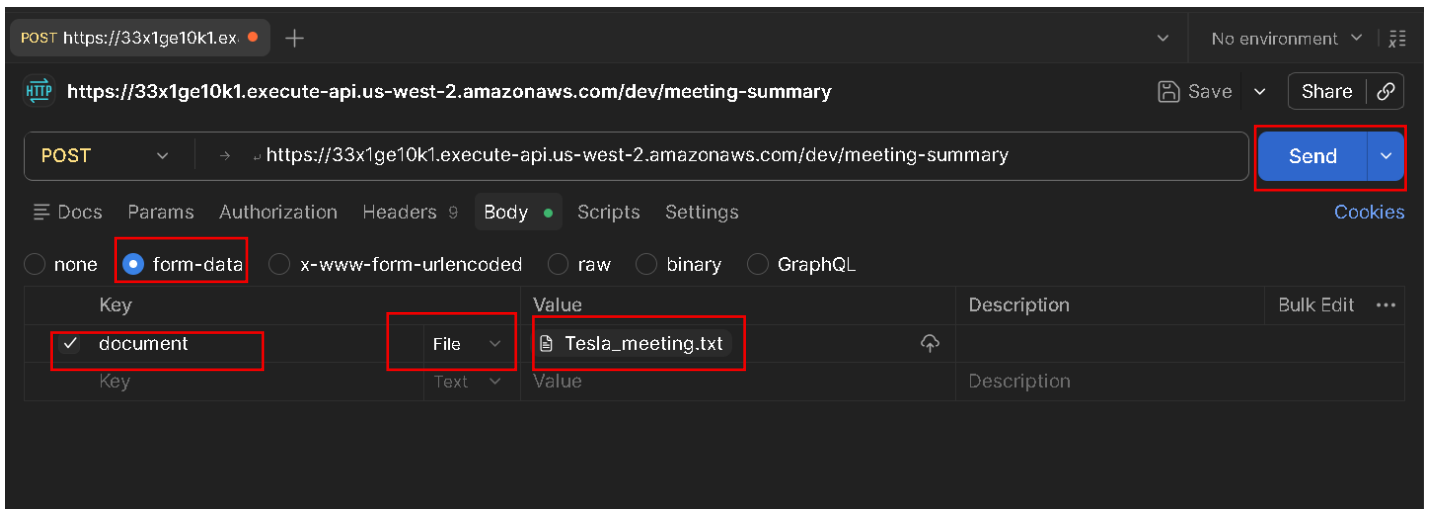

- Now select form-data.
- Then give file name.
- And select File option.
- And then upload text file given in Resource.
- And simply click Send.

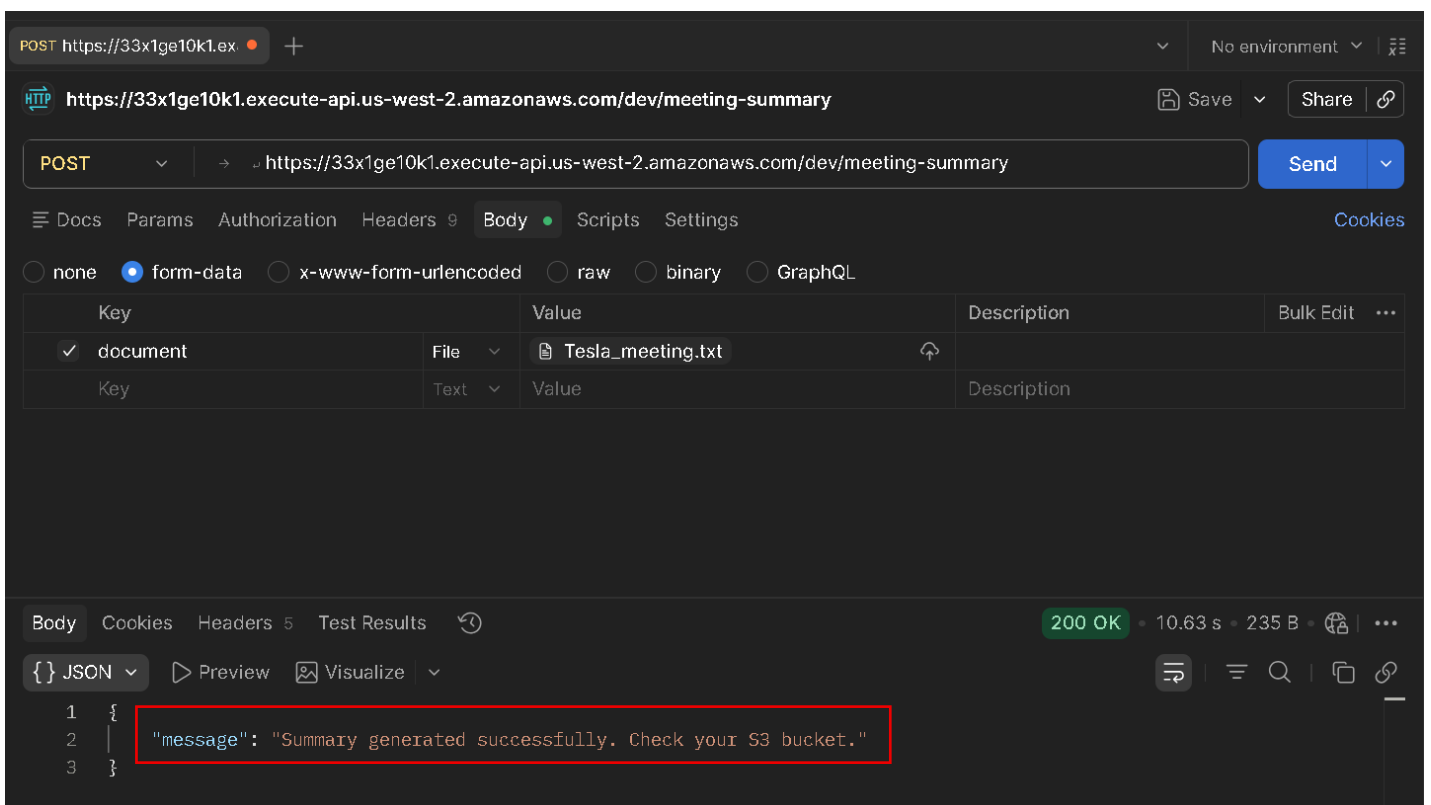

- Now our API is working.

- Go and check your S3 bucket.

bedrock-course-bucket23 [Info](#)

Objects

Metadata

Properties

Permissions

Metrics

Management

File systems - new

Access Points

Objects (2)

[Copy S3 URI](#)[Copy URL](#)[Download](#)[Open](#)[Delete](#)[Actions](#)[Create folder](#)[Upload](#)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

< 1 >



☐	Name	Type	Last modified	Size	Storage class
☐	code-output/	Folder	-	-	-
☐	summary-output/	Folder	-	-	-

- Our Lambda function is also perfectly working it's generate summary-output/
- Now open this and download and check it.

summary-output/

[Copy S3 URI](#)

Objects

Properties

Objects (1)

[Copy S3 URI](#)[Copy URL](#)[Download](#)[Open](#)[Delete](#)[Actions](#)[Create folder](#)[Upload](#)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

< 1 >



☐	Name	Type	Last modified	Size	Storage class
☐	055311.txt	txt	May 12, 2026, 11:23:14 (UTC+05:30)	1.3 KB	Standard

- Open it.

055311.txt [Info](#)

[Copy S3 URI](#)[Download](#)[Open](#)[Object actions](#)

Properties

Permissions

Versions

Object overview

Owner

ea494e9301e0e9ed79a85aa0c0282dcccdbaa7eabbae9b707dc9c2cfe1a489686

AWS Region

US West (Oregon) us-west-2

Last modified

May 12, 2026, 11:23:14 (UTC+05:30)

Size

1.3 KB

S3 URI

[s3://bedrock-course-bucket23/summary-output/055311.txt](#)

Amazon Resource Name (ARN)

[arn:aws:s3:::bedrock-course-bucket23/summary-output/055311.txt](#)

Entity tag (Etag)

[22e499f5dd644c0c7a1f27cce38900ed](#)

Object URL

[https://bedrock-course-bucket23.s3.us-west-2.amazonaws.com/summary-output/055311.txt](#)

- Now simply click Download.

- Now go and check download folder in your system and open this file.

055311 - Notepad

File Edit Format View Help

Tesla Strategy Meeting Summary

Battery & Powertrain

- New **4680** battery cells show 20% range increase and potential cost savings
- Pilot production line in Fremont addressing early challenges
- Larger-scale production targeted for **Q4**

Full Self-Driving (FSD)

- **FSD Beta v11** nearing wider release
- Improvements made to neural networks and edge case handling
- Safety team feedback being integrated

Energy Division

- Energy storage deployments **doubled** this quarter
- Strong demand for Powerwalls and Megapacks
- Expanding solar offerings for residential and commercial use

Vehicle Launches

- **Cybertruck** production preparations underway; main challenge is scaling manufacturing
- **Roadster** design finalized, including a unique "SpaceX package"

Factory & Global Expansion

- **Gigafactory Austin** on track for production next year
- **Gigafactory Berlin** nearing completion; first Model Ys expected by year-end
- Exploring markets in **India** and other Asian regions

Software Updates

- **Version 11** includes UI overhaul, Autopilot improvements, and new entertainment options

Financial & Other

- Cost savings from new battery cells expected to **boost margins**
- Exploring government partnerships and EV incentives worldwide
- Team to regroup for **upcoming earnings call** preparation

- Now you see it's full summary of meeting.
- It means our all thing working properly.