


AWS Command Line Interface (CLI)

Summary: -

This document explains how to install and configure AWS CLI, create access keys, configure AWS credentials, create security groups and key pairs using CLI commands, launch an EC2 instance from the command line, and finally terminate the instance using its instance ID.

Let's Start: -

- Open First Searched link [Link](#)
- And download Amazon CLI and install it in your system.
- When your installation is completed open CMD

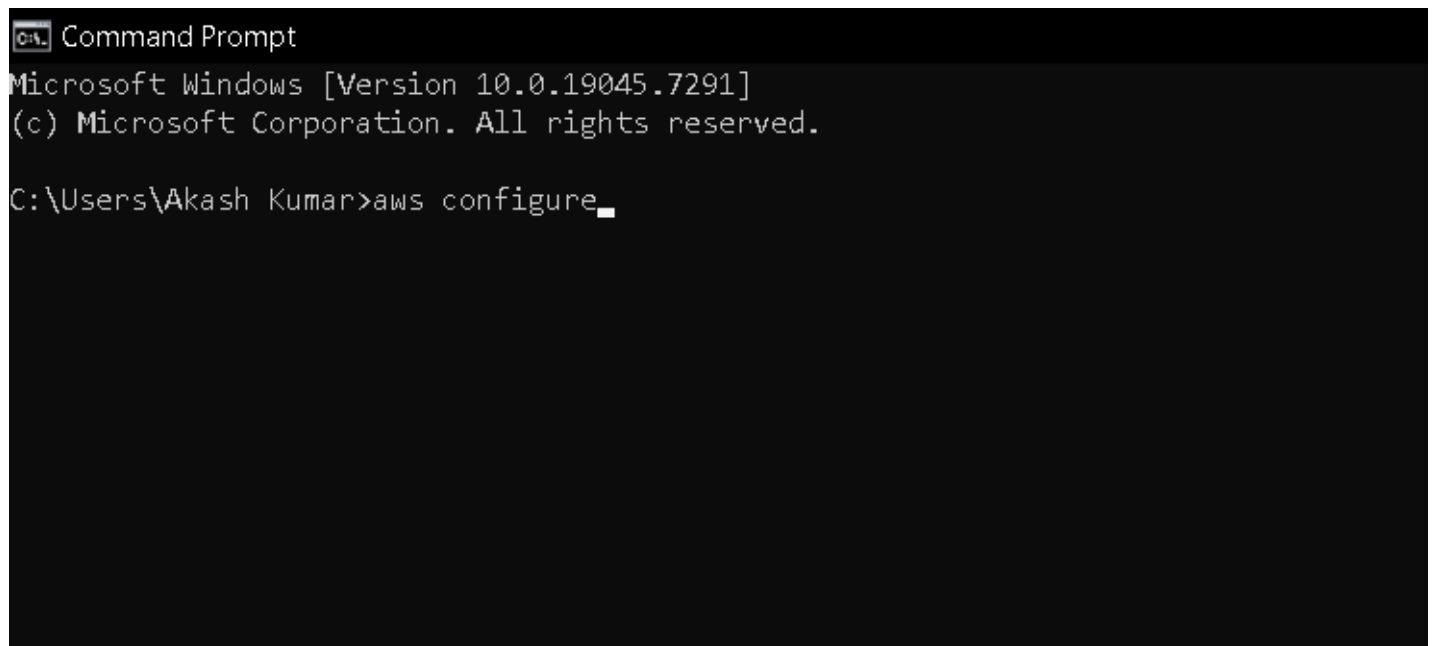A screenshot of a Windows Command Prompt window. The title bar reads 'C:\> Command Prompt'. The window content shows the following text: 'Microsoft Windows [Version 10.0.19045.7291]', '(c) Microsoft Corporation. All rights reserved.', and 'C:\Users\Akash Kumar>aws configure_'. The cursor is at the end of the command line.

```
C:\> Command Prompt
Microsoft Windows [Version 10.0.19045.7291]
(c) Microsoft Corporation. All rights reserved.


C:\Users\Akash Kumar>aws configure_
```

- Type aws configure.

```
Microsoft Windows [Version 10.0.19045.7291]
(c) Microsoft Corporation. All rights reserved.

C:\Users\Akash Kumar>aws configure
AWS Access Key ID [*****DKT6]:
```

- Now we need access key id.
- So go to your aws console in your browser.

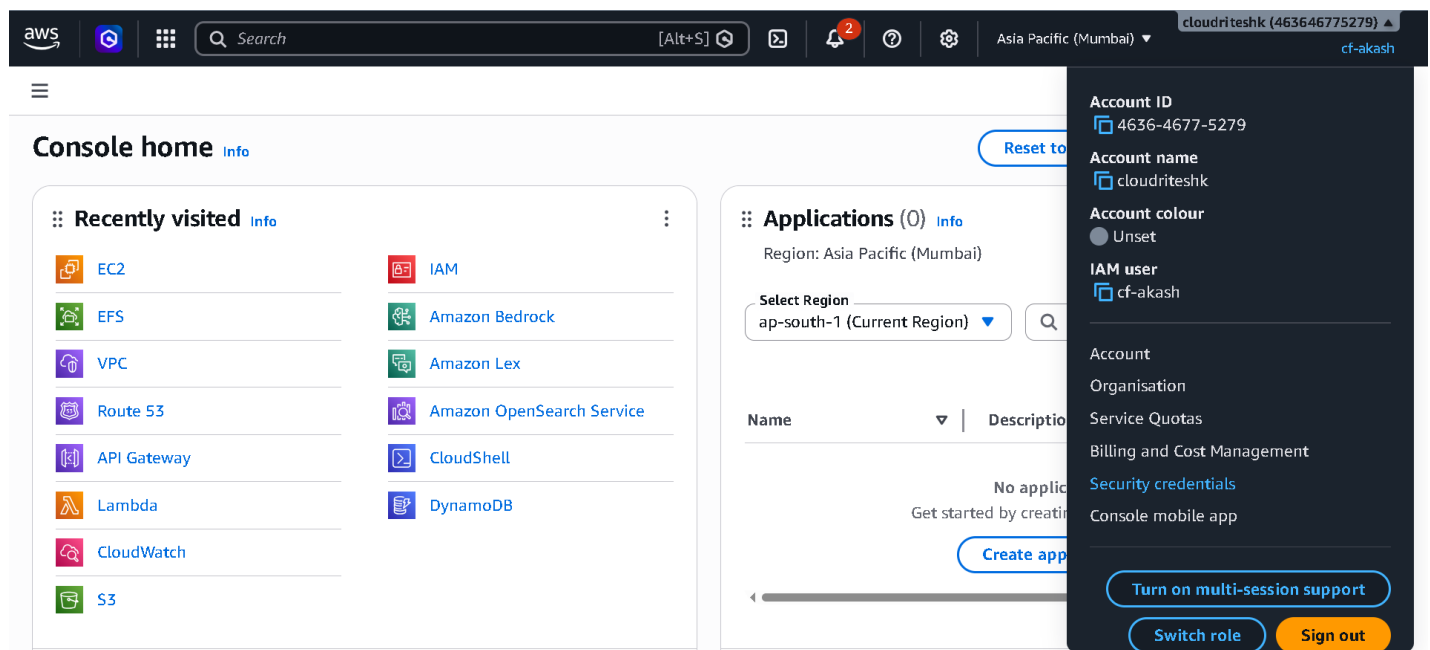

- Now click your name and then select Security Credentials.

Access keys (0)

Use access keys to send programmatic calls to AWS from the AWS CLI, AWS Tools for PowerShell, AWS SDKs, or direct AWS API calls. You can have a maximum of two access keys (active or inactive) at a time. [Learn more](#)

No access keys. As a best practice, avoid using long-term credentials like access keys. Instead, use tools which provide short term credentials. [Learn more](#)

[Create access key](#)

- Now scroll down and click Create access key.

Access key best practices & alternatives [Info](#)

Avoid using long-term credentials like access keys to improve your security. Consider the following use cases and alternatives.

Use case

☒ **Command Line Interface (CLI)**

You plan to use this access key to enable the AWS CLI to access your AWS account.

☐ **Local code**

You plan to use this access key to enable application code in a local development environment to access your AWS account.

☐ **Application running on an AWS compute service**

You plan to use this access key to enable application code running on an AWS compute service like Amazon EC2, Amazon ECS, or AWS Lambda to access your AWS account.

☐ **Third-party service**

You plan to use this access key to enable access for a third-party application or service that monitors or manages your AWS resources.

- Select CLI and scroll down click next.

Set description tag - *optional* [Info](#)

The description for this access key will be attached to this user as a tag and shown alongside the access key.

Description tag value

Describe the purpose of this access key and where it will be used. A good description will help you rotate this access key confidently later.

Maximum 256 characters. Allowed characters are letters, numbers, spaces representable in UTF-8, and: _ . : / = + - @

[Cancel](#)

[Previous](#)

[Create access key](#)

- Now simply click create access key.

Retrieve access keys [Info](#)

Access key

If you lose or forget your secret access key, you cannot retrieve it. Instead, create a new access key and make the old key inactive.

Access key

Secret access key



AKIAWX44AK7X5ITQVV2U



***** [Show](#)

- Now we have both access key and secret access key.
- Copy access key now.

Command Prompt - aws configure

```
Microsoft Windows [Version 10.0.19045.7291]
(c) Microsoft Corporation. All rights reserved.

C:\Users\Akash Kumar>aws configure
AWS Access Key ID [*****DKT6]: AKIAWX44AK7X5ITQWV2U
AWS Secret Access Key [*****BfrU]: █
```

- Then paste access key and secret access key.

Command Prompt

```
Microsoft Windows [Version 10.0.19045.7291]
(c) Microsoft Corporation. All rights reserved.

C:\Users\Akash Kumar>aws configure
AWS Access Key ID [*****DKT6]: AKIAWX44AK7X5ITQWV2U
AWS Secret Access Key [*****BfrU]: futIe7plFB2ALBu\WkFPT+cp18xUolviT5XtR6vY
Default region name [us-west-2]: ap-south-1
Default output format [None]: json

C:\Users\Akash Kumar>█
```

- Now Enter region name according to you.
- Now we create Ec2 with our CLI.

```

C:\Users\Akash Kumar>aws configure
AWS Access Key ID [*****DKT6]: AKIAWX44AK7X5ITQWV2U
AWS Secret Access Key [*****BfrU]: 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
Default region name [us-west-2]: ap-south-1
Default output format [None]: json

C:\Users\Akash Kumar>aws ec2 create-security-group --group-name awsclittraining --description "test sg from cli"
{
  "GroupId": "sg-0e127bd9e40e06619",
  "SecurityGroupArn": "arn:aws:ec2:ap-south-1:463646775279:security-group/sg-0e127bd9e40e06619"
}

C:\Users\Akash Kumar>

```

- Now paste this in your CLI.
- `aws ec2 create-security-group --group-name awsclittraining --description "test sg from cli"`
- it will create security group.
- And most important copy the GroupId in notepad it used in some steps.

```

C:\Users\Akash Kumar>aws ec2 authorize-security-group-ingress --group-name awsclittraining --protocol tcp --port 3389 --cidr 0.0.0.0/0

```

- Now paste it
- `aws ec2 authorize-security-group-ingress --group-name awsclittraining --protocol tcp --port 3389 --cidr 0.0.0.0/0`
- it will add rules.

```

C:\Users\Akash Kumar>aws ec2 create-key-pair --key-name cliKeyPair --query "KeyMaterial" --output text > clikeyPair.pem

C:\Users\Akash Kumar>_

```

- Now paste this.
- `aws ec2 create-key-pair --key-name cliKeyPair --query "KeyMaterial" --output text > clikeyPair.pem`
- it will create a key.
- Now we need AMI Id go to your EC2 dashboard in Aws.

EC2

[Dashboard](#)

[AWS Global View](#)

[Events](#)

▼ **Instances**

[Instances](#)

[Instance Types](#)

To get started, launch an Amazon EC2 instance, which is a virtual server in the cloud.

[Launch instance](#)

[Launch instance from template](#)

Note: Your instances will launch in the Asia Pacific (Mumbai) Region

[AWS Health Dashboard](#)

Region
Asia Pacific (Mumbai)

Status
✓ This service is operating normally.

- Now click Launch instance.

▼ **Application and OS Images (Amazon Machine Image)** [Info](#)

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose **Browse more AMIs**.

🔍 Search our full catalog including 1000s of application and OS images

Quick Start

Amazon Linux
aws

macOS
Mac

Ubuntu
ubuntu

Windows
Microsoft

Red Hat
Red Hat

SUSE
SU

[Browse more AMIs](#)

Including AMIs from AWS, Marketplace and the Community

- Scroll down.
- Click Browse more AMIs.

☰ [EC2](#) > [Instances](#) > [Launch an instance](#) > [AMIs](#) ⓘ 🖨

🔍 Search for an AMI by entering a search term e.g. "Windows"

Quick Start AMIs (45)
Commonly used AMIs

My AMIs (13)
Created by me

AWS Marketplace AMIs (6107)
AWS & trusted third-party AMIs

Community AMIs (500)
Published by anyone

Windows

Free tier eligible

Verified provider

Microsoft Windows Server 2016 Base

[ami-04f8aacac0c1f66be](#) (64-bit (x86))

Microsoft Windows 2016 Datacenter edition. [English]

Platform: windows Root device type: ebs Virtualization: hvm ENA enabled: Yes

[Select](#)

64-bit (x86)

- Now copy AMI id I copy Ami id of windows 2016.
- And currently save in notepad.
- Now we need Subnet id.
- So Search VPC in aws console and in VPC go inside subnet.

Subnets (1/8) [Info](#) Last updated 3 minutes ago [Actions](#) [Create subnet](#)

Find subnets by attribute or tag

Name	Subnet ID	State	VPC
☒ -	subnet-04ffa8e5e9c79ad3d	Available	vpc-072c4acd761c3b942
☐ Private_Subnet_1A	subnet-0c7f2a6dca3b30943	Available	vpc-024ea5e06d5e0984d
☐ Public_Subnet_1A	subnet-017beec4eea88eb2b	Available	vpc-024ea5e06d5e0984d
☐ Public_Subnet_2B	subnet-0699c7ba3b45fca86	Available	vpc-024ea5e06d5e0984d

subnet-04ffa8e5e9c79ad3d

Details

Subnet ID

[subnet-04ffa8e5e9c79ad3d](#)

Subnet ARN

[arn:aws:ec2:ap-south-1:463646775279:subnet/subnet-04ffa8e5e9c79ad3d](#)

State

Available

IPv6 CIDR

Block Public Access

Off

IPv6 CIDR association ID

- Select a default subnet and copy Subnet ID.
- And currently paste in your notepad.

```

C:\Users\Akash Kumar>aws ec2 run-instances --image-id ami-04f8aacac0c1f66be --count 1 --instance-type t2.micro --key-name cliKeyPair --security-group-ids sg-0e127bd9e40e06619 --subnet-id subnet-04ffa8e5e9c79ad3d

```

- Now paste this code
- `aws ec2 run-instances --image-id AMIID --count 1 --instance-type t2.micro --key-name cliKeyPair --security-group-ids SECURITYGROUPID --subnet-id SUBNETID`
- add AMIID, SECURITYGROUPID and SUBNETID in it.
- Now go to youe EC2 instance and check our instance is created or not.

Instances (1) [Info](#) Last updated less than a minute ago [Connect](#) [Instance state](#) [Actions](#) [Launch instances](#)

Saved filter sets [Choose filter set](#) Find Instance by attribute or tag (case-sensitive)

Name	Instance ID	Instance state	Instance type	Status check	Availability
☐	i-04f1c8133f86b260a	Running	t2.micro	2/2 checks passed	ap-south-

- Now see our instance is created.
- Now again go to CMD to terminate this instance.
- Before copy this instance id.

```
C:\Users\Akash Kumar>aws ec2 terminate-instances --instance-ids i-04f1c8133f86b260a
{
  "TerminatingInstances": [
    {
      "InstanceId": "i-04f1c8133f86b260a",
      "CurrentState": {
        "Code": 32,
        "Name": "shutting-down"
      },
      "PreviousState": {
        "Code": 16,
        "Name": "running"
      }
    }
  ]
}
```

C:\Users\Akash Kumar>

- aws ec2 terminate-instances --instance-ids {Your ID}
- no go to EC2 instance and check its terminated or not.

Instances (1/1) [Info](#)

Last updated less than a minute ago  [Connect](#) [Instance state](#) [Actions](#) [Launch instances](#)

Saved filter sets
[Choose filter set](#)

☒	Name 	Instance ID	Instance state	Instance type	Status check	Availabili
☒		i-04f1c8133f86b260a	 Terminated  	t2.micro	–	ap-south-

- now see its terminated.