

AWS S3 Requester Pay: -

Summary: -

In this lab, I performed AWS S3 Requester Pays configuration, where the requester pays the download and request charges instead of the bucket owner. First, I created an S3 bucket, uploaded a file, and made the bucket public by modifying bucket permissions and policies. Then, I enabled the Requester Pays feature from the bucket properties. After that, I copied the S3 URI of the uploaded object and logged into another AWS account to act as a requester. Using AWS CLI commands, I configured the requester account credentials and downloaded the file with the --request-payer requester option. Finally, I verified that the file was successfully downloaded in the local system.

Let's Start: -

- A bucket owner in Amazon S3 is the AWS account that created the S3 bucket. The bucket owner has full control over the bucket and its contents.
- By default, the bucket owner is responsible for paying
 - Storage Costs
 - Data Transfer Costs
 - PUT, GET
 - Other Request Costs
- Types of Requesters
 - Authenticated Requester: - A requester that uses AWS credentials associated with an AWS account
 - Anonymous Requester: - A requester that does not provide any AWS credentials.
- Requester Pays is a feature in Amazon S3 where the person or entity downloading or accessing data from an S3 bucket pays the costs instead of the bucket owner.
- Costs Paid by Requester
 - Data Transfer Costs
 - Request Costs
- This feature is useful for bucket owners who want to share data but do not want to bear the costs of data transfer and requests
- Now we need one S3 Bucket to perform this.

Buckets

General purpose buckets

All AWS Regions

Directory buckets

General purpose buckets (203) [Info](#)



Copy ARN

Empty

Delete

Create bucket

Buckets are containers for data stored in S3.

Q my-s3



1 match

< 1 >



Name	AWS Region	Creation date
my-s3bucket2312	Asia Pacific (Mumbai) ap-south-1	May 23, 2026, 13:44:04 (UTC+05:30)

- So I create one S3 Bucket.

Objects (1)

[Copy S3 URI](#)[Copy URL](#)[Download](#)[Open](#)[Delete](#)[Actions](#)[Create folder](#)[Upload](#)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

< 1 >

☐	Name	Type	Last modified	Size	Storage class
☐	Amazon FSx.pdf	pdf	May 23, 2026, 13:51:29 (UTC+05:30)	1.4 MB	Standard

- In my s3 I uploaded a file.
- So I'm going to make my bucket public.

Permissions overview

Access finding

Access findings are provided by IAM external access analyzers. Learn more about [How IAM analyzer findings work](#)
[View analyzer for ap-south-1](#)

Block public access (bucket settings)

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to all your S3 buckets and objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to your buckets or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

Block all public access

☒ On[Edit](#)

- Go to permissions.
- Then click Edit.

Edit Block public access (bucket settings) [Info](#)

Block public access (bucket settings)

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to all your S3 buckets and objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to your buckets or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☐ Block all public access

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

☐ Block public access to buckets and objects granted through **new** access control lists (ACLs)

S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

☐ Block public access to buckets and objects granted through **any** access control lists (ACLs)

S3 will ignore all ACLs that grant public access to buckets and objects.

☐ Block public access to buckets and objects granted through **new** public bucket or access point policies

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☐ Block public and cross-account access to buckets and objects through **any** public bucket or access point policies

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

[Cancel](#)[Save changes](#)

- Untick Block all public access.
- And click Save changes.

Bucket policy

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

No policy to display.

[Edit](#) [Delete](#) [Copy](#)

- Now scroll down and click Edit Bucket policy.

Bucket policy

The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#)

[Policy examples](#)

Bucket ARN
`arn:aws:s3:::web.cloudservicesdemo.in`

Policy

1

Edit statement

Select a statement

Select an existing statement in the policy or add a new statement.

[+ Add new statement](#)

- Now click Add new statement.

1 {
2 "Version": "2012-10-17",
3 "Statement": [
4 {
5 "Sid": "Statement1",
6 "Principal": {},
7 "Effect": "Allow",
8 "Action": [],
9 "Resource": []
10 }
11]
12 }

Edit statement

Statement1 [Remove](#)

Add actions

Choose a service

Available

- S3
- S3 Express
- S3 Files
- S3 Object Lambda
- S3 Outposts
- S3 Tables
- S3 Vectors

- Now search S3 in Choose a service.

```
1 {
2   "Version": "2012-10-17",
3   "Statement": [
4     {
5       "Sid": "Statement1",
6       "Principal": {},
7       "Effect": "Allow",
8       "Action": [
9         "s3:GetObject"
10      ],
11      "Resource": []
12    }
13  ]
14 }
```

Edit statement
Statement1 [Remove](#)

Add actions

All services > S3

Access level - list

Access level - read

☒ [GetObject Info](#)

☐ [GetObjectAcl Info](#)

☐ [GetObjectAttributes Info](#)

☐ [GetObjectLegalHold Info](#)

- Now step2 search GetObject and select it.

Policy

```
1 {
2   "Version": "2012-10-17",
3   "Statement": [
4     {
5       "Sid": "RequesterPaysAccess",
6       "Effect": "Allow",
7       "Principal": "*",
8       "Action": [
9         "s3:GetObject",
10        "s3:ListBucket"
11      ],
12      "Resource": []
13    }
14  ]
15 }
```

Edit statement
RequesterPaysAccess [Remove](#)

Add actions

All services > S3

Access level - list

☒ [ListBucket Info](#)

☐ [ListBucketMultipartUploads Info](#)

☐ [ListBucketVersions Info](#)

- Now step2 search ListBucket and select it.

Bucket ARN

 arn:aws:s3:::my-s3bucket2312

Policy

```
1 {
2   "Version": "2012-10-17",
3   "Statement": [
4     {
5       "Sid": "RequesterPaysAccess",
6       "Effect": "Allow",
7       "Principal": "*",
8       "Action": [
9         "s3:GetObject",
10        "s3:ListBucket"
11      ],
12      "Resource": [
13        "arn:aws:s3:::my-s3bucket2312",
14        "arn:aws:s3:::my-s3bucket2312/*"
15      ]
16    }
17  ]
18 }
```

Edit statement

Select a statement

Select an existing statement in the policy or add a new statement.

[+ Add new statement](#)

- Now in Principle gives “*”
- Then in resource “copy arn from top and paste in quote”.
- The also in 2nd line in resource paste arn and append /* .

[+ Add new statement](#)

JSON Ln 14, Col 1

Security: 0 Errors: 0 Warnings: 0 Suggestions: 0

[Preview external access](#)

[Cancel](#) [Save changes](#)

- Now simply scroll down and click Save changes.

my-s3bucket2312 [Info](#)

[Objects](#) [Metadata](#) [Properties](#) [Permissions](#) [Metrics](#) [Management](#) [File systems - new](#) [Access Points](#)

Bucket overview

AWS Region Asia Pacific (Mumbai) ap-south-1	Amazon Resource Name (ARN)  arn:aws:s3:::my-s3bucket2312	Creation date May 23, 2026, 13:44:04 (UTC+05:30)
---	---	--

- Now click Properties.

Requester pays

When enabled, the requester pays for requests and data transfer costs, and anonymous access to this bucket is disabled. [Learn more](#)

Requester pays
Disabled

[Edit](#)

- Now scroll down and click Edit int Requester pays.

Edit requester pays [Info](#)

Requester pays

When enabled, the requester pays for requests and data transfer costs, and anonymous access to this bucket is disabled. [Learn more](#)

Requester pays

☐ Disable

Bucket owner pays the cost of data requests and downloads from this bucket.

☒ Enable

Requester will pay for requests and data transfer. While requester pays is enabled, anonymous access to this bucket is disabled.

[Cancel](#)

[Save changes](#)

- Make Enable and click Save changes.

my-s3bucket2312 [Info](#)

[Objects](#)

[Metadata](#)

[Properties](#)

[Permissions](#)

[Metrics](#)

[Management](#)

[File systems - new](#)

[Access Points](#)

Objects (1)

[Refresh](#) [Copy S3 URI](#) [Copy URL](#) [Download](#) [Open](#) [Delete](#) [Actions](#) [Create folder](#) [Upload](#)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

< 1 > [Settings](#)

☐	Name	Type	Last modified	Size	Storage class
☐	Amazon FSx.pdf	pdf	May 23, 2026, 13:51:29 (UTC+05:30)	1.4 MB	Standard

- Now go to objects and open uploaded file.

Amazon FSx.pdf [Info](#)

[Copy S3 URI](#)

[Download](#)

[Open](#)

[Object actions](#)

[Properties](#)

[Permissions](#)

[Versions](#)

Object overview

Owner

ea494e9301e0e9ed79a85aa0c0282dccdbaa7eabbbae9b707dc9c2cfe1a489686

AWS Region

Asia Pacific (Mumbai) ap-south-1

Last modified

May 23, 2026, 13:51:29 (UTC+05:30)

Size

1.4 MB

Type

pdf

S3 URI

[Copy](#) s3://my-s3bucket2312/Amazon FSx.pdf

Amazon Resource Name (ARN)

[Copy](#) arn:aws:s3::my-s3bucket2312/Amazon FSx.pdf

Entity tag (Etag)

[Copy](#) f3eee8cbc6d2f53888f05633ebfc247b

Object URL

[Copy](#) https://my-s3bucket2312.s3.ap-south-1.amazonaws.com/Amazon+FSx.pdf

- Now copy S3 URI and note in notepad.
- Because of this file I am the owner so I need one more aws account so I can access like a requester.
- So, log out and log in with new aws account.
- Then open Command prompt in your system.

```
Command Prompt
Microsoft Windows [Version 10.0.19045.7291]
(c) Microsoft Corporation. All rights reserved.

C:\Users\Akash Kumar>aws configure
AWS Access Key ID [*****\V2U]: AKIAVHBHLJFN24SW7PCA
AWS Secret Access Key [*****R6vY]: 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
Default region name [ap-south-1]:
Default output format [json]:

C:\Users\Akash Kumar>
```

- Enter aws configure.
- And configure requester Access Key and Secret access key.

```
C:\Users\Akash Kumar>mkdir req

C:\Users\Akash Kumar>cd req

C:\Users\Akash Kumar\req>_
```

- Now Create a folder request.
- And open it.

```
C:\Users\Akash Kumar\req>dir
Volume in drive C has no label.
Volume Serial Number is CC63-EC96

Directory of C:\Users\Akash Kumar\req

23-05-2026  14:28    <DIR>          .
23-05-2026  14:28    <DIR>          ..
               0 File(s)                0 bytes
               2 Dir(s)  50,057,674,752 bytes free


C:\Users\Akash Kumar\req>
```

- So currently no file in it.

```
C:\Users\Akash Kumar\req>aws s3 cp "s3://my-s3bucket2312/Amazon FSx.pdf" . --request-payer requester
download: s3://my-s3bucket2312/Amazon FSx.pdf to .\Amazon FSx.pdf

C:\Users\Akash Kumar\req>_
```

- Now Enter `aws s3 cp <S3 URL Of Object> . --request-payer requester`
- Now see our file is download .
- For see where file is downloaded go to c drive then go to User and search your create directory in my case I created req directory.

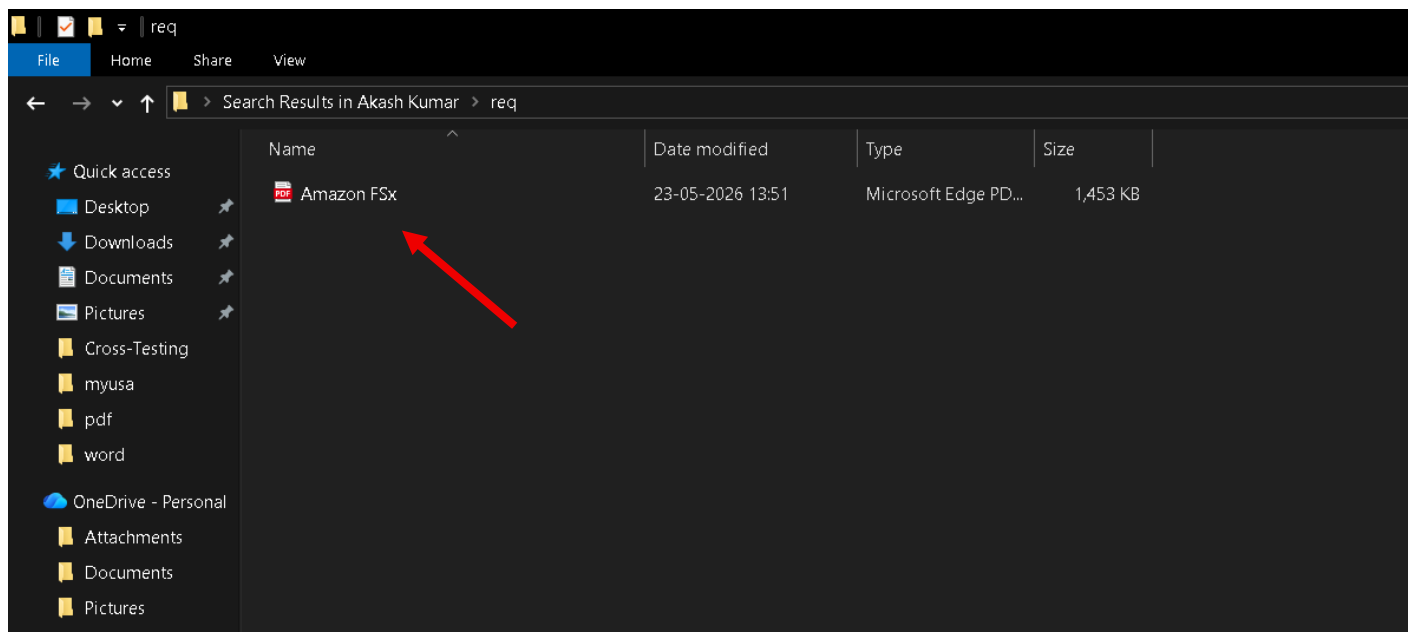

- Now see our file is completely downloaded.