


Amazon Redshift Serverless Console Overview

To Begin with the Lab


Summary of the Lab

In this lab, the major sections of the **Amazon Redshift Serverless** console were explored to understand how administrators, data engineers, and analysts manage serverless data warehouses. The overview covered the Serverless Dashboard, Query Editor v2, Workgroup Configuration, Namespace Configuration, Data Backup, Monitoring, Resource Monitoring, Datashares, Zero-ETL Integrations, Tags, and Alarms. Each console section was reviewed to understand its purpose, available metrics, and operational use cases. The monitoring and performance views were examined to analyze query execution, resource utilization, and database activity. Finally, the Serverless Dashboard was reviewed to verify that it provides a centralized view of namespaces, workgroups, snapshots, datashares, and compute usage metrics.


- Sign in to the AWS Management Console
- Search for **Amazon Redshift**
- Open **Amazon Redshift**

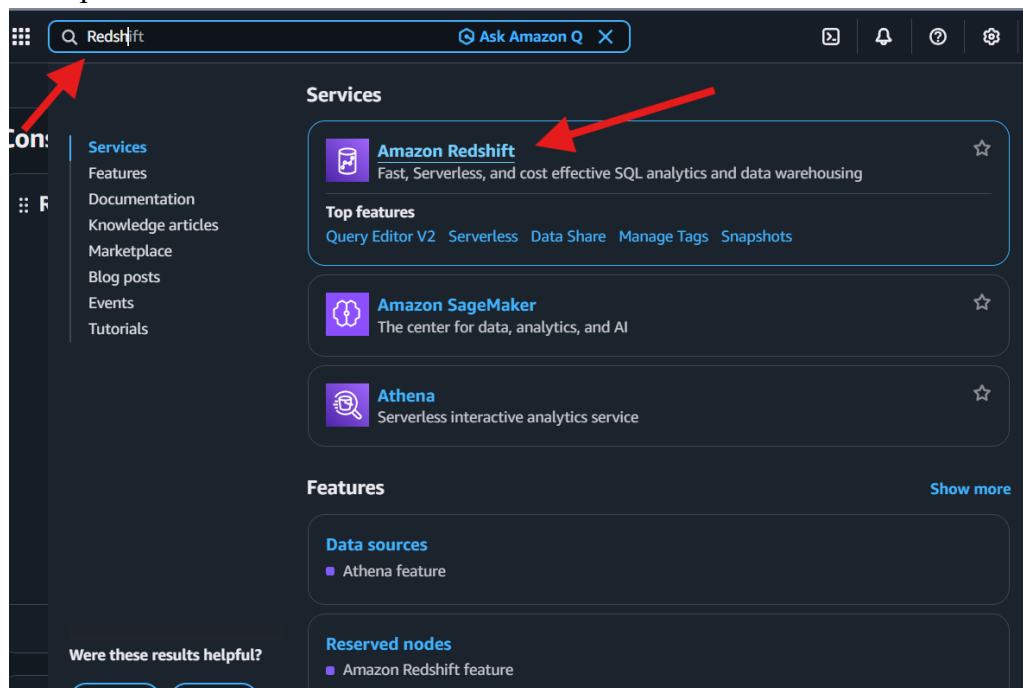


- Navigate to **Serverless dashboard**
- Review the Serverless Dashboard homepage

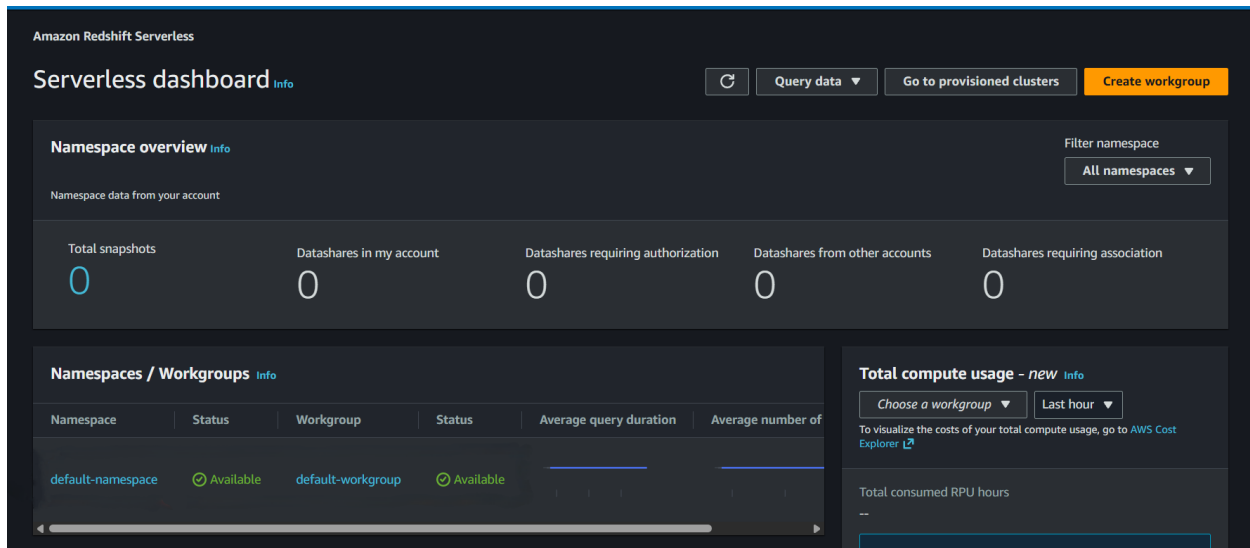


- Understand that the Serverless Dashboard provides a centralized view of serverless data warehouses, compute usage, namespaces, workgroups, snapshots, and datashares
- Click **Query editor v2**
- Review **Query Editor v2**

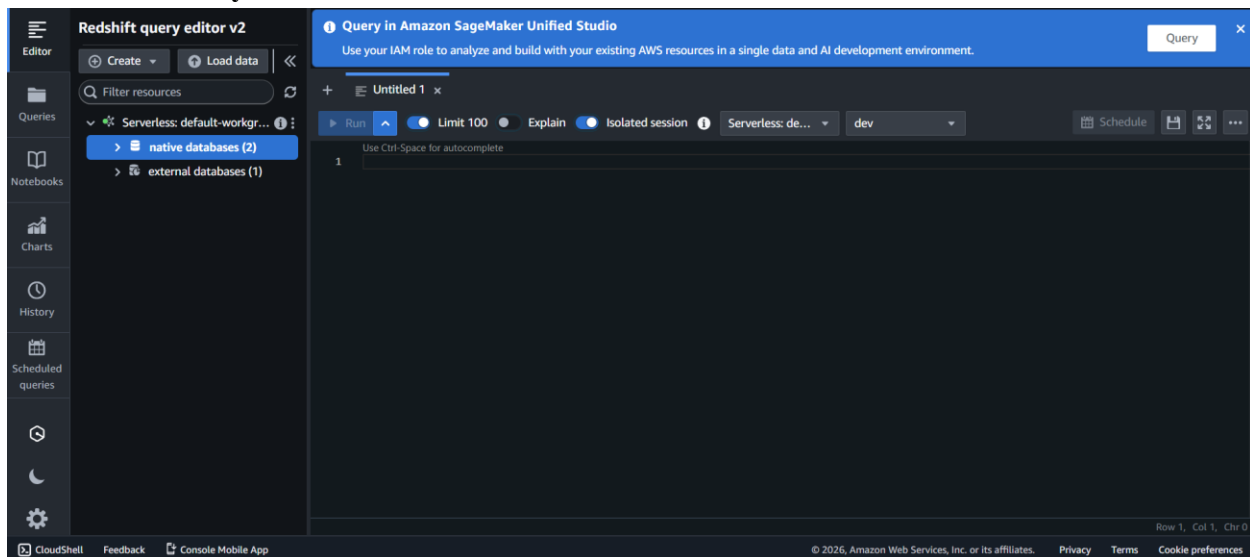


- Understand that **Query Editor v2** is used to execute SQL queries, create notebooks, validate data, and perform data analysis directly on **Amazon Redshift**
- Navigate to **Workgroup configuration**

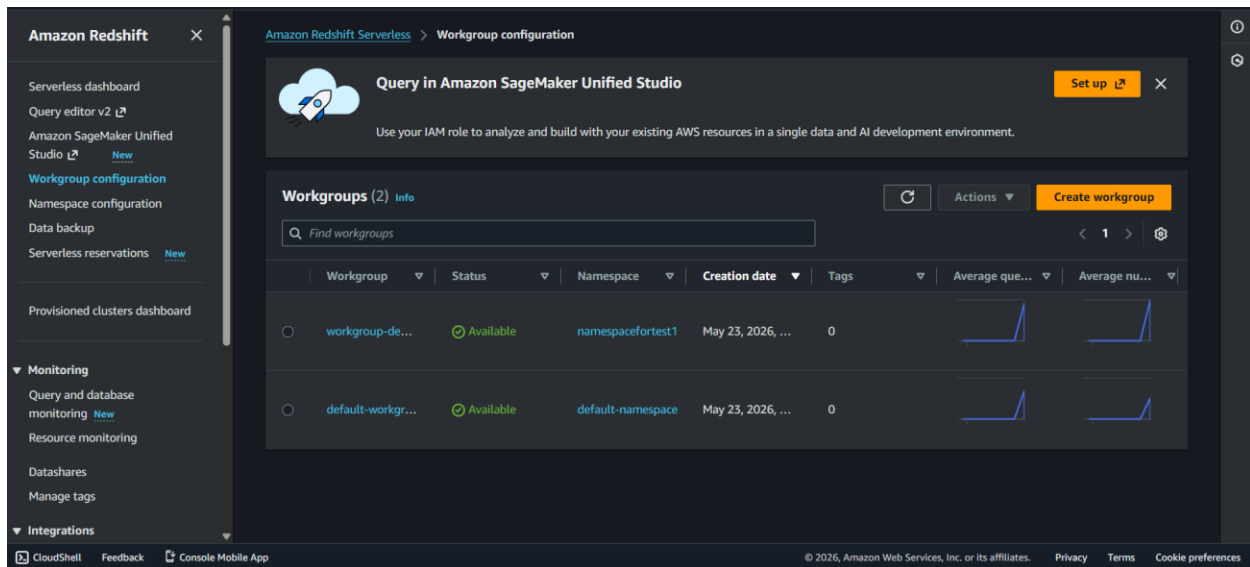


- Review the list of available workgroups
- Understand that a workgroup defines compute resources, networking settings, security settings, and query processing capacity
- Understand the use case that multiple teams can use different workgroups for workload isolation and cost management
- Navigate to **Namespace configuration**

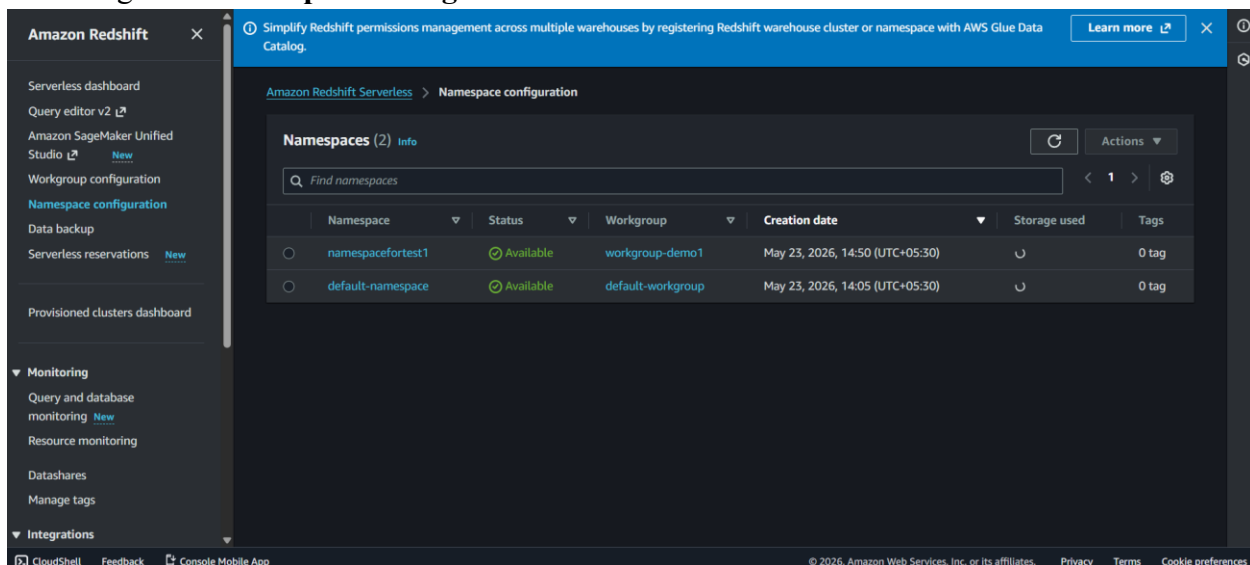


- Review the list of available namespaces
- Understand that a namespace stores databases, schemas, users, permissions, and metadata
- Understand the use case that separate development, testing, and production environments can be maintained using different namespaces
- Navigate to **Data backup**

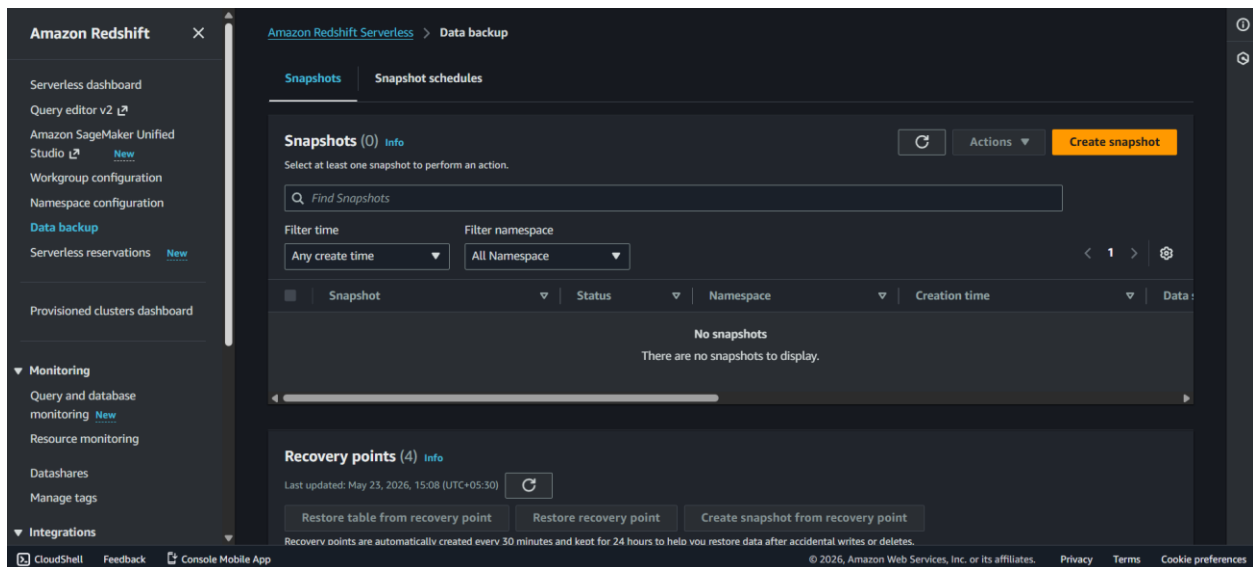


- Review available snapshots and recovery points
- Understand that snapshots can be used for backup, disaster recovery, and restoring deleted data
- Navigate to **Query and database monitoring**

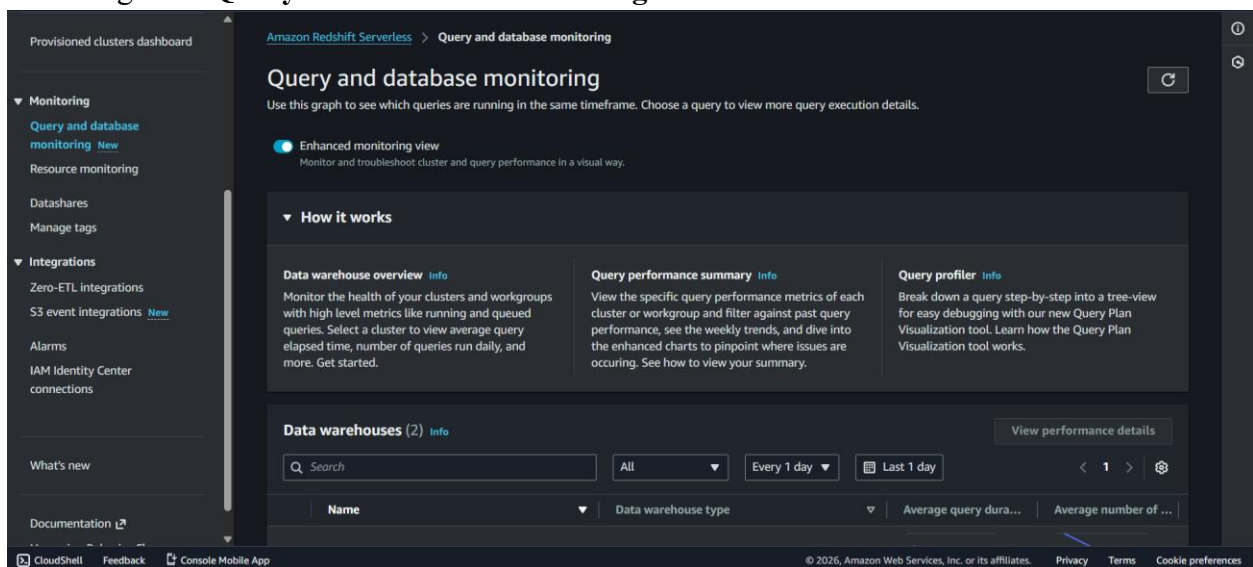


- Disable **Enhanced monitoring view** if enabled

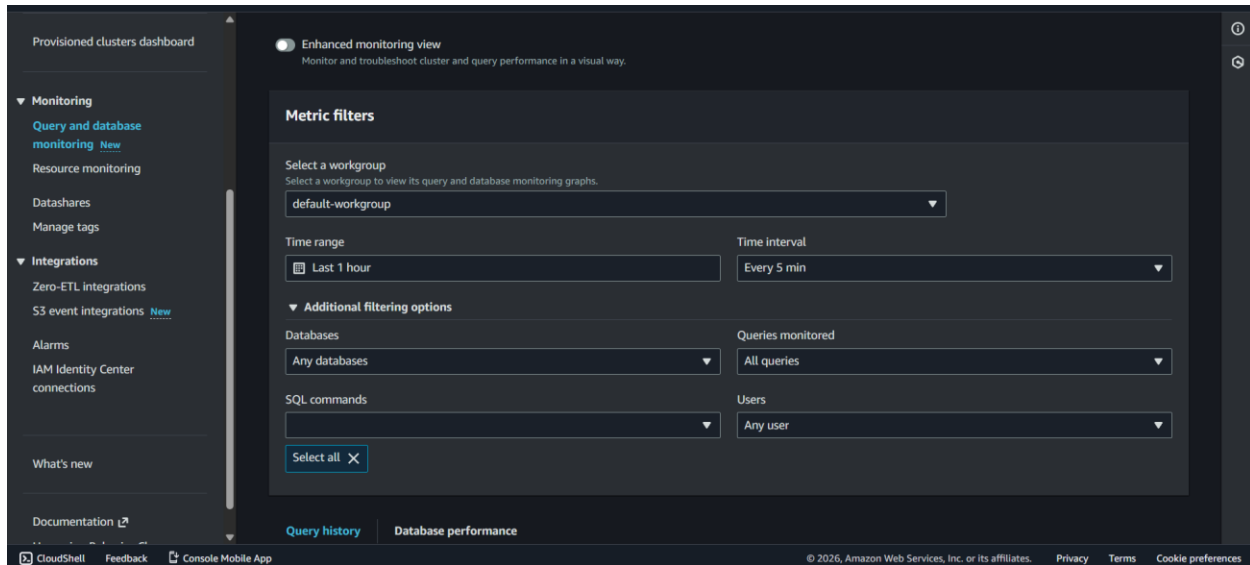


- Review query execution metrics and monitoring filters
- Understand that this page helps identify long-running queries, failed queries, and query performance bottlenecks
- Review query history metrics
- Review query duration metrics
- Review database connection metrics
- Navigate to **Database performance**

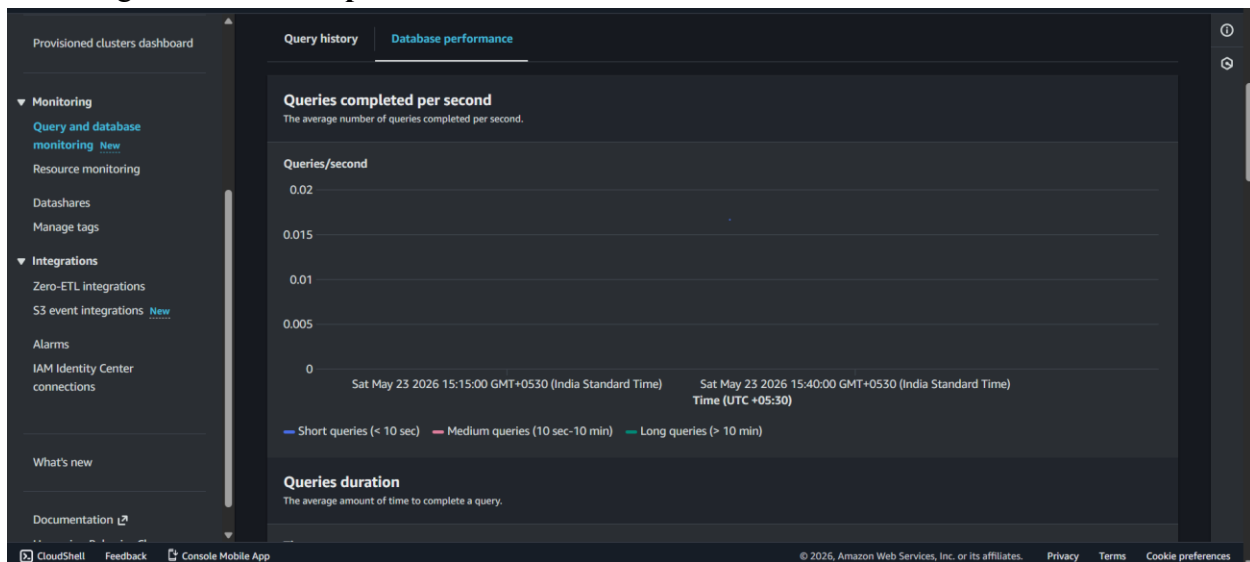


- Review database performance graphs and statistics
- Understand that database performance metrics help monitor workload patterns and overall system health
- Navigate to **Resource monitoring**

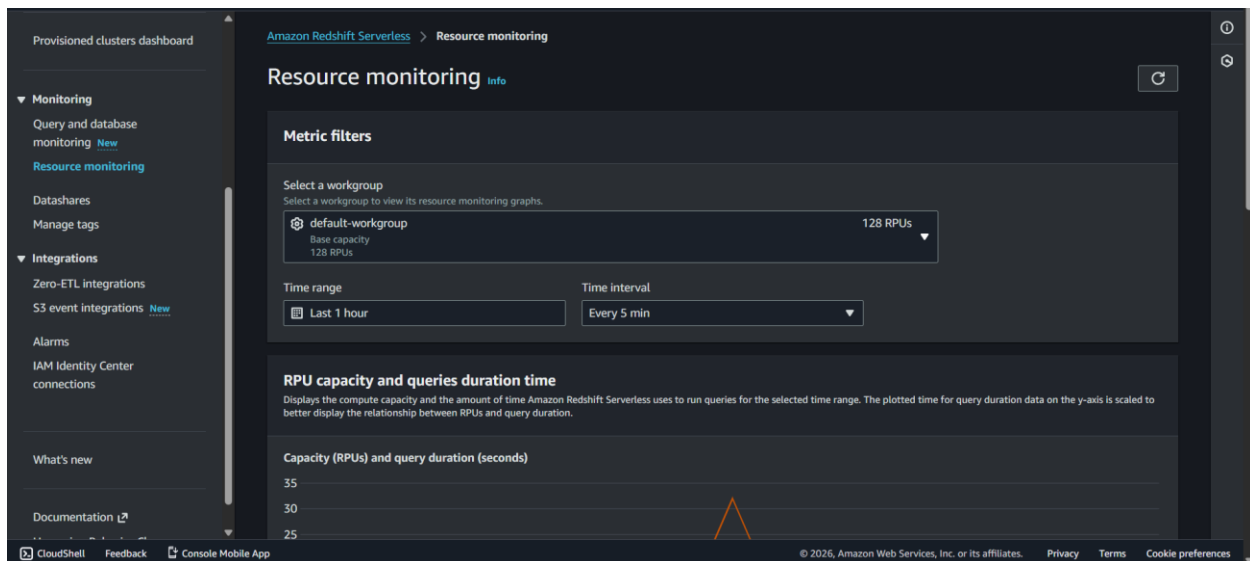


- Review RPU capacity metrics
- Review compute usage metrics
- Review query duration metrics
- Review available time range and interval filters
- Understand that resource monitoring helps track serverless compute consumption and optimize costs
- Navigate to **Datashares**

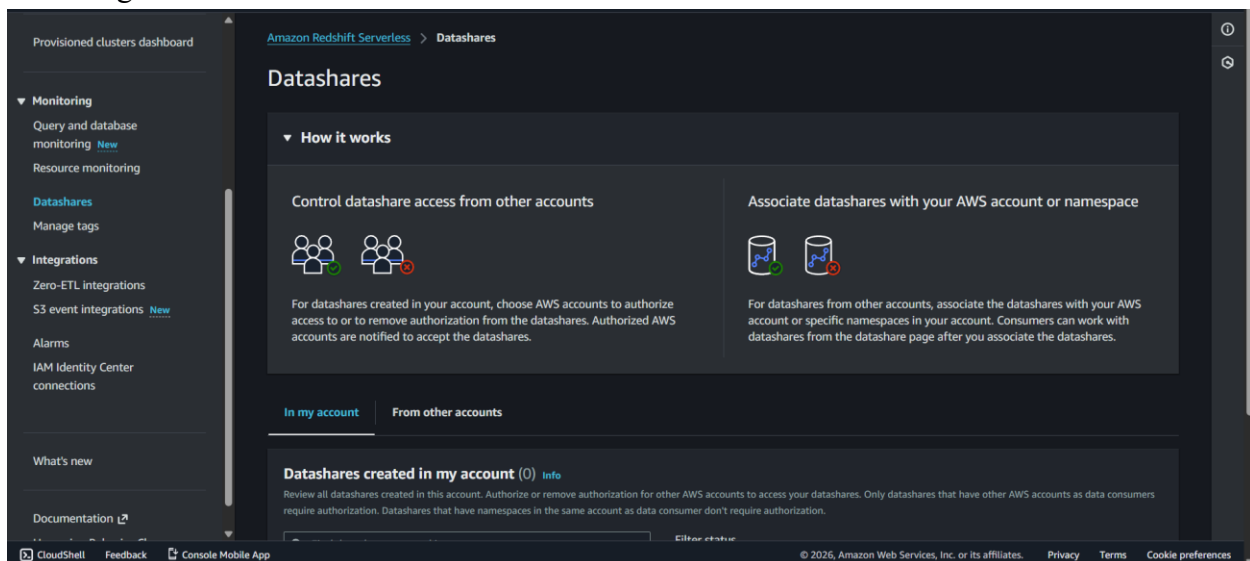


- Review available datashares
- Understand that datashares allow secure sharing of live data across **Amazon Redshift** clusters, workgroups, accounts, and regions without copying data
- Navigate to **Manage tags**

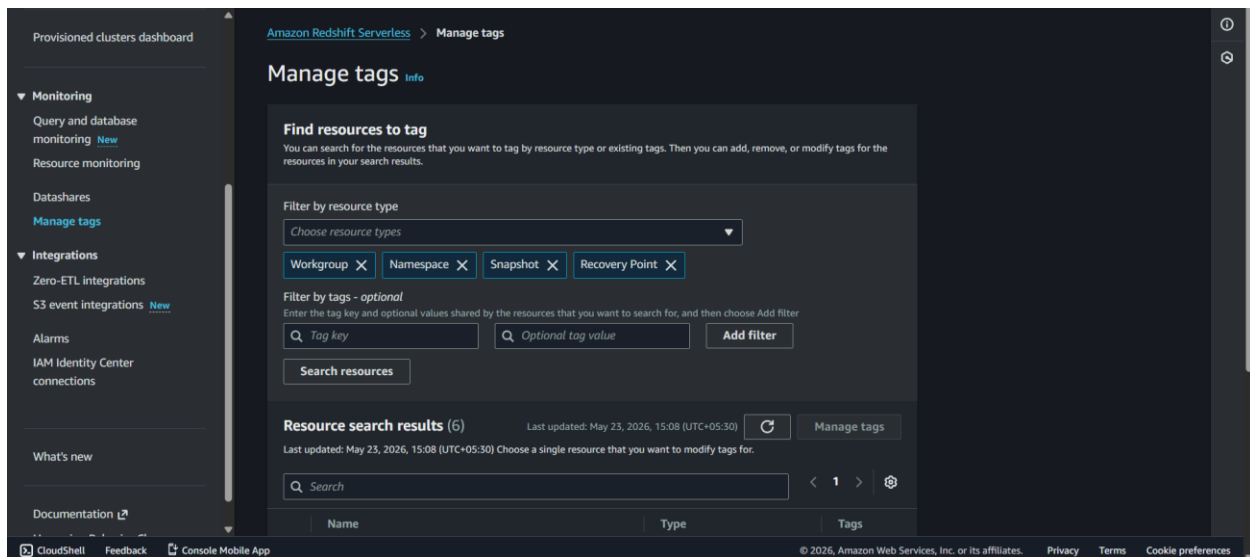


- Review resource tagging options
- Understand that tags can be used for cost allocation, governance, resource organization, and automation
- Navigate to **Zero-ETL integrations**

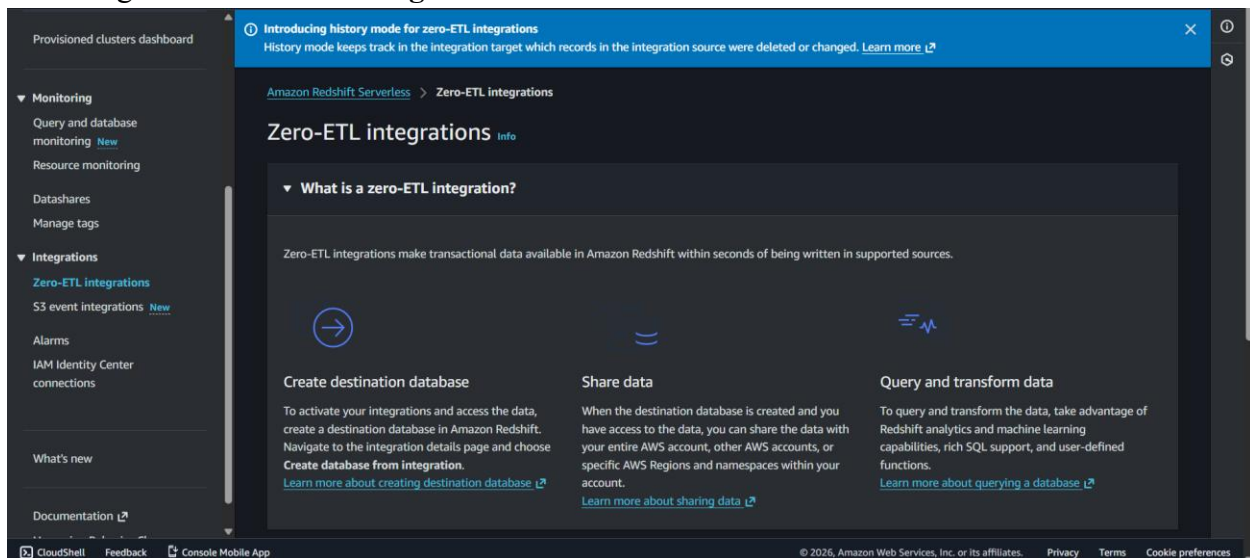

- Review available integration options
- Understand that Zero-ETL integrations enable near real-time data movement from operational databases into **Amazon Redshift** without building ETL pipelines
- Navigate to **Alarms**

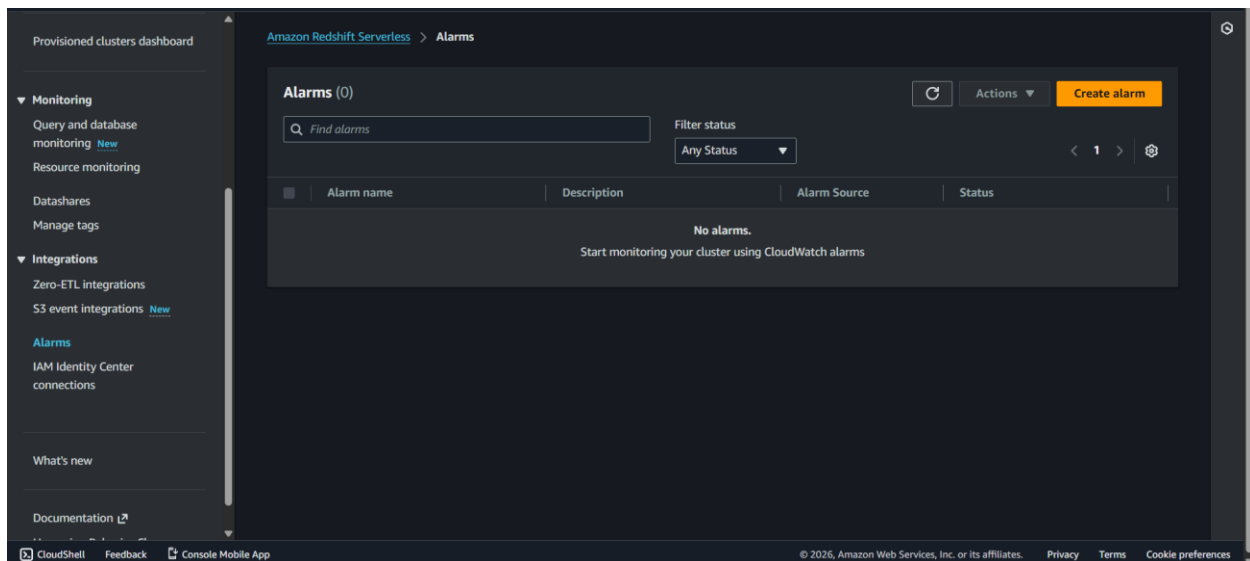

- Review configured alarms
- Understand that alarms can notify administrators when resource usage, query activity, or operational thresholds exceed defined limits
- Return to the **Serverless dashboard**

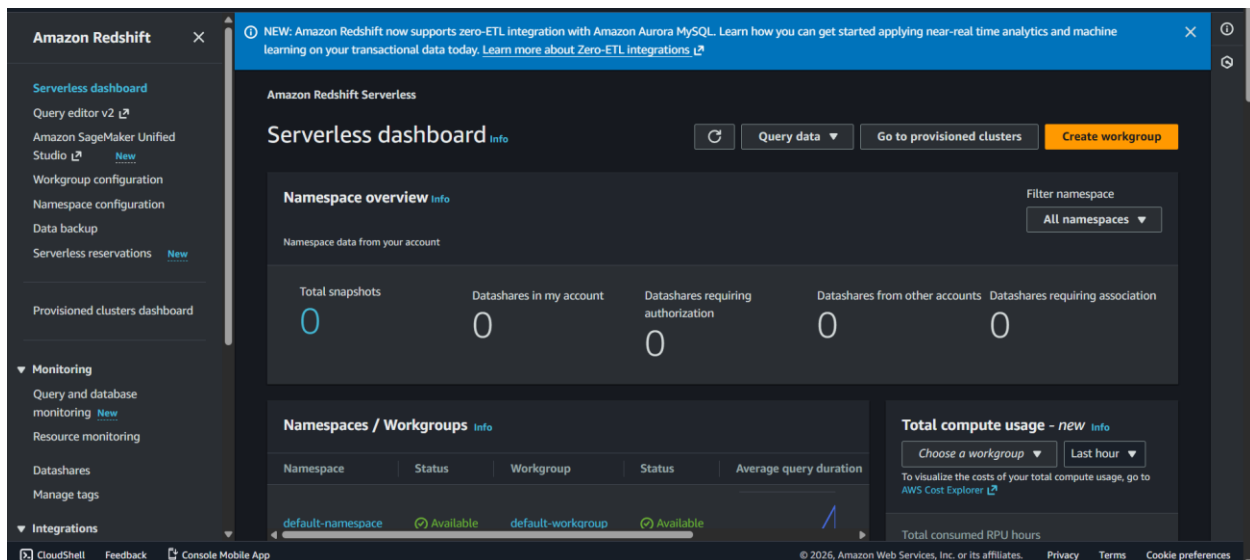

- Review snapshot metrics
- Review datashare metrics
- Review namespace metrics
- Review workgroup metrics
- Review total compute usage metrics
- Verify that the Serverless Dashboard provides a complete operational overview of the **Amazon Redshift Serverless** environment successfully