


Getting started with Redshift Serverless

Summary


In these notes, we will learn how to create a Redshift Serverless Dashboard and then load the sample data into it.

Accessing AWS Redshift


- Go to homepage and search for Redshift.

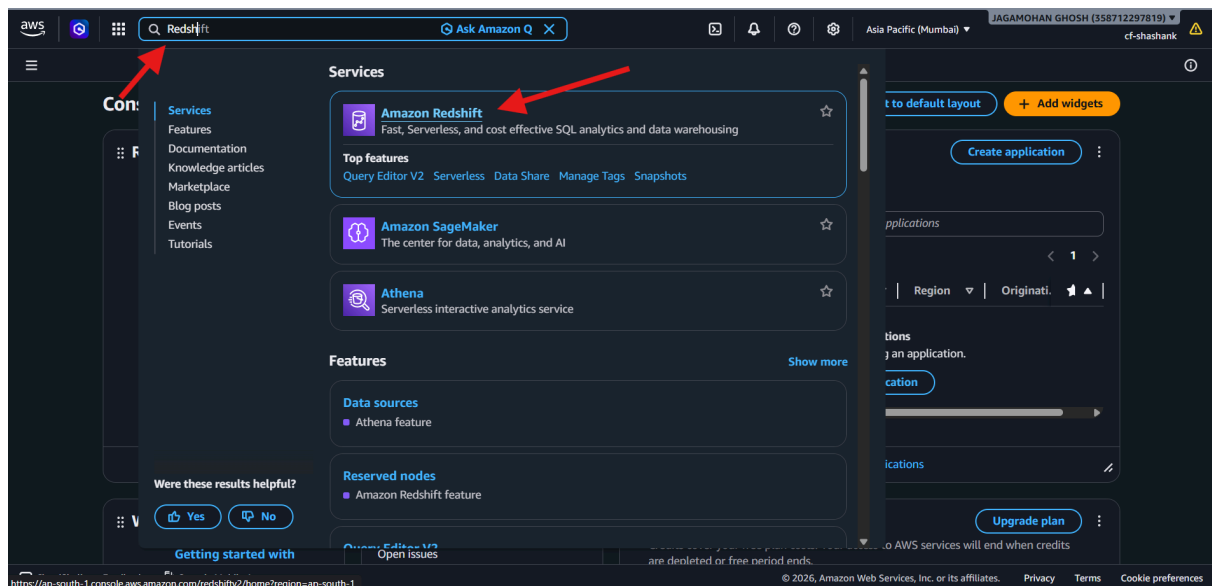


- Click on Redshift.

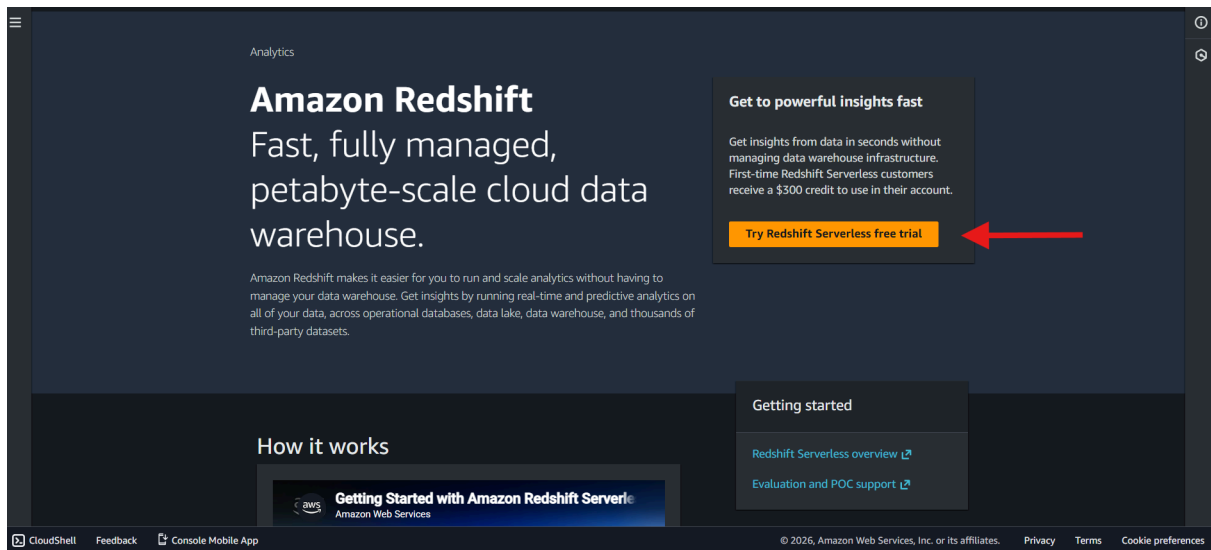


- Click Try Redshift Serverless free trial.

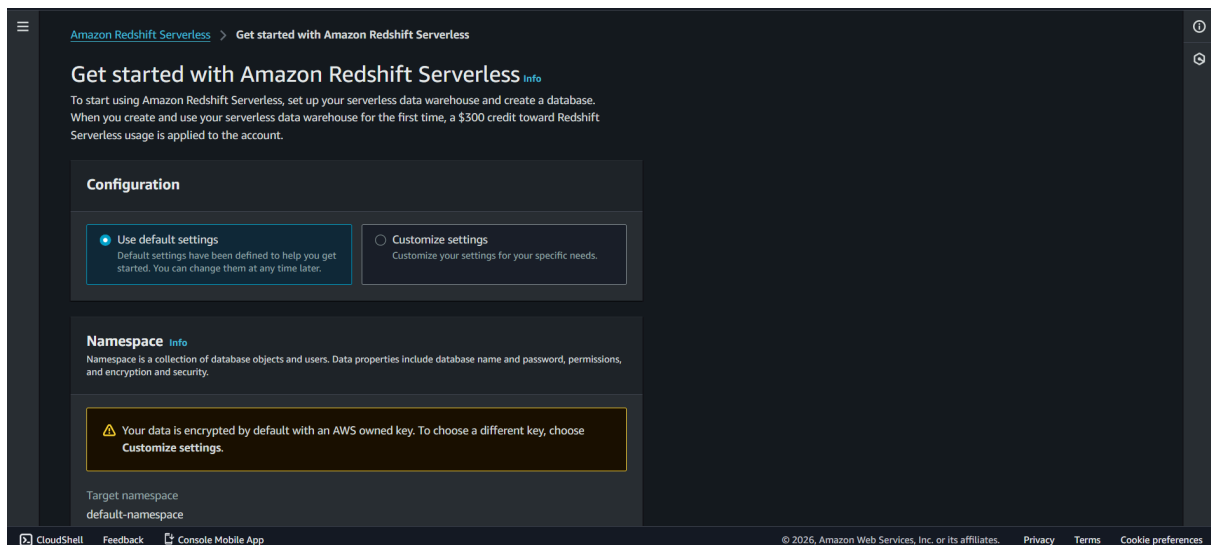


- Keep default namespace and rest of settings to be default.
- Now we need to setup IAM role for Redshift to access resources and S3 to load or unload data.

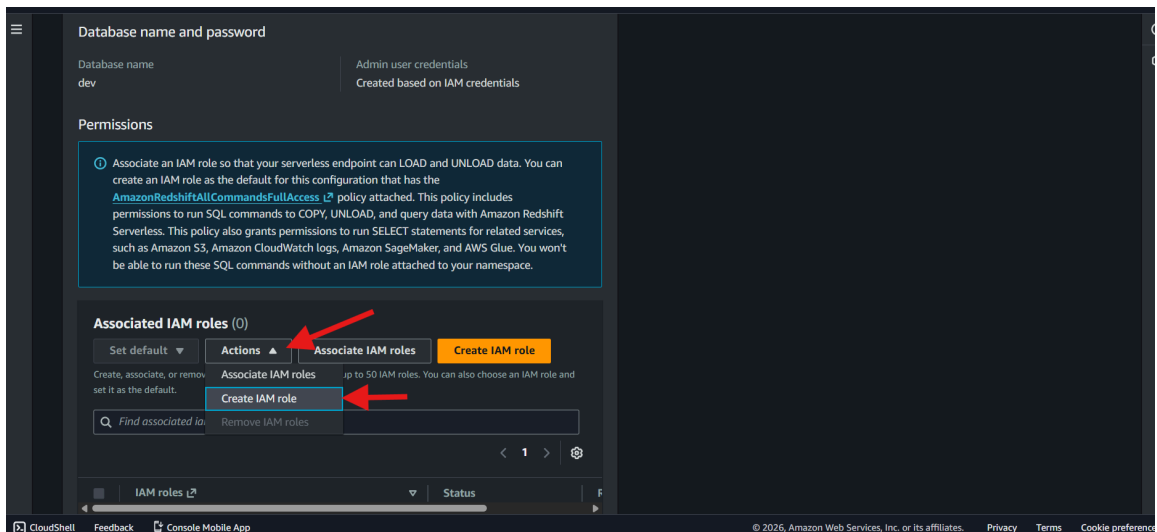


- Click Manage IAM Role → Create IAM Role.

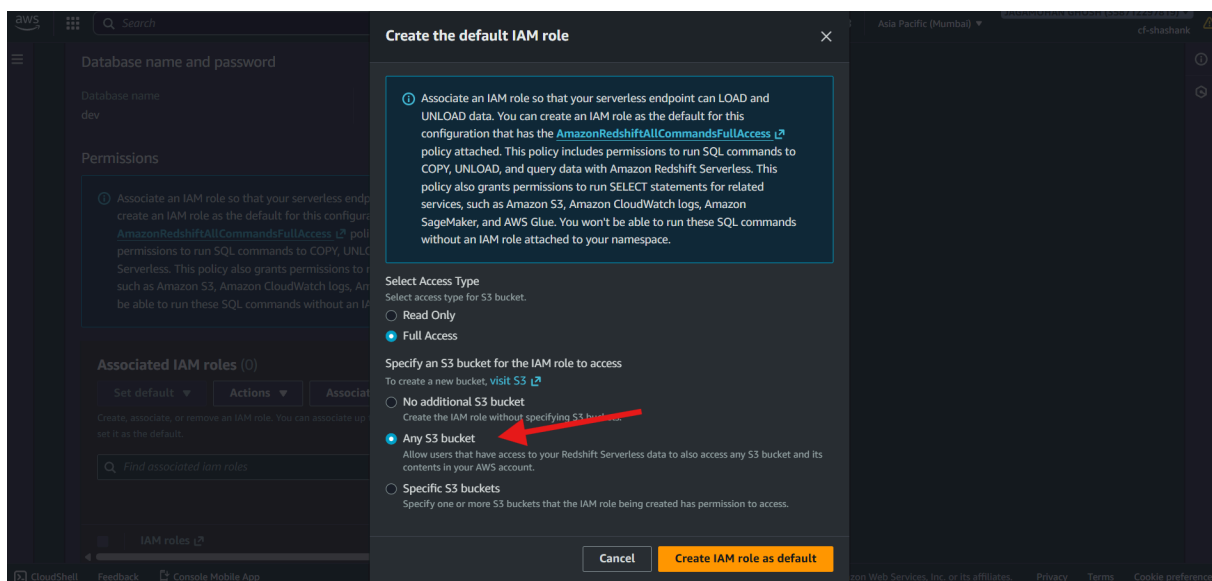


- Now choose Any S3 bucket. This will allow us to use S3 buckets and in future, if we add on other buckets, we do not need to change it from here again and again.

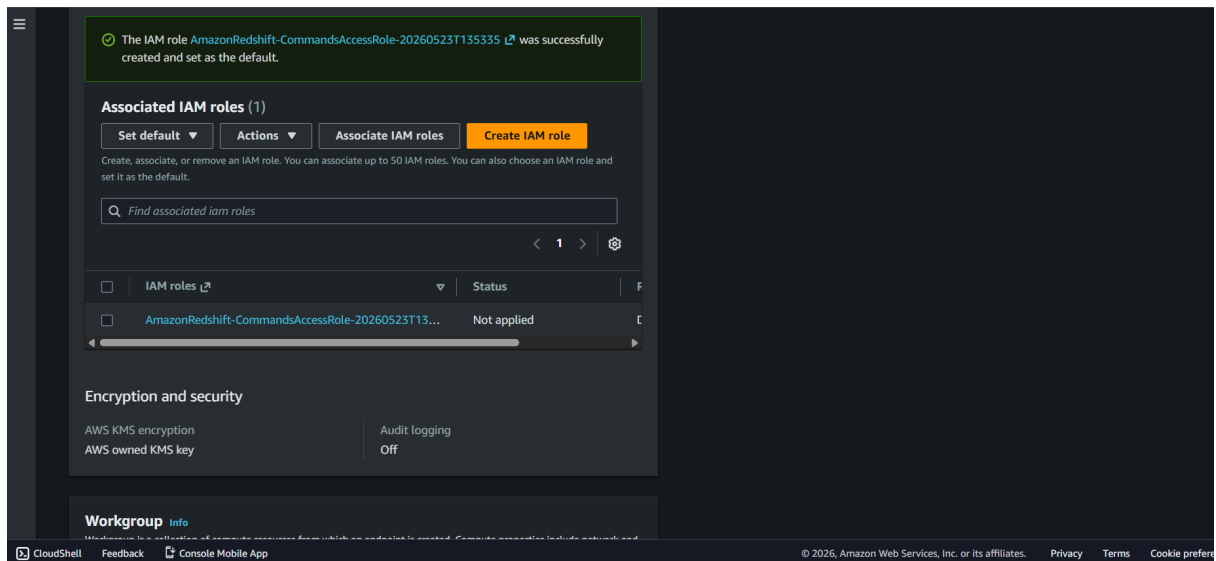


- Click Create IAM Role as default button and it will create the required IAM roles for us.

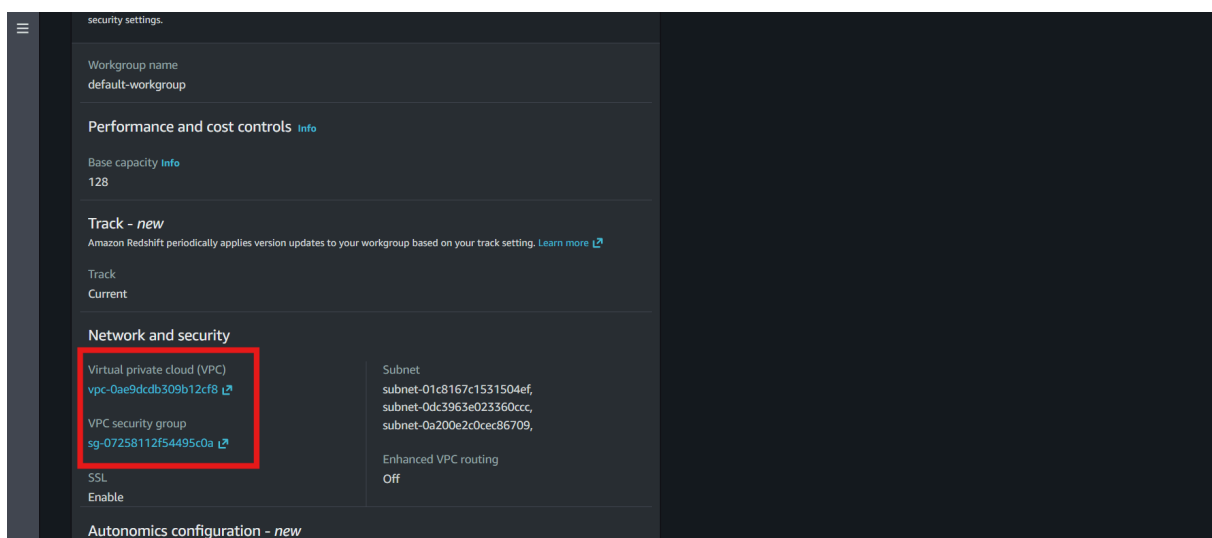


- The workgroup automatically picks up the default VPC and security group for us.

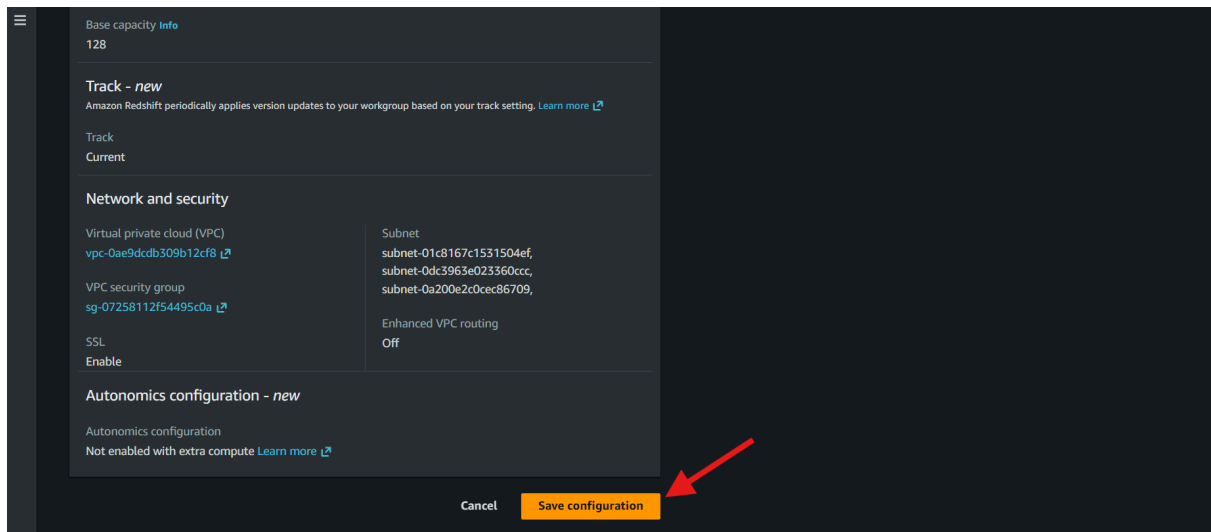


- Now click Save Configuration and let it setup by itself.

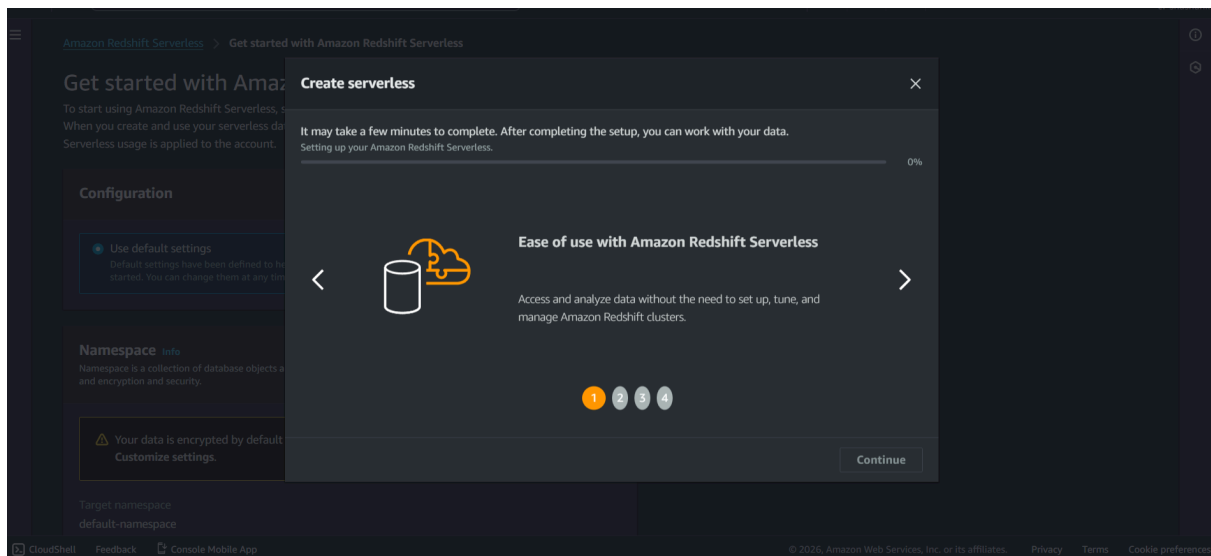


- After loading, Click Continue and you can access the Redshift Serverless Dashboard.

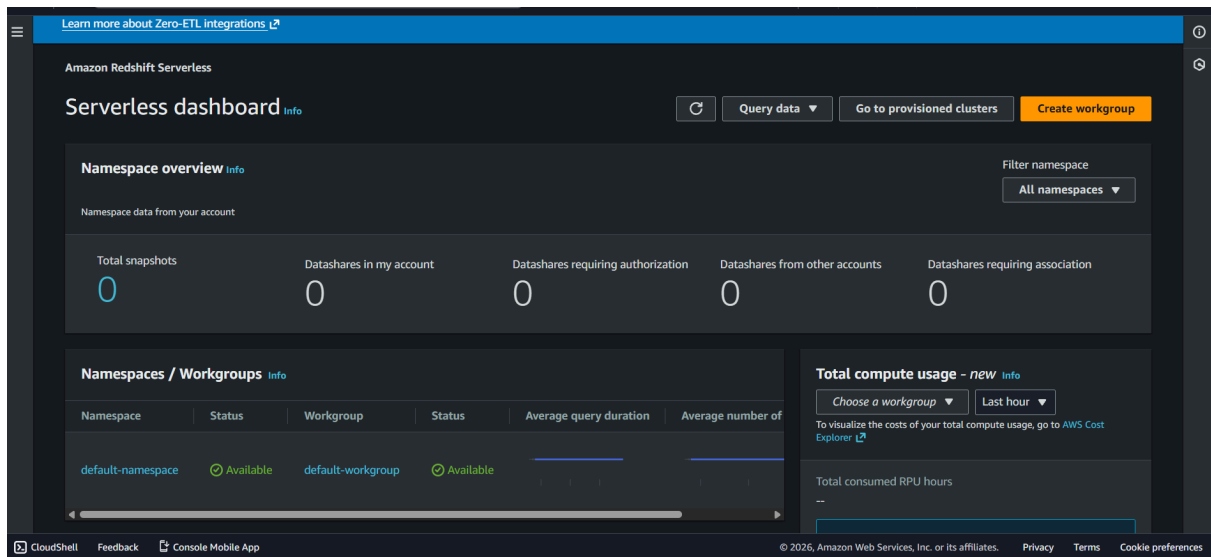


- You can see the dashboard and the default Namespace and Workgroup loaded for us.
- Now lets load up sample data in our serverless data warehouse.

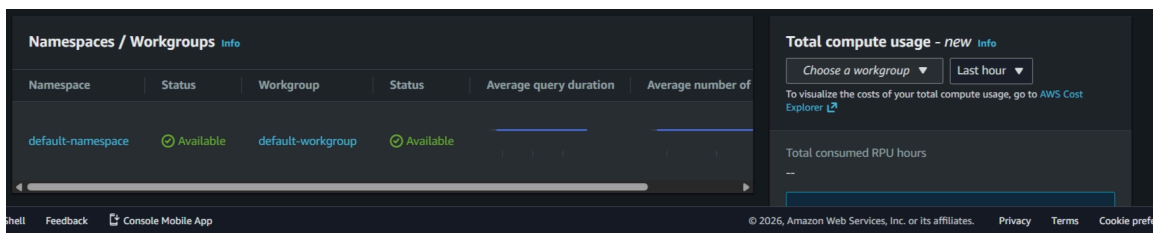


- For this, click on your Namespace.

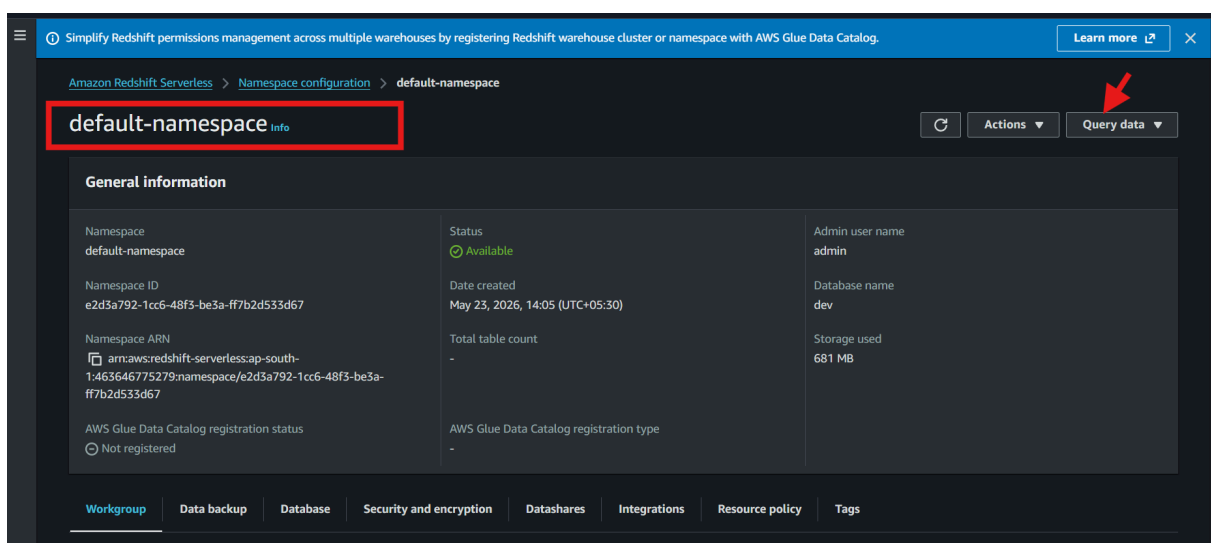


- Now click on Query Data → Query in query editor v2, to open the query editor page.

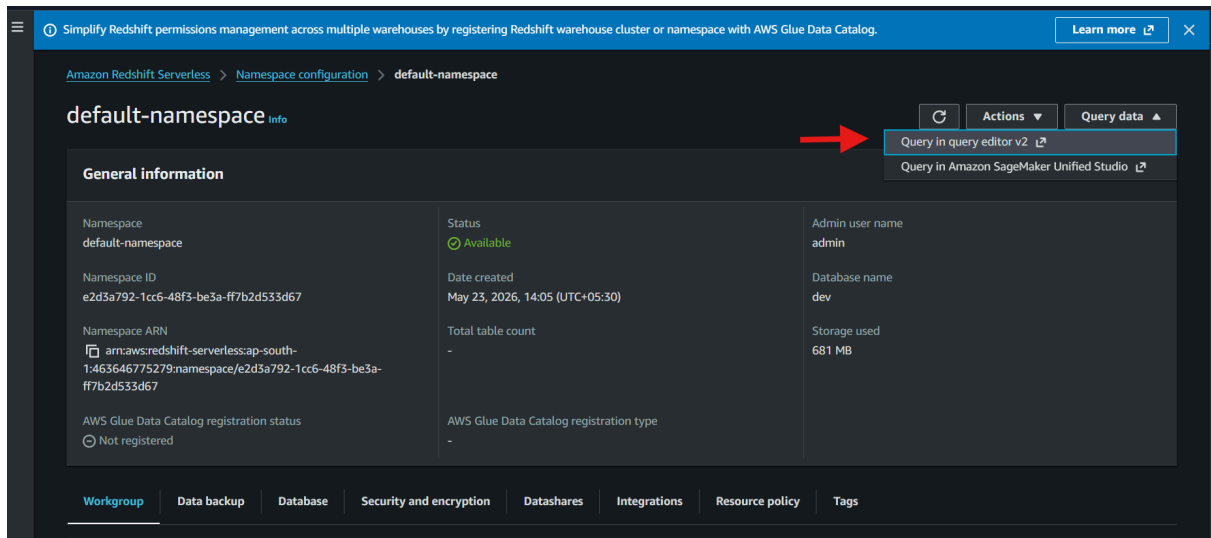


- You can see the default workgroup, click on it and it will pop up a new window for connection.

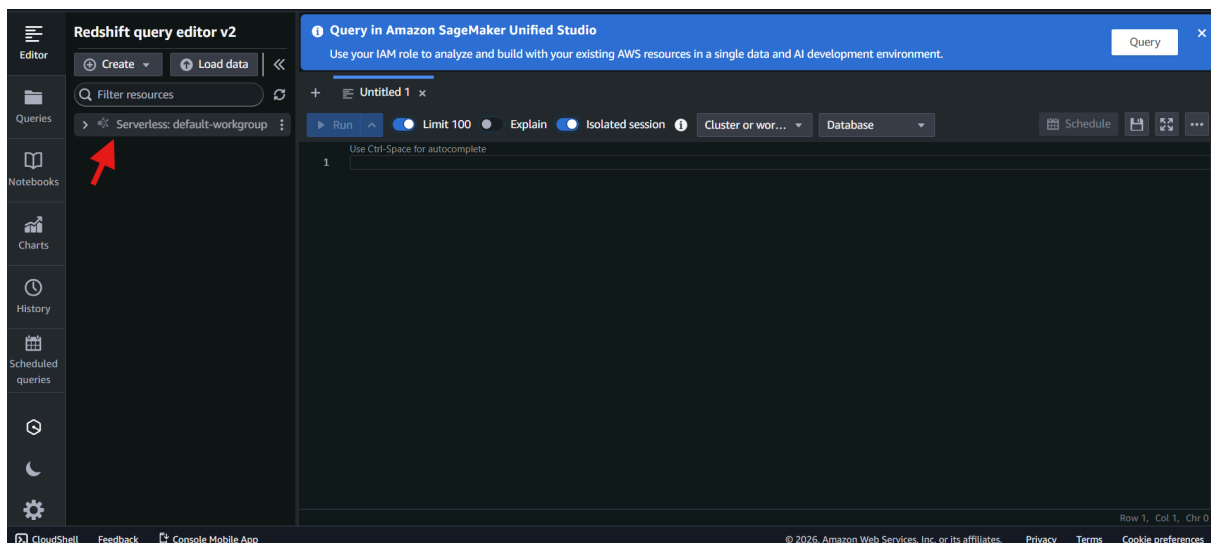


- We will use the federated user which will generate a temporary access based on our current AWS Credentials.

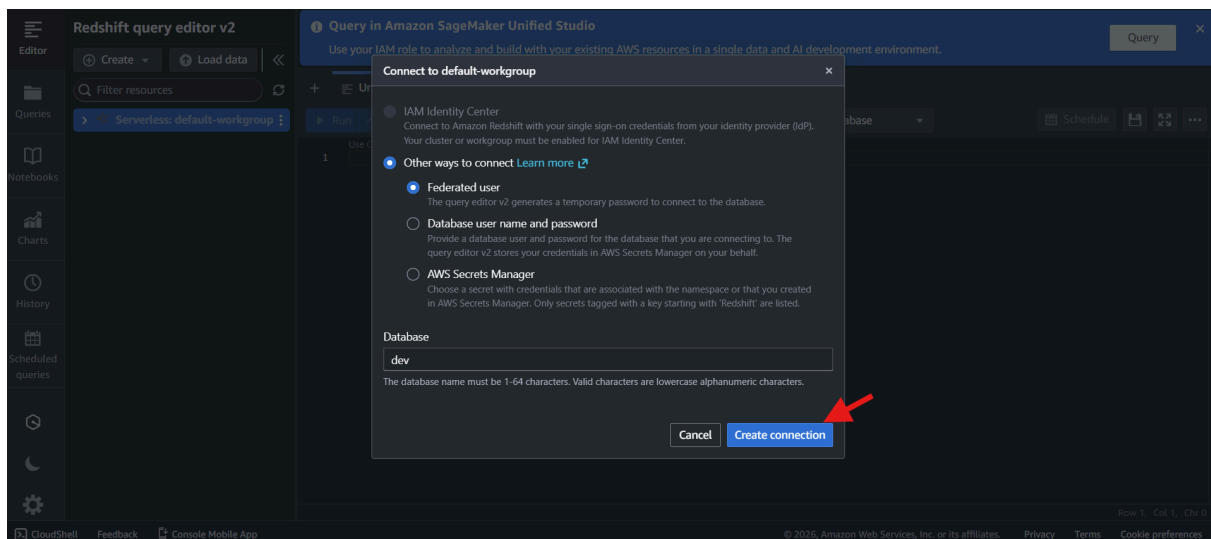


- Click Create Connection, and you are now able to see the database now.

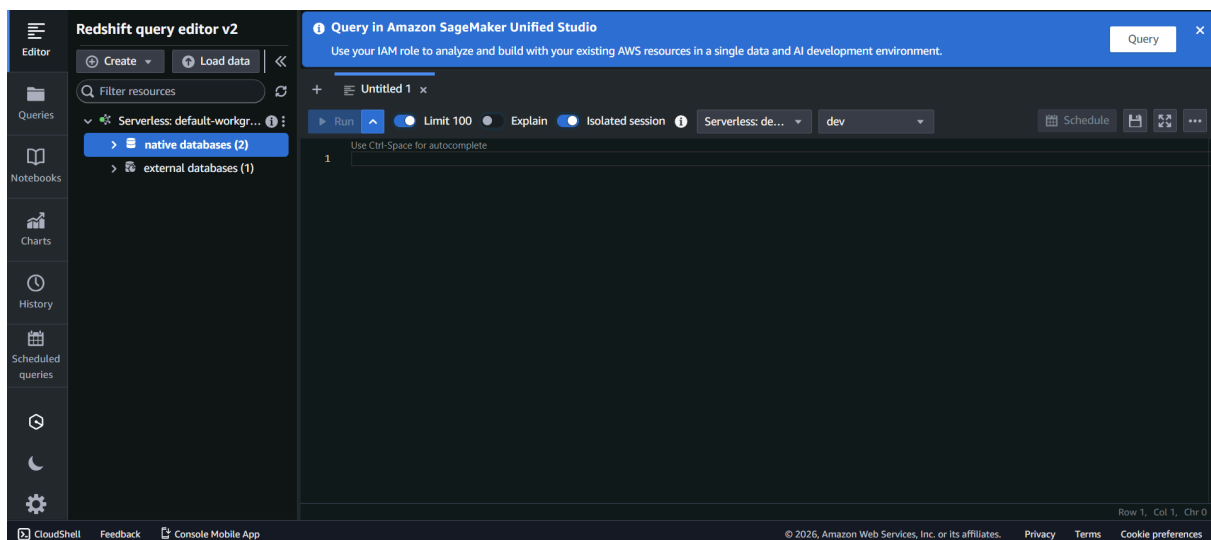


- You can see the sample_data_dev folder which contains the 3 sample schemas that lead to 3 sample datasets and are not loaded yet.

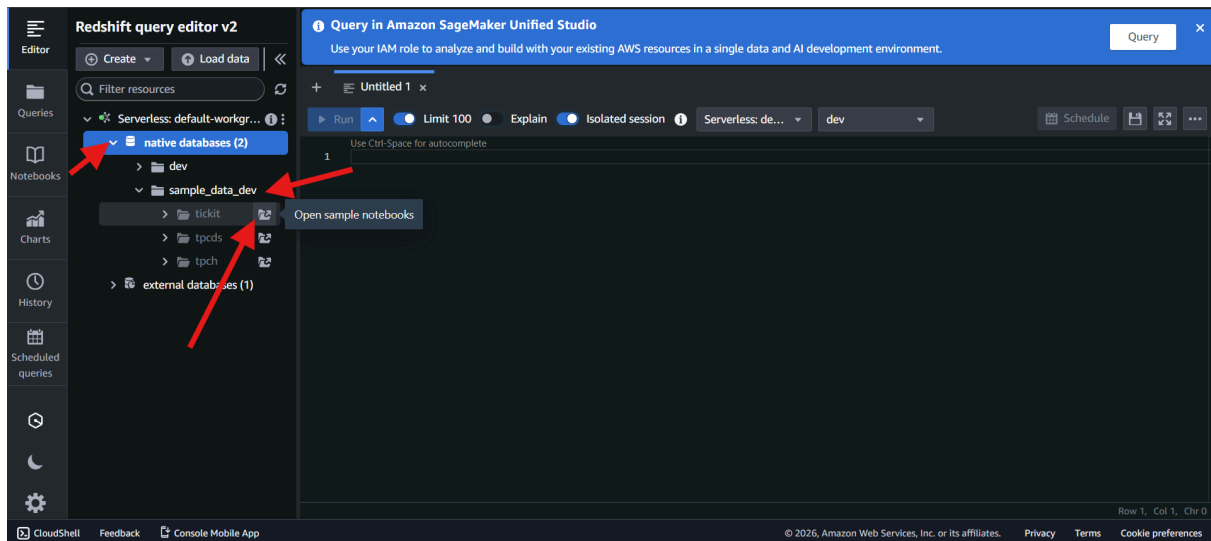


- Click native database → sample_data_dev → tickit.
- We will go with tickit, click on it and click on the option of Open Sample Notebooks.

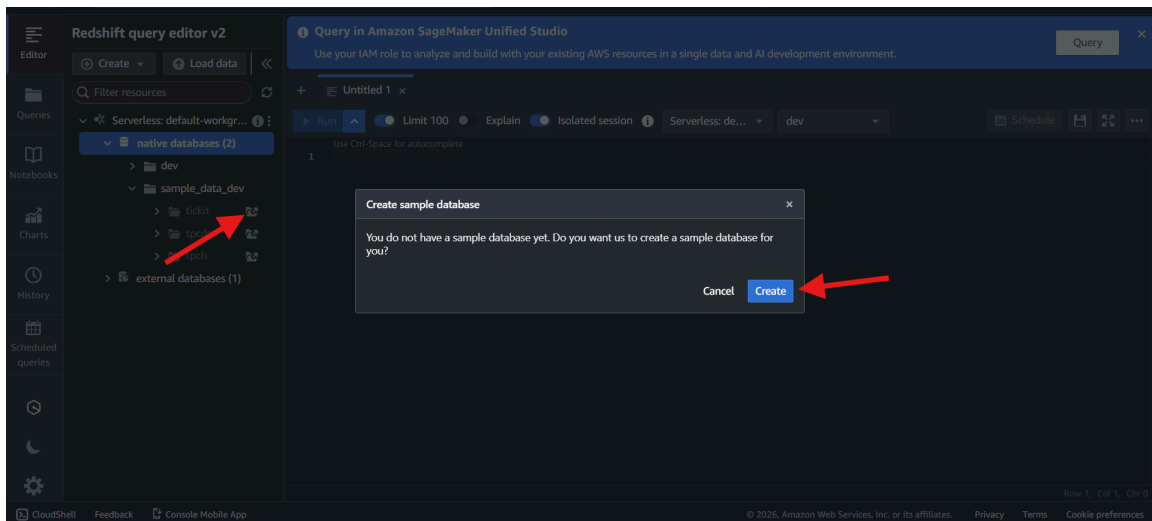

- It will now show up a Create Sample Database window because it is the first time you are accessing it, click Create and it will now load up data from S3 bucket.

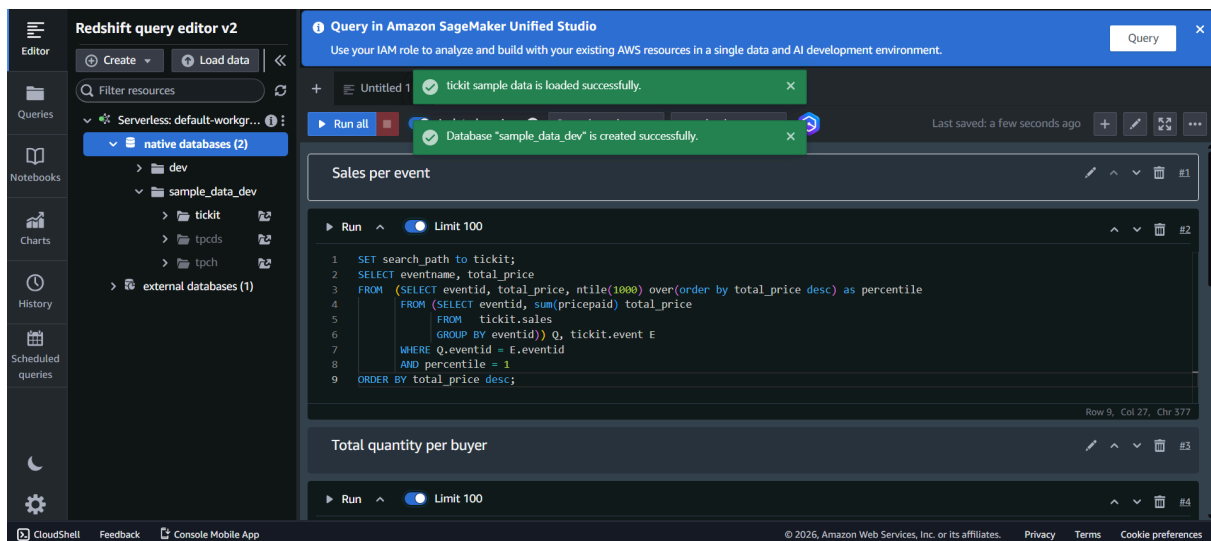

- Now you can see the sample queries loaded here, available for us to execute.

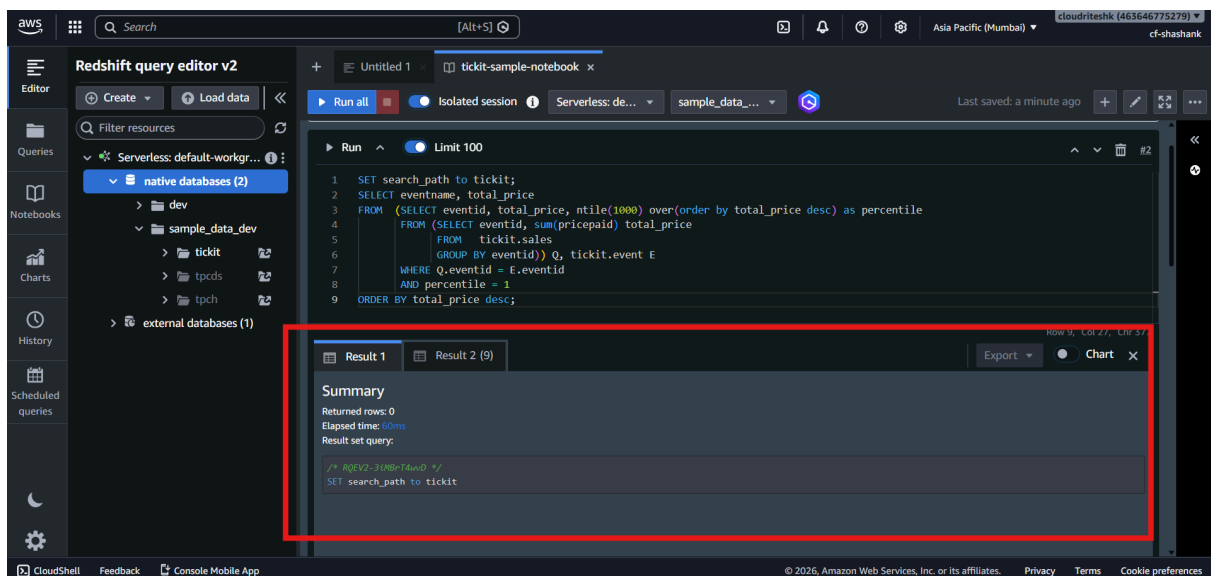

- Click on run all and we can see the result of the queries in their respective cells just below them.