(a) Mamba block

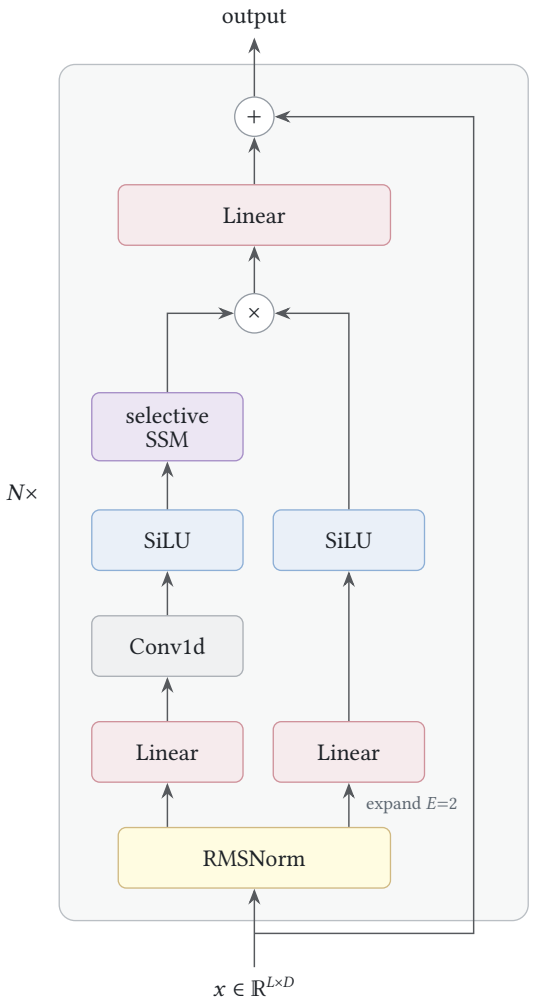

(b) 2-D selective scan (SS2D)

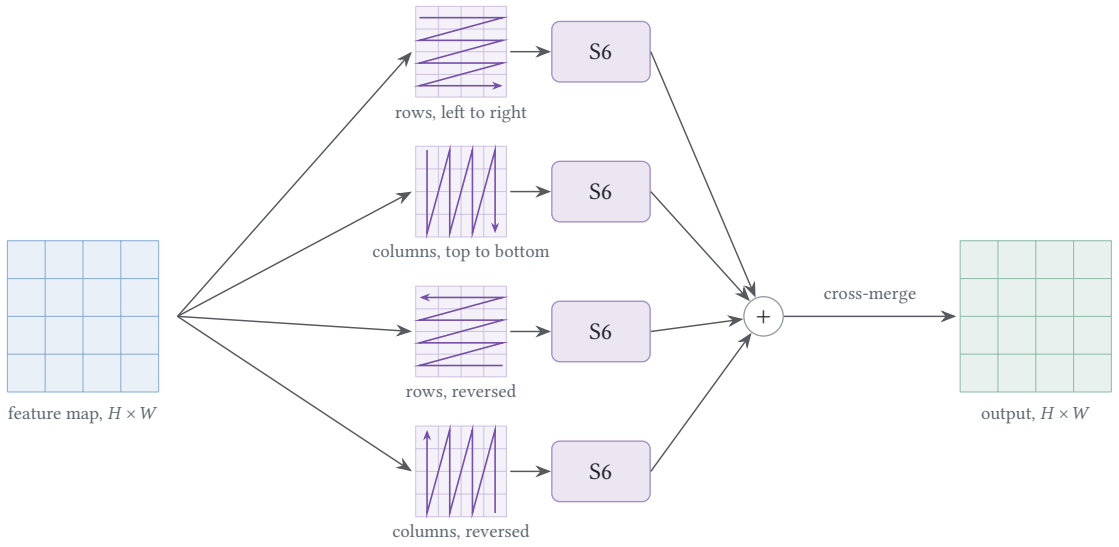

Flattening an image into one sequence loses its 2-D neighbourhoods. SS2D scans it four ways, runs an independent selective scan (S6) on each, and adds the results, so every pixel sees context from all four directions at linear cost.
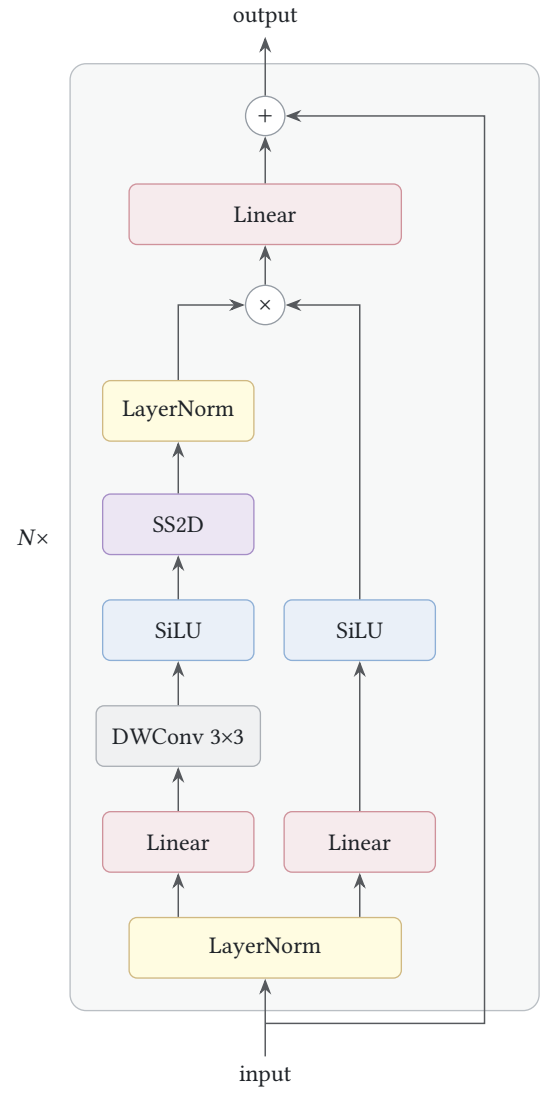
(c) VSS block