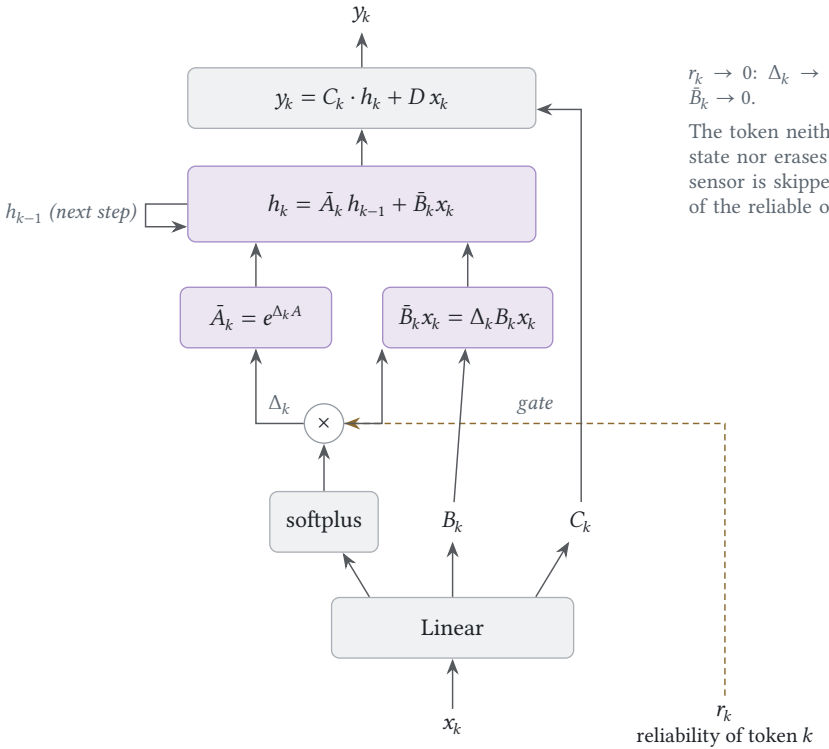

$r_k \to 0$: $\Delta_k \to 0$, so $\bar{A}_k \to 1$ and $\bar{B}_k \to 0$.

The token neither writes into the state nor erases it: an unreliable sensor is skipped, and the memory of the reliable one carries on.