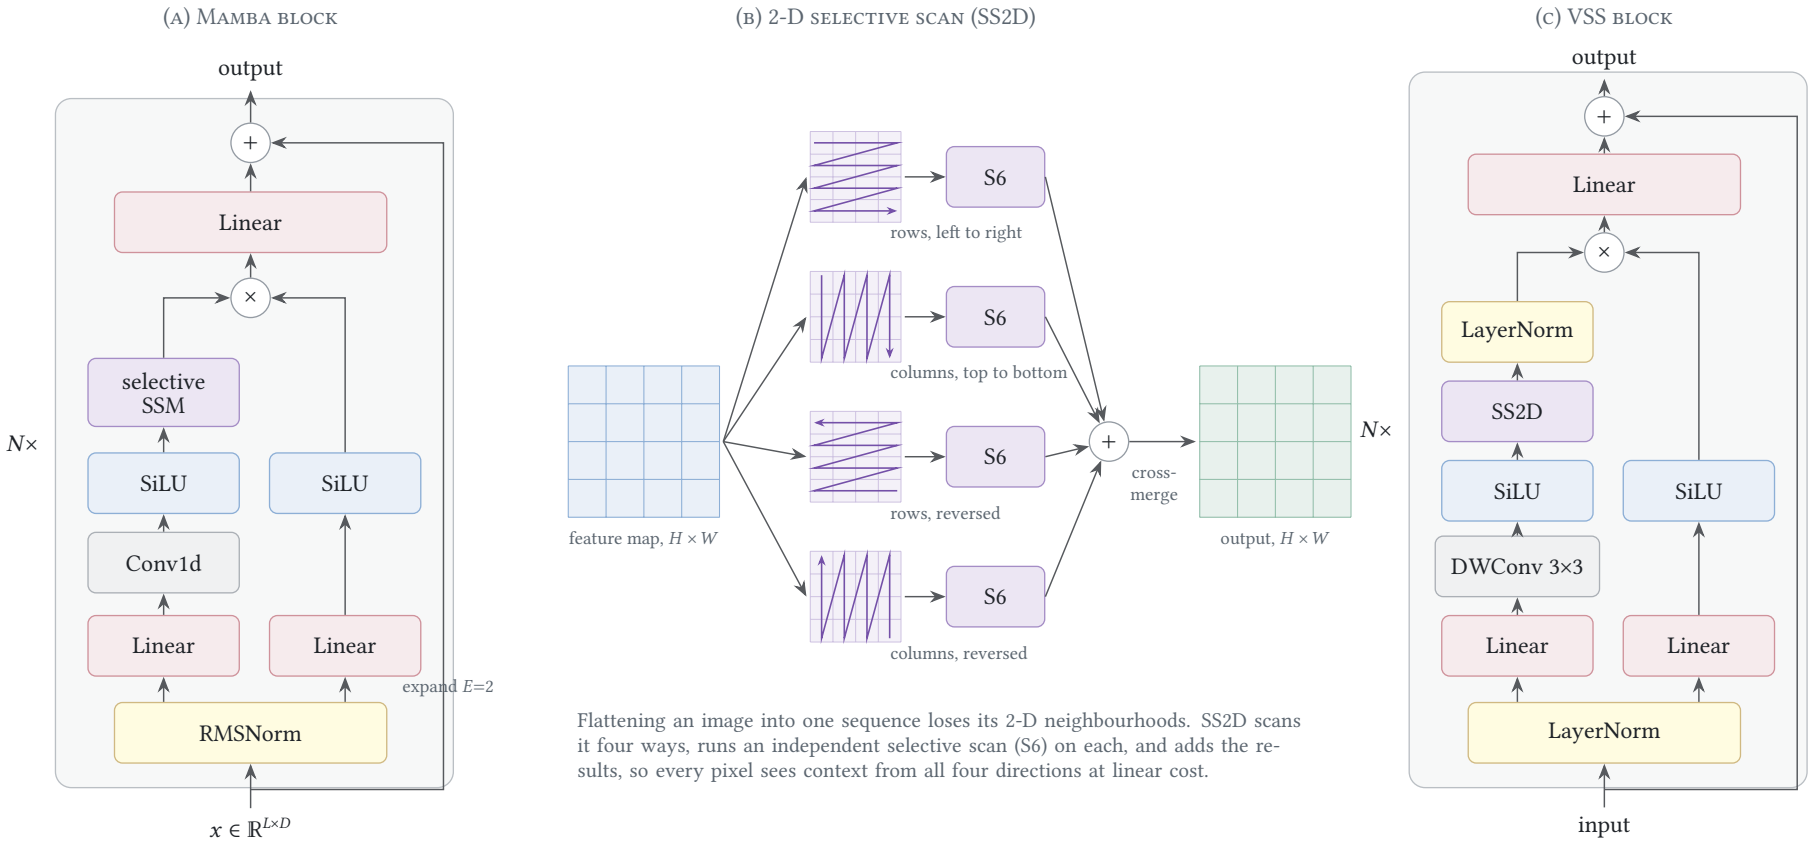

Flattening an image into one sequence loses its 2-D neighbourhoods. SS2D scans it four ways, runs an independent selective scan (S6) on each, and adds the results, so every pixel sees context from all four directions at linear cost.