

NAAN MUDHALVAN MINI PROJECT

Implement Client Script & UI Policy (Incident)

IMPLEMENTATION DOCUMENTATION

TEAM MEMBERS

- **RITHIKA R**
– ServiceNow Configuration
- **ROSHAN BR**
– ServiceNow Configuration
- **RISHIKA R**
– Client Script Configuration
- **JEEVASREE SK**
– Client Script Configuration
- **SHEIKA FATHIMA K**
– Client Script Configuration

DEPARTMENT

Programme : **BE CSE (AIML)**

Year : **IIIrd Year**

Semester : **5th Semester**

Table of Contents

1. Setup Instructions.....	2
2. Folder Structure.....	7
3. Running the Application.....	7
4. Functional Documentation.....	8
5. Authentication.....	8
6. User Interface.....	8
7. Known Issues.....	9
8. Future Enhancements.....	9
9. Conclusion.....	9

1. Setup Instructions

Prerequisites

The following are required:

- ServiceNow instance
- ServiceNow account
- Administrative or configuration access
- Web browser
- Access to the Incident table

Configuration Steps

1.1 Create UI Policy

Navigate to: **System UI** → **UI Policies**

Create a new UI Policy with the following configuration:

Property	Value
Name	High Impact Control
Table	Incident
Active	True
Condition	Impact is 1 - High
Reverse if false	True

Configure the Assignment Group UI Policy Action as mandatory.

The screenshot shows the ServiceNow 'UI Policy - New Record' form. The 'Table' is set to 'Incident [incident]' and 'Application' is 'Global'. The 'Active' checkbox is checked. The 'Short description' field contains 'High Impact Control' and the 'Order' is 100. Below the form, the 'When to Apply' tab is selected, showing a 'Conditions' section with buttons for 'Add Filter Condition' and 'Add OR Clause'. The condition field is currently empty, showing '-- choose field --', '-- oper --', and '-- value --'.

Figure 1: Creating the High Impact Control UI Policy

servicenow All Favorites History UI Policy - New Record Search

UI Policy New record View: Advanced*

When to Apply Script

Conditions Add Filter Condition Add OR Clause

Impact is 1 - High AND OR

If selected, the UI Policy applies to all form views; otherwise the UI Policy is view-specific

Global ☒

Reverse the effects of the UI policy actions when the Conditions evaluate to false

Reverse if false ☒

Apply the UI policy actions when the form is loaded and when the user changes values on the form

On load ☒

Tables that extend the specified Table inherit this UI Policy

Inherit ☐

Submit

Related Links

Default view

Figure 2: UI Policy condition (Impact is 1 - High) with Reverse if false enabled

servicenow All Favorites History UI Policy Action - New Record Search

UI Policy Action New record

UI policy actions specify exactly what actions to take on a specified field. The conditions specified in the UI policy determine when these actions are triggered. [More Info](#)

UI policy High Impact Control

Table Incident [incident]

* Field name Assignment group

Application Global

Mandatory True

Visible Leave alone

Read only False

Clear the field value ☐


Submit

Figure 3: UI Policy Action: Assignment Group set to Mandatory

1.2 Configure Urgency

Create a UI Policy Action under the High Impact Control UI Policy and configure:

Property	Value
Field	Urgency
Read-only	True

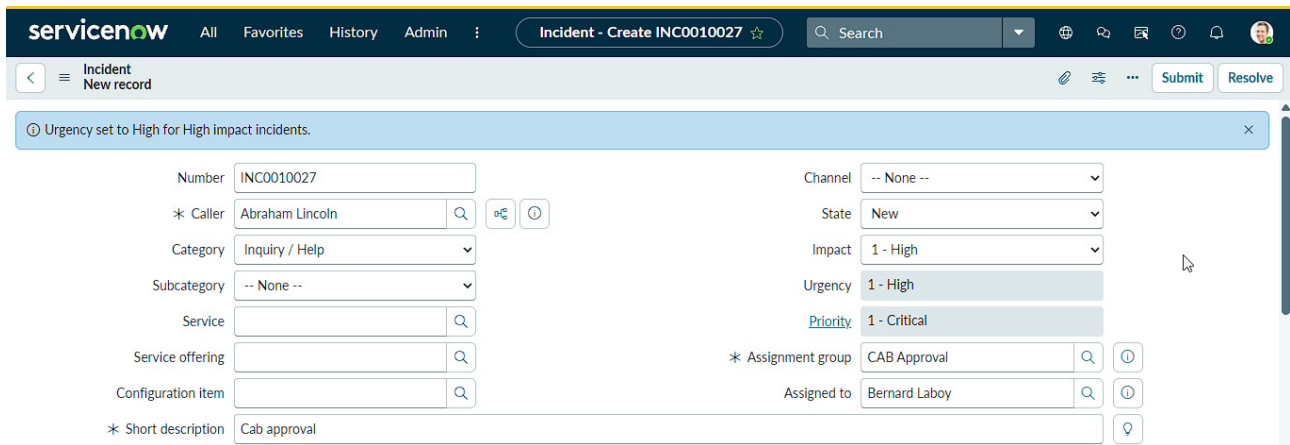

Urgency set to High for High impact incidents.

Number: INC0010027

* Caller: Abraham Lincoln

Category: Inquiry / Help

Subcategory: -- None --

Service:

Service offering:

Configuration item:

* Short description: Cab approval

Channel: -- None --

State: New

Impact: 1 - High

Urgency: 1 - High

Priority: 1 - Critical

* Assignment group: CAB Approval

Assigned to: Bernard Laboy

Figure 4: Urgency UI Policy Action configuration

1.3 Create onChange Client Script

Create a Client Script with:

Property	Value
Name	Auto set urgency for high impact
Table	Incident
Type	onChange
Field	Impact
Active	True

The script automatically sets Urgency to High when Impact is High.

```
function onChange(control, oldValue, newValue, isLoading) {
    if (isLoading || newValue == '') {
        return;
    }

    if (newValue == '1') {
        g_form.setValue('urgency', '1');
        g_form.addInfoMessage('Urgency set to High for High impact incidents.');
    }
}
```

Client Script
Auto set urgency for high impact

New client-scripts are run in strict mode, with direct DOM access disabled. Access to jQuery, prototype and the window object are likewise disabled. To disable this on a per-script basis, configure this form and add the "Isolate script" field. To disable this feature for all new globally-scoped client-side scripts set the system property "glide.script.block.client.globals" to false.

Name: Auto set urgency for high impact

Table: Incident [incident]

UI Type: Desktop

Type: onChange

Field name: Impact

Application: Global

Active: ☒

Inherited: ☐

Global: ☒

Description:

Messages:

Script

```

1 function onChange(control, oldValue, newValue, isLoading) {
2   if (isLoading || newValue == '') {
3     return;
4   }
5
6   if (newValue == '1') {
7     g_form.setValue('urgency', '1');
8     g_form.addInfoMessage('Urgency set to High for High impact incidents.');
```

Isolate script: ☒

Figure 5: onChange Client Script configuration

1.4 Create onSubmit Client Script

Create a Client Script with:

Property	Value
Name	Prevent save if Assigned To missing
Table	Incident
Type	onSubmit
Active	True

The script prevents the Incident from being saved when Impact is High and Assigned To is empty.

servicenow

Incident - INC00000003

Number: INC00000003

* Caller: Joe Employee

Category: Network

Subcategory: -- None --

Service:

Service offering:

Configuration item:

Channel: -- None --

State: In Progress

Impact: 1 - High

Urgency: 1 - High

Priority: 1 - Critical

* Assignment group: Network

Assigned to:

* Short description: Wireless access is down in my area

Description: I just moved from floor 2 to floor 3 and my laptop cannot connect to any wireless network.

Assigned To is mandatory for High impact incidents.

Related Search Results >

Notes | Related Records | Resolution Information

Activate Windows
Go to Settings to activate Windows.

Figure 6: onSubmit Client Script validation message on the Incident form

1.5 Create onCellEdit Client Script

Create a Client Script with:

Property	Value
Name	Prevent state change via list edit
Table	Incident
Type	onCellEdit
Field	State
Active	True

The script prevents users from changing State directly from the Incident list.

The screenshot displays the ServiceNow Incident form and list view. The top section shows the incident details for INC0000002, including fields for Number, Caller, Category, Subcategory, Service, Service offering, Configuration item, Short description, and Description. The right side shows fields for Channel, State, Impact, Urgency, Priority, Assignment group, and Assigned to. The bottom section shows a list of incidents with columns for Number, Opened, Short description, Caller, Priority, State, Category, Assignment group, Assigned to, Updated, and Updated by.

Incident Form Details:

- Number: INC0000002
- Caller: Fred Luddy
- Category: Network
- Subcategory: -- None --
- Service:
- Service offering:
- Configuration item: FileServerFloor2
- Short description: Network file shares access issue
- Description: User can't get to any of his files on the file server.
- Channel: -- None --
- State: In Progress
- Impact: 1 - High
- Urgency: 1 - High
- Priority: 1 - Critical
- Assignment group: Network
- Assigned to: Howard Johnson

Incident List View:

Number	Opened	Short description	Caller	Priority	State	Category	Assignment group	Assigned to	Updated	Updated by
INC0000001	2026-03-11 16:09:51	Can't read email	Fred Luddy	1 - Critical	On Hold	Network	Service Desk	Charlie Whitherspoon	2026-10-02 09:44:32	system
INC0000002	2026-03-05 15:07:12	Network file shares access issue	Fred Luddy	1 - Critical	In Progress	Network	Network	Howard Johnson	2026-10-02 11:33:11	admin
INC0000003	2026-03-12 16:07:30	Wireless access is down in my area	Joe Employee	1 - Critical	In Progress	Network	Network	Beth Anglin	2026-06-11 12:51:14	admin
INC0000004	2026-03-18 15:49:22	Forgot email password	Fred Luddy	1 - Critical	Closed	Inquiry / Help	Service Desk	Bud Richman	2026-06-11 13:16:24	admin
INC0000005	2026-03-07 15:06:52	CPU load high for over 10 minutes	Alejandro Mascall	1 - Critical	Closed	Hardware	Hardware	Bud Richman	2026-06-12 15:58:47	system
INC0000006	2026-03-11 16:08:05	Hangs when trying to print VISIO document	Joe Employee	1 - Critical	Closed	Software	Software	Howard Johnson	2026-06-11 13:15:59	admin
INC0000007	2015-08-12 16:08:24	Need access to sales DB for the West	Joe Employee	1 - Critical	On Hold	Database	(empty)	David Loo	2026-10-02 09:40:05	system

Figure 7: onCellEdit Client Script configuration

2. Folder Structure

This project is configured directly within the ServiceNow platform and does not use a traditional client-server folder structure. The logical project structure is:

```
ServiceNow Incident Management Project
├── Incident Table
├── UI Policies
│   ├── High Impact Control
│   │   └── UI Policy Actions
│   │       ├── Assignment Group - Mandatory
│   │       └── Urgency - Read Only
├── Client Scripts
│   ├── Auto set urgency for high impact
│   │   └── onChange
│   ├── Prevent save if Assigned To missing
│   │   └── onSubmit
│   └── Prevent state change via list edit
│       └── onCellEdit
```

3. Running the Application

This project runs directly inside the ServiceNow platform. There is no separate frontend or backend server to start. To run and test the project:

1. Log in to the ServiceNow instance.
2. Navigate to the Incident module.
3. Create or open an Incident.
4. Change the Impact field.
5. Observe the configured field behavior.
6. Try saving the Incident.
7. Open the Incident list and test State editing.

The configured UI Policies and Client Scripts execute automatically based on their conditions.

4. Functional Documentation

4.1 High Impact Control

A UI Policy named High Impact Control is created for the Incident table.

Condition

Impact is 1 - High

Actions

- Assignment Group becomes mandatory.
- Urgency becomes read-only.

The Reverse if false option ensures that the field behavior is reversed when Impact is no longer High.

4.2 Automatic Urgency Update

An onChange Client Script is created for the Impact field. When Impact is changed to High, the script automatically sets Urgency to High.

4.3 Assigned To Validation

An onSubmit Client Script checks the Assigned To field before saving. If Impact is High and Assigned To is empty, the record is not saved and an error message is displayed.

4.4 State List Editing Restriction

An onCellEdit Client Script is created for the State field. When a user attempts to change State directly from the Incident list, the update is blocked and an alert message is displayed. State changes can still be performed from the Incident form.

5. Authentication

Authentication is handled by the ServiceNow platform. Users must log in to the ServiceNow instance before accessing Incident records. Access to configuration features such as UI Policies and Client Scripts depends on the user's ServiceNow roles and permissions.

The project does not implement a separate authentication system.

6. User Interface

The project uses the standard ServiceNow Incident interface. The Incident form allows users to create and update Incident records. The UI Policies and Client Scripts dynamically change the behavior of fields based on the Incident's Impact and user actions.

The main interface behaviors demonstrated are:

- Assignment Group becoming mandatory.
- Urgency becoming read-only.

- Urgency being automatically set to High.
- Error message when Assigned To is missing.
- State list editing being blocked.
- State form editing being allowed.

7. Known Issues

1. The project requires access to a configured ServiceNow instance.
2. The Client Scripts are configured specifically for the Incident table.
3. The State restriction applies to direct list editing.
4. State changes through the Incident form are allowed.
5. The implementation mainly uses client-side controls. Additional server-side validation may be required for integrations or other methods of creating records.

8. Future Enhancements

The project can be enhanced with the following features:

1. Server-side validation using Business Rules.
2. Automatic Incident assignment.
3. SLA integration based on Impact and Urgency.
4. Email notifications for High Impact Incidents.
5. Automatic Priority calculation.
6. Incident dashboards and reports.
7. Advanced validation for Category and Subcategory.
8. Automated routing of Incidents to appropriate Assignment Groups.

9. Conclusion

The ServiceNow Incident Management Automation project demonstrates how UI Policies and Client Scripts can be used to improve data quality and enforce business rules in Incident Management.

The project uses UI Policies to dynamically control field behavior and Client Scripts to automate values, validate records before submission, and restrict inappropriate list-based updates.

The implementation demonstrates the practical use of ServiceNow configuration and JavaScript to create a more controlled and consistent Incident management process.