

ASSIGNMENT 8

AIM: Department maintains a student information. the file contains roll number, name, division and address. Allow user to add, delete information of student. display information of particular employee. If record of student does not exist, an appropriate message is displayed. If it is, then the system displays the student details. use sequential file to maintain the data.

OBJECTIVE: To implement file handling and perform functions like insertion, deletion and display of record using sequential file.

THEORY: A **sequential file** is one that contains and stores data in chronological order. The data itself may be ordered or unordered in the file. Unlike a **random-access file**, sequential files must be read from the beginning, up to the location of the desired data. Sequential files are often stored on **sequential access** devices, like a magnetic tape.

A sequential file contains records organized by the order in which they were entered. The order of the records is fixed.

Records in sequential files can be read or written only sequentially.

After you place a record into a sequential file, you cannot shorten, lengthen, or delete the record. However, you can update a record if the length does not change. New records are added at the end of the file.

If the order in which you keep records in a file is not important, sequential organization is a good choice whether there are many records or only a few. Sequential output is also useful for printing reports.

ALGORITHM:

1.CREATE A FILE HAVING COLLECTION OF RECORDS

```
void Create()
{
    char ch='y';
    ofstream seqfile;
    seqfile.open("stud.DAT",ios::out|ios::binary);
    do
    {
        cout<<"\n Enter roll no: ";
        cin>>Records.rollno;
        seqfile.write((char*)&Records,sizeof(Records));
        cout<<"\nDo you want to add more records?";
        cin>>ch;
    }while(ch=='y');
    seqfile.close();
}
```

2.DISPLAY OF FILE

```
Void Display()
{
    ifstream seqfile;
    seqfile.open("stud.DAT",ios::in|ios::binary);
```

Skill Development Lab-II 2018-19

```
seqfile.seekg(0,ios::beg);
cout<<"\n The Contents of file are ..."<<endl;
while(seqfile.read((char *)&Records,sizeof(Records)))
{
    if(Records.rollno!=-1)
    {
        cout<<"\nRoll No: "<<Records.rollno;
    }
}
seqfile.close();
}
```

3.SEARCHING A RECORD

```
int :Search()
{
    fstream seqfile;
    int id,pos,offset;
    cout<<"\n Enter the no for searching the record ";
    cin>>id;
    seqfile.open("stud.DAT",ios::in|ios::binary);
    pos=-1;
    seqfile.seekg(0,ios::beg);
    int i=0;
    while(seqfile.read((char *)&Records,sizeof(Records)))
```

```
{
    if(id==Records.rollno)
    {
        pos=i;
        break;
    }
    i++;
}
seqfile.close();
return pos;
}
```

4.DELETION OF RECORD:-

```
void deletion()
{
    int id,pos;
    cout<<"For deletion"<<endl;
    fstream seqfile;
    pos=Search();
    seqfile.open("stud.DAT",ios::in|ios::binary|ios::out);
    seqfile.seekg(0,ios::beg);
    if(pos==-1)
    {
        cout<<"\n Record is not present in the file";
    }
}
```

Skill Development Lab-II 2018-19

```
        return;
    }
    int offset=pos*sizeof(Records);
    seqfile.seekp(offset);
    Records.rollno=-1;
    seqfile.write((char *)&Records,sizeof(Records));
    seqfile.seekg(0);
    seqfile.close();
}
```

#endif // SDASSIGNMENT8_CPP_INCLUDED

PROGRAM:

```
#include<iostream>
#include<fstream>
#include<string.h>
using namespace std;
typedef struct data
{
    char name[10];
```

Skill Development Lab-II 2018-19

```
int rollno;
char div;
char address[100];
}Rec;
class student
{

    Rec Records;
public:
    void Create();
    void Display();
    int Search();
    void deletion();
};

void student::Create()
{
    char ch='y';
    ofstream seqfile;
    seqfile.open("stud.DAT",ios::out|ios::binary);
    do
    {
        cout<<"\n Enter Name: ";
```

Skill Development Lab-II 2018-19

```
    cin>>Records.name;
    cout<<"\n Enter roll no: ";
    cin>>Records.rollno;
    cout<<"\n Enter division";
    cin>>Records.div;
    cout<<"\n Enter ADDRESS: ";
    cin>>Records.address;
    seqfile.write((char*)&Records,sizeof(Records));
    cout<<"\nDo you want to add more records?";
    cin>>ch;
    }while(ch=='y');
    seqfile.close();
}

void student::Display()
{
    ifstream seqfile;
    seqfile.open("stud.DAT",ios::in|ios::binary);
    seqfile.seekg(0,ios::beg);
    cout<<"\n The Contents of file are ..."<<endl;
    while(seqfile.read((char *)&Records,sizeof(Records)))
    {
        if(Records.rollno!=-1)
        {
```

Skill Development Lab-II 2018-19

```
        cout<<"\nName: "<<Records.name<<flush;
        cout<<"\nRoll No: "<<Records.rollno;
        cout<<"\nDivision : "<<Records.div;
        cout<<"\nAddress: "<<Records.address;
        cout<<"\n";
    }
}
seqfile.close();
}
int student::Search()
{
    fstream seqfile;
    int id,pos,offset;
    cout<<"\n Enter the roll no for searching the record ";
    cin>>id;
    seqfile.open("stud.DAT",ios::in|ios::binary);
    pos=-1;
    seqfile.seekg(0,ios::beg);
    int i=0;
    while(seqfile.read((char *)&Records,sizeof(Records)))
    {
        if(id==Records.rollno)
        {
```


Skill Development Lab-II 2018-19

```
        pos=i;
        break;
    }
    i++;
}
seqfile.close();
return pos;
}
void student::deletion()
{
    int id,pos;
    cout<<"For deletion"<<endl;
    fstream seqfile;
    pos=Search();
    seqfile.open("stud.DAT",ios::in|ios::binary|ios::out);
    seqfile.seekg(0,ios::beg);
    if(pos==-1)
    {
        cout<<"\n Record is not present in the file";
        return;
    }
    int offset=pos*sizeof(Records);
    seqfile.seekp(offset);
```

Skill Development Lab-II 2018-19

```
strcpy(Records.name,"");
Records.rollno=-1;
Records.div=-1;
strcpy(Records.address,"");
seqfile.write((char *)&Records,sizeof(Records));
seqfile.seekg(0);
seqfile.close();

}

int main()
{
student e;
char ans='y';
int choice,key;
int h=0;
do
{
    cout<<"1.Create"<<endl;
    cout<<"2.Display"<<endl;
    cout<<"3.Search"<<endl;
    cout<<"4.Delete"<<endl;
    cout<<"Enter your choice"<<endl;
    cin>>choice;
```

Skill Development Lab-II 2018-19


```
switch(choice)
{
case 1:
    e.Create();
    break;
case 2:
    e.Display();
    break;
case 3:
    h=e.Search();
    if(h<0)
        cout<<"\n Student not present in file"<<endl;
    else
        cout<<"\n Student is present in file"<<endl;
    break;
case 4:
    e.deletion();
    break;
}
cout<<"Do you want to continue"<<endl;
cin>>ans;

}while (ans=='y');
return 0;
```

Skill Development Lab-II 2018-19


```
}
```

OUTPUT:-

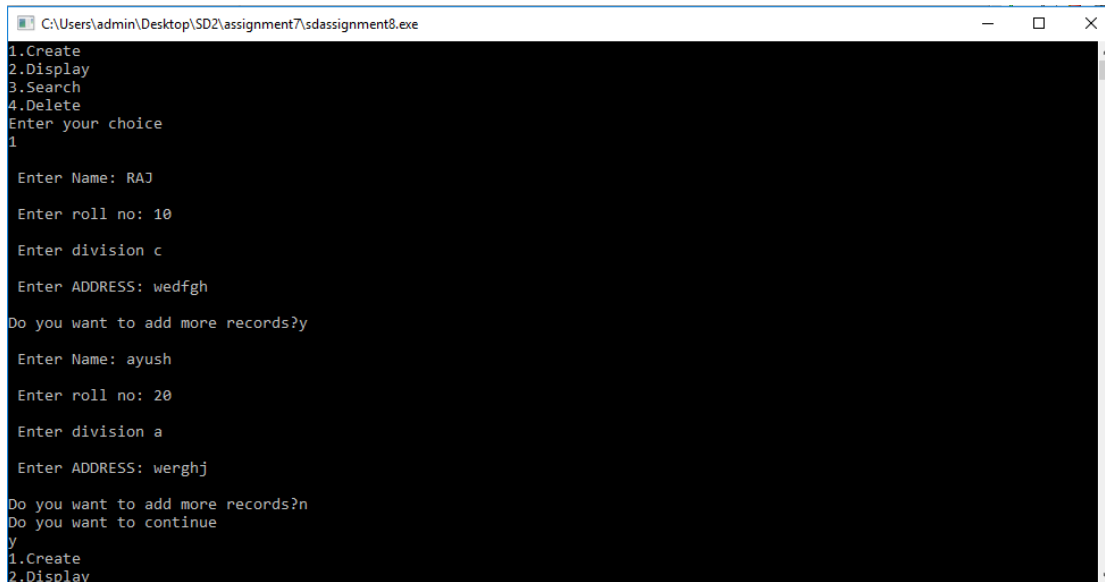

```
C:\Users\admin\Desktop\SD2\assignment7\sdassignment8.exe
1.Create
2.Display
3.Search
4.Delete
Enter your choice
1

Enter Name: RAJ
Enter roll no: 10
Enter division c
Enter ADDRESS: wedfgh
Do you want to add more records?y
Enter Name: ayush
Enter roll no: 20
Enter division a
Enter ADDRESS: werghj
Do you want to add more records?n
Do you want to continue
y
1.Create
2.Display
```

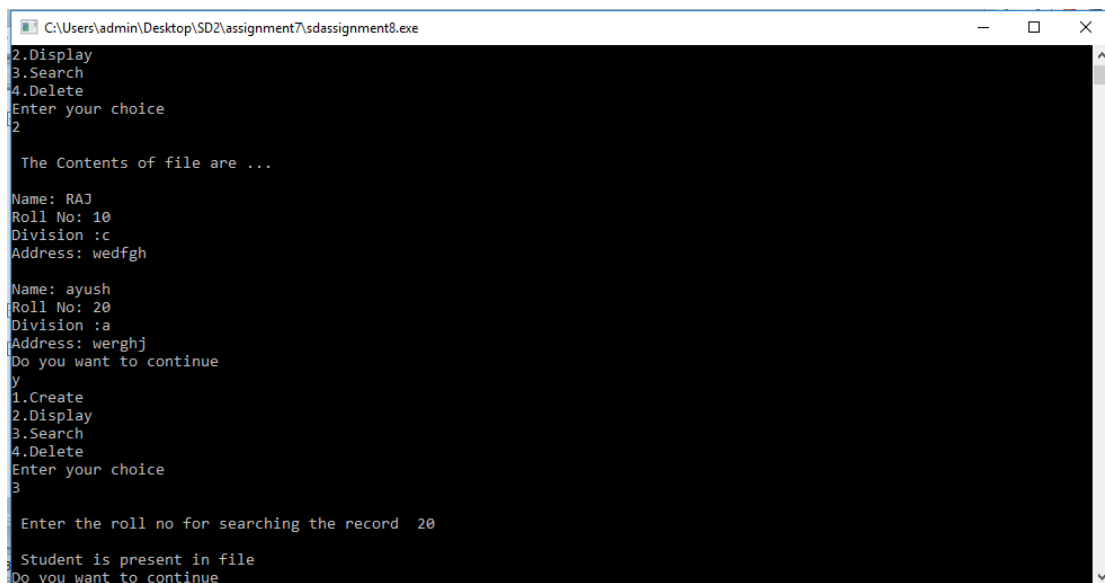


```
C:\Users\admin\Desktop\SD2\assignment7\sdassignment8.exe
2.Display
3.Search
4.Delete
Enter your choice
2

The Contents of file are ...
Name: RAJ
Roll No: 10
Division :c
Address: wedfgh
Name: ayush
Roll No: 20
Division :a
Address: werghj
Do you want to continue
y
1.Create
2.Display
3.Search
4.Delete
Enter your choice
3

Enter the roll no for searching the record 20
Student is present in file
Do you want to continue
```

Skill Development Lab-II 2018-19

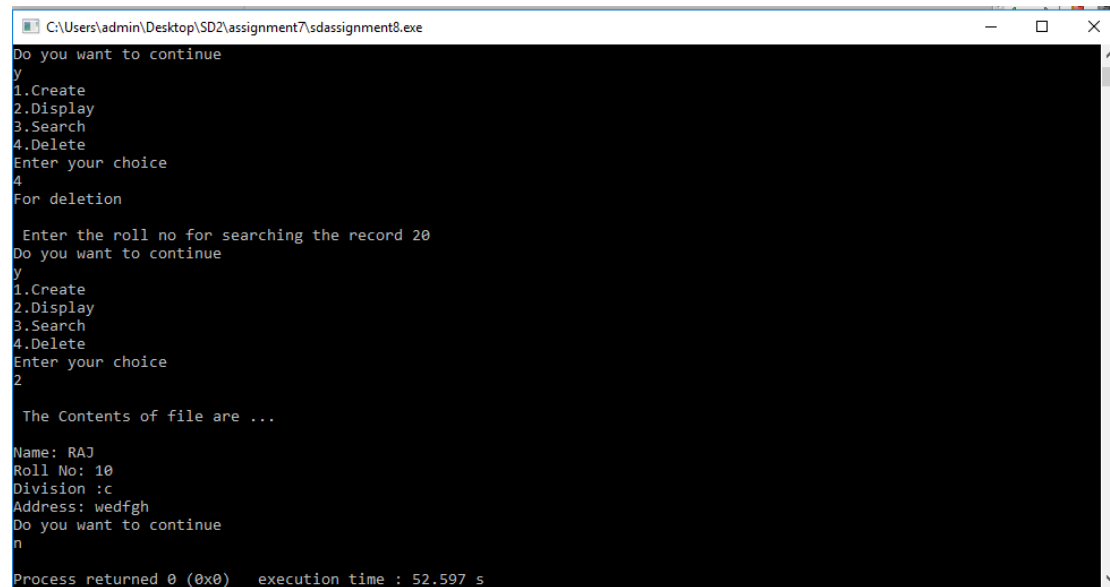

```
C:\Users\admin\Desktop\SD2\assignment7\sdassignment8.exe
Do you want to continue
y
1.Create
2.Display
3.Search
4.Delete
Enter your choice
4
For deletion
Enter the roll no for searching the record 20
Do you want to continue
y
1.Create
2.Display
3.Search
4.Delete
Enter your choice
2
The Contents of file are ...
Name: RAJ
Roll No: 10
Division :c
Address: wedfgh
Do you want to continue
n
Process returned 0 (0x0)   execution time : 52.597 s
```

CONCLUSION: We have successfully implemented file handling and performed functions like insertion, deletion and display of record using sequential file.