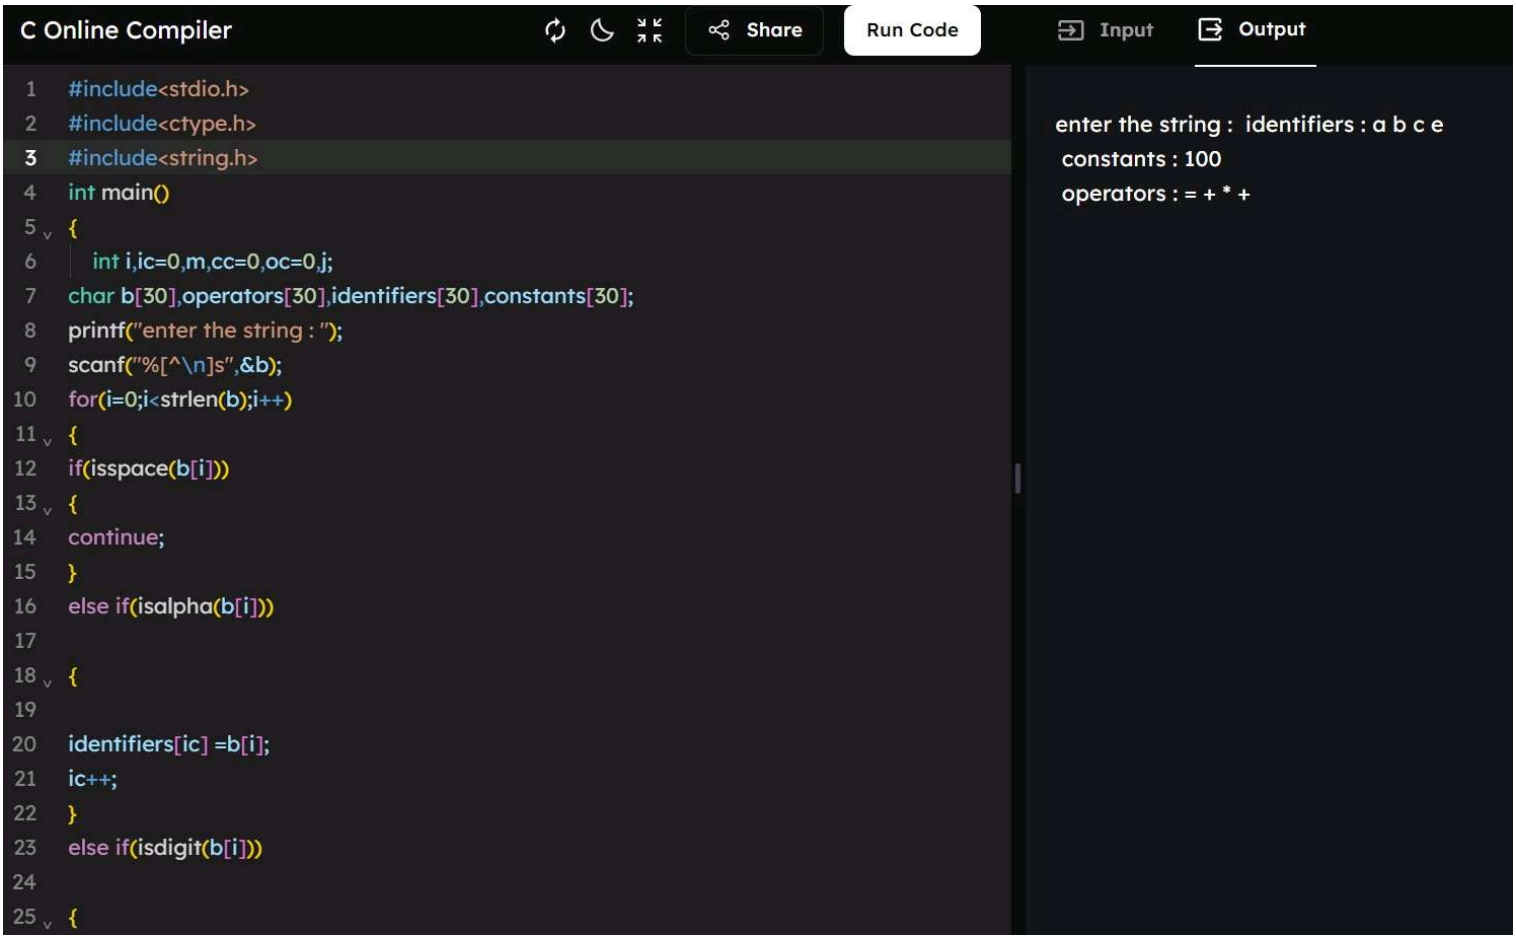

C Online Compiler
Share
Run Code
Input
Output
#include<stdio.h>
#include<ctype.h>
#include<string.h>
int main()
{
int i,ic=0,m,cc=0,oc=0,j;
char b[30],operators[30],identifiers[30],constants[30];
printf("enter the string : ");
scanf("%[^\n]s",&b);
for(i=0;i<strlen(b);i++)
{
if(isspace(b[i]))
{
continue;
}
else if(isalpha(b[i]))
{
identifiers[ic] =b[i];
ic++;
}
else if(isdigit(b[i]))
{
enter the string : identifiers : a b c e
constants : 100
operators : = + * +

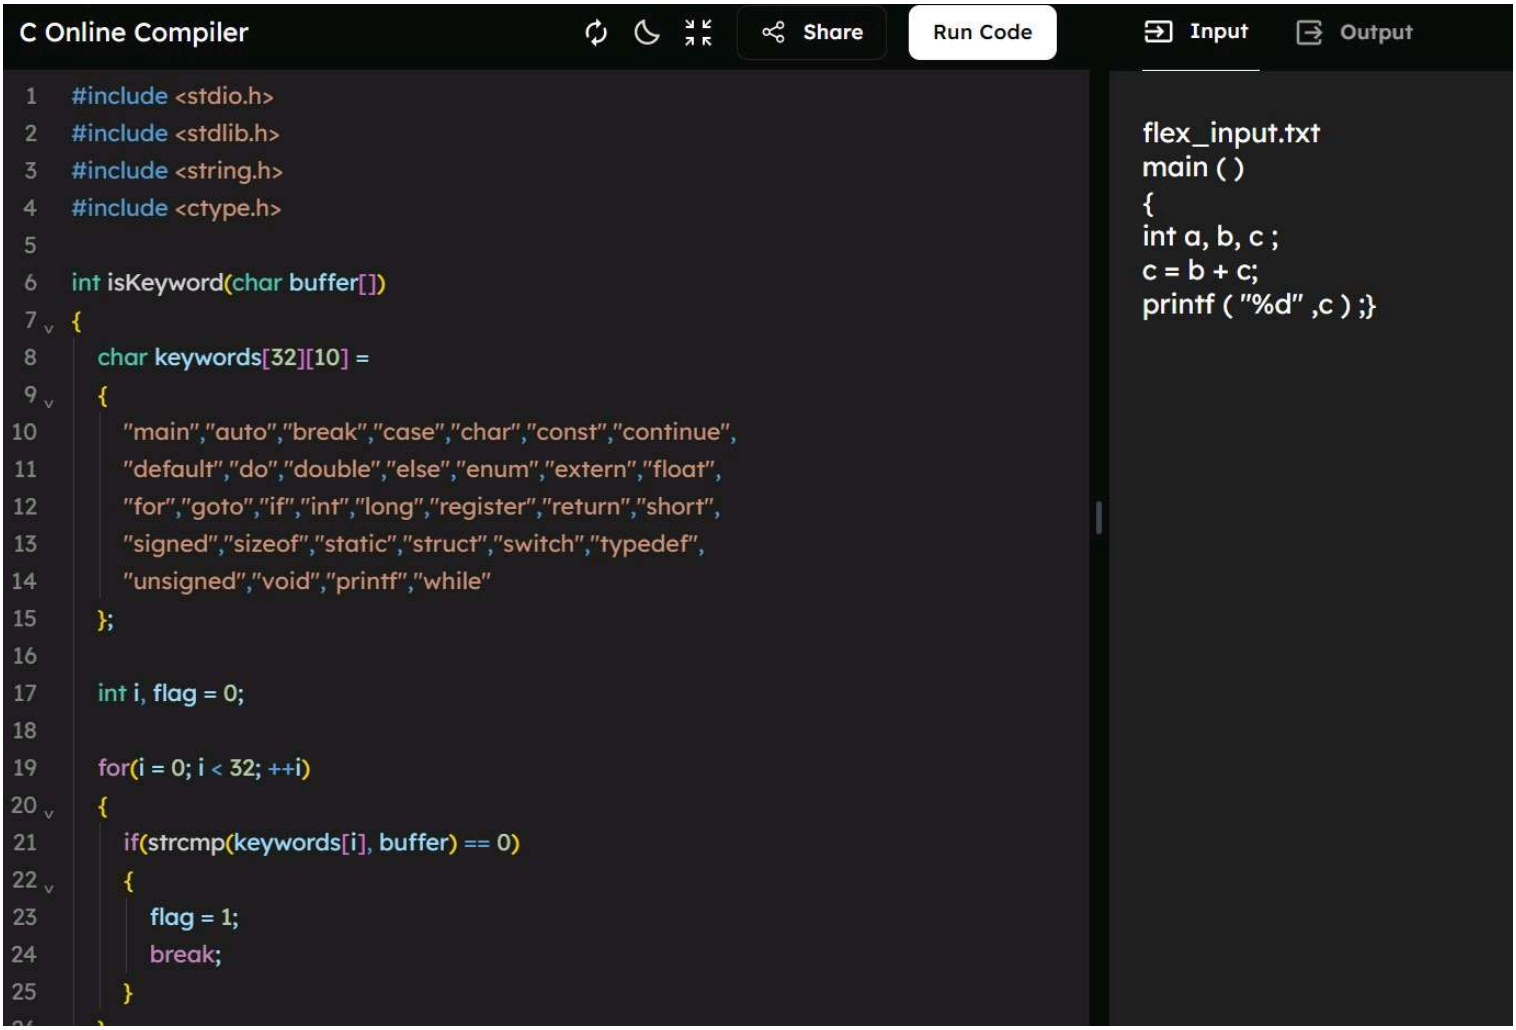
C Online Compiler

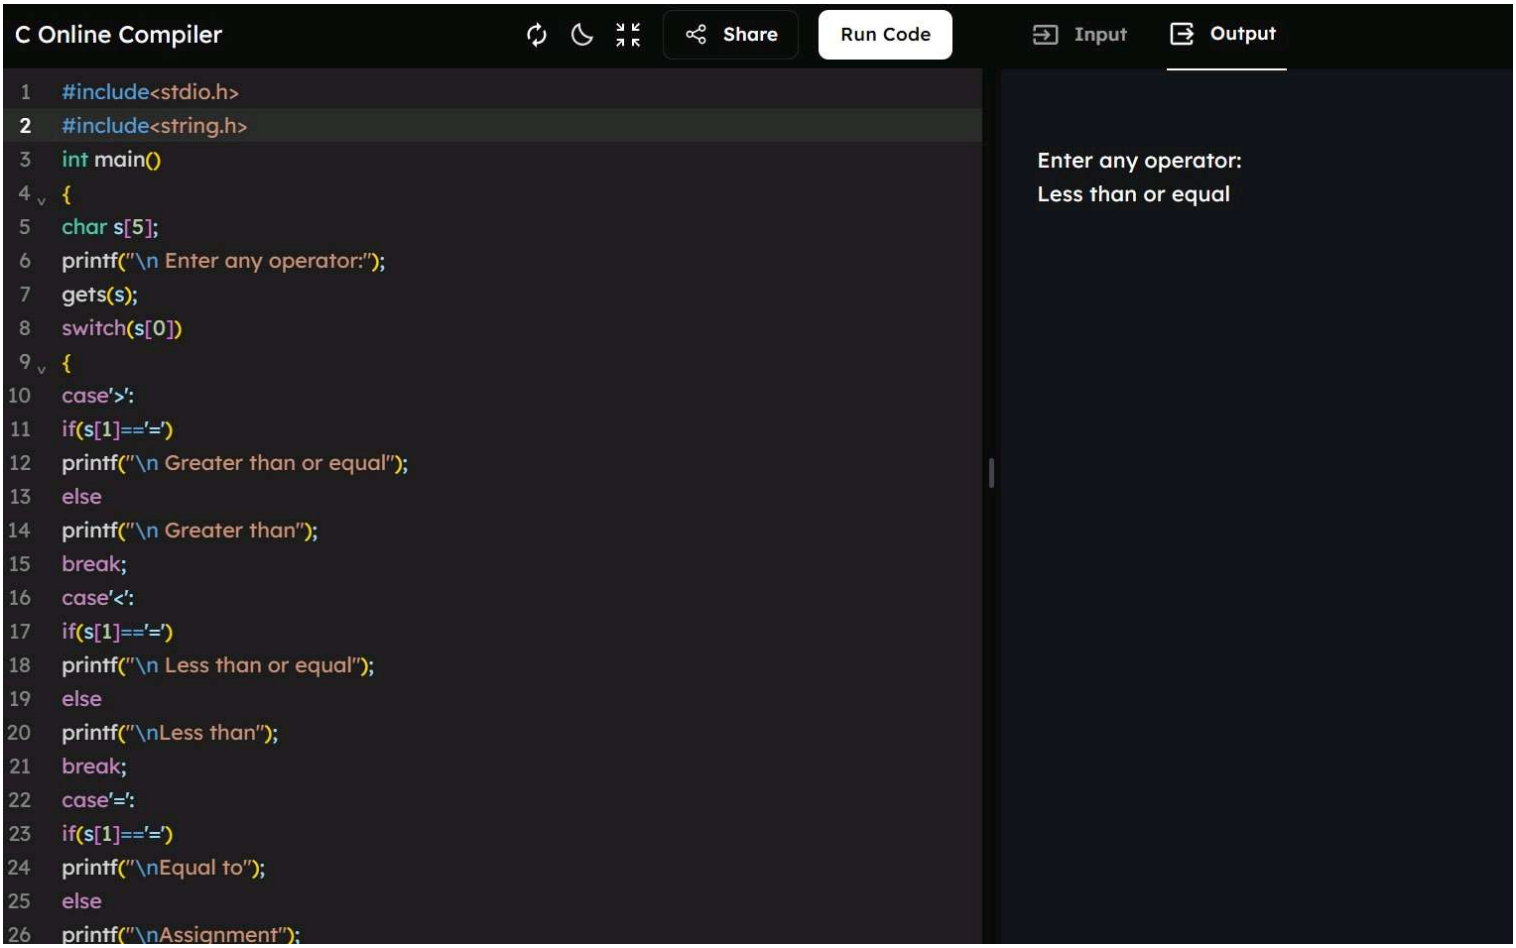
Share | Run Code | Input | Output

```c
#include<stdio.h>
#include<string.h>
int main()
{
char com[30];
int i=2,a=0;
printf("\n Enter comment:");
gets(com);
if(com[0]=='/')
{
if(com[1]=='/')
printf("\n It is a comment");
else if(com[1]=='*')
{
for(i=2;i<=30;i++)
{
if(com[i]=='*'&&com[i+1]=='/')
{
printf("\n It is a comment");
a=1;
break;
}
else
continue;

}
```

```
Enter comment:
It is not a comment
```


C Online Compiler
Share
Run Code
Input
Output
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <ctype.h>
int isKeyword(char buffer[])
{
char keywords[32][10] =
{
"main","auto","break","case","char","const","continue",
"default","do","double","else","enum","extern","float",
"for","goto","if","int","long","register","return","short",
"signed","sizeof","static","struct","switch","typedef",
"unsigned","void","printf","while"
};
int i, flag = 0;
for(i = 0; i < 32; ++i)
{
if(strcmp(keywords[i], buffer) == 0)
{
flag = 1;
break;
}
flex_input.txt
main ( )
{
int a, b, c ;
c = b + c;
printf ("%d" ,c) ;}


C Online Compiler
Share
Run Code
Input
Output
#include<stdio.h>
#include<string.h>
int main()
{
char s[5];
printf("\n Enter any operator:");
gets(s);
switch(s[0])
{
case'>':
if(s[1]=='=')
printf("\n Greater than or equal");
else
printf("\n Greater than");
break;
case'<':
if(s[1]=='=')
printf("\n Less than or equal");
else
printf("\nLess than");
break;
case'=':
if(s[1]=='=')
printf("\nEqual to");
else
printf("\nAssignment");
Enter any operator:
Less than or equal

C Online Compiler

Share | Run Code | Input | Output

```c
#include <stdio.h>

int main() {
char str[100];
int words = 0, lines = 0, characters = 0;
printf("Enter text (up to 100 characters, use ~ to end):\n");
scanf("%[^~]", str);
for (int i = 0; str[i] != '\0'; i++) {
if (str[i] == ' ' || str[i] == '\t') {
words++;
} else if (str[i] == '\n') {
lines++;
} else {
characters++;
}
}
// Check for an empty input
if (characters > 0) {
words++; // If there are characters, there is at least one word
lines++; // If there are characters, there is at least one line
}
printf("Total number of words: %d\n", words);
printf("Total number of lines: %d\n", lines);
printf("Total number of characters: %d\n", characters);

return 0;
```

```
Enter text (up to 100 characters, use ~ to end):
Total number of words: 12
Total number of lines: 7
Total number of characters: 34
```