Practical No.1:- Identify the basic structure of ASP.net and Web page models.

WebForm1.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="WebForm1.aspx.cs" Inherits="WebApplication4.WebForm1" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title>ASP.NET Basic Structure</title>

</head>

<body>

<form id="form1" runat="server">

<div>

<h2>Welcome to ASP.NET Web Page Model</h2>

<asp:Label ID="Label1" runat="server" Text="Enter Your Name:"></asp:Label>

<br /><br />

<asp:TextBox ID="TextBox1" runat="server"></asp:TextBox> <br /><br />

<asp:Button ID="Button1" runat="server" Text="Submit" OnClick="Button1_Click"/><br /><br />

<asp:Label ID="Label2" runat="server"></asp:Label>

</div>

</form>

</body>

</html>
```

WebForm1.aspx.cs(code behind)

```
using System;

using System.Collections.Generic;

using System.Linq;

using System.Web;

using System.Web.UI;
```

```
using System.Web.UI.WebControls;

namespace WebApplication4

{

public partial class WebForm1 : System.Web.UI.Page

{

protected void Page_Load(object sender, EventArgs e)

{

}

protected void Button1_Click(object sender, EventArgs e)

{

Label2.Text = "Hello " + TextBox1.Text + ", Welcome to ASP.NET!";}

}

}
```

OUTPUT:-

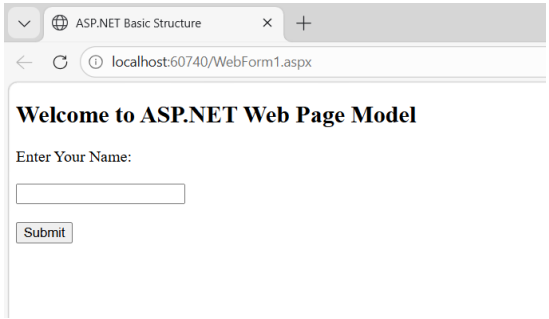

Practical No.2:- Describe the uses of different types of asp.net controls.

WebForm1.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="WebForm1.aspx.cs" Inherits="WebApplication5.WebForm1" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title>ASP.NET Controls Example</title>

</head>

<body>

<form id="form1" runat="server">

<div>

<h2>ASP.NET Controls Demonstration</h2>

<asp:Label ID="lblName" runat="server" Text="Enter Name:"></asp:Label>

<asp:TextBox ID="txtName" runat="server"></asp:TextBox> <br /><br />

<asp:CheckBox ID="chkStudent" runat="server" Text="Are you a Student?" />

<br /><br />

Gender:

<asp:RadioButton ID="rbMale" runat="server" GroupName="Gender" Text="Male" />

<asp:RadioButton ID="rbFemale" runat="server" GroupName="Gender" Text="Female" />
<br /><br />

Select Course:

<asp:DropDownList ID="ddlCourse" runat="server">

<asp:ListItem>BCA</asp:ListItem>

<asp:ListItem>BBA</asp:ListItem>

<asp:ListItem>MCA</asp:ListItem>

</asp:DropDownList> <br /><br />

<asp:Button ID="btnSubmit" runat="server" Text="Submit" OnClick="btnSubmit_Click" />
```

```
<br /><br />
<asp:Label ID="lblResult" runat="server"></asp:Label>
</div>
</form>
</body>
</html>
```

WebForm1.aspx.cs(code behind)

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
namespace WebApplication5
{
public partial class WebForm1 : System.Web.UI.Page
{
protected void Page_Load(object sender, EventArgs e)
{
}
protected void btnSubmit_Click(object sender, EventArgs e)
{
string name = txtName.Text;
string gender = "";
if (rbMale.Checked)
gender = "Male";
else if (rbFemale.Checked)
```

```
gender = "Female";

string course = ddlCourse.SelectedItem.Text;

lblResult.Text = "Name: " + name +

"<br/>Gender: " + gender +

"<br/>Course: " + course;

}

}

}
```

OUTPUT:-

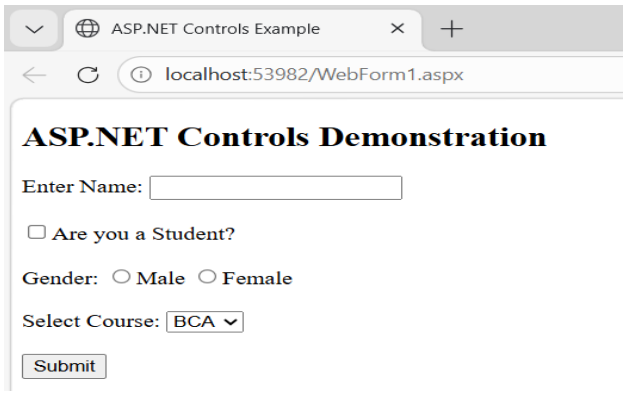

Practical No.3:- Illustrate the different types of intrinsic object and state management techniques.

Demo.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Demo.aspx.cs" Inherits="_03_Intrinsic_Object_State_Management.Demo" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title>Intrinsic Objects & State Management</title>

</head>

<body>

<form id="form1" runat="server">

<h2>ASP.NET Intrinsic Objects & State Management</h2>

Name:

<asp:TextBox ID="txtName" runat="server"></asp:TextBox>  <br /><br />

<asp:Button ID="btnSubmit" runat="server" Text="Submit"

OnClick="btnSubmit_Click" /> <br /><br />

<asp:Label ID="lblResult" runat="server" Font-Bold="true"></asp:Label>

</form>

</body>

</html>
```

Demo.aspx.cs(code behind)

```
using System;

using System.Collections.Generic;

using System.Linq;

using System.Web;

using System.Web.UI;

using System.Web.UI.WebControls;
```

```
namespace _03_Intrinsic_Object_State_Management
{
public partial class Demo : System.Web.UI.Page
{
protected void Page_Load(object sender, EventArgs e)
{
if (Application["Count"] == null)
Application["Count"] = 0;
Application["Count"] = (int)Application["Count"] + 1;
if (!IsPostBack)
ViewState["Visits"] = 0;
}
protected void btnSubmit_Click(object sender, EventArgs e)
{
string name = txtName.Text;
Session["UserName"] = name;
ViewState["Visits"] = (int)ViewState["Visits"] + 1;
Response.Cookies["UserName"].Value = name;
lblResult.Text =
"Name (Request): " + name + "<br/>" +
"Session Value: " + Session["UserName"] + "<br/>" +
"Application Count: " + Application["Count"] + "<br/>" +
"ViewState Count: " + ViewState["Visits"];
}
}
}
```

OUTPUT:-

Intrinsic Objects & State Managem
localhost:53507/Demo.aspx
ASP.NET Intrinsic Objects & State Management
Name:
Submit

Practical No.4:- Explain the uses of web designing controls, and ado.net controls.

(Web designing controls)

WebForm1.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="WebForm1.aspx.cs" Inherits="WebApplication5.WebForm1" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title>ASP.NET Controls Example</title>

</head>

<body>

<form id="form1" runat="server">

<div>

<h2>ASP.NET Controls Demonstration</h2>

<asp:Label ID="lblName" runat="server" Text="Enter Name:"></asp:Label>

<asp:TextBox ID="txtName" runat="server"></asp:TextBox>   <br /><br />

<asp:CheckBox ID="chkStudent" runat="server" Text="Are you a Student?" />

<br /><br />

Gender:

<asp:RadioButton ID="rbMale" runat="server" GroupName="Gender" Text="Male" />

<asp:RadioButton ID="rbFemale" runat="server" GroupName="Gender" Text="Female" />
<br /><br />

Select Course:

<asp:DropDownList ID="ddlCourse" runat="server">

<asp:ListItem>BCA</asp:ListItem>

<asp:ListItem>BBA</asp:ListItem>

<asp:ListItem>MCA</asp:ListItem>

</asp:DropDownList>   <br /><br />
```

```
<asp:Button ID="btnSubmit" runat="server" Text="Submit" OnClick="btnSubmit_Click" />
<br /><br />
<asp:Label ID="lblResult" runat="server"></asp:Label>
</div>
</form>
</body>
</html>
```

WebForm1.aspx.cs(code behind)

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
namespace WebApplication5
{
public partial class WebForm1 : System.Web.UI.Page
{
protected void Page_Load(object sender, EventArgs e)
{
}
protected void btnSubmit_Click(object sender, EventArgs e)
{
string name = txtName.Text;
string gender = "";
if (rbMale.Checked)
gender = "Male";
```

```
else if (rbFemale.Checked)

gender = "Female";

string course = ddlCourse.SelectedItem.Text;

lblResult.Text = "Name: " + name +

"<br/>Gender: " + gender +

"<br/>Course: " + course;

}

}

}
```

OUTPUT:-

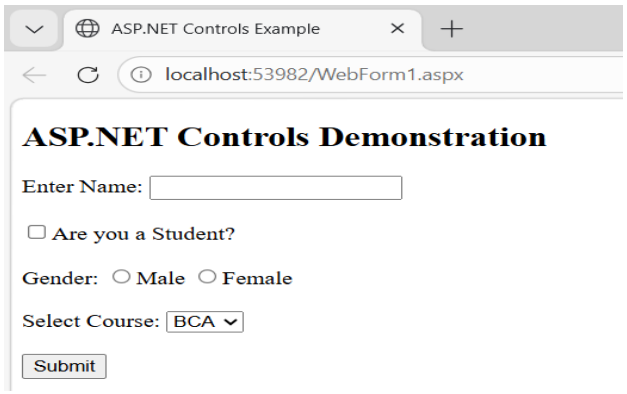

(ado.net controls)

Default.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Default.aspx.cs" Inherits="_18_Grid_View_Demo.Default" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title>GridView Data Binding using ADO.NET</title>

</head>

<body>

<form id="form1" runat="server">
```

```
<h2>Employee Details</h2>
<asp:GridView ID="GridView1" runat="server"
AutoGenerateColumns="False"
BorderWidth="2"
CellPadding="5">
<Columns>
<asp:BoundField DataField="EmpId" HeaderText="Employee ID" />
<asp:BoundField DataField="EmpName" HeaderText="Employee Name" />
<asp:BoundField DataField="Salary" HeaderText="Salary" />
<asp:BoundField DataField="Department" HeaderText="Department" />
</Columns>
</asp:GridView>
</form>
</body>
</html>
```

Web.config

```
<?xml version="1.0" encoding="utf-8"?>
<!--  For more information on how to configure your ASP.NET application, please visit
https://go.microsoft.com/fwlink/?LinkId=169433  -->
<configuration>
<connectionStrings>
<add name="cs"
connectionString="Data Source=JUNAID\SQLEXPRESS;
Initial Catalog=EmployeeDB;Integrated Security=True"
providerName="System.Data.SqlClient"/>
</connectionStrings>
<system.web>
```

```
<compilation debug="true" targetFramework="4.7.2" />

<httpRuntime targetFramework="4.7.2" />

</system.web>

<system.codedom>

<compilers>

<compiler language="c#;cs;csharp" extension=".cs" type="Microsoft.CodeDom.Providers.DotNetCompilerPlatform.CSharpCodeProvider, Microsoft.CodeDom.Providers.DotNetCompilerPlatform, Version=2.0.1.0, Culture=neutral, PublicKeyToken=31bf3856ad364e35" warningLevel="4" compilerOptions="/langversion:default /nowarn:1659;1699;1701" />

<compiler language="vb;vbs;visualbasic;vbscript" extension=".vb" type="Microsoft.CodeDom.Providers.DotNetCompilerPlatform.VBCodeProvider, Microsoft.CodeDom.Providers.DotNetCompilerPlatform, Version=2.0.1.0, Culture=neutral, PublicKeyToken=31bf3856ad364e35" warningLevel="4" compilerOptions="/langversion:default /nowarn:41008 /define:_MYTYPE=\&quot;Web\&quot; /optionInfer+" />

</compilers>

</system.codedom>

</configuration>
```

OUTPUT:-

localhost:61705/Default.aspx

Employee Details

Employee ID	Employee Name	Salary	Department
1	Ali	25000.00	HR
2	Sara	30000.00	IT
3	John	40000.00	Finance

Practical No.5:- Evaluate the basic security and configuration controls.

Login.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Login.aspx.cs" Inherits="_05_Basic_Security_Configuration.Login" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title>Security Login</title>

</head>

<body>

<form id="form1" runat="server">

<h2>Login Page</h2>

Username:

<asp:TextBox ID="txtUser" runat="server"></asp:TextBox><br />  <br />

Password:

<asp:TextBox ID="txtPass" runat="server" TextMode="Password"></asp:TextBox><br/>

<br />

<asp:Button ID="btnLogin" runat="server" Text="Login" OnClick="btnLogin_Click" /><br />

<br />

<asp:Label ID="lblMsg" runat="server"></asp:Label>

</form>

</body>

</html>
```

Login.aspx.cs

```
using System;

using System.Collections.Generic;

using System.Linq;
```

```
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
namespace _05_Basic_Security_Configuration
{
public partial class Login : System.Web.UI.Page
{
protected void Page_Load(object sender, EventArgs e)
{
}
protected void btnLogin_Click(object sender, EventArgs e)
{
if (txtUser.Text == "admin" && txtPass.Text == "123")
{
Session["User"] = txtUser.Text;
Response.Redirect("Home.aspx");
}
else
{
lblMsg.Text = "Invalid Username or Password!";
}
}
}
}
```

Home.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Home.aspx.cs" Inherits="_05_Basic_Security_Configuration.Home" %>
```

```
<!DOCTYPE html>
<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
<title>Secure Page</title>
</head>
<body>
<form id="form1" runat="server">
<h2>Welcome to Secure Page</h2>
<asp:Label ID="lblUser" runat="server"></asp:Label><br />  <br />
<asp:Button ID="btnLogout" runat="server" Text="Logout" OnClick="btnLogout_Click" />
</form>
</body>
</html>
```

Home.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
namespace _05_Basic_Security_Configuration
{
public partial class Home : System.Web.UI.Page
{
protected void Page_Load(object sender, EventArgs e)
{
if (Session["User"] == null)
```

```
{
Response.Redirect("Login.aspx");
}
else
{
lblUser.Text = "Logged in as: " + Session["User"].ToString();
}
}
protected void btnLogout_Click(object sender, EventArgs e)
{
Session.Abandon();
Response.Redirect("Login.aspx");
}
}
}
```

Web.config

```
<?xml version="1.0" encoding="utf-8"?>
<!--  For more information on how to configure your ASP.NET application, please visit
https://go.microsoft.com/fwlink/?LinkId=169433 -->
<configuration>
<system.web>
<!-- Authentication Control -->
<authentication mode="Forms">
<forms loginUrl="Login.aspx" timeout="30"/>
</authentication>
<!-- Authorization Control -->
```

```
<authorization>

<deny users="admin" />

</authorization>

<!-- Session Configuration -->

<sessionState timeout="20"></sessionState>

<!-- Custom Error Handling -->

<customErrors mode="On" defaultRedirect="Error.aspx"/>

<compilation debug="true" targetFramework="4.7.2" />

<httpRuntime targetFramework="4.7.2" />

</system.web>

<system.codedom>

<compilers>

<compiler language="c#;cs;csharp" extension=".cs" type="Microsoft.CodeDom.Providers.DotNetCompilerPlatform.CSharpCodeProvider, Microsoft.CodeDom.Providers.DotNetCompilerPlatform, Version=2.0.1.0, Culture=neutral, PublicKeyToken=31bf3856ad364e35" warningLevel="4" compilerOptions="/langversion:default /nowarn:1659;1699;1701" />

<compiler language="vb;vbs;visualbasic;vbscript" extension=".vb" type="Microsoft.CodeDom.Providers.DotNetCompilerPlatform.VBCodeProvider, Microsoft.CodeDom.Providers.DotNetCompilerPlatform, Version=2.0.1.0, Culture=neutral, PublicKeyToken=31bf3856ad364e35" warningLevel="4" compilerOptions="/langversion:default /nowarn:41008 /define:_MYTYPE=\&quot;Web\&quot; /optionInfer+" />

</compilers>

</system.codedom>

</configuration>
```

OUTPUT:-

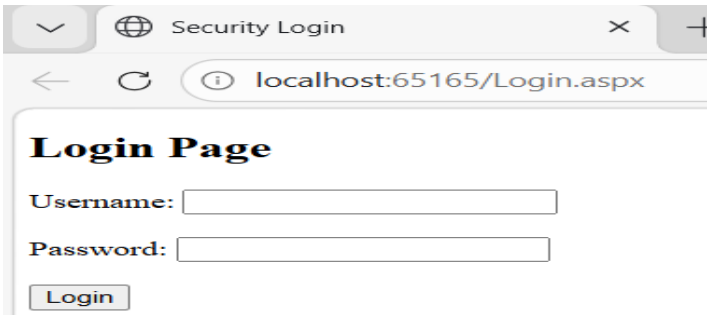

Practical No.6:- Write an ASP .NET program that demonstrates use view state, session state, and application state.

WebForm1.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeFile="StateDemo.aspx.cs" Inherits="StateDemo" %>

<!DOCTYPE html>

<html>

<head runat="server">

   <title>State Management Demo</title>

</head>

<body>

   <form id="form1" runat="server">

      <div>

         <h2>View State Example</h2>

         <asp:Label ID="lblView" runat="server" Text="0"></asp:Label><br />

         <asp:Button ID="btnView" runat="server" Text="Increase View State"

            OnClick="btnView_Click" /><br /><br />

         <h2>Session State Example</h2>

         <asp:Label ID="lblSession" runat="server" Text="0"></asp:Label><br />

         <asp:Button ID="btnSession" runat="server" Text="Increase Session"

            OnClick="btnSession_Click" /><br /><br />

         <h2>Application State Example</h2>

         <asp:Label ID="lblApp" runat="server" Text="0"></asp:Label><br />

         <asp:Button ID="btnApp" runat="server" Text="Increase Application"

            OnClick="btnApp_Click" /><br />

      </div>

   </form>

</body>
```

```
</html>
```

WebForm1.aspx.cs(code behind)

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
public partial class StateDemo : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {
        if (ViewState["count"] == null)
        {
            ViewState["count"] = 0;
        }
        if (Session["sessionCount"] == null)
        {
            Session["sessionCount"] = 0;
        }
        if (Application["appCount"] == null)
        {
            Application["appCount"] = 0;
        }
        lblView.Text = ViewState["count"].ToString();
        lblSession.Text = Session["sessionCount"].ToString();
        lblApp.Text = Application["appCount"].ToString();
```

```
    }
    protected void btnView_Click(object sender, EventArgs e)
    {
        int count = (int)ViewState["count"];
        count++;
        ViewState["count"] = count;
        lblView.Text = count.ToString();
    }
    protected void btnSession_Click(object sender, EventArgs e)
    {
        int count = (int)Session["sessionCount"];
        count++;
        Session["sessionCount"] = count;
        lblSession.Text = count.ToString();
    }
    protected void btnApp_Click(object sender, EventArgs e)
    {
        Application.Lock();
        int count = (int)Application["appCount"];
        count++;
        Application["appCount"] = count;
        Application.UnLock();
        lblApp.Text = count.ToString();
    }
}
```

OUTPUT:-

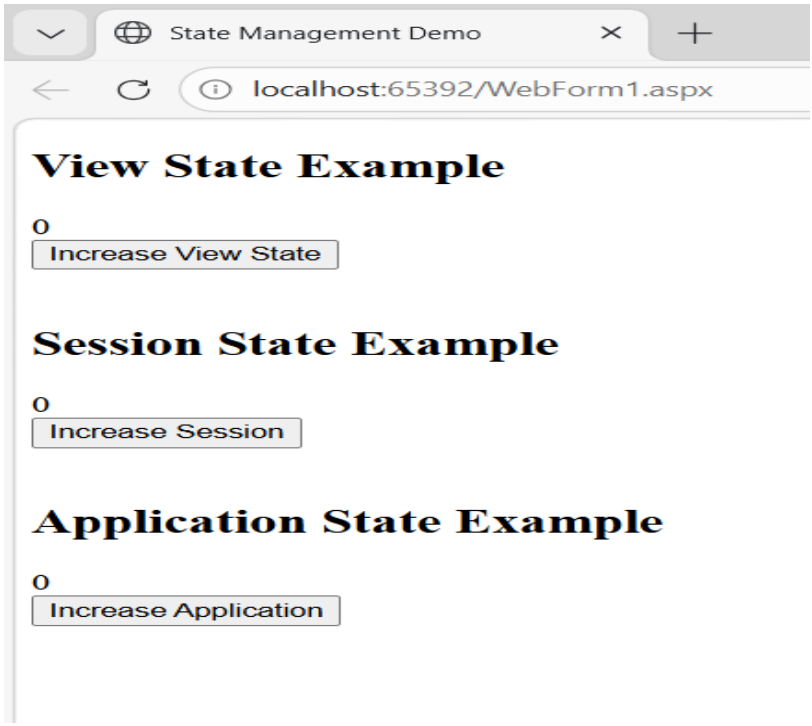
State Management Demo
localhost:65392/WebForm1.aspx
View State Example
0
Increase View State
Session State Example
0
Increase Session
Application State Example
0
Increase Application

Practical No.7:- Write an ASP .NET program that demonstrates use of Master Page.

Site1.master

```
<%@ Master Language="C#" AutoEventWireup="true" CodeBehind="Site1.master.cs" Inherits="_07_Master_Page.Site1" %>

<!DOCTYPE html>

<html>

<head runat="server">

<title></title>

<asp:ContentPlaceHolder ID="head" runat="server">

</asp:ContentPlaceHolder>

</head>

<body>

<form id="form1" runat="server">

<div style="background-color:darkblue; color:white; padding:15px;">

<h2>Raisoni WebSite</h2>

</div>

<div style="background-color:lightgray; padding:10px;">

<asp:HyperLink ID="lnkHome" runat="server" NavigateUrl="Home.aspx">

Home

</asp:HyperLink> |

<asp:HyperLink ID="lnkAbout" runat="server" NavigateUrl="About.aspx">

About

</asp:HyperLink>

</div>

<div style="padding:20px;">

<asp:ContentPlaceHolderID="ContentPlaceHolder1"runat="server"></asp:ContentPlaceHolder>

</div>

<div style="background-color:darkblue; color:white; padding:10px; text-align:center;">
```

© 2026 GHRCEM, Jalgaon

```
</div>

</form>

</body>

</html>
```

Home.aspx

```
<%@ Page Title="" Language="C#" MasterPageFile="~/Site1.Master" AutoEventWireup="true" CodeBehind="Home.aspx.cs" Inherits="_07_Master_Page.Home"

%>

<asp:Content ID="Content1" ContentPlaceHolderID="head" runat="server"></asp:Content>

<asp:Content ID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" runat="server">

<h3>Welcome to ASP.NET Master Page Demo</h3>

<asp:Label ID="lblMessage" runat="server" Text=""></asp:Label> <br /><br />

<asp:Button ID="btnClick" runat="server" Text="Click Me" OnClick="btnClick_Click" />

</asp:Content>
```

Home.aspx.cs

```
using System;

using System.Collections.Generic;

using System.Linq;

using System.Web;

using System.Web.UI;

using System.Web.UI.WebControls;

namespace _07_Master_Page

{

public partial class Home : System.Web.UI.Page

{

protected void Page_Load(object sender, EventArgs e)
```

```
{

}

protected void btnClick_Click(object sender, EventArgs e)

{

lblMessage.Text = "Master Page is working successfully!";

}

}

}
```

About.aspx

```
<%@PageTitle=""Language="C#"MasterPageFile="~/Site1.Master"AutoEventWireup="true
" CodeBehind="About.aspx.cs" Inherits="_07_Master_Page.About" %>

<asp:Content ID="Content1" ContentPlaceHolderID="head" runat="server"></asp:Content>

<asp:Content ID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" runat="server">

<h3>Welcome to ASP.NET About Page</h3>

<asp:Label ID="lblMessage" runat="server" Text=""></asp:Label>   <br /><br />

<asp:Button ID="btnClick" runat="server" Text="Click Me" OnClick="btnClick_Click" />

</asp:Content>
```

About.aspx.cs

```
using System;

using System.Collections.Generic;

using System.Linq;

using System.Web;

using System.Web.UI;

using System.Web.UI.WebControls;

namespace _07_Master_Page

{

public partial class About : System.Web.UI.Page
```

```
{
protected void Page_Load(object sender, EventArgs e)
{
}
protected void btnClick_Click(object sender, EventArgs e)
{
lblMessage.Text = "About Us Page!";
}
}
}
```

OUTPUT:-

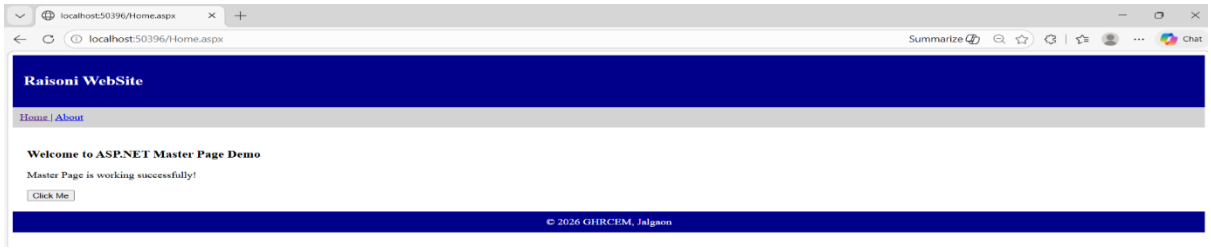

Practical No.8:- Create a student registration form by using asp.net basic server controls.

Demo.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Demo.aspx.cs" Inherits="_08_Student_Registration.Demo" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title></title>

</head>

<body>

<form id="form1" runat="server">

<div style="width:400px; margin:auto; padding:20px;

border:1px solid #ccc; border-radius:10px;">

<h2>Student Registration Form</h2>

<asp:Label ID="lblName" runat="server"

Text="Full Name:" AssociatedControlID="txtName"></asp:Label><br />

<asp:TextBox ID="txtName" runat="server" Width="250px"></asp:TextBox><br /><br />

<asp:Label ID="lblAge" runat="server" Text="Age:" AssociatedControlID="txtAge"></asp:Label><br />

<asp:TextBox ID="txtAge" runat="server" Width="100px"></asp:TextBox><br /><br />

<asp:Label ID="lblGender" runat="server" Text="Gender:"></asp:Label><br />

<asp:RadioButtonList ID="rblGender" runat="server">

<asp:ListItem Text="Male" Value="Male"></asp:ListItem>

<asp:ListItem Text="Female" Value="Female"></asp:ListItem>

<asp:ListItem Text="Other" Value="Other"></asp:ListItem>

</asp:RadioButtonList><br />

<asp:Label ID="lblCourse" runat="server" Text="Course:"></asp:Label><br/>
<asp:DropDownList ID="ddlCourse" runat="server">
```

```
<asp:ListItem Text="Select Course" Value=""></asp:ListItem>

<asp:ListItem Text="B.Sc" Value="B.Sc"></asp:ListItem>

<asp:ListItem Text="B.Com" Value="B.Com"></asp:ListItem>

<asp:ListItem Text="B.A" Value="B.A"></asp:ListItem>

<asp:ListItem Text="B.Tech" Value="B.Tech"></asp:ListItem>

</asp:DropDownList><br /><br />

<asp:Label ID="lblSubjects" runat="server"

Text="Subjects Interested:"></asp:Label><br />

<asp:CheckBoxList ID="cblSubjects" runat="server">

<asp:ListItem Text="Math" Value="Math"></asp:ListItem>

<asp:ListItem Text="Physics" Value="Physics"></asp:ListItem>

<asp:ListItem Text="Chemistry" Value="Chemistry"></asp:ListItem>

<asp:ListItem Text="Computer" Value="Computer"></asp:ListItem>

</asp:CheckBoxList><br />

<asp:Button ID="btnSubmit" runat="server" Text="Register" OnClick="btnSubmit_Click"
/><br /><br />

<asp:Label ID="lblMessage" runat="server" ForeColor="Green"></asp:Label>

</div>

</form>

</body>

</html>
```

Demo.aspx.cs

```
using System;

using System.Collections.Generic;

using System.Linq;

using System.Web;

using System.Web.UI;
```

```
using System.Web.UI.WebControls;
namespace _08_Student_Registration
{
public partial class Demo : System.Web.UI.Page
{
protected void Page_Load(object sender, EventArgs e)
{
}
protected void btnSubmit_Click(object sender, EventArgs e)
{
string name = txtName.Text.Trim();
string age = txtAge.Text.Trim();
string gender = rblGender.SelectedValue;
string course = ddlCourse.SelectedValue;
string subjects = "";
foreach (var item in cblSubjects.Items)
{
if (((System.Web.UI.WebControls.ListItem)item).Selected)
{
subjects += ((System.Web.UI.WebControls.ListItem)item).Text     + ", ";
}
}
if (subjects.EndsWith(", "))
subjects = subjects.Substring(0, subjects.Length - 2);
lblMessage.Text = $"Student Registered Successfully! <br/>"
+
$"Name: {name} <br/>" +
```

```
$"Age: {age} <br/>" +
$"Gender: {gender} <br/>" +
$"Course: {course} <br/>" +
$"Subjects: {subjects}";
}
}
}
```

OUTPUT:-

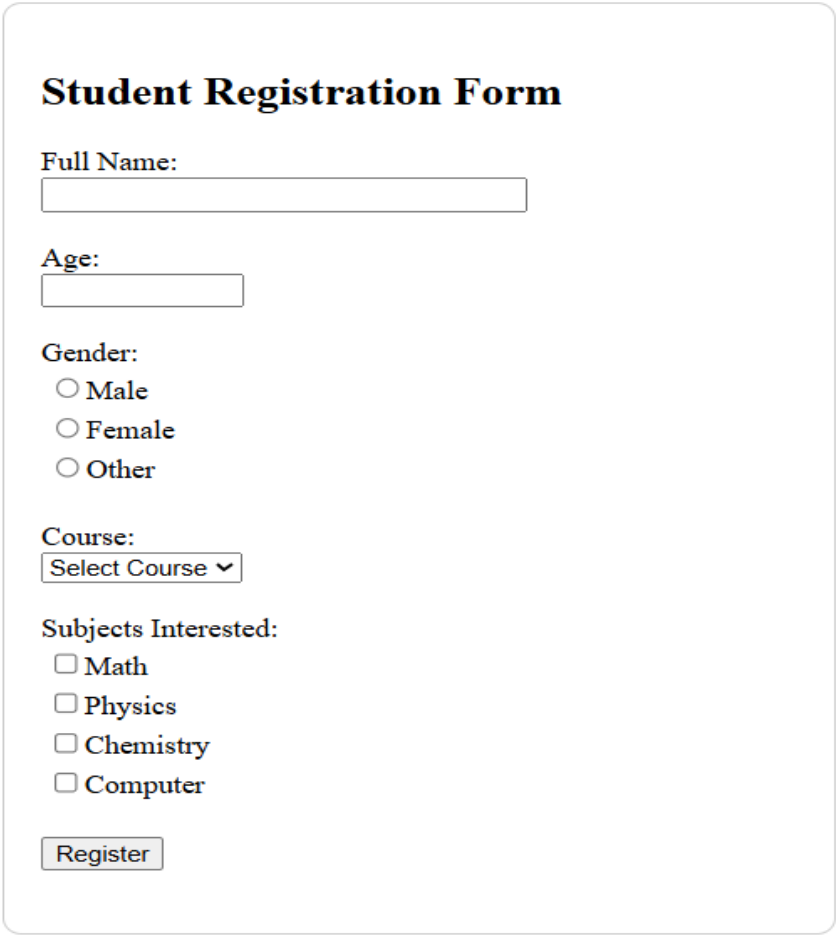

Practical No.9:- Write an ASP .NET program that demonstrates use of Intrinsic Objects.

Demo.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Demo.aspx.cs" Inherits="_09_Intrinsic_Object.Demo" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title>All Intrinsic Objects Demo</title>

</head>

<body>

<form id="form1" runat="server">

<h2>ASP.NET Intrinsic Objects – Complete Program</h2>

Enter Name:

<asp:TextBox ID="txtName" runat="server"></asp:TextBox>   <br /><br />

<asp:Button ID="btnShow" runat="server"

Text="Show Intrinsic Objects"

OnClick="btnShow_Click" />   <br /><br />

<asp:Label ID="lblResult" runat="server" Font-Bold="true"></asp:Label>

</form>

</body>

</html>
```

Demo.aspx.cs

```
using System;

using System.Collections.Generic;

using System.Linq;

using System.Web;

using System.Web.UI;
```

```
using System.Web.UI.WebControls;
namespace _09_Intrinsic_Object
{
public partial class Demo : System.Web.UI.Page
{
protected void Page_Load(object sender, EventArgs e)
{
// Application Object
if (Application["Visitors"] == null)
Application["Visitors"] = 0;
Application["Visitors"] =
(int)Application["Visitors"] + 1;
// Cache Object
if (Cache["Message"] == null)
Cache["Message"] = "Welcome to ASP.NET";
}
protected void btnShow_Click(object sender, EventArgs e)
{
// Request Object
string name = txtName.Text;
// Session Object
Session["UserName"] = name;
// Server Object
string filePath = Server.MapPath("AllObjects.aspx");
// Context Object
string browser =
Context.Request.Browser.Browser;
```

```
// Trace Object
Trace.Write("Button clicked by user");
// Response Object (Output)
lblResult.Text =
"Name (Request): " + name + "<br/>" +
"Session User: " + Session["UserName"] + "<br/>" +
"Total Visitors (Application): " +
Application["Visitors"] + "<br/>" +
"Cached Message: " + Cache["Message"] + "<br/>" +
"Server File Path: " + filePath + "<br/>" +
"Browser Name (Context): " + browser;
}
}
}
```

OUTPUT:-

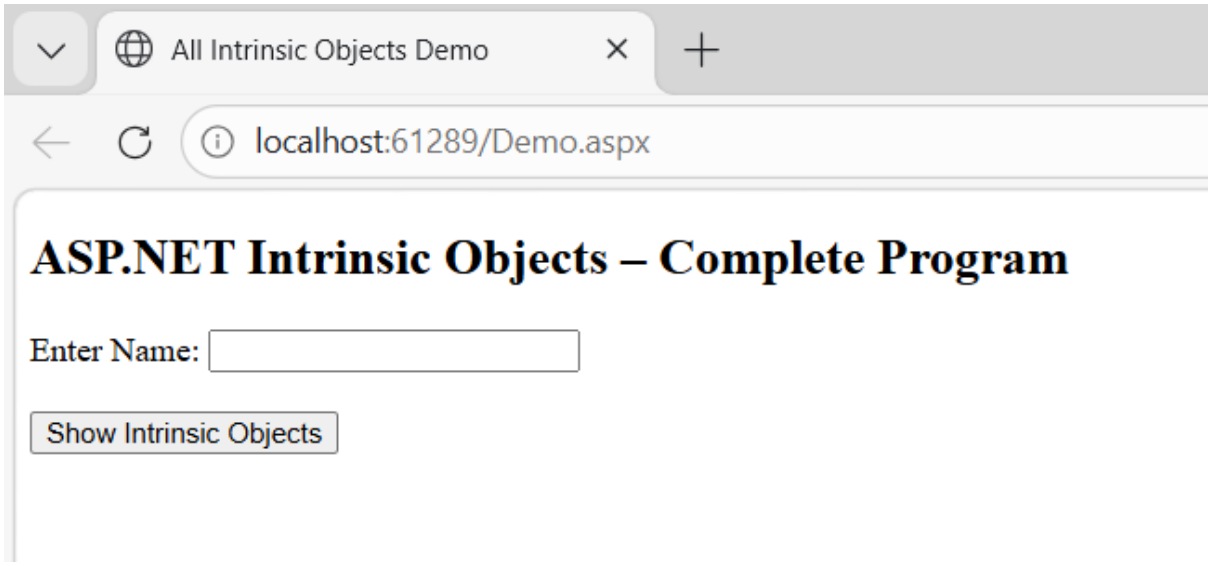

Practical No.10:- Write an asp.net program to demonstrate Calendar control.

Demo.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Demo.aspx.cs" Inherits="_10_Calender_Control.Demo" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title></title>

</head>

<body>

<form id="form1" runat="server">

<div>

<asp:Label ID="lblTitle" runat="server"

Text="Calendar Control Demonstration"

Font-Bold="true" Font-Size="Large"></asp:Label><br /><br />

<asp:Calendar ID="Calendar1" runat="server"

OnSelectionChanged="Calendar1_SelectionChanged">

</asp:Calendar><br /><br />

<asp:Label ID="lblDate" runat="server"

ForeColor="Green"></asp:Label>

</div>

</form>

</body>

</html>
```

Demo.aspx.cs

```
using System;

using System.Collections.Generic;
```

```
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
namespace _10_Calender_Control
{
public partial class Demo : System.Web.UI.Page
{
protected void Page_Load(object sender, EventArgs e)
{
}
protected void Calendar1_SelectionChanged(object sender, EventArgs e)
{
DateTime selectedDate = Calendar1.SelectedDate;
int monthNumber = selectedDate.Month;
string monthName = selectedDate.ToString("MMMM");
lblDate.Text = "Selected Month: " + monthName + " (" + monthNumber + ")";
}
}
}
```

OUTPUT:-

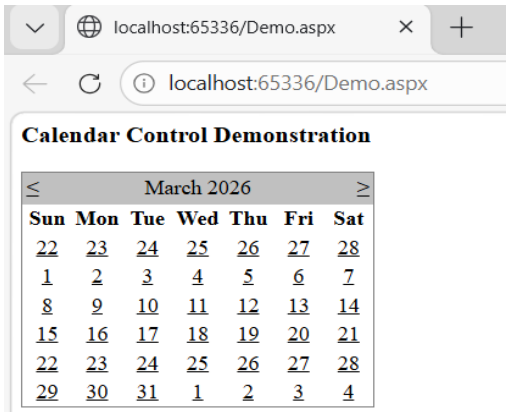

Practical No.11:- Write an asp.net program to demonstrate AdRotator control.

Demo.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Demo.aspx.cs" Inherits="_11_AdRotator_Control.Demo" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title></title>

</head>

<body>

<form id="form1" runat="server">

<div>

<asp:Label ID="lblTitle" runat="server"

Text="AdRotator Control Demonstration"

Font-Bold="true" Font-Size="Large"></asp:Label>    <br /><br />

<asp:AdRotator ID="AdRotator1" runat="server"

AdvertisementFile="~/Ads.xml"

Width="300px"

Height="150px" />

</div>

</form>

</body>

</html>
```

Ads.Xml

```
<?xml version="1.0" encoding="utf-8" ?>

<Advertisements>

<Ad>
```

```
<ImageUrl>~/Images/microsoft.jpg</ImageUrl>
<NavigateUrl>https://www.microsoft.com</NavigateUrl>
<AlternateText>Microsoft</AlternateText>
<Impressions>40</Impressions>
</Ad>
<Ad>
<ImageUrl>~/Images/oracle.png</ImageUrl>
<NavigateUrl>https://www.oracle.com</NavigateUrl>
<AlternateText>Oracle</AlternateText>
<Impressions>30</Impressions>
</Ad>
<Ad>
<ImageUrl>~/Images/google.png</ImageUrl>
<NavigateUrl>https://www.google.com</NavigateUrl>
<AlternateText>Google</AlternateText>
<Impressions>40</Impressions>
</Ad>
</Advertisements>
```


OUTPUT:-

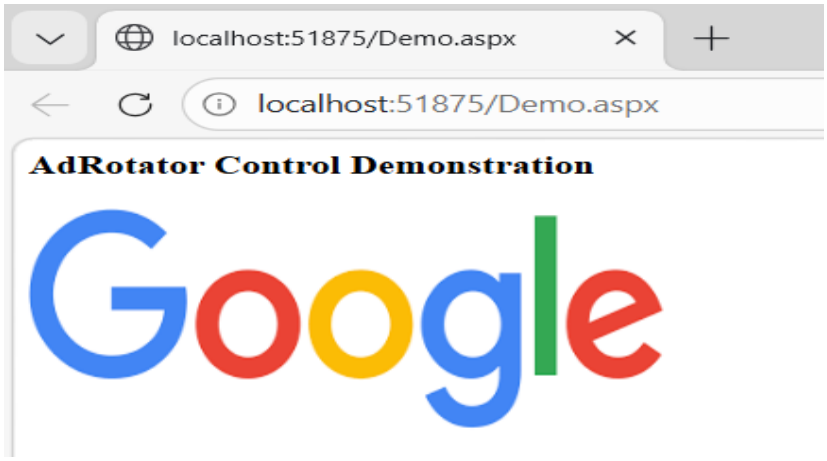

Practical No.12:- Write an ASP .NET program that demonstrates cookies.

Demo.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Demo.aspx.cs" Inherits="_12_Cookies_Demo.Demo" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title>Cookies Demo</title>

</head>

<body>

<form id="form1" runat="server">

<h2>ASP.NET Cookies Example</h2>

Enter Name:

<asp:TextBox ID="txtName" runat="server"></asp:TextBox>  <br /><br />

<asp:Button ID="btnSave" runat="server"

Text="Save Cookie" OnClick="btnSave_Click" />

 

<asp:Button ID="btnRead" runat="server"

Text="Read Cookie" OnClick="btnRead_Click" />  <br /><br />

<asp:Label ID="lblMsg" runat="server" Font-Bold="true"></asp:Label>

</form>

</body>

</html>
```

Demo.aspx.cs

```
using System;

using System.Collections.Generic;

using System.Linq;
```

```
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
namespace _12_Cookies_Demo
{
public partial class Demo : System.Web.UI.Page
{
protected void Page_Load(object sender, EventArgs e)
{
}
protected void btnSave_Click(object sender, EventArgs e)
{
Response.Cookies["UserName"].Value = txtName.Text;
Response.Cookies["UserName"].Expires =
DateTime.Now.AddMinutes(1);
lblMsg.Text = "Cookie Saved Successfully!";
}
protected void btnRead_Click(object sender, EventArgs e)
{
if (Request.Cookies["UserName"] != null)
{
lblMsg.Text = "Cookie Value: " +
Request.Cookies["UserName"].Value;
}
else
{
lblMsg.Text = "Cookie not found!";
```

```
}
}
}
}
```

OUTPUT:-

Cookies Demo
localhost:56426/Demo.aspx
ASP.NET Cookies Example
Enter Name:
Save Cookie
Read Cookie

Practical No.13:- Create a student registration form and apply all validation controls.

Demo.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Demo.aspx.cs" Inherits="_13_Validation_Control.Demo" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title></title>

</head>

<body>

<form id="form1" runat="server">

<div>

<h2>Student Registration Form</h2>

Name:

<asp:TextBox ID="txtName" runat="server"></asp:TextBox>

<asp:RequiredFieldValidator ID="rfvName" runat="server"

ControlToValidate="txtName"

ErrorMessage="Name is required"

ForeColor="Red"></asp:RequiredFieldValidator>  <br /><br />

Age:

<asp:TextBox ID="txtAge" runat="server"></asp:TextBox>

<asp:RangeValidator ID="rvAge" runat="server"

ControlToValidate="txtAge"

MinimumValue="18" MaximumValue="60"

Type="Integer"

ErrorMessage="Age must be between 18 and 60"

ForeColor="Red"></asp:RangeValidator>  <br /><br />
```

```
Email:
<asp:TextBox ID="txtEmail" runat="server"></asp:TextBox>
<asp:RegularExpressionValidator ID="revEmail" runat="server"
ControlToValidate="txtEmail"
ErrorMessage="Invalid Email ID"
ValidationExpression="\w+([-+.' ]\w+)*@\w+([-.]\w+)*\.\w+([-.]\w+)*"
ForeColor="Red"></asp:RegularExpressionValidator> <br /><br />
Password:
<asp:TextBox ID="txtPassword" runat="server"
TextMode="Password"></asp:TextBox>
<asp:RequiredFieldValidator ID="rfvPassword" runat="server"
ControlToValidate="txtPassword"
ErrorMessage="Password required"
ForeColor="Red"></asp:RequiredFieldValidator>    <br /><br />
Confirm Password:
<asp:TextBox ID="txtConfirmPassword" runat="server"
TextMode="Password"></asp:TextBox>
<asp:CompareValidator ID="cvPassword" runat="server"
ControlToCompare="txtPassword"
ControlToValidate="txtConfirmPassword"
ErrorMessage="Passwords do not match"
ForeColor="Red"></asp:CompareValidator>  <br /><br />
Gender:
<asp:RadioButton ID="rbMale" runat="server"
Text="Male" GroupName="Gender" />
<asp:RadioButton ID="rbFemale" runat="server"
Text="Female" GroupName="Gender" />   <br /><br />
```

```
Course:
<asp:DropDownList ID="ddlCourse" runat="server">
<asp:ListItem Value="0">--Select--</asp:ListItem>
<asp:ListItem>ASP.NET</asp:ListItem>
<asp:ListItem>Java</asp:ListItem>
<asp:ListItem>Python</asp:ListItem>
</asp:DropDownList>
<asp:CustomValidator ID="cvCourse" runat="server"
ControlToValidate="ddlCourse"
ErrorMessage="Please select a course"
ForeColor="Red"
OnServerValidate="cvCourse_ServerValidate">
</asp:CustomValidator>  <br /><br />
<asp:Button ID="btnSubmit" runat="server"   Text="Register" /> <br /><br />
<asp:ValidationSummary ID="ValidationSummary1"
runat="server"
ForeColor="Red"
HeaderText="Errors:" />
</div>
</form>
</body>
</html>
```

Demo.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
```

```
using System.Web.UI;
using System.Web.UI.WebControls;
namespace _13_Validation_Control
{
public partial class Demo : System.Web.UI.Page
{
protected void Page_Load(object sender, EventArgs e)
{
}
protected void cvCourse_ServerValidate(object source, ServerValidateEventArgs args)
{
if (ddlCourse.SelectedValue == "0")
args.IsValid = false;
else
args.IsValid = true;
}
}
}
```

Web.config

```
<?xml version="1.0" encoding="utf-8"?>
<!--  For more information on how to configure your ASP.NET application, please visit
https://go.microsoft.com/fwlink/?LinkId=169433  -->
<configuration>
<system.web>
<compilation debug="true" targetFramework="4.7.2" />
<httpRuntime targetFramework="4.7.2" />
</system.web>
```

```
<appSettings>

<add key="ValidationSettings:UnobtrusiveValidationMode"

value="None" />

<!-- other app settings -->

</appSettings>

<system.codedom>

<compilers>

<compiler language="c#;cs;csharp" extension=".cs" type="Microsoft.CodeDom.Providers.DotNetCompilerPlatform.CSharpCodeProvider, Microsoft.CodeDom.Providers.DotNetCompilerPlatform, Version=2.0.1.0, Culture=neutral, PublicKeyToken=31bf3856ad364e35" warningLevel="4" compilerOptions="/langversion:default /nowarn:1659;1699;1701" />

<compiler language="vb;vbs;visualbasic;vbscript" extension=".vb" type="Microsoft.CodeDom.Providers.DotNetCompilerPlatform.VBCodeProvider, Microsoft.CodeDom.Providers.DotNetCompilerPlatform, Version=2.0.1.0, Culture=neutral, PublicKeyToken=31bf3856ad364e35" warningLevel="4" compilerOptions="/langversion:default /nowarn:41008 /define:_MYTYPE=\&quot;Web\&quot; /optionInfer+" />

</compilers>

</system.codedom>

</configuration>
```

OUTPUT:-

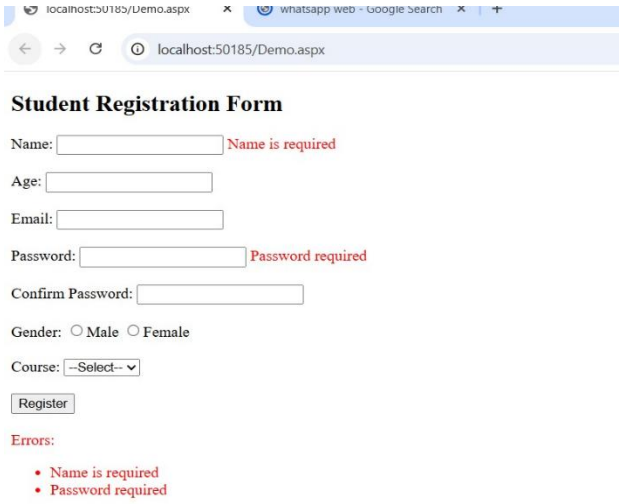

Practical No.14:- Create a simple web page for G H Raisoni College that displays college information using various control

CollegeInfo.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="CollegeInfo.aspx.cs" Inherits="_14_Raisoni_Page.CollegeInfo" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title>G H Raisoni College</title>

</head>

<body>

<form id="form1" runat="server">

<div>

<asp:Panel ID="Panel1" runat="server" BorderStyle="Solid"

BorderWidth="2">

<asp:Image ID="imgCollege" runat="server"

ImageUrl="~/Image/raisoni.png"

Height="120px" Width="120px" /> <br /><br />

<asp:Label ID="lblName" runat="server"  Text="G H Raisoni College of     Engineering"

Font-Bold="true" Font-Size="Large"  </asp:Label>   <br /><br />

<asp:Label ID="lblAddress" runat="server" Text="Nagpur, Maharashtra, India">

</asp:Label>   <br /><br />

<asp:Label ID="lblInfo" runat="server"

Text="Providing quality education in Engineering, Management and Technology.">

</asp:Label> <br /><br />

<asp:HyperLink ID="hlWebsite" runat="server"

NavigateUrl="https://www.raisoni.net"

Text="Visit Official Website" Target="_blank">  </asp:HyperLink>   <br /><br />
```

```
<asp:Button ID="btnShow" runat="server" Text="Show Message"
OnClick="btnShow_Click" />   <br /><br />
<asp:Label ID="lblMessage" runat="server" Font-Bold="true">  </asp:Label>
</asp:Panel>
</div>
</form>
</body>
</html>
```

CollegeInfo.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
namespace _14_Raisoni_Page
{
public partial class CollegeInfo : System.Web.UI.Page
{
protected void Page_Load(object sender, EventArgs e)
{
}
protected void btnShow_Click(object sender, EventArgs e)
{
lblMessage.Text = "Welcome to G H Raisoni College!";
}
}
```

}

OUTPUT:-

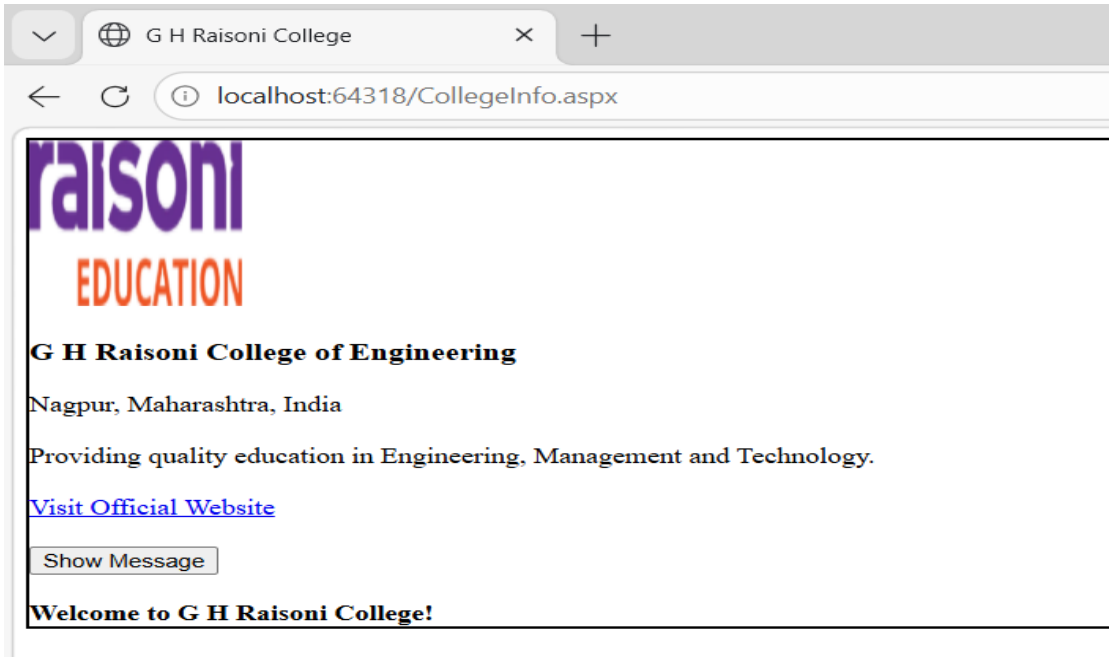
G H Raisoni College
localhost:64318/CollegeInfo.aspx
raisoni
EDUCATION
G H Raisoni College of Engineering
Nagpur, Maharashtra, India
Providing quality education in Engineering, Management and Technology.
Visit Official Website
Show Message
Welcome to G H Raisoni College!

Practical No.15:- Demonstrate the use of checkbox, Radio button control.

Demo.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Demo.aspx.cs" Inherits="_15_RadioButton_CheckBox.Demo" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title></title>

</head>

<body>

<form id="form1" runat="server">

<div>

<asp:Label ID="lblTitle" runat="server"

Text="CheckBox and RadioButton Demonstration"

Font-Bold="true" Font-Size="Large"></asp:Label> <br /><br />

<b>Gender:</b><br />

<asp:RadioButton ID="rbMale" runat="server" Text="Male" GroupName="Gender"/>

<asp:RadioButton ID="rbFemale" runat="server" Text="Female"GroupName="Gender" />
<br /><br />

<b>Skills:</b><br />

<asp:CheckBox ID="chkASP" runat="server" Text="ASP.NET" />

<asp:CheckBox ID="chkCSharp" runat="server" Text="C#" />

<asp:CheckBox ID="chkSQL" runat="server" Text="SQL" /> <br /><br />

<asp:Button ID="btnSubmit" runat="server" Text="Submit" OnClick="btnSubmit_Click" />
<br /><br />

<asp:Label ID="lblResult" runat="server" ForeColor="Green"></asp:Label>

</div>

</form>
```

```
</body>
</html>
```

Demo.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
namespace _15_RadioButton_CheckBox
{
public partial class Demo : System.Web.UI.Page
{
protected void Page_Load(object sender, EventArgs e)
{
}
protected void btnSubmit_Click(object sender, EventArgs e)
{
string gender = "Not Selected";
if (rbMale.Checked)
gender = "Male";
else if (rbFemale.Checked)
gender = "Female";
string skills = "";
if (chkASP.Checked) skills += "ASP.NET ";
if (chkCSharp.Checked) skills += "C# ";
if (chkSQL.Checked) skills += "SQL ";
```

```
lblResult.Text = "Gender: " + gender +
"<br/>Skills: " + skills;
}
}
}
```

OUTPUT:-

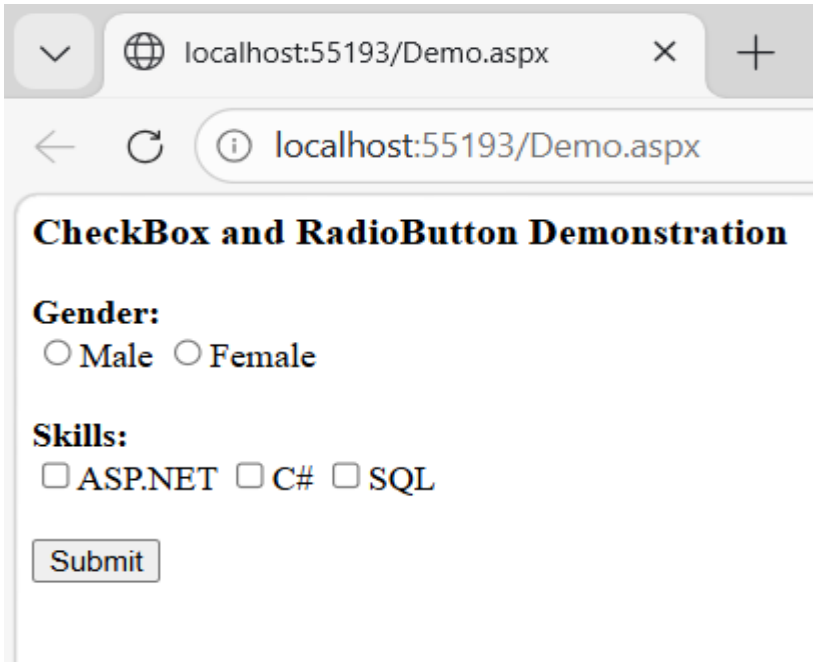

Practical No.16:- Write an ASP.NET Web Forms application that demonstrates the use of a DropDownList for subject selection. The DropDownList should allow a user to select a subject (e.g., Math, Science, and English). When the user clicks a button, display the selected subject on the page.

Demo.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Demo.aspx.cs" Inherits="_16_DropDownSelection.Demo" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title></title>

</head>

<body>

<form id="form1" runat="server">

<div style="width:300px; margin:auto; padding:20px;

border:1px solid #ccc; border-radius:10px;">

<h2>Select a Subject</h2

<asp:Label ID="lblSubject" runat="server"

Text="Choose a subject:"></asp:Label><br /><br />

<asp:DropDownList ID="ddlSubjects" runat="server">

<asp:ListItem Text="--Select--" Value=""></asp:ListItem>

<asp:ListItem Text="Math" Value="Math"></asp:ListItem>

<asp:ListItem Text="Science" Value="Science"></asp:ListItem>

<asp:ListItem Text="English" Value="English"></asp:ListItem>

</asp:DropDownList><br /><br />

<asp:Button ID="btnShowSubject" runat="server"

Text="Show Selected Subject" OnClick="btnShowSubject_Click" /><br /><br />

<asp:Label ID="lblResult" runat="server"

ForeColor="Blue"></asp:Label>
```

```
</div>
</form>
</body>
</html>
```

Demo.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
namespace _16_DropDownSelection
{
public partial class Demo : System.Web.UI.Page
{
protected void Page_Load(object sender, EventArgs e)
{
}
protected void btnShowSubject_Click(object sender, EventArgs e)
{
string selectedSubject = ddlSubjects.SelectedValue;
if (string.IsNullOrEmpty(selectedSubject))
{
lblResult.Text = "Please select a subject!";
}
else
{
```

```
lblResult.Text = "You selected: " + selectedSubject;
}
}
}
}
```

OUTPUT:-

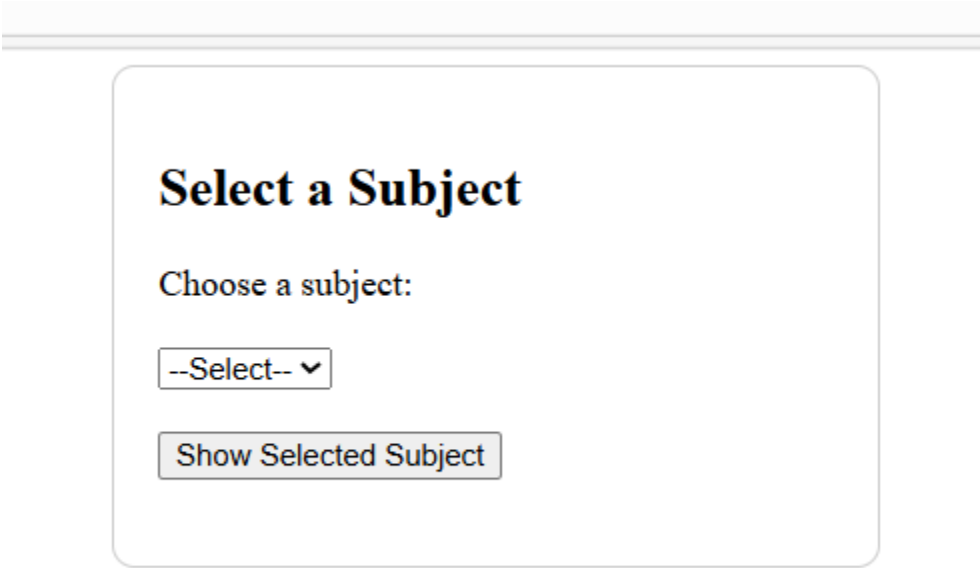

Practical No.17:- Implement an ASP .NET application to demonstrate User controls.

Header.ascx

```
<%@ Control Language="C#" AutoEventWireup="true" CodeBehind="Header.ascx.cs" Inherits="_17_Users_Controls.Header" %>

<div style="background-color:lightblue; padding:10px;">

<h2>My ASP.NET Website</h2>

<asp:Label ID="lblMessage" runat="server" Text="Welcome to User Control Demo"></asp:Label>

</div>
```

OUTPUT:-

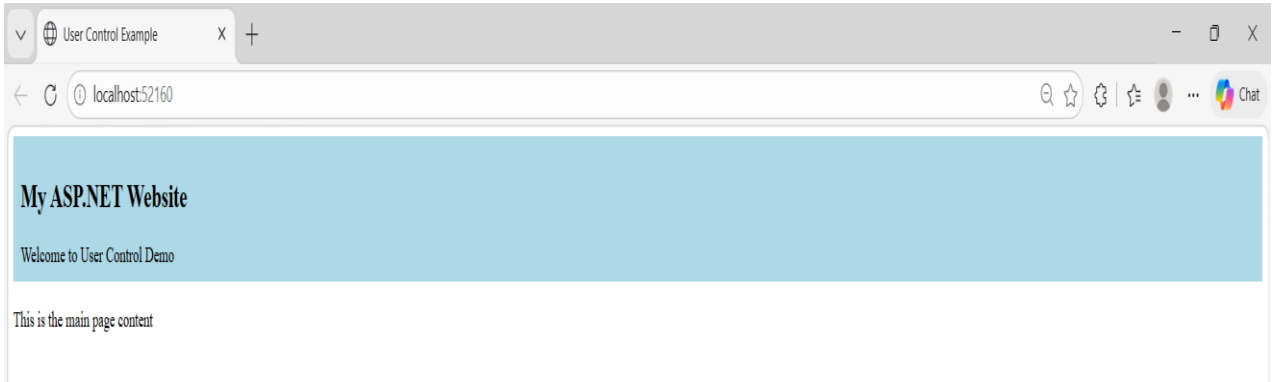

Practical No.18:- Implement an ASP .NET application to demonstrate binding of GridView, Control by using ADO .NET.

Default.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Default.aspx.cs" Inherits="_18_Grid_View_Demo.Default" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title>GridView Data Binding using ADO.NET</title>

</head>

<body>

<form id="form1" runat="server">

<h2>Employee Details</h2>

<asp:GridView ID="GridView1" runat="server"

AutoGenerateColumns="False"

BorderWidth="2"

CellPadding="5">

<Columns>

<asp:BoundField DataField="EmpId" HeaderText="Employee ID" />

<asp:BoundField DataField="EmpName" HeaderText="Employee Name" />

<asp:BoundField DataField="Salary" HeaderText="Salary" />

<asp:BoundField DataField="Department" HeaderText="Department" />

</Columns>

</asp:GridView>

</form>

</body>

</html>
```

Web.config

```
<?xml version="1.0" encoding="utf-8"?>

<!-- For more information on how to configure your ASP.NET application, please visit

https://go.microsoft.com/fwlink/?LinkId=169433  -->

<configuration><connectionStrings>

<add name="cs"

connectionString="Data Source=JUNAID\SQLEXPRESS;

Initial Catalog=EmployeeDB;Integrated Security=True"

providerName="System.Data.SqlClient"/></connectionStrings>

<system.web>

<compilation debug="true" targetFramework="4.7.2" />

<httpRuntime targetFramework="4.7.2" />

</system.web>

<system.codedom>

<compilers><compiler language="c#;cs;csharp" extension=".cs"
type="Microsoft.CodeDom.Providers.DotNetCompilerPlatform.CSharpCodeProvider,
Microsoft.CodeDom.Providers.DotNetCompilerPlatform, Version=2.0.1.0, Culture=neutral,
PublicKeyToken=31bf3856ad364e35" warningLevel="4"
compilerOptions="/langversion:default /nowarn:1659;1699;1701" />

<compiler language="vb;vbs;visualbasic;vbscript" extension=".vb"
type="Microsoft.CodeDom.Providers.DotNetCompilerPlatform.VBCodeProvider,
Microsoft.CodeDom.Providers.DotNetCompilerPlatform, Version=2.0.1.0, Culture=neutral,
PublicKeyToken=31bf3856ad364e35" warningLevel="4"
compilerOptions="/langversion:default /nowarn:41008
/define:_MYTYPE=\&quot;Web\&quot; /optionInfer+" /></compilers>

</system.codedom>

</configuration>
```

OUTPUT:-

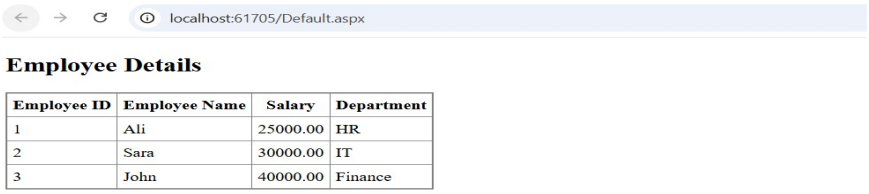

Employee ID	Employee Name	Salary	Department
1	Ali	25000.00	HR
2	Sara	30000.00	IT
3	John	40000.00	Finance

Practical No.19:- Asp.net that returns the windows name of your computer.

Demo.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Demo.aspx.cs" Inherits="_19_MachineName.Demo" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title></title>

</head>

<body>

<form id="form1" runat="server">

<div>

<asp:Label ID="Label1" runat="server"

Text="Get Windows Computer Name"

Font-Bold="true"

Font-Size="Large"></asp:Label>  <br /><br />

<asp:Button ID="btnShow" runat="server"

Text="Show Computer Name"

OnClick="btnShow_Click" /><br /><br />

<asp:Label ID="lblResult" runat="server"

ForeColor="Green"></asp:Label>

</div>

</form>

</body>

</html>
```

Demo.aspx.cs

```
using System;
```

```
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
namespace _19_MachineName
{
public partial class Demo : System.Web.UI.Page
{
protected void Page_Load(object sender, EventArgs e)
{
}
protected void btnShow_Click(object sender, EventArgs e)
{
// Get Windows computer name
string computerName = Environment.MachineName;
lblResult.Text = "Windows Computer Name: " + computerName;
}
}
}
```

OUTPUT:-

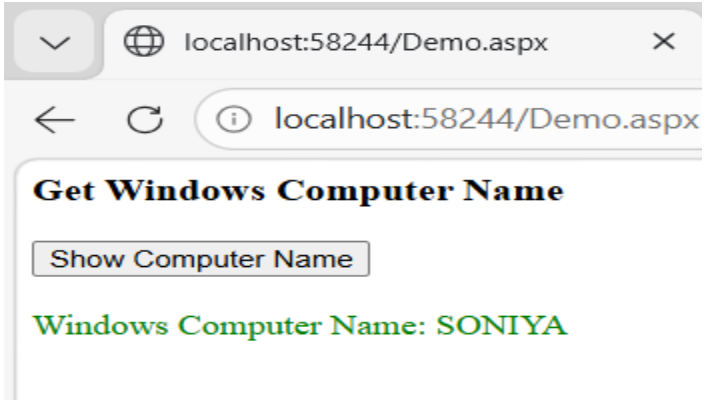

Practical No.20:- Write an ASP.NET Web Forms application that demonstrates navigation using both Server.Transfer () and Response.Redirect (). Create two pages (Page1.aspx and Page2.aspx). On Page1.aspx, provide two buttons: one that navigates to Page2.aspx using Server.Transfer () and another using Response.Redirect (). Display a message on Page2.aspx showing how the navigation occurred.

Page.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Page1.aspx.cs" Inherits="_20_Redirection_Demo.Page1" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title></title>

</head>

<body>

<form id="form1" runat="server">

<div>

<asp:Button ID="btnServerTransfer" runat="server"

Text="Go using Server.Transfer()"

OnClick="btnServerTransfer_Click" /><br /><br />

<asp:Button ID="btnResponseRedirect" runat="server"

Text="Go using Response.Redirect()"

OnClick="btnResponseRedirect_Click" />

</div>

</form>

</body>

</html>
```

Page.aspx.cs

```
using System;

using System.Collections.Generic;
```

```
using System.Linq;

using System.Web;

using System.Web.UI;

using System.Web.UI.WebControls;

namespace _20_Redirection_Demo

{

public partial class Page1 : System.Web.UI.Page

{

protected void Page_Load(object sender, EventArgs e)

{

}

protected void btnServerTransfer_Click(object sender, EventArgs e)

{

Server.Transfer("Page2.aspx?method=ServerTransfer");

}

protected void btnResponseRedirect_Click(object sender, EventArgs e)

{

Response.Redirect("Page2.aspx?method=ResponseRedirect");

}

}

}
```

Page2.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Page2.aspx.cs" Inherits="_20_Redirection_Demo.Page2" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">
```

```
<title></title>
</head>
<body>
<form id="form1" runat="server">
<div>
<asp:Label ID="lblMessage" runat="server" Font-Bold="true"></asp:Label>
</div>
</form>
</body>
</html>
```

Page2.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
namespace _20_Redirection_Demo
{
public partial class Page2 : System.Web.UI.Page
{
protected void Page_Load(object sender, EventArgs e)
{
string method = Request.QueryString["method"];
if (method == "ServerTransfer")
{
lblMessage.Text = "Navigation done using Server.Transfer()";
```

```
}
else if (method == "ResponseRedirect")
{
lblMessage.Text = "Navigation done using Response.Redirect()";
}
}
}
}
```

OUTPUT:-

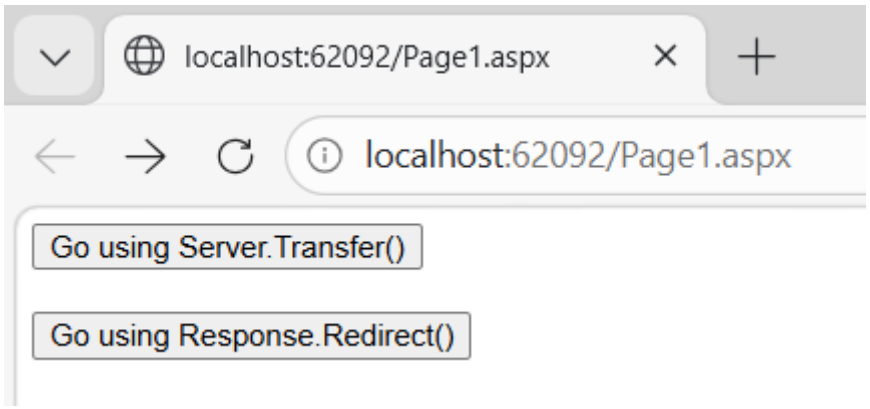

Practical No.21:- ASP .net program that demonstrate Application and Session Scope Variables using Global.Asax

Default.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Default.aspx.cs" Inherits="_21_Session_Application_Demo.Default" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title></title>

</head>

<body>

<form id="form1" runat="server">

<div>

<h2>Application and Session Demo</h2>

<asp:Button ID="btnClick" runat="server"

Text="Click Me"

OnClick="btnClick_Click" />

<br /><br />

<asp:Label ID="lblVisitors" runat="server"></asp:Label>

<br />

<asp:Label ID="lblClicks" runat="server"></asp:Label>

</div>

</form>

</body>

</html>
```

Default.aspx.cs

```
using System;

using System.Collections.Generic;
```

```
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
namespace _21_Session_Application_Demo
{
public partial class Default : System.Web.UI.Page
{
protected void Page_Load(object sender, EventArgs e)
{
lblVisitors.Text = "Total Visitors: " + Application["TotalVisitors"];
lblClicks.Text = "Your Total Clicks: " + Session["UserClicks"];
}
protected void btnClick_Click(object sender, EventArgs e)
{
Session["UserClicks"] = (int)Session["UserClicks"] + 1;
lblClicks.Text = "Your Total Clicks: " + Session["UserClicks"];
lblVisitors.Text = "Total Visitors: " + Application["TotalVisitors"];
}
}
}
```

Global.asax.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.Security;
```

```
using System.Web.SessionState;
namespace _21_Session_Application_Demo
{
public class Global : System.Web.HttpApplication
{
protected void Application_Start(object sender, EventArgs e)
{
Application["TotalVisitors"] = 0;
}
protected void Session_Start(object sender, EventArgs e)
{
Application.Lock();
Application["TotalVisitors"] = (int)Application["TotalVisitors"] + 1;
Application.UnLock();
Session["UserClicks"] = 0;
}
protected void Application_BeginRequest(object sender, EventArgs e)
{
}
protected void Application_AuthenticateRequest(object sender, EventArgs e)
{
}
protected void Application_Error(object sender, EventArgs e)
{
}
protected void Session_End(object sender, EventArgs e)
{
```

```
Application.Lock();

Application["TotalUsers"] = (int)Application["TotalUsers"] - 1;

Application.UnLock();

}

protected void Application_End(object sender, EventArgs e)

{

}

}

}
```

OUTPUT:-

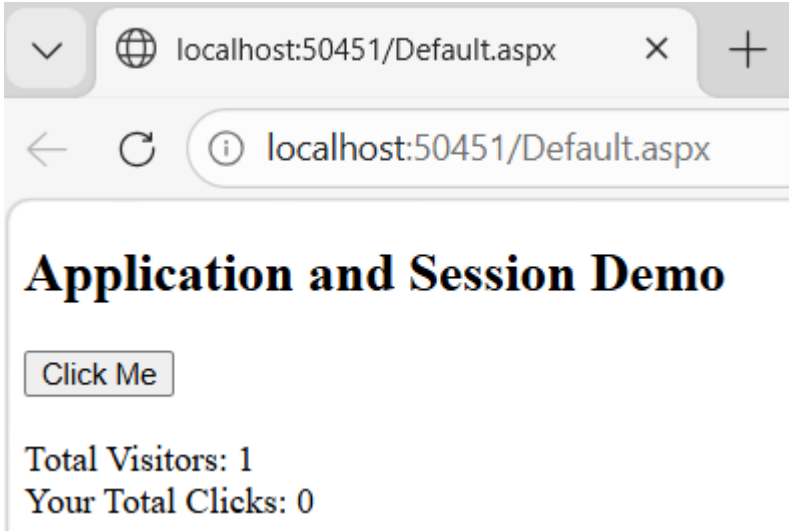

Practical No.22:- Implement Master Pages and website navigation controls (sitemap path, treeview, menu) using SiteMap file.

Site.Master

```
<%@ Master Language="C#" AutoEventWireup="true" CodeBehind="Site.master.cs" Inherits="_22_SiteMap_With_Master_Page.Site" %>

<!DOCTYPE html>

<html>

<head runat="server">

<title>Master Page Navigation Demo</title>

<asp:ContentPlaceHolder ID="head" runat="server">

</asp:ContentPlaceHolder>

</head>

<body>

<form id="form1" runat="server">

<div style="background-color: darkblue; color: white; padding: 15px;">

<h2>Raisoni College</h2>

</div>

<div style="background-color: lightgray; padding: 10px;">

<asp:Menu ID="Menu1" runat="server"

DataSourceID="SiteMapDataSource1"

Orientation="Horizontal"

BackColor="LightBlue"

ForeColor="Black">

</asp:Menu>

</div>

<div style="display: flex;">

<div style="width: 200px; background-color: #f0f0f0; padding: 10px;">

<asp:TreeView ID="TreeView1" runat="server"
```

```
DataSourceID="SiteMapDataSource1"
ExpandDepth="1">
</asp:TreeView>
</div>
<div style="flex: 1; padding: 20px;">
<asp:SiteMapPath ID="SiteMapPath1" runat="server"
PathSeparator=" > ">
</asp:SiteMapPath>
<br />
<br />
<asp:ContentPlaceHolder ID="ContentPlaceHolder1" runat="server" />
</div>
</div>
<div style="background-color: darkblue; color: white; padding: 10px; text-align: center;">
© 2026 Raisoni
</div>
<asp:SiteMapDataSource ID="SiteMapDataSource1" runat="server" />
</form>
</body>
</html>
```

Web.Sitemap

```
<?xml version="1.0" encoding="utf-8" ?>
<siteMap xmlns="http://schemas.microsoft.com/AspNet/SiteMap-File-1.0" >
<siteMapNode url="Default.aspx" title="Home" description="Home Page">
<siteMapNode url="About.aspx" title="About Us" description="About Page" />
<siteMapNode url="Courses.aspx" title="Courses" description="Courses Page">
<siteMapNode url="BCA.aspx" title="BCA" description="BCA Course" />
```

```
<siteMapNode url="BScIT.aspx" title="BScIT" description="BSc IT Course" />

</siteMapNode>

<siteMapNode url="Contact.aspx" title="Contact" description="Contact Page" />

</siteMapNode>

</siteMap>
```

Default.aspx

```
<%@ Page Title="" Language="C#" MasterPageFile="~/Site.Master" AutoEventWireup="true" CodeBehind="Default.aspx.cs" Inherits="_22_SiteMap_With_Master_Page.Default" %>

<asp:Content ID="Content1" ContentPlaceHolderID="head" runat="server">

</asp:Content>

<asp:Content ID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" runat="server">

<h3>Welcome to Home Page</h3>

<p>This page demonstrates Master Page and Navigation Controls.</p>

</asp:Content>
```

About.aspx

```
<%@ Page Title="" Language="C#" MasterPageFile="~/Site.Master" AutoEventWireup="true" CodeBehind="About.aspx.cs" Inherits="_22_SiteMap_With_Master_Page.About" %>

<asp:Content ID="Content1" ContentPlaceHolderID="head" runat="server">

</asp:Content>

<asp:Content ID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" runat="server">

<h3>Welcome to About Page</h3>

</asp:Content>
```

BCA.aspx

```
<%@ Page Title="" Language="C#" MasterPageFile="~/Site.Master" AutoEventWireup="true" CodeBehind="BCA.aspx.cs" Inherits="_22_SiteMap_With_Master_Page.BCA" %>

<asp:Content ID="Content1" ContentPlaceHolderID="head" runat="server">

</asp:Content>
```

```
<asp:Content ID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" runat="server">
<h3>BCA Course Details</h3>
<p>BCA is a 3-year undergraduate program.</p>
</asp:Content>
```

OUTPUT:-

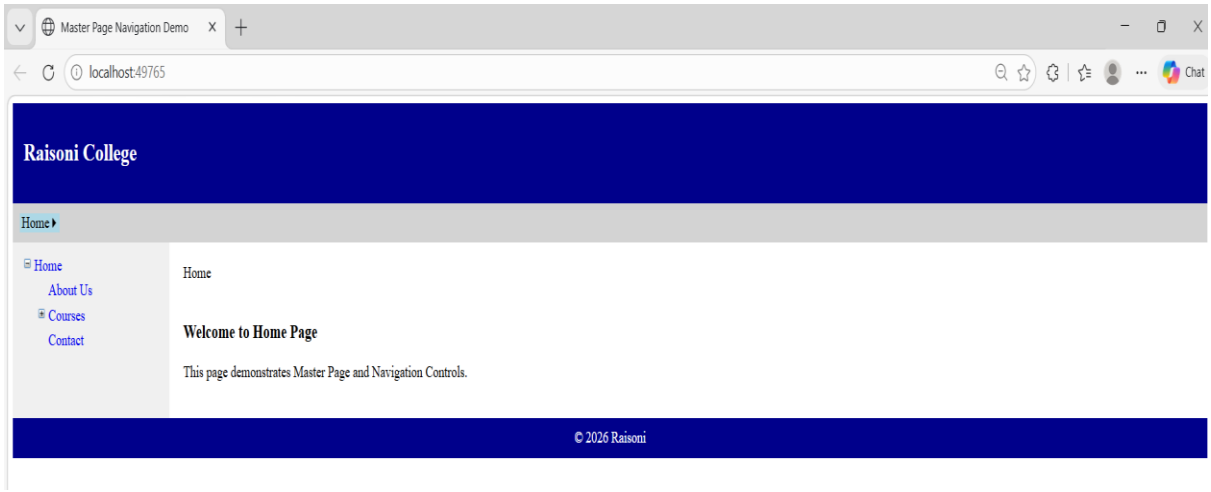

Practical No.23:- Implement sample website for demonstrating use of Profiles/Themes using skin files.

Default.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Default.aspx.cs" Inherits="_26_Profile_Themes.Default" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title>Profiles and Themes Demo</title>

</head>

<body>

<form id="form1" runat="server">

<h2>ASP.NET Profiles and Themes Example</h2>

Enter Name:

<asp:TextBox ID="txtName" runat="server"></asp:TextBox> <br />   <br />

Select Theme:

<asp:DropDownList ID="ddlTheme" runat="server">

<asp:ListItem>LightTheme</asp:ListItem>

<asp:ListItem>DarkTheme</asp:ListItem>

</asp:DropDownList>  <br />  <br />

<asp:Button ID="btnSave" runat="server" Text="Save Profile" OnClick="btnSave_Click" /><br /><br />

<asp:Label ID="lblMessage" runat="server"></asp:Label>

</form>

</body>

</html>
```

Default.aspx.cs

```
using System;
```

```
using System.Web;
namespace _26_Profile_Themes
{
public partial class Default : System.Web.UI.Page
{
protected void Page_PreInit(object sender, EventArgs e)
{
if (HttpContext.Current.Profile["ThemeName"] != null)
{
Page.Theme = HttpContext.Current.Profile["ThemeName"].ToString();
}
}
protected void Page_Load(object sender, EventArgs e)
{
}
protected void btnSave_Click(object sender, EventArgs e)
{
HttpContext.Current.Profile["UserName"] = txtName.Text;
HttpContext.Current.Profile["ThemeName"] = ddlTheme.SelectedValue;
lblMessage.Text = "Profile Saved for " + txtName.Text;
}
}
}
```

SkinFile.skin

```
<%--Default skin template. The following skins are provided as examples only.
1. Named control skin. The SkinId should be uniquely defined because
duplicate SkinId's per control type are not allowed in the same theme.
```

```
<asp:GridView runat="server" SkinId="gridviewSkin" BackColor="White" >
<AlternatingRowStyle BackColor="Blue" /></asp:GridView>
```

2. Default skin. The SkinId is not defined. Only one default

control skin per control type is allowed in the same theme.

```
<asp:Image runat="server" ImageUrl="~/images/image1.jpg" />--%>
<asp:Button runat="server" BackColor="LightBlue" ForeColor="Black" Font-Bold="true" />
<asp:Label runat="server" ForeColor="Blue" Font-Size="Large" />
```

Web.config

```
<system.web>
<anonymousIdentification enabled="true"/>
<profile enabled="true">
<properties>
<add name="UserName" type="System.String" allowAnonymous="true"/>
<add name="ThemeName" type="System.String" defaultValue="LightTheme" allowAnonymous="true"/>
</properties>
</profile>
<compilation debug="true" targetFramework="4.7.2" />
<httpRuntime targetFramework="4.7.2" />
</system.web>
```

OUTPUT:-

Practical No.24:- Demonstrate website navigation controls using menu.

Web.Sitemap

```
<?xml version="1.0" encoding="utf-8" ?>

<siteMap xmlns="http://schemas.microsoft.com/AspNet/SiteMap-File-1.0" >

<siteMapNode url="Default.aspx" title="Home" description="Home Page">

<siteMapNode url="About.aspx" title="About Us" description="About Page" />

<siteMapNode url="Courses.aspx" title="Courses" description="Courses Offered">

<siteMapNode url="BCA.aspx" title="BCA" description="BCA Course" />

<siteMapNode url="BScIT.aspx" title="BScIT" description="BSc IT Course" />

</siteMapNode>

<siteMapNode url="Contact.aspx" title="Contact" description="Contact Page" />

</siteMapNode>

</siteMap>
```

Default.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Default.aspx.cs" Inherits="_24_Menu_Control.Default" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title>Menu Navigation Demo</title>

</head>

<body>

<form id="form1" runat="server">

<h2>Website Navigation Using Menu Control</h2>

<asp:Menu ID="Menu1" runat="server" DataSourceID="SiteMapDataSource1"

Orientation="Horizontal"

StaticDisplayLevels="2"
```

```
BackColor="LightBlue"

ForeColor="Black"

Font-Size="Medium">

</asp:Menu>

<asp:SiteMapDataSource ID="SiteMapDataSource1" runat="server" />

<br /><br />

<asp:Label ID="Label1" runat="server"

Text="Select menu item to navigate"></asp:Label>

</form>

</body>

</html>
```

About.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="About.aspx.cs" Inherits="_24_Menu_Control.About" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title></title>

</head>

<body>

<form id="form1" runat="server">

<h2>About Us Page</h2>

<asp:HyperLink ID="HyperLink1" runat="server" NavigateUrl="Default.aspx">

Back to Home

</asp:HyperLink>

</form>

</body>
```

```
</html>
```

Web.config

```
<?xml version="1.0" encoding="utf-8"?>

<!--  For more information on how to configure your ASP.NET application, please visit

https://go.microsoft.com/fwlink/?LinkId=169433 -->

<configuration>

<system.web>

<compilation debug="true" targetFramework="4.7.2" />

<httpRuntime targetFramework="4.7.2" />

</system.web>

<system.codedom>

<compilers> <compiler language="c#;cs;csharp" extension=".cs" type="Microsoft.CodeDom.Providers.DotNetCompilerPlatform.CSharpCodeProvider, Microsoft.CodeDom.Providers.DotNetCompilerPlatform, Version=2.0.1.0, Culture=neutral, PublicKeyToken=31bf3856ad364e35" warningLevel="4" compilerOptions="/langversion:default /nowarn:1659;1699;1701" />

<compiler language="vb;vbs;visualbasic;vbscript" extension=".vb" type="Microsoft.CodeDom.Providers.DotNetCompilerPlatform.VBCodeProvider, Microsoft.CodeDom.Providers.DotNetCompilerPlatform, Version=2.0.1.0, Culture=neutral, PublicKeyToken=31bf3856ad364e35" warningLevel="4" compilerOptions="/langversion:default /nowarn:41008 /define:_MYTYPE=\&quot;Web\&quot; /optionInfer+" />  </compilers>

</system.codedom>

</configuration>
```

OUTPUT:-

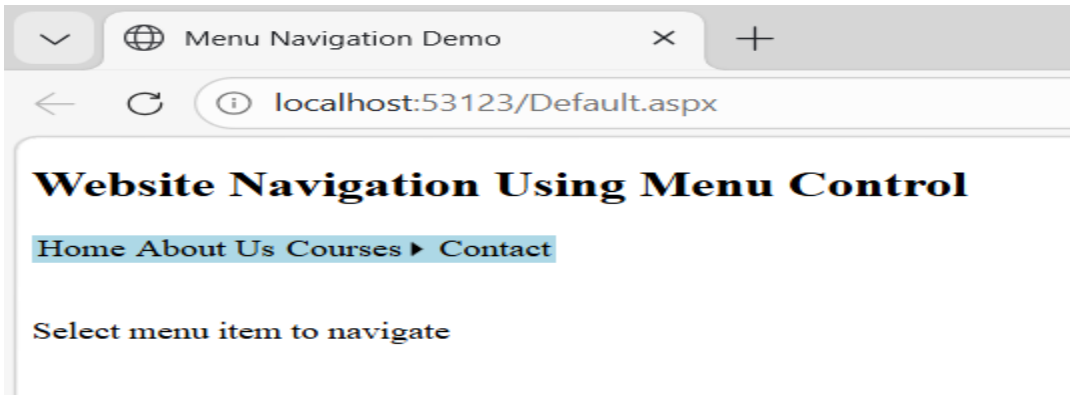

Practical No.25:- Design a web application insert delete and update operation using grid view Control ADO.Net.

Default.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Default.aspx.cs" Inherits="_25_ADO_NET_Operation.Default" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title>GridView CRUD using ADO.NET</title>

</head>

<body>

<form id="form1" runat="server">

<h2>Student Record</h2>

Name:<asp:TextBox ID="txtName" runat="server"></asp:TextBox><br /><br />

Age: <asp:TextBox ID="txtAge" runat="server"></asp:TextBox><br /> <br />

Course: <asp:TextBox ID="txtCourse" runat="server"></asp:TextBox><br /> <br />

<asp:Button ID="btnInsert" runat="server" Text="Insert" OnClick="btnInsert_Click" />

<br />  <br />

<asp:GridView ID="GridView1" runat="server"

AutoGenerateColumns="False"

DataKeyNames="Id"

OnRowEditing="GridView1_RowEditing"

OnRowCancelingEdit="GridView1_RowCancelingEdit"

OnRowUpdating="GridView1_RowUpdating"

OnRowDeleting="GridView1_RowDeleting">

<Columns>

<asp:BoundField DataField="Id" HeaderText="ID" ReadOnly="True" />

<asp:BoundField DataField="Name" HeaderText="Name" />
```

```
<asp:BoundField DataField="Age" HeaderText="Age" />
<asp:BoundField DataField="Course" HeaderText="Course" />
<asp:CommandField ShowEditButton="True" ShowDeleteButton="True" />
</Columns>
</asp:GridView>
</form>
</body>
</html>
```

Default.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Configuration;
using System.Data;
using System.Data.SqlClient;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
namespace _25_ADO_NET_Operation
{
public partial class Default : System.Web.UI.Page
{
SqlConnection con = new SqlConnection(
ConfigurationManager.ConnectionStrings["cs"].ConnectionString);
protected void Page_Load(object sender, EventArgs e)
{
if (!IsPostBack)
```

```
{
BindGrid();
}
}
private void BindGrid()
{
SqlDataAdapter da = new SqlDataAdapter("SELECT * FROM Student", con);
DataTable dt = new DataTable();
da.Fill(dt);
GridView1.DataSource = dt;
GridView1.DataBind();
}
protected void btnInsert_Click(object sender, EventArgs e)
{
SqlCommand cmd = new SqlCommand(
"INSERT INTO Student(Name, Age, Course) VALUES(@Name,@Age,@Course)", con);
cmd.Parameters.AddWithValue("@Name", txtName.Text);
cmd.Parameters.AddWithValue("@Age", txtAge.Text);
cmd.Parameters.AddWithValue("@Course", txtCourse.Text);
con.Open();
cmd.ExecuteNonQuery();
con.Close();
BindGrid();
}
protected void GridView1_RowEditing(object sender, GridViewEditEventArgs e)
{
GridView1.EditIndex = e.NewEditIndex;
```

```
BindGrid();

}

protected void GridView1_RowCancelingEdit(object sender, GridViewCancelEditEventArgs
e)

{

GridView1.EditIndex = -1;

BindGrid();

}

protected void GridView1_RowUpdating(object sender, GridViewUpdateEventArgs e)

{

int id = Convert.ToInt32(GridView1.DataKeys[e.RowIndex].Value);

string name = ((System.Web.UI.WebControls.TextBox)

GridView1.Rows[e.RowIndex].Cells[1].Controls[0]).Text;

string age = ((System.Web.UI.WebControls.TextBox)

GridView1.Rows[e.RowIndex].Cells[2].Controls[0]).Text;

string course = ((System.Web.UI.WebControls.TextBox)

GridView1.Rows[e.RowIndex].Cells[3].Controls[0]).Text;

SqlCommand cmd = new SqlCommand(

"UPDATE Student SET Name=@Name, Age=@Age, Course=@Course WHERE Id=@Id",
con);

cmd.Parameters.AddWithValue("@Name", name);

cmd.Parameters.AddWithValue("@Age", age);

cmd.Parameters.AddWithValue("@Course", course);

cmd.Parameters.AddWithValue("@Id", id);

con.Open();

cmd.ExecuteNonQuery();

con.Close();

GridView1.EditIndex = -1;
```

```
BindGrid();
}
protected void GridView1_RowDeleting(object sender, GridViewDeleteEventArgs e)
{
int id = Convert.ToInt32(GridView1.DataKeys[e.RowIndex].Value);
SqlCommand cmd = new SqlCommand("DELETE FROM Student WHERE Id=@Id", con);
cmd.Parameters.AddWithValue("@Id", id);
con.Open();
cmd.ExecuteNonQuery();
con.Close();
BindGrid();
}
}
}
```

Web.config

```
<?xml version="1.0" encoding="utf-8"?>
<!--  For more information on how to configure your ASP.NET application, please visit
https://go.microsoft.com/fwlink/?LinkId=169433  -->
<configuration>
<connectionStrings>
<add name="cs"
connectionString="Data Source=JUNAID\SQLEXPRESS;Initial Catalog=StudentDB;Integrated Security=True"
providerName="System.Data.SqlClient"/>
</connectionStrings>
<system.web>
<compilation debug="true" targetFramework="4.7.2" />
```

```
<httpRuntime targetFramework="4.7.2" />

</system.web>

<system.codedom>

<compilers>

<compiler language="c#;cs;csharp" extension=".cs" type="Microsoft.CodeDom.Providers.DotNetCompilerPlatform.CSharpCodeProvider, Microsoft.CodeDom.Providers.DotNetCompilerPlatform, Version=2.0.1.0, Culture=neutral, PublicKeyToken=31bf3856ad364e35" warningLevel="4" compilerOptions="/langversion:default /nowarn:1659;1699;1701" />

<compiler language="vb;vbs;visualbasic;vbscript" extension=".vb" type="Microsoft.CodeDom.Providers.DotNetCompilerPlatform.VBCodeProvider, Microsoft.CodeDom.Providers.DotNetCompilerPlatform, Version=2.0.1.0, Culture=neutral, PublicKeyToken=31bf3856ad364e35" warningLevel="4" compilerOptions="/langversion:default /nowarn:41008 /define:_MYTYPE=\&quot;Web\&quot; /optionInfer+" />

</compilers>

</system.codedom>

</configuration>
```

OUTPUT:-

Practical No.26:- Demonstrate website navigation controls (sitemap path, treeview) using SiteMap file.

Web.config

```
<?xml version="1.0" encoding="utf-8"?>

<!--  For more information on how to configure your ASP.NET application, please visit

https://go.microsoft.com/fwlink/?LinkId=169433  -->

<configuration>

<system.web>

<anonymousIdentification enabled="true"/>

<profile enabled="true">

<properties>

<add name="UserName" type="System.String" allowAnonymous="true"/>

<add name="ThemeName" type="System.String" defaultValue="LightTheme" allowAnonymous="true"/>

</properties>

</profile>

<compilation debug="true" targetFramework="4.7.2" />

<httpRuntime targetFramework="4.7.2" />

</system.web>

<!--<system.codedom>

<compilers>

<compiler language="c#;cs;csharp" extension=".cs" type="Microsoft.CodeDom.Providers.DotNetCompilerPlatform.CSharpCodeProvider, Microsoft.CodeDom.Providers.DotNetCompilerPlatform, Version=2.0.1.0, Culture=neutral, PublicKeyToken=31bf3856ad364e35" warningLevel="4" compilerOptions="/langversion:default /nowarn:1659;1699;1701" />

<compiler language="vb;vbs;visualbasic;vbscript" extension=".vb" type="Microsoft.CodeDom.Providers.DotNetCompilerPlatform.VBCodeProvider, Microsoft.CodeDom.Providers.DotNetCompilerPlatform, Version=2.0.1.0, Culture=neutral, PublicKeyToken=31bf3856ad364e35" warningLevel="4" compilerOptions="/langversion:default /nowarn:41008 /define:_MYTYPE=\&quot;Web\&quot; /optionInfer+" />
```

```
</compilers>
</system.codedom>-->
</configuration>
```

Skinfile.skin

```
<%--
Default skin template. The following skins are provided as examples only.
1. Named control skin. The SkinId should be uniquely defined because
duplicate SkinId's per control type are not allowed in the same theme.
<asp:GridView runat="server" SkinId="gridviewSkin" BackColor="White" >
<AlternatingRowStyle BackColor="Blue" />
</asp:GridView>
2. Default skin. The SkinId is not defined. Only one default
control skin per control type is allowed in the same theme.
<asp:Image runat="server" ImageUrl="~/images/image1.jpg" />--%>
<asp:Button runat="server" BackColor="Black" ForeColor="White" Font-Bold="true" />
<asp:Label runat="server" ForeColor="White" Font-Size="Large" />
```

Skinfile.skin

```
<%--Default skin template. The following skins are provided as examples only.
1. Named control skin. The SkinId should be uniquely defined because
duplicate SkinId's per control type are not allowed in the same theme.
<asp:GridView runat="server" SkinId="gridviewSkin" BackColor="White" >
<AlternatingRowStyle BackColor="Blue" />
</asp:GridView>
2. Default skin. The SkinId is not defined. Only one default
control skin per control type is allowed in the same theme.
<asp:Image runat="server" ImageUrl="~/images/image1.jpg" />--%>
<asp:Button runat="server" BackColor="LightBlue" ForeColor="Black" Font-Bold="true" />
```

```
<asp:Label runat="server" ForeColor="Blue" Font-Size="Large" />
```

Default.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Default.aspx.cs" Inherits="_26_Profile_Themes.Default" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title>Profiles and Themes Demo</title>

</head>

<body>

<form id="form1" runat="server">

<h2>ASP.NET Profiles and Themes Example</h2>

Enter Name: <asp:TextBox ID="txtName" runat="server"></asp:TextBox> <br /><br />

Select Theme:

<asp:DropDownList ID="ddlTheme" runat="server">

<asp:ListItem>LightTheme</asp:ListItem>

<asp:ListItem>DarkTheme</asp:ListItem>

</asp:DropDownList><br /><br />

<asp:Button ID="btnSave" runat="server" Text="Save Profile" OnClick="btnSave_Click" />
<br /> <br />

<asp:Label ID="lblMessage" runat="server"></asp:Label>

</form>

</body>

</html>
```

Default.aspx.cs

```
using System;

using System.Web;

namespace _26_Profile_Themes
```

```
{
public partial class Default : System.Web.UI.Page
{
protected void Page_PreInit(object sender, EventArgs e)
{
if (HttpContext.Current.Profile["ThemeName"] != null)
{
Page.Theme = HttpContext.Current.Profile["ThemeName"].ToString();
}
}
protected void Page_Load(object sender, EventArgs e)
{
}
protected void btnSave_Click(object sender, EventArgs e)
{
HttpContext.Current.Profile["UserName"] = txtName.Text;
HttpContext.Current.Profile["ThemeName"] = ddlTheme.SelectedValue;
lblMessage.Text = "Profile Saved for " + txtName.Text;
}
}
}
```

OUTPUT:-

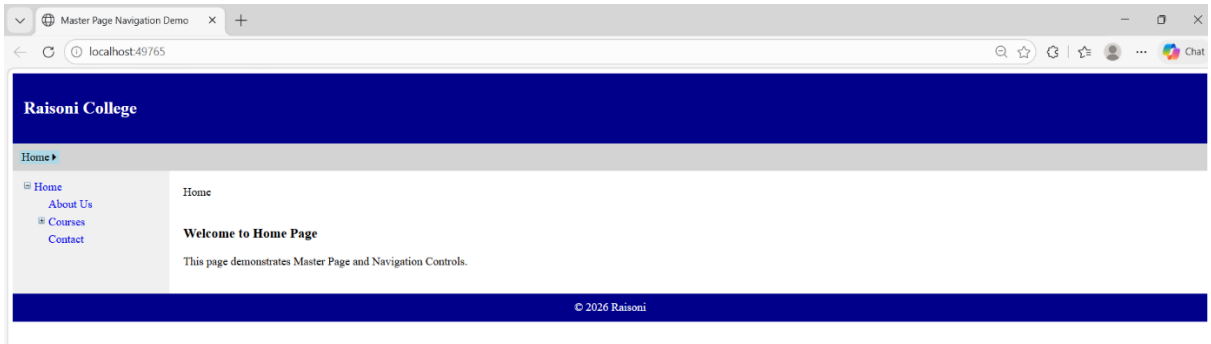

Practical No.27:- Write an ASP .net program that demonstrates use login status and login control.

Login.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Login.aspx.cs" Inherits="_27_Login_Status.Login" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title>Login Page</title>

</head>

<body>

<form id="form1" runat="server">

<h2>Login Page</h2>

<asp:Login ID="Login1" runat="server" OnAuthenticate="Login1_Authenticate">

</asp:Login>

</form>

</body>

</html>
```

Login.aspx.cs

```
using System;

using System.Collections.Generic;

using System.Linq;

using System.Web;

using System.Web.Security;

using System.Web.UI;

using System.Web.UI.WebControls;

namespace _27_Login_Status

{
```

```
public partial class Login : System.Web.UI.Page
{
protected void Page_Load(object sender, EventArgs e)
{
}
protected void Login1_Authenticate(object sender, AuthenticateEventArgs e)
{
if (Login1.UserName == "admin" && Login1.Password == "123")
{
FormsAuthentication.RedirectFromLoginPage(Login1.UserName, false);
}
else
{
e.Authenticated = false;
}
}
}
}
```

Default.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Default.aspx.cs" Inherits="_27_Login_Status.Default" %>
<!DOCTYPE html>
<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
<title>Home Page</title>
</head>
<body>
```

```
<form id="form1" runat="server">
<h2>Welcome to Secure Page</h2>
<asp:LoginName ID="LoginName1" runat="server" FormatString="Welcome {0}" /><br /><br />
<asp:LoginStatus ID="LoginStatus1" runat="server"
LogoutAction="Redirect"
LogoutPageUrl="Login.aspx" />
</form>
</body>
</html>
```

Web.config

```
<?xml version="1.0" encoding="utf-8"?>
<!--For more information on how to configure your ASP.NET application, please visit
https://go.microsoft.com/fwlink/?LinkId=169433-->
<configuration>
<appSettings>
<add key="ValidationSettings:UnobtrusiveValidationMode" value="None" />
</appSettings>
<system.web>
<authentication mode="Forms">
<forms loginUrl="Login.aspx"/>
</authentication>
<authorization>
<deny users="?" />
</authorization>
<compilation debug="true" targetFramework="4.7.2" />
<httpRuntime targetFramework="4.7.2" />
</system.web>
```

```
<system.codedom>

<compilers>

<compiler language="c#;cs;csharp" extension=".cs" type="Microsoft.CodeDom.Providers.DotNetCompilerPlatform.CSharpCodeProvider, Microsoft.CodeDom.Providers.DotNetCompilerPlatform, Version=2.0.1.0, Culture=neutral, PublicKeyToken=31bf3856ad364e35" warningLevel="4" compilerOptions="/langversion:default /nowarn:1659;1699;1701" />

<compiler language="vb;vbs;visualbasic;vbscript" extension=".vb" type="Microsoft.CodeDom.Providers.DotNetCompilerPlatform.VBCodeProvider, Microsoft.CodeDom.Providers.DotNetCompilerPlatform, Version=2.0.1.0, Culture=neutral, PublicKeyToken=31bf3856ad364e35" warningLevel="4" compilerOptions="/langversion:default /nowarn:41008 /define:_MYTYPE=\&quot;Web\&quot; /optionInfer+" />

</compilers>

</system.codedom>

</configuration>
```

OUTPUT:-

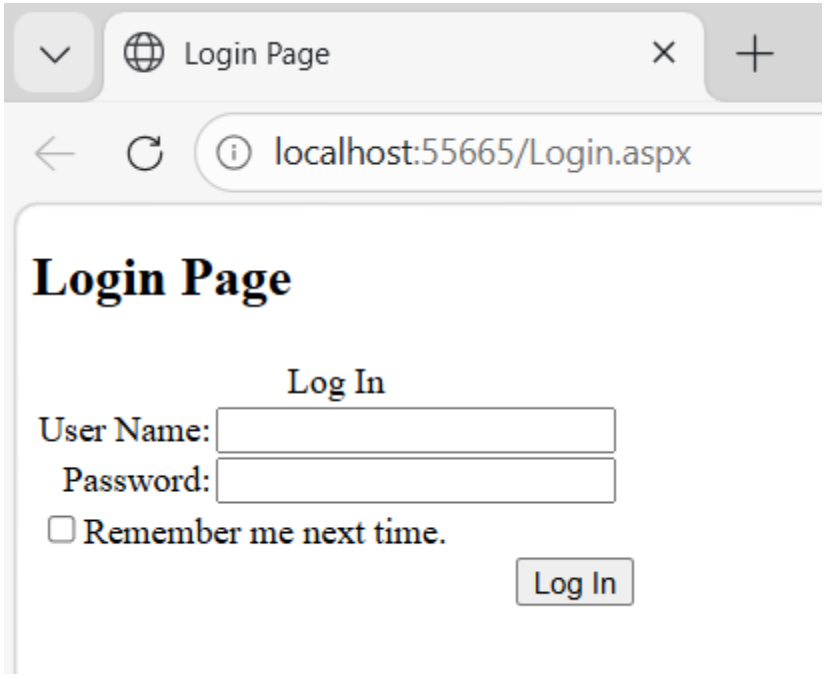

Practical No.28:- Design a dynamic website using all tools and controls.

Demo.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Demo.aspx.cs" Inherits="_08_Student_Registration.Demo" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title></title>

</head>

<body>

<form id="form1" runat="server">

<div style="width:400px; margin:auto; padding:20px;

border:1px solid #ccc; border-radius:10px;">

<h2>Student Registration Form</h2>

<asp:Label ID="lblName" runat="server"

Text="Full Name:" AssociatedControlID="txtName"></asp:Label><br />

<asp:TextBox ID="txtName" runat="server" Width="250px"></asp:TextBox><br /><br />

<asp:Label ID="lblAge" runat="server" Text="Age:" AssociatedControlID="txtAge"></asp:Label><br />

<asp:TextBox ID="txtAge" runat="server" Width="100px"></asp:TextBox><br /><br />

<asp:Label ID="lblGender" runat="server" Text="Gender:"></asp:Label><br />

<asp:RadioButtonList ID="rblGender" runat="server">

<asp:ListItem Text="Male" Value="Male"></asp:ListItem>

<asp:ListItem Text="Female" Value="Female"></asp:ListItem>

<asp:ListItem Text="Other" Value="Other"></asp:ListItem>

</asp:RadioButtonList><br />

<asp:Label ID="lblCourse" runat="server" Text="Course:"></asp:Label><br/>
<asp:DropDownList ID="ddlCourse" runat="server">
```

```
<asp:ListItem Text="Select Course" Value=""></asp:ListItem>
<asp:ListItem Text="B.Sc" Value="B.Sc"></asp:ListItem>
<asp:ListItem Text="B.Com" Value="B.Com"></asp:ListItem>
<asp:ListItem Text="B.A" Value="B.A"></asp:ListItem>
<asp:ListItem Text="B.Tech" Value="B.Tech"></asp:ListItem>
</asp:DropDownList><br /><br />
<asp:Label ID="lblSubjects" runat="server"
Text="Subjects Interested:"></asp:Label><br />
<asp:CheckBoxList ID="cblSubjects" runat="server">
<asp:ListItem Text="Math" Value="Math"></asp:ListItem>
<asp:ListItem Text="Physics" Value="Physics"></asp:ListItem>
<asp:ListItem Text="Chemistry" Value="Chemistry"></asp:ListItem>
<asp:ListItem Text="Computer" Value="Computer"></asp:ListItem>
</asp:CheckBoxList><br />
<asp:Button ID="btnSubmit" runat="server" Text="Register"
OnClick="btnSubmit_Click" /><br /><br />
<asp:Label ID="lblMessage" runat="server" ForeColor="Green"></asp:Label>
</div>
</form>
</body>
</html>
```

Demo.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
```

```
using System.Web.UI.WebControls;
namespace _08_Student_Registration
{
public partial class Demo : System.Web.UI.Page
{
protected void Page_Load(object sender, EventArgs e)
{
}
protected void btnSubmit_Click(object sender, EventArgs e)
{
// Get values from controls
string name = txtName.Text.Trim();
string age = txtAge.Text.Trim();
string gender = rblGender.SelectedValue;
string course = ddlCourse.SelectedValue;
string subjects = "";
foreach (var item in cblSubjects.Items)
{
if (((System.Web.UI.WebControls.ListItem)item).Selected)
{
subjects += ((System.Web.UI.WebControls.ListItem)item).Text     + ", ";
}
}
if (subjects.EndsWith(", "))
subjects = subjects.Substring(0, subjects.Length - 2);
// Display a confirmation message
lblMessage.Text = $"Student Registered Successfully! <br/>"
```

```
+
$"Name: {name} <br/>" +
$"Age: {age} <br/>" +
$"Gender: {gender} <br/>" +
$"Course: {course} <br/>" +
$"Subjects: {subjects}";
}
}
}
```

OUTPUT:-

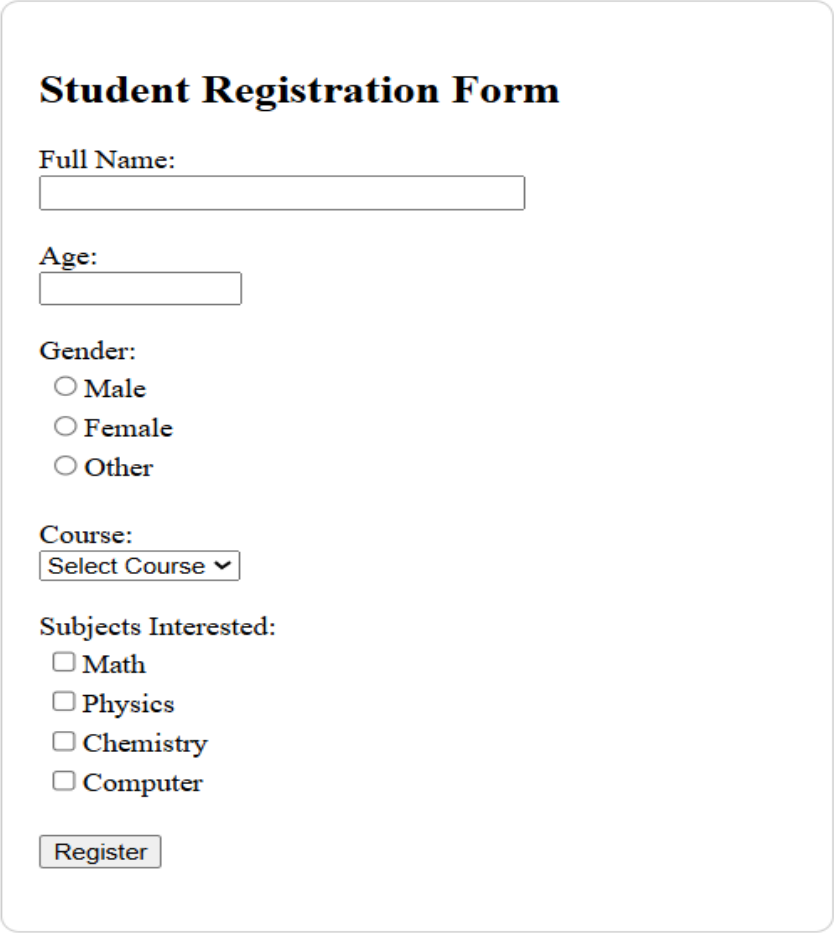

Practical No.29:- Write an asp.net program to demonstrate Repeater Control.

RepeaterDemo.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="RepeaterDemo.aspx.cs"
Inherits="_29_Repeator_Control.RepeaterDemo" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title>Repeater Control with Database</title>

</head>

<body>

<form id="form1" runat="server">

<h2>Student List</h2>

<asp:Repeater ID="Repeater1" runat="server">

<HeaderTemplate>

<table border="1">

<tr>

<th>ID</th>

<th>Name</th>

<th>Age</th>

<th>Course</th>

</tr>

</HeaderTemplate>

<ItemTemplate>

<tr>

<td><%# Eval("ID") %></td>

<td><%# Eval("Name") %></td>

<td><%# Eval("Age") %></td>
```

```
<td><%# Eval("Course") %></td>

</tr>

</ItemTemplate>

<FooterTemplate>

</table>

</FooterTemplate>

</asp:Repeater>

</form>

</body>

</html>
```

RepeaterDemo.aspx.cs

```
using System;

using System.Collections.Generic;

using System.Data;

using System.Data.SqlClient;

using System.Linq;

using System.Web;

using System.Web.UI;

using System.Web.UI.WebControls;

namespace _29_Repeator_Control

{

public partial class RepeaterDemo : System.Web.UI.Page

{

SqlConnection con = new SqlConnection("Data Source=JUNAID\\SQLEXPRESS;Initial Catalog=StudentDB;Integrated Security=True");

protected void Page_Load(object sender, EventArgs e)

{
```

```
if (!IsPostBack)
{
BindData();
}
}
void BindData()
{
SqlDataAdapter da = new SqlDataAdapter("SELECT * FROM Student", con);
DataTable dt = new DataTable();
da.Fill(dt);
Repeater1.DataSource = dt;
Repeater1.DataBind();
}
}
}
```

Web.config

```
<?xml version="1.0" encoding="utf-8"?>
<!--For more information on how to configure your ASP.NET application, please visit
https://go.microsoft.com/fwlink/?LinkId=169433-->
<configuration>
<system.web>
<compilation debug="true" targetFramework="4.7.2" />
<httpRuntime targetFramework="4.7.2" />
</system.web>
<system.codedom>
<compilers>
```

```
<compiler language="c#;cs;csharp" extension=".cs" type="Microsoft.CodeDom.Providers.DotNetCompilerPlatform.CSharpCodeProvider, Microsoft.CodeDom.Providers.DotNetCompilerPlatform, Version=2.0.1.0, Culture=neutral, PublicKeyToken=31bf3856ad364e35" warningLevel="4" compilerOptions="/langversion:default /nowarn:1659;1699;1701" />

<compiler language="vb;vbs;visualbasic;vbscript" extension=".vb" type="Microsoft.CodeDom.Providers.DotNetCompilerPlatform.VBCodeProvider, Microsoft.CodeDom.Providers.DotNetCompilerPlatform, Version=2.0.1.0, Culture=neutral, PublicKeyToken=31bf3856ad364e35" warningLevel="4" compilerOptions="/langversion:default /nowarn:41008 /define:_MYTYPE=\&quot;Web\&quot; /optionInfer+" />

</compilers>

</system.codedom>

</configuration>
```

OUTPUT:-

Practical No.30:- Write an asp.net program to demonstrate Form View control.

FormViewDemo.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="FormViewDemo.aspx.cs"
Inherits="_30_Form_View_Control.FormViewDemo" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">

<head runat="server">

<title></title>

</head>

<body>

<form id="form1" runat="server">

<h2>Student Details</h2>

<asp:FormView ID="FormView1" runat="server" AllowPaging="True">

<ItemTemplate>

<table border="1">

<tr>

<td>ID</td>

<td><%# Eval("ID") %></td>

</tr>

<tr>

<td>Name</td>

<td><%# Eval("Name") %></td>

</tr>

<tr>

<td>Course</td>

<td><%# Eval("Course") %></td>

</tr>
```

```
</table>

</ItemTemplate>

</asp:FormView>

</form>

</body>

</html>
```

FormViewDemo.aspx.cs

```
using System;

using System.Collections.Generic;

using System.Data;

using System.Data.SqlClient;

using System.Linq;

using System.Web;

using System.Web.UI;

using System.Web.UI.WebControls;

namespace _30_Form_View_Control

{

public partial class FormViewDemo : System.Web.UI.Page

{

SqlConnection con = new SqlConnection("Data Source=JUNAID\\SQLEXPRESS;Initial Catalog=StudentDB;Integrated Security=True");

protected void Page_Load(object sender, EventArgs e)

{

if (!IsPostBack)

{

BindData();

}
```

```
}
void BindData()
{
SqlDataAdapter da = new SqlDataAdapter
("SELECT * FROM Student", con);
DataTable dt = new DataTable();
da.Fill(dt);
FormView1.DataSource = dt;
FormView1.DataBind();
}
}
}
```
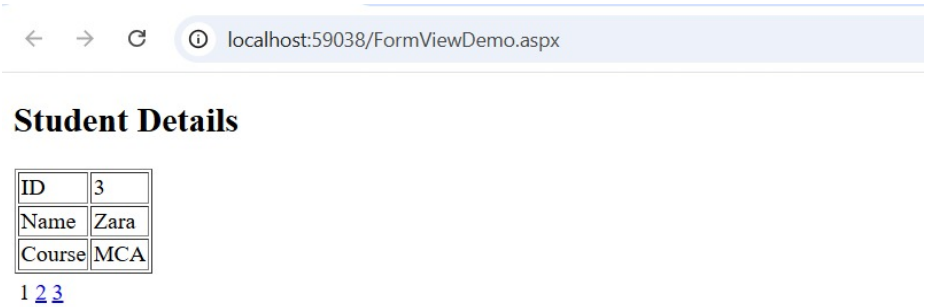
OUTPUT:-