

ABSTRACT

This **Courier Management System** Project will have different modules. The login section will have login facility for the admin and for the user who will operate this system. While taking orders from its customers, it will take all the details of its customers who is placing the orders and all the details for the recipient such as its address, name, mobile number. Through the tracking id, customers or its recipient will able to track their products from any location using internet. It will provide status of the product after placing orders within 1 minute. The admin can manipulate the data through admin login page and add any new consignment if required. The profile section shows the data of the user and the pricing section of the project shows the price that will be charged for the consignment according to the weight categories.

Using the courier service person can easily send his/her parcel to other person in the particular destination within the time.

CONTENTS

CHAPTERS	PAGE NO
Chapter 1	Introduction
Chapter 2	Requirements
Chapter 3	Entity Relationship Diagram
Chapter 4	Schema Diagram
Chapter 5	Implementation
Chapter 6	Snapshots
	Conclusion
	References

CHAPTER 1

Introduction

This Courier Management System Project will have different modules. The login section will have login facility for the admin and for the user who will operate this system. While taking orders from its customers, it will take all the details of its customers who is placing the orders and all the details for the recipient such as its address, name, mobile number. During billing process system will generate a tracking id for their products. Through this tracking id, customers or its recipient will able to track their products from any location using internet. It will provide status of the product after placing orders within 1 minute.

The courier service is one of the solutions of these problems. It is used to send some things to any person in the world within time. The courier company has number of branches, which are spread over the country or the world. So that when person wants to send things then he has to contact at nearest courier service branch. The courier company creates the schedule & gives internal/external services. The courier service work as destination office or source office.

In modern age, as time increase, needs & requirements of the person are also increased. They want more facility & try to do their task quickly & within time. But they can not get all the things at nearest market or area, so they have to import the things from any place in the world. Within the country, the things can be imported through post service. But it consumes the time & sometimes problem of damage or missing occur. Where as in the international market, the one way is shipping. But it also requires more time.

Motivation behind this project:

To gain maximum business region, customer demands good service. So to make more profit and gain maximum business region, their administration must also have a system to tackle all these problems on time. Its administration can take immediate orders and provide a receipt which will include all the details of the products along with appropriate price to their customers. Thus saving time and eliminating line making process.

Features of Purposed System:

These are the important features of the project Courier Management System:

- In computer system of the courier service computation of the rate is easily & quickly done.
- Computer system of the courier service provide fast access.
- Using this computerized system, bill issued procedure becomes fast.
- In computer system the person has to fill the various forms & number of copies of the forms can be easily generated at a time.
- In computer system, it is not necessary to create the Manifest but we can directly print it, which saves our time.
- It contain better storage capacity.
- Accuracy in work.
- Easy & fast retrieval of information.
- Well designed reports.
- Decrease the load of the person involve in existing manual system.
- Access of any information individually.
- Work becomes very speedy.
- Easy to update information.

CHAPTER 2

REQUIREMENTS

System Requirements:

Software Requirement:

- Apache Server 2.0
- PHP Version 5.3 or above
- MySQL Version 5.5 or above
- Latest browser : Chrome, Firefox, Safari etc
- Operating System : Any (Linux, Windows, Mac etc)

Hardware Requirements:

- Processor Pentium IV or higher version.
- Ram 128 MB or above
- Hard Disk 150 MB or above

CHAPTER 3

ENTITY RELATIONSHIP DIAGRAM

An **Entity–relationship model (ER model)** describes the structure of a database with the help of a diagram, which is known as **Entity Relationship Diagram (ER Diagram)**. An ER model is a design or blueprint of a database that can later be implemented as a database. The main components of E-R model are: entity set and relationship set.

What is an Entity Relationship Diagram (ER Diagram)?

An ER diagram shows the relationship among entity sets. An entity set is a group of similar entities and these entities can have attributes. In terms of DBMS, an entity is a table or attribute of a table in database, so by showing relationship among tables and their attributes, ER diagram shows the complete logical structure of a database.

The geometric shapes and their meaning in an E-R Diagram. We will discuss these terms in detail in the next section(Components of a ER Diagram) of this guide so don't worry too much about these terms now, just go through them once.

Rectangle: Represents Entity sets.

Ellipses: Attributes

Diamonds: Relationship Set


Lines: They link attributes to Entity Sets and Entity sets to Relationship Set

Double Ellipses: Multivalued Attributes


Dashed Ellipses: Derived Attributes

Double Rectangles: Weak Entity Sets

Double Lines: Total participation of an entity in a relationship set

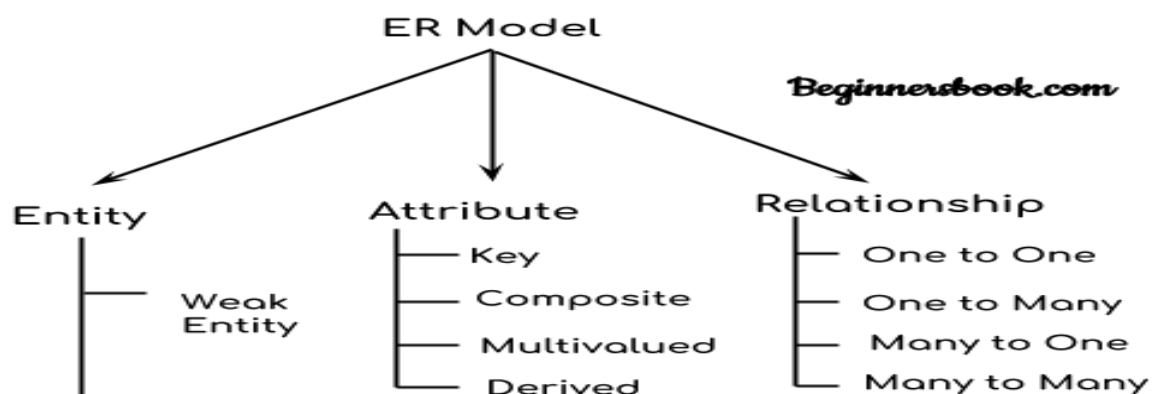

Components of ER Diagram

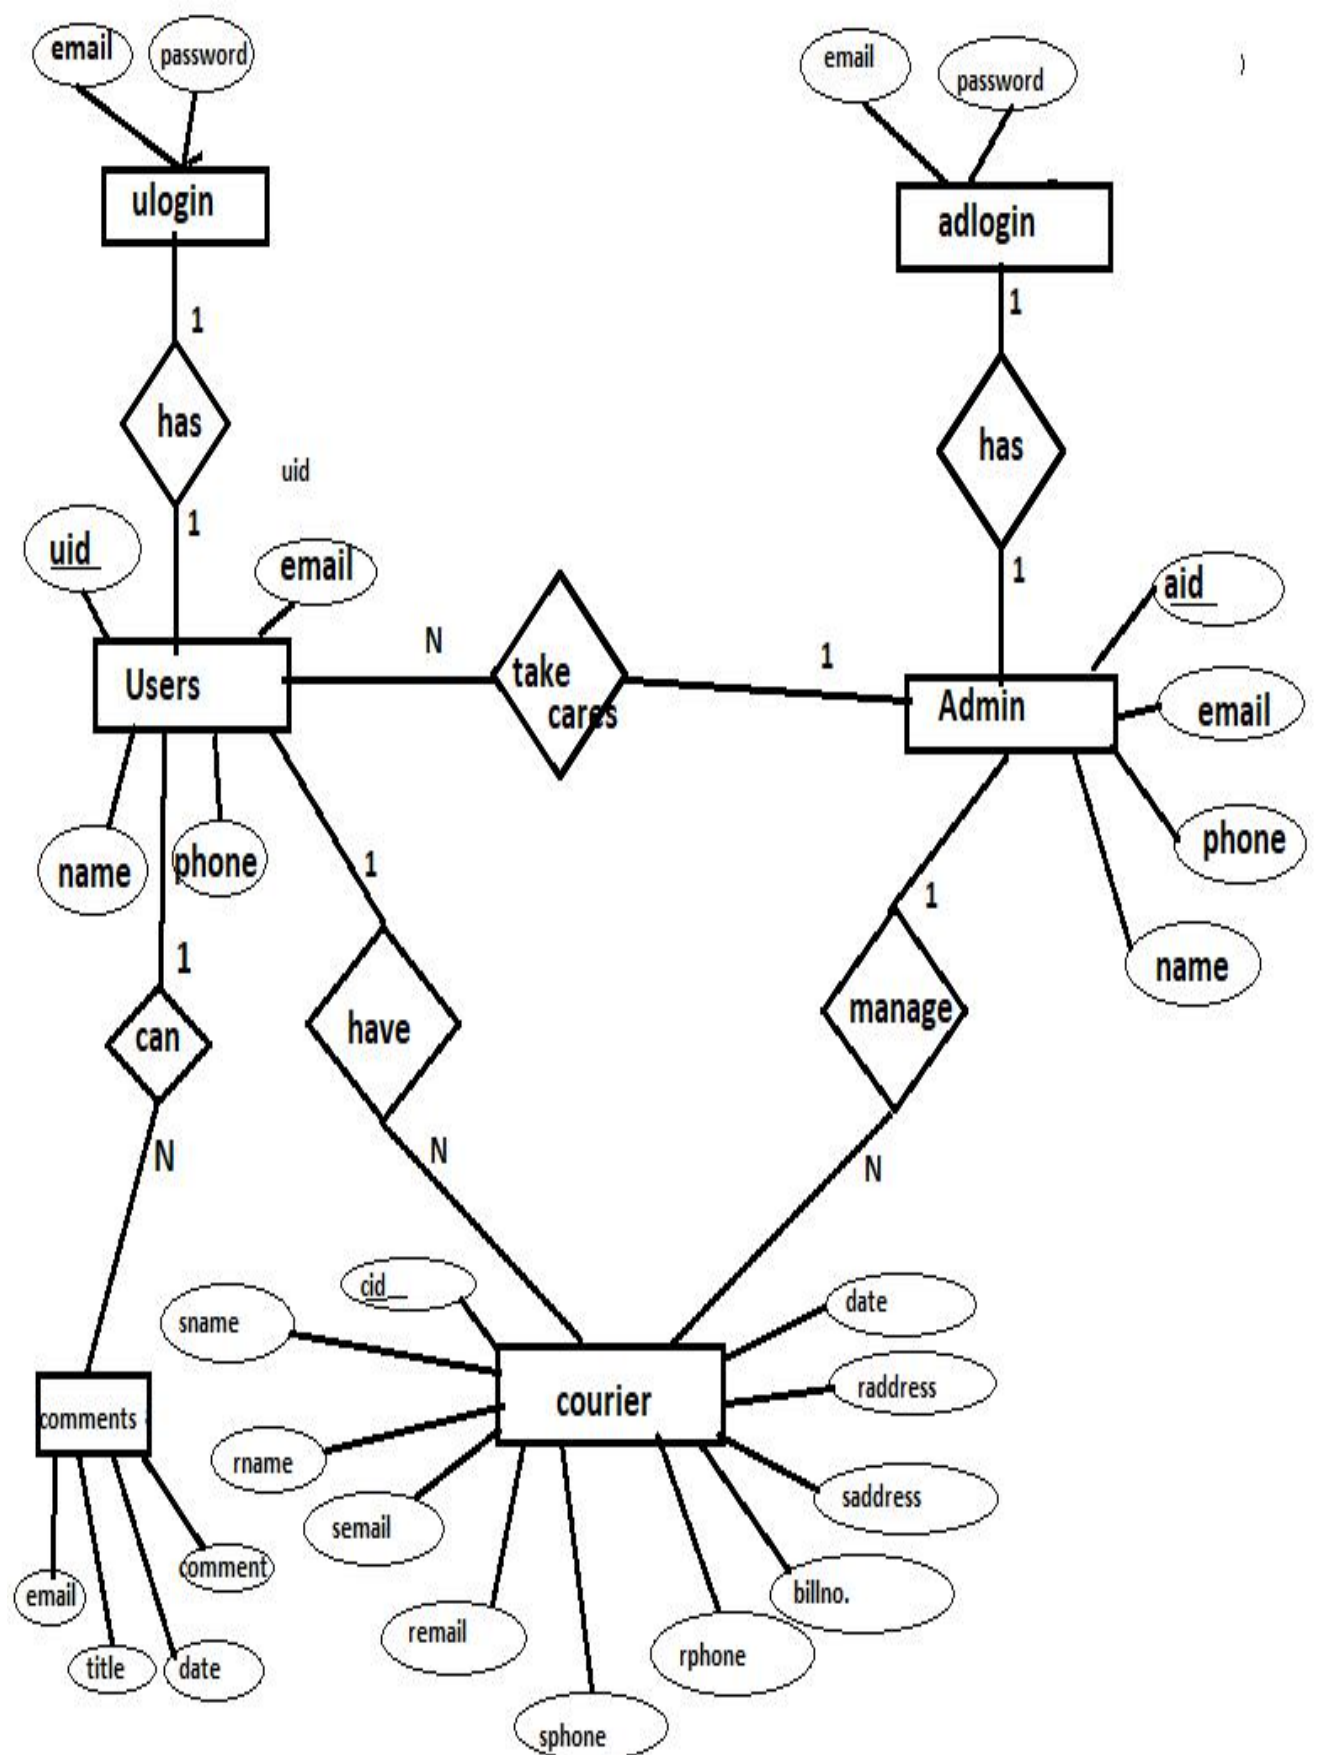

CHAPTER 4

ENTITY RELATIONSHIP SCHEMA DIAGRAM

A database schema is the skeleton structure that represents the logical view of the entire database. It defines how the data is organized and how the relations among them are associated. It formulates all the constraints that are to be applied on the data.

A database schema defines its entities and the relationship among them. It contains a descriptive detail of the database, which can be depicted by means of schema diagrams.

An Entity-Relationship Model (ERM) is an abstract and conceptual representation of data. Entity-relationship modeling is a database modeling method, used to produce a type of conceptual schema or semantic data model of a system, often a relational database, and its requirements in a top-down fashion.

In order to create an ER schema you must know three main concepts: entity, attribute and relationship.

Entity

Entity is the central concept of the Entity-Relationship model. An entity represents a description of the common features of set of objects of the real world. Examples of entities are Person, Car, Artist, and Album.

Attribute

An Attribute represents the properties of real world objects that are relevant for the application purposes. Attributes are associated with the concept of Entity, with the meaning that all the instances of the entity are characterized by the same set of attributes. In other words, the entity is a descriptor of the common properties of a set of objects, and such properties are expressed as attributes.

Relationship

A Relationship represents semantic connections between entities, like the association between an artist and his/her album, or between an artist and his/her reviews.

The possible values are one and many. Based on their maximum cardinality constraints, relationships are called

1. "one-to-one", if both relationships roles have maximum cardinality 1,
2. "one-to-many", if one relationship role has maximum cardinality 1 and the other role has maximum cardinality N,
3. "many-to-many", if both relationships roles have maximum cardinality N.

E-R Schema Normalization

E-R includes some concept that are not minimal but which can be specified through the usage of the three main concepts of the ER Schema. These concepts are:

- Multi value attributes.

Attributes of an object that can take a set of values represented by an entity and a relationship

- Composed attributes.

Attributes with an internal structure (i.e, an address can include different fields), represented by using an entity and a relationship


- N-ary relationships.

Represented by a central entity and two reports

- Relationships with attributes.

Relationships involving N entities

ER SCHEMA DIAGRAM FOR COURIER MANAGEMENT SYSTEM

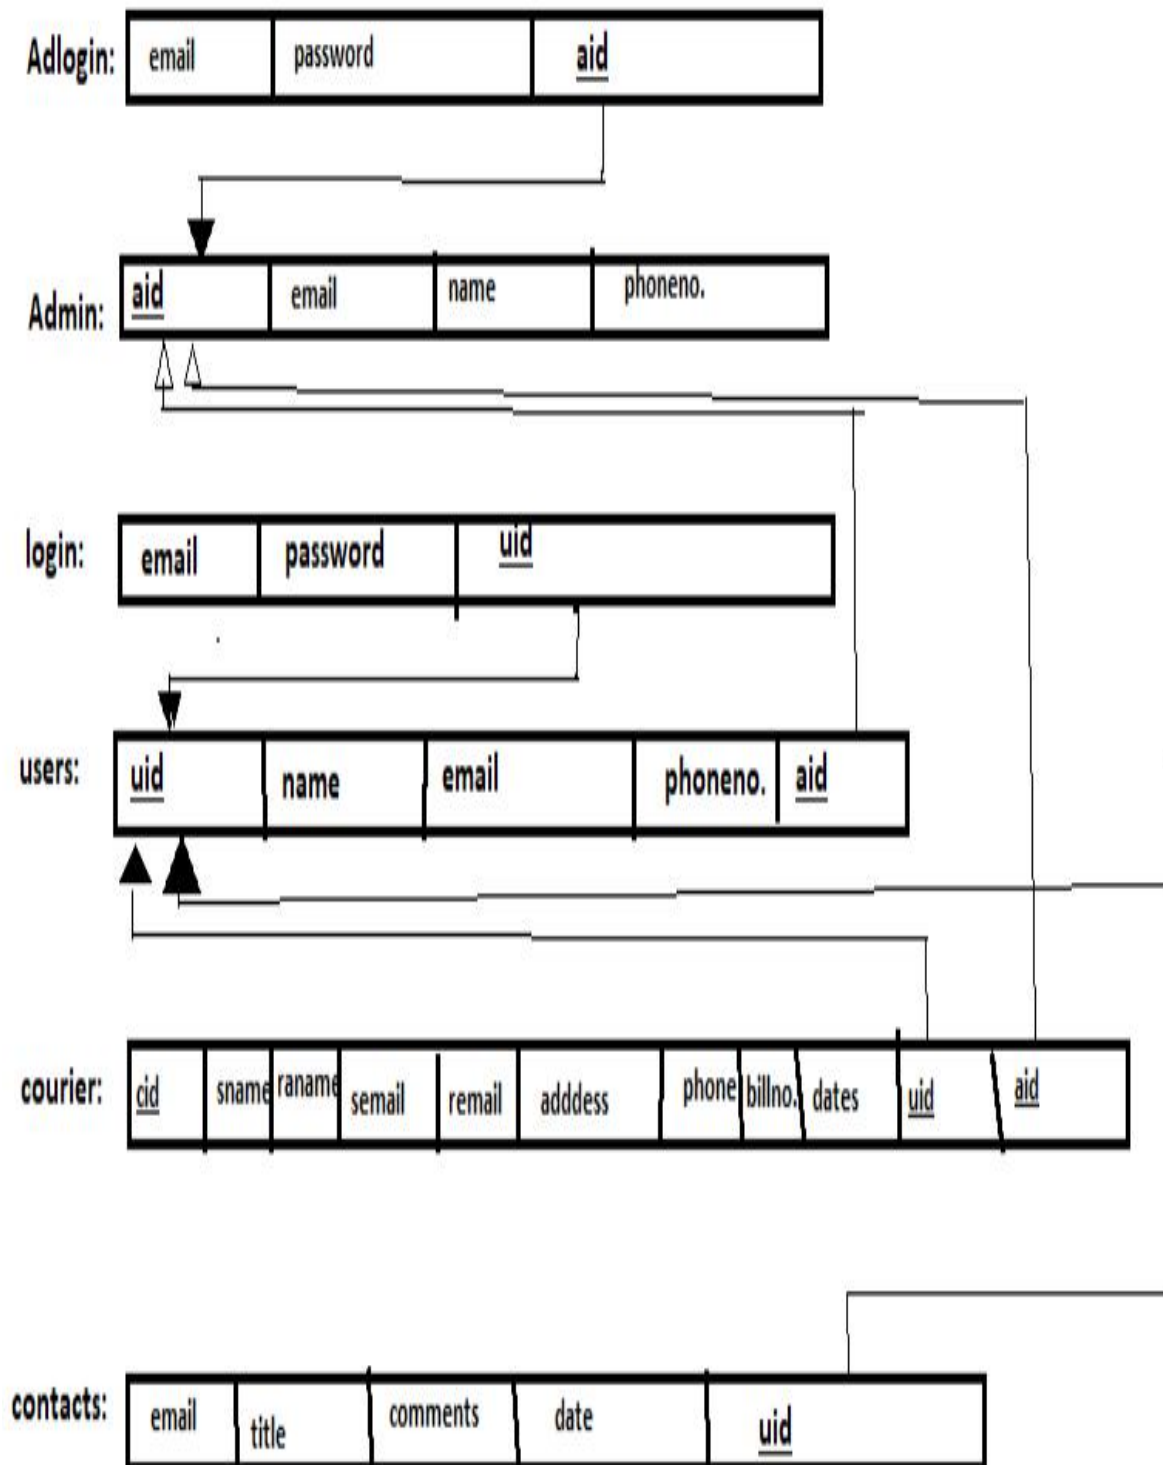

CHAPTER 5

IMPLEMENTATION

FRONTEND CODE

INDEX.PHP

```
<?php

require_once "dbconnection.php";
require_once "session.php";

if ($_SERVER["REQUEST_METHOD"] == "POST" && isset($_POST['submit'])) {

    $email = $_POST['email'];
    $password = $_POST['password'];

    $qry = "SELECT * FROM `login` WHERE `email`='$email' AND
`password`='$password'";
    $run = mysqli_query($dbcon, $qry);
    $row = mysqli_num_rows($run);
    if ($row < 1) {
?>
        <script>
            alert("Opps! plz Enter Your Username and Pswd again..");
            window.open('index.php', '_self');
        </script> <?php
    } else {
        $data = mysqli_fetch_assoc($run);
        $id = $data['u_id']; //fetch id value of user
        $email = $data['email'];
        $_SESSION['uid'] = $id; //now we can use it until session destroy
        $_SESSION['emm'] = $email;
        ?>
        <script>
            alert("स् वागत है आपका");
            window.open('home/home.php', '_self');
            // changes made here
        </script> <?php
    }
}
?>
```



```

<!DOCTYPE html>
<html lang="en">

<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Login</title>
  <link rel="stylesheet"
href="https://stackpath.bootstrapcdn.com/bootstrap/4.4.1/css/bootstrap.min.css">
  <style>
    body {
      background-image: url('images/10.jpg');
      background-repeat: no-repeat;
      background-size: cover;
    }
  </style>
</head>

<body>
  <h1 align='center' style="margin: 15px; color:seagreen;font-weight: bold;font-
family:'Times New Roman', Times, serif">TYPHOON COURIER SERVICE</h1>
  <hr />
  <P align='center' style="font-weight: bold;color:orange;font-family:'Times New Roman',
Times, serif">The Fastest Courier Service Ever</P>
  <div>
    <h5><a href="admin/adminlogin.php" style="float: right; margin-right:40px; color:blue;
margin-top:0px">AdminLogin</a></h5>
  </div>
  <div class="container" style="margin-top: 60px; width:50%;">
    <div class="row">
      <div class="col-md-12">
        <h2 style="color: #273c75;">Login</h2>
        <p style="color:#e84118;">Please Fill Your      </p>
        <!-- <?php echo $error; ?> -->
        <form action="" method="post">
          <div class="form-group">
            <label>Email Address</label>
            <input type="email" name="email" class="form-control" placeholder="Enter
username/emailId" required />
          </div>
          <div class="form-group">
            <label>Password</label>
            <input type="password" name="password" class="form-control"
placeholder="Enter your password" required>
          </div>
          <div class="form-group">
            <input type="submit" name="submit" class="btn btn-primary" value="SignIn"
/>
            <button onclick="window.location.href='resetpswd.php'" class="btn btn-
danger" style="cursor:pointer">Reset Password</button>

```

```

</div>
        <p style="color: #e84118;">Don't have an account? ➤ <a
href="register.php">Register here</a>.</p>

        </form>
    </div>
</div>
</body>

</html>

```

DBCONNECTION.PHP

```

<?php

$dbcon = mysqli_connect('localhost','root','','courierdb');

if($dbcon==false)
{
    echo "Database is not Connected!";
}

?>

```

REGISTER.PHP

```

<?php
require_once "dbconnection.php";
require_once "session.php";

if ($_SERVER["REQUEST_METHOD"] == "POST" && isset($_POST['submit'])) {

    $fullname = $_POST['name'];
    $phn = $_POST['ph'];
    $email = $_POST['email'];
    $password = $_POST['password'];
    $confirm_password = $_POST['confirm_password'];
    if($password==$confirm_password){

        $qry = "INSERT INTO `users` (`email`, `name`, `pnumber`) VALUES ('$email',
'$fullname', '$phn')";
        $run = mysqli_query($dbcon,$qry);

        if($run==true){

```

```
$psqry = "INSERT INTO `login` (`email`, `password`, `u_id`) VALUES ('$email',  
'$password',LAST_INSERT_ID() )";
```

```

$psrun = mysqli_query($dbcon,$psqry);
    ?> <script>
        alert('Registration Successfully :');
        window.open('index.php','_self');
    </script>
<?php
}
} else {
    ?> <script>
        alert('Password mismatched!!');
    </script>
<?php
}
}
?>
<!DOCTYPE html>
<html lang="en">
    <head>
        <meta charset="UTF-8">
        <meta name="viewport" content="width=device-width, initial-scale=1.0">
        <title>Sign Up</title>
        <link rel="stylesheet"
href="https://stackpath.bootstrapcdn.com/bootstrap/4.4.1/css/bootstrap.min.css">
    </style>
    <body>
        {
        background-image:url('images/brr.png');
        background-repeat: no-repeat;
        background-size: cover;
        }
    </style>
</head>
<body><br>
    <div class="container">
        <div class="row">
            <div class="col-md-12">
                <h2 style="color:green">Register</h2>
                <p>Please fill this form to create an account.</p>
                <!-- <?php echo $success; ?>
                <?php echo $error; ?> -->
                <form action="" method="post">
                    <div class="form-group">
                        <label>Full Name</label>
                        <input type="text" name="name" class="form-control" required>
                    </div>
                    <div class="form-group">
                        <label>Phone Num.</label>
                        <input type="number" name="ph" class="form-control" required>
                    </div>

```



```

        <div class="form-group">
            <label>Email Address</label>
            <input type="email" name="email" class="form-control" required />
        </div>
        <div class="form-group">
            <label>Password</label>
            <input type="password" name="password" class="form-control" required>
        </div>
        <div class="form-group">
            <label>Confirm Password</label>
            <input type="password" name="confirm_password" class="form-control"
required>
        </div>
        <div class="form-group">
            <input type="submit" name="submit" class="btn btn-danger"
value="Register">
        </div>
        <p>Already have an account? <a href="index.php" style="color: red;">Login
here</a>.</p>
    </form>
</div>
</div>
<hr><p>Notice: If the email Id is registered before, it will not respond.</p>
<p>In this case, reset your password or register with different email Id....</p>
</div>
</body>
</html>

```

RESET.PHP

```

<?php

include('dbconnection.php');
session_start();
$gd = $_SESSION['gid'];

?>

<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">

```

```
<title>Set Pswd</title>
<style>
  body {
    background-image: url('images/Reset.jpg');
    background-repeat: no-repeat;
    background-size: cover;
  }
</style>
</head>

<body>
  <form action="reset.php" method="POST">
    <table border="0px solid" style="margin-left: auto; margin-right:auto; margin-top:70px;
font-weight:bold;border-spacing: 50px 30px;">
      <th colspan="3" style="text-align: center;font-size:35px; width: 300px; height:
70px;font-weight:bold;">To chalo new Password daalo bina kisi bakchodi k\</th>
      <tr>
        <td colspan="2" style="font-size: 20px;font-weight:bold">New Password</td>
        <td><input type="password" name="pass" placeholder="enter new password"
style="font-size: 20px;font-weight:bold" required /></td>
      </tr>

      <tr>
        <td colspan="3" align="center">
          <input type="submit" name="submit" value="Update" style="background-color:
red; border-radius: 15px; width: 140px; height: 50px;" />
        </td>
      </tr>
    </table>

  </form>
</body>

</html>

<?php
```

```

if (isset($_POST['submit'])) {

    $password = $_POST['pass'];

    $qryd = "UPDATE `login` SET `password` = '$password' WHERE `u_id` = '$gd'";
    $run = mysqli_query($dbcon, $qryd);

    if ($run == true) {
        ?> <script>
            alert('Password Updated Successfully :');
            window.open('logout.php', '_self');
        </script>
        <?php
    }
}
?>

```

RESETPSWD.PHP

```

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link rel="stylesheet"
href="https://stackpath.bootstrapcdn.com/bootstrap/4.4.1/css/bootstrap.min.css">
    <title>Conforming</title>
    <style>
        body
        {
            background-image:url('images/brr.png');
            background-repeat: no-repeat;
            background-size: cover;
        }
    </style>
</head>
<body>
    <h1 align='center' style="margin: 15px; color:green;font-weight: bold;font-family:'Times
New Roman', Times, serif">THE BROKEN SAINT</h1><hr/>
    <P align='center' style="font-weight: bold;color:yellow;font-family:'Times New Roman',
Times, serif">The Fastest Courier Service Ever</P>
    <div><h5 ><a href="index.php" style="float: right; margin-right:40px; color:blue; margin-
top:0px">SignIn</a></h5></div>
    <div class="container" style="margin-top: 60px; width:50%;">
        <div class="row">
            <div class="col-md-12">
                <h2 style="color: #273c75;">Verify The Following Details</h2>
                <p style="color:#e84118;">To Reset Your Passwprd    </p>
            </div>
        </div>
    </div>

```

```

<form action="resetpswd.php" method="get">

    <div class="form-group">
        <label>Email</label>
        <input type="email" name="email" class="form-control"
placeholder="Enter emailId" required>
    </div>
    <div class="form-group">
        <input type="submit" name="submit" class="btn btn-primary"
value="Verify" />
    </div>
    <p style="color: #e84118;">Don't have an account?  ➤ <a
href="register.php">Register here</a>.</p>

    </form>
</div>
</div>
</div>
</body>
</html>

```

```

<?php

require_once "dbconnection.php";
// require_once "session.php";

if (isset($_REQUEST['submit'])) {

    $email = $_REQUEST['email'];

    $qryy= "SELECT * FROM `login` WHERE `email`='$email'";
    $run= mysqli_query($dbcon,$qryy);
    $row= mysqli_num_rows($run);
    if($row<1){
        ?>
        <script>alert("Oops! Email not matched..Try again or Create New One");
        window.open('resetpswd.php','_self');
        </script> <?php
    }
    else{
        $data= mysqli_fetch_assoc($run);
        $id=$data['u_id'];
        session_start();
        $_SESSION['gid']=$id;

        ?> <script>

        window.open('reset.php','_self');
        </script>
    <?php

```

```
}  
}  
  
?>
```

SESSION.PHP

```
<?php  
// Start the session  
session_start();  
  
// if the user is already logged in then redirect user to welcome page  
if (isset($_SESSION["uid"]) && $_SESSION["uid"] === true) {  
    header("location: home/home.php");  
    exit;  
}  
?  
?>
```

HEAD.PHP

```
<!-- Admin header style for Admin pages -->  
  
<!DOCTYPE html>  
<html>  
    <head>  
        <title>Header Demo</title>  
        <meta charset="UTF-8">  
        <meta name="viewport" content="width=device-width,initial-scale=1.0">  
        <style>  
            *{  
margin: 0;  
padding: 0;  
  
background-repeat: no-repeat;  
}  
/* body {  
background-image: url('../images/plane.jpg');  
background-size: cover;  
} */  
.admintitle{  
    position: relative;  
    background-color: brown;  
    color: #fff;  
    height: 100px;  
    line-height: 140px;
```

```
}
</style>
</head>
<body bgcolor="#067d64">
```

ADMINLOGIN.PHP

```
<!-- admin logIn page and login logic -->
<?php
```

```
session_start();
if (isset($_SESSION['uid'])) {

    header('location: dashboard.php');
}
?>
```

```
<!DOCTYPE html>
<html lang="en">
```

```
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Admin Login</title>
</head>
```

```
<body bgcolor="#067d64">
    <h5><a href="../index.php" style="float: right; margin-right:50px;
color:#00BCD4">BackToHome</a></h5><br>
    <h1 align='center' style="color: #00BCD4;font-size:60px">Admin Login</h1>
    <h6 align='center' style="color: #212121;font-weight: bold;font-size:15px">Swagat Nahi
Karoge Hamara..</h6>
    <form action="adminlogin.php" method="POST" style="margin: auto;">
        <table align="center">
            <tr>
                <td>Email_ID:</td>
                <td><input type="email" name="uname" require></td>
            </tr>
            <tr><td><br></td></tr>
            <tr>
                <td>Password:</td>
                <td><input type="password" name="pass" require></td>
            </tr>
            <tr>
                <td colspan="2">
                    <hr>
```

```

</td>
    </tr>
    <tr>
        <td colspan="2" align="center"><input type="submit" name="login"
value="Login" style="cursor: pointer;"></td>
    </tr>
</table>
</form>
</body>

</html>

```

```

<?php

include('../dbconnection.php');
if (isset($_POST['login'])) {
    $ademail = $_POST['uname'];
    $password = $_POST['pass'];
    $qry = "SELECT * FROM `adlogin` WHERE `email`='$ademail' AND
`password`='$password'";
    $run = mysqli_query($dbcon, $qry);
    $row = mysqli_num_rows($run);
    if ($row < 1) {
        ?>
        <script>
            alert("Only admin can login..");
            window.open('adminlogin.php', '_self');
        </script><?php
    }
    else {
        $data = mysqli_fetch_assoc($run);
        $id = $data['a_id'];
        $_SESSION['uid'] = $id;
        header('location:dashboard.php');
    }
}
?>

```

USERDELETED.PHP

<!-- this page will delete user & there courier when deleteUser link clicked in deleteusers.php by admin -->

```

<?php
include('../dbconnection.php');
$em= $_GET['emm'];

```

```
// $qrycr="DELETE FROM `courier` WHERE `semail`='$sem';
// $runcr = mysqli_query($dbcon,$qrycr);
// if($runcr==false){
//     echo "
// }

$qry = "DELETE FROM `users` WHERE `email`='$sem';
$run = mysqli_query($dbcon,$qry);

if($run==true){
?> <script>
    alert('User Removed Successfully :');
    window.open('deleteusers.php','_self');
</script>
<?php
}

?>
```

DASHBOARD.PHP

<!-- admin dashbord page with options for admin -->

```
<?php
session_start();
if(isset($_SESSION['uid'])){
    echo "";
}else{
    header('location: ../login.php');
}

?>

<?php
include('head.php');
?>

<style>
    body {
        background-image: url('../images/5.png');
        background-size: cover;
    }
</style>

<div class="admintitle">
    <div>
        <h5 ><a href="../index.php" style="float: left; margin-left:20px;
color:aliceblue;">LoginAsUser</a></h5>
```



```

<h5 ><a href="logout.php" style="float: right; margin-right:20px;
color:aliceblue;">LogOut</a></h5>
</div>
<h1 align='center' style="text-shadow: 0.1em 0.1em 0.15em #f9829b;">Welcome To
Admin Dashbord</h1>
</div>
<div align="center" style="margin-top:240px;">
<form style="position: center;color:lightblue;font-weight:bold;font-size:50px">

    <!-- <a href="insertdata.php">Insert Data</a><br><br> -->

    <!-- <a href="updatedata.php">Update Data</a><br><br> -->

    <a href="deletedata.php">Delete Data</a><br><br>

    <a href="deleteusers.php">Delete Users</a><br><br>
</form>

</div>
</body>
</html>

```

DELETEDATA.PHP

```

<!-- when admin click delete data link, page with filter options-->
<?php
session_start();
if(isset($_SESSION['uid'])){
    echo "";
} else {
    header('location: ../login.php');
}

?>

<?php
include('head.php');
?>

<div class="admintitle">
    <div>
        <h5 ><a href="dashboard.php" style="float: left; margin-left:20px;
color:aliceblue;">BackToDashboard</a></h5>
        <h5 ><a href="logout.php" style="float: right; margin-right:20px;
color:aliceblue;">LogOut</a></h5>
    </div>

```

```

<table width='80%' border="1px solid" style="margin-left: auto; margin-right:auto; margin-
top:30px; font-weight:bold;border-spacing: 5px 5px;">
  <tr style="background-color: indigo;">
    <th>No.</th>
    <th>Items Image</th>
    <th>Sender Name</th>
    <th>Receiver Name</th>
    <th>Sender Email</th>
    <th>Action</th>
  </tr>

  <?php
  include('../dbconnection.php');

  $qryd= "SELECT * FROM `courier`";
  $run= mysqli_query($dbcon,$qryd);

  if(mysqli_num_rows($run)<1){
    echo "<tr><td colspan='6'>No record found..</td></tr>";
  }
  else{
    $count=0;
    while($data=mysqli_fetch_assoc($run))
    {
      $count++;
      ?>
      <tr align="center">
        <td><?php echo $count; ?></td>
        <td> </td>
        <td><?php echo $data['sname']; ?></td>
        <td><?php echo $data['rname']; ?></td>
        <td><?php echo $data['semail']; ?></td>
        <td><a href="datadeleted.php?bb=<?php echo $data['billno']; ?>">Delete</a></td>
      </tr>
      <?php
    }
  }
  ?>
</table>
</div>

```

DELETEUSERS.PHP

```

<!-- when admin click delete user link, it displays all users with delete option -->
<?php
  session_start();
  if(isset($_SESSION['uid'])){

```

```

        echo "";
    }else{
        header('location: ../login.php');
    }

?>

<?php
include('head.php');
?>

<div class="admintitle">
    <div>
        <h5 ><a href="dashboard.php" style="float: left; margin-left:20px;
color:aliceblue;">BackToDashboard</a></h5>
        <h5 ><a href="logout.php" style="float: right; margin-right:20px;
color:aliceblue;">LogOut</a></h5>
    </div>
    <h1 align='center' style="text-shadow: 0.1em 0.1em 0.15em #f9829b;">Showing All
Users</h1>
</div>
<div style="overflow-x:auto;">
<table width='80%' border="1px solid" style="margin-left: auto; margin-right:auto; margin-
top:30px; font-weight:bold;border-collapse: collapse;">
    <tr style="background-color: indigo;">
        <th>No.</th>
        <th>Users Name</th>
        <th>Email Id</th>
        <th>Action</th>
    </tr>
<?php

    include('../dbconnection.php');

    $qry= "SELECT * FROM `users`"; //AND `name` LIKE '%name%'
    $run= mysqli_query($dbcon,$qry);

    if(mysqli_num_rows($run)<1){
        echo "<tr><td colspan='6'>There is no Data in Database</td></tr>";
    }
    else{
        $count=0;
        while($data=mysqli_fetch_assoc($run))
        {
            $count++;
        }
        ?>
        <tr align="center">
            <td><?php echo $count; ?></td>
            <td><?php echo $data['name']; ?></td>
            <td><?php echo $data['email']; ?></td>

```

```

        <td><a href="usersdeleted.php?emm=<?php echo
$data['email']; ?>">DeleteUser</a></td>
    </tr>
    <?php
    }
}
}

?>

</table>
</div>

```

DATADELETED.PHP

```

<!-- this page will delete data when deleted by admin -->

<?php
include('../dbconnection.php');
$billno= $_REQUEST['bb'];

$qry = "DELETE FROM `courier` WHERE `billno`='".$billno'";
$run = mysqli_query($dbcon,$qry);

if($run==true){
?> <script>
    alert('Courier Deleted Successfully :');
    window.open('deletedata.php','_self');//_self is used to open in same page
    //inside php after echo rem to put ";"
</script>
<?php
}
?>

```

DELETECOURIER.PHP

```

<!-- user will delete there courier themself when click delete link in track section-->
<?php
include('../dbconnection.php');
$billno= $_REQUEST['bb'];

$qry = "DELETE FROM `courier` WHERE `billno`='".$billno'";

```

```

$run = mysqli_query($dbcon,$qry);

if($run==true){
?> <script>
    alert('Courier Deleted Successfully :');
    window.open('trackMenu.php','_self');

    </script>
<?php
}
?>

```

EDITDATA.PHP

<!-- php code for updating new info to database, directed from updatationtable.php -->

```

<?php

if(isset($_POST['submit'])){

    include('../dbconnection.php');
    $idd = $_POST['idd'];

    $sname = $_POST['sname'];
    $rname = $_POST['rname'];
    $semail = $_POST['semail'];
    $remail = $_POST['remail'];
    $sphone = $_POST['sphone'];
    $rphone = $_POST['rphone'];
    $sadd = $_POST['saddress'];
    $radd = $_POST['raddress'];
    $wgt = $_POST['wgt'];
    $billn = $_POST['billno'];
    $originalDate = $_POST['date'];
    $newDate = date("Y-m-d", strtotime($originalDate));
    $imagenam = $_FILES['simg']['name'];
    $stempnam = $_FILES['simg']['tmp_name'];

    move_uploaded_file($stempnam,"../dbimages/$imagenam");

    $qry = "UPDATE `courier` SET
`sname`='$sname',`rname`='$rname',`semail`='$semail',`remail`='$remail',`sphone`='$sphone',
`rphone`='$rphone',`saddress`='$sadd',`raddress`='$radd',`weight`='$wgt',`billno`='$billn',`im
age`='$imagenam',`date`='$newDate' WHERE `c_id`='$idd";
    $run = mysqli_query($dbcon,$qry);

    if($run==true){

```

```

        ?> <script>
            alert('Data Updated Successfully :');
            window.open('home.php','_self');
        </script>
        <?php
    }

}

?>

```

HEADER.PHP

```

<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
<title>Navbar with Logo Image</title>
<link rel="stylesheet"
href="https://stackpath.bootstrapcdn.com/bootstrap/4.5.2/css/bootstrap.min.css">

<style>
    .bs-example{
        margin: 0;
    }
</style>
</head>
<body>
<div class="bs-example">
    <nav class="navbar navbar-expand-md navbar-light bg-light">
        <a href="home.php" class="navbar-brand">
            
        </a>
        <button type="button" class="navbar-toggler" data-toggle="collapse" data-
target="#navbarCollapse">
            <span class="navbar-toggler-icon"></span>
        </button>

        <div class="collapse navbar-collapse" id="navbarCollapse">
            <div class="navbar-nav">
                <a href="home.php" class="nav-item nav-link active">Home</a>
                <a href="price.php" class="nav-item nav-link active">Price</a>
                <a href="courierMenu.php" class="nav-item nav-link">Courier</a>
                <a href="trackMenu.php" class="nav-item nav-link">Track</a>

                <a href="profile.php" class="nav-item nav-link">Profile</a>
            </div>
        </div>
    </nav>
</div>

```

```

<a href="contactUS.php" class="nav-item nav-link">ContactUs</a>
    <!-- mailto:premkumar1215225@gmail.com -->
</div>
<div class="navbar-nav ml-auto">
    <a href="../admin/logout.php" class="nav-item nav-link">AdminPage</a>
    <a href="../logout.php" class="nav-item nav-link">LogOut</a>
</div>
</div>
</nav>
</div>
</body>
</html>
<?php include('footer.php'); ?>

```

HEAD.PHP

```

<?php

session_start();
if(isset($_SESSION['uid'])){
    echo "";
}else{
    header('location: ../index.php');
}
?>

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Home Page</title>
    <style>
        body
        {
            background-image:url('../images/1920_1080.jpg');
            background-repeat: no-repeat;
            background-size: cover;
        }
    </style>
</head>
<body>
    <?php include('header.php'); ?>
    <div align='center' style="font-weight: bold;font-family:'Times New Roman', Times,
serif"><br><br><br><br>
        <h2>This is a Typhoon Courier Management Service</h2>
        <h4>The fastest courier service of India</h4><br><br>
    </div>
</body>
</html>

```

```
<h3>DBMS MINI PROJECT</h3>
    <h6>By Group 24</h6>
</div>
</body>
</html>
```

PRICE.PHP

```
<?php
session_start();
if(isset($_SESSION['uid'])){
    echo "";
} else {
    header('location: ../index.php');
}

?>
<?php
include('header.php');
?>

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Pricing</title>
</head>
<body>
    <table width='30%' border="5px solid" style="margin-top:30px;margin-left:auto ;margin-
right:auto ;font-weight:bold;border-spacing: 5px 5px;border-collapse: collapse;">
        <tr style="background-color: green;font-size:30px">
            <th>Weight in Kg</th><th>Price</th>
        </tr>
        <tr>
            <td>0-1</td><td>120</td>
        </tr>
        <tr>
            <td>1-2</td><td>200</td>
        </tr>
        <tr>
            <td>2-4</td><td>250</td>
        </tr>
        <tr>
            <td>4-5</td><td>300</td>
        </tr>
```



```

<tr>
  <td>5-7</td><td>400</td>
</tr>
<tr>
  <td>7-above</td><td>500</td>
</tr>
</table>
<h3 align="center" style="margin-top:20px;"> As per your courier's weight pay the
amount on:</h3>
<div style="margin-left:45% ;margin-right:auto ;font-weight:bold;">
<ol>
<li>UPI: abcd@sbi.com</li>
<li>GPay: 6362786223</li>
<li>PhnPay: 3565656555</li>
</ol>
</div>
</body>
</html>

```

TRACKMENU.PHP

```

<!-- when track menu is clicked it will show all courier placed by that User-->
<?php
session_start();
if(isset($_SESSION['uid'])){
  echo "";
}else{
  header('location: ../login.php');
}

?>
<?php include('header.php'); ?>

<div style="overflow-x:auto;">
<table width='80%' border="1px dash" style="margin-top:30px;margin-left:auto ;margin-
right:auto ;font-weight:bold;border-spacing: 5px 5px;border-collapse: collapse;">
  <tr style="background-color: green;font-size:30px">
    <th>No.</th>
    <th>Item's Image</th>
    <th>Sender Name</th>
    <th>Receiver Name</th>
    <th>Receiver Email</th>
    <th>Action</th>
  </tr>

  <?php
include('../dbconnection.php');

```

```

$email = $_SESSION['emm'];

$qryy= "SELECT * FROM `courier` WHERE `semail`='$email'";
$run= mysqli_query($dbcon,$qryy);

if(mysqli_num_rows($run)<1){
    echo "<tr><td colspan='6'>No record found..</td></tr>";
}
else{
    $count=0;
    while($data=mysqli_fetch_assoc($run))
    {
        $count++;
        ?>
        <tr align="center">
            <td><?php echo $count; ?></td>
            <td> </td>
            <td><?php echo $data['sname']; ?></td>
            <td><?php echo $data['rname']; ?></td>
            <td><?php echo $data['remail']; ?></td>
            <td>
                <a href="updatationtable.php?sid=<?php echo $data['c_id']; ?>">Edit</a> ||
                <a href="deletecourier.php?bb=<?php echo $data['billno']; ?>">Delete</a>||
                <a href="status.php?sidd=<?php echo $data['c_id']; ?>">CheckStatus</a>
            </td>
        </tr>
        <?php
    }
    ?>
</table>
</div>

```

COURIERMENU.PHP

```

<!-- for 'courier' navbar, courier placing page -->
<?php
session_start();
if (isset($_SESSION['uid'])) {
    echo "";
} else {
    header('location: ../index.php');
}

?>
<?php

```

```

include('header.php');
$email = $_SESSION['emm'];
$uid = $_SESSION['uid'];
?>

<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Place Order</title>
    <style>
        body {
            background-image: url('../images/1920_1080.jpg');
            background-repeat: no-repeat;
            background-size: cover;
        }
    </style>
</head>

<body>
    <form action="courierMenu.php" method="POST" enctype="multipart/form-data">
        <div style="overflow-x:auto;">
            <table border="0px solid" style="margin: auto; font-weight:bold;border-spacing: 5px
15px;">
                <th colspan="4" style="text-align: center;background-color:#00FF00; width: 140px;
height: 50px;">Fill The Details Of Sender & Receiver</th>
                <tr>
                    <td colspan="4" style="text-align: center;">
                        <hr>
                    </td>
                </tr>
                <tr style="text-align: center;">
                    <th colspan="2">SENDER</th>
                    <th colspan="2">RECEIVER</th>
                </tr>
                <tr>
                    <td colspan="4">
                        <hr>
                    </td>
                </tr>
                <tr>
                    <th colspan="2"></th>
                    <th colspan="2"></th>
                </tr>
                <tr>
                    <td>Name:</td>
                    <td><input type="text" name="sname" placeholder="Sender FullName"
required></td>

```

Name:	<input name="rname" placeholder="Sender FullName" required="" type="text"/>
Email:	<input name="semail" readonly="" type="text" value="<?php echo \$email; ?>"/>
Email:	<input name="remail" placeholder="Receiver EmailId" required="" type="text"/>
PhoneNo.:	<input name="sphone" placeholder="sender number" required="" type="number"/>
PhoneNo.:	<input name="rphone" placeholder="receiver number" required="" type="number"/>
Address:	<input name="saddress" placeholder="sender address" required="" type="textfield"/>
Address:	<input name="raddress" placeholder="receiver address" required="" type="textfield"/>
XXXXXXXXXXXXXXXXXXXX	
Weight:	<input name="wgt" placeholder="weights in kg" required="" type="number"/>
Payment Id:	<input name="billno" placeholder="enter transition num" required="" type="number"/>
Date:	<input name="date" type="date"/>
<input name="date" readonly="" type="date" value="<?php echo date('Y-m-d'); ?>"/>	

```

<td>Items Image:</td>
    <td><input type="file" name="simg" ></td>
</tr>
<tr>
    <td colspan="4" align="center"><input type="submit" name="submit"
value="Place Order" style="background-color: orange; border-radius: 15px; width: 140px;
height: 50px;cursor:pointer;"></td>
</tr>
</table>
</div>
</form>
</body>

</html>

```

```

<?php

```

```

if (isset($_POST['submit'])) { //if we'll not give this,it will submit from with zero values.

```

```

    include('../dbconnection.php');

```

```

    $sname = $_POST['sname'];
    $rname = $_POST['rname'];
    $semail = $_POST['semail'];
    $remail = $_POST['remail'];
    $sphone = $_POST['sphone'];
    $rphone = $_POST['rphone'];
    $sadd = $_POST['saddress'];
    $radd = $_POST['raddress'];
    $wgt = $_POST['wgt'];
    $billn = $_POST['billno'];
    $originalDate = $_POST['date'];
    $newDate = date("Y-m-d", strtotime($originalDate));
    $imagenam = $_FILES['simg']['name'];
    $tempnam = $_FILES['simg']['tmp_name'];

```

```

    move_uploaded_file($tempnam, "../dbimages/$imagenam");

```

```

    $qry = "INSERT INTO `courier` (`sname`, `rname`, `semail`, `remail`, `sphone`, `rphone`,
`saddress`, `raddress`, `weight`, `billno`, `image`, `date`, `u_id`) VALUES ('$sname', '$rname',
'$semail', '$remail', '$sphone', '$rphone', '$sadd', '$radd', '$wgt', '$billn', '$imagenam',
'$newDate', '$uid');";

```

```

    $run = mysqli_query($dbcon, $qry);

```

```

    // $trackqry= "INSERT INTO `track` (`u_id`, `c_id`) VALUES ('$uid',
'LAST_INSERT_ID()");

```

```

/$runtrack = mysqli_query($dbcon, $trackqry);

if ($run == true) {

    ?> <script>
        alert('Order Placed Successfully :');
        window.open('courierMenu.php', '_self');
    </script>
    <?php
    }
}

?>

```

STATUS.PHP

```

<?php
session_start();
if(isset($_SESSION['uid'])){
    echo "";
} else {
    header('location: ../login.php');
}

?>
<?php include('header.php');
include('../dbconnection.php');
$sidd = $_GET['sidd'];

$qryy= "SELECT * FROM `courier` WHERE `c_id`='$sidd'";
$run= mysqli_query($dbcon,$qryy);
$data=mysqli_fetch_assoc($run);
$stdate = $data['date'];
$tddate= date('Y-m-d');

if($stdate==$tddate){
    ?>
    <h1 style="margin: 100px;background-color:red;text-align:center">Status >> On The
Way...</h1>
    <br/><hr/>
    <div align='center'>

```

```

<button onclick="window.location.href='trackMenu.php'" style="background-
color:green;height:60px;width:130px;border-radius:15px;cursor:pointer">GoBack</button>
</div>
<?php
}
else{
?>
<h1 style="margin: 100px;background-color:red;text-align:center">Status >> Items
Delivered..<br /><p>HAVE A NICE DAY</p></h1>
<br/><hr/>
<div align='center'>
<button onclick="window.location.href='trackMenu.php'" style="background-
color:green;height:60px;width:130px;border-radius:15px;cursor:pointer">GoBack</button>
</div>
<?php
}
?>

```

PROFILE.PHP

```

<?php
session_start();
if(isset($_SESSION['uid'])){
    echo "";
} else {
    header('location: ../index.php');
}

?>
<?php
include('header.php');
?>

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Profile</title>
    <link rel="stylesheet"
href="https://cdn.jsdelivr.net/npm/bootstrap@4.5.3/dist/css/bootstrap.min.css"
integrity="sha384-
TX8t27EcRE3e/ihU7zmQxVncDAy5uIKz4rEkgIXeMed4M0jlfIDPvg6uqKI2xXr2"
crossorigin="anonymous">
    <style>
        body {
            background-color: #f9f9fa

```

```
}
```

```
.padding {  
padding: 3rem !important  
}
```

```
.user-card-full {  
overflow: hidden  
}
```

```
.card {  
border-radius: 5px;  
-webkit-box-shadow: 0 1px 20px 0 rgba(69, 90, 100, 0.08);  
box-shadow: 0 1px 20px 0 rgba(69, 90, 100, 0.08);  
border: none;  
margin-bottom: 30px  
}
```

```
.m-r-0 {  
margin-right: 0px  
}
```

```
.m-l-0 {  
margin-left: 0px  
}
```

```
.user-card-full .user-profile {  
border-radius: 5px 0 0 5px  
}
```

```
.bg-c-lite-green {  
background: -webkit-gradient(linear, left top, right top, from(#f29263), to(#ee5a6f));  
background: linear-gradient(to right, #ee5a6f, #f29263)  
}
```

```
.user-profile {  
padding: 20px 0  
}
```

```
.card-block {  
padding: 1.25rem  
}
```

```
.m-b-25 {  
margin-bottom: 25px  
}
```

```
.img-radius {  
border-radius: 5px  
}
```



```
h6 {  
  font-size: 14px  
}  
  
.card .card-block p {  
  line-height: 25px  
}  
  
@media only screen and (min-width: 1400px) {  
  p {  
    font-size: 14px  
  }  
}  
  
.card-block {  
  padding: 1.25rem  
}  
  
.b-b-default {  
  border-bottom: 1px solid #e0e0e0  
}  
  
.m-b-20 {  
  margin-bottom: 20px  
}  
  
.p-b-5 {  
  padding-bottom: 5px !important  
}  
  
.card .card-block p {  
  line-height: 25px  
}  
  
.m-b-10 {  
  margin-bottom: 10px  
}  
  
.text-muted {  
  color: #919aa3 !important  
}  
  
.b-b-default {  
  border-bottom: 1px solid #e0e0e0  
}  
  
.f-w-600 {  
  font-weight: 600
```

```
}
```

```
.m-b-20 {  
margin-bottom: 20px  
}
```

```
.m-t-40 {  
margin-top: 20px  
}
```

```
.p-b-5 {  
padding-bottom: 5px !important  
}
```

```
.m-b-10 {  
margin-bottom: 10px  
}
```

```
.m-t-40 {  
margin-top: 20px  
}
```

```
.user-card-full .social-link li {  
display: inline-block  
}
```

```
.user-card-full .social-link li a {  
font-size: 20px;  
margin: 0 10px 0 0;  
-webkit-transition: all 0.3s ease-in-out;  
transition: all 0.3s ease-in-out  
}
```

```
</style>
```

```
</head>
```

```
<body>
```

```
<?php
```

```
include('../dbconnection.php');  
$id= $_SESSION['uid'];  
$qry= "SELECT * FROM `users` WHERE `u_id`='".$id"'";  
$run= mysqli_query($dbcon,$qry);
```

```
$data = mysqli_fetch_assoc($run);
```

```
?>
```

```

<div class="page-content page-container" id="page-content">
  <div class="padding">
    <div class="row container d-flex justify-content-center">
      <div class="col-xl-6 col-md-12">
        <div class="card user-card-full">
          <div class="row m-l-0 m-r-0">
            <div class="col-sm-4 bg-c-lite-green user-profile">
              <div class="card-block text-center text-white">
                <div class="m-b-25">  </div>
                <h3 class="f-w-600"><?php echo $data['name']; ?></h3>
                <p>user</p> <i class=" mdi mdi-square-edit-outline feather icon-edit m-
t-10 f-16"></i>
              </div>
            </div>
            <div class="col-sm-8">
              <div class="card-block">
                <h6 class="m-b-20 p-b-5 b-b-default f-w-600">Information</h6>
                <div class="row">
                  <div class="col-sm-6">
                    <p class="m-b-10 f-w-600">Email</p>
                    <h6 class="text-muted f-w-400"><?php echo
$data['email']; ?></h6>
                  </div>
                  <div class="col-sm-6">
                    <p class="m-b-10 f-w-600">Phone</p>
                    <h6 class="text-muted f-w-400"><?php echo
$data['pnumber']; ?></h6>
                  </div>
                </div>
              </div>
              <div class="row">
                <hr><br><hr>
              </div>
              <ul class="social-link list-unstyled m-t-40 m-b-10">
                <h6>Leave it when u can't hold it..</h6>
              </ul>
            </div>
          </div>
        </div>
      </div>
    </div>
  </div>
</div>
</body>
</html>

```

UPDATIONTABLE.PHP

```
<!-- when we click update any items, it gives table with prev info -->
<?php
session_start();
if(isset($_SESSION['uid'])){
    echo "";
} else {
    header('location: ../index.php');
}

?>

<?php
include('../dbconnection.php');

$idd= $_GET['sid'];
$uqry= "SELECT * FROM `courier` WHERE `c_id`='$idd'";
$run= mysqli_query($dbcon,$uqry);
$data = mysqli_fetch_assoc($run);
?>

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Place Order</title>

</head>
<body>
<form action="editdata.php" method="POST" enctype="multipart/form-data">
<div style="overflow-x:auto;">
    <table border="0px solid" style="margin-left: auto; margin-right:auto; margin-top:30px;
font-weight:bold;border-spacing: 5px 15px;">
        <th colspan="4" style="text-align: center;background-color:#00FF00; width: 140px;
height: 50px;">Update The Details As Required</th>
        <tr>
            <th colspan="2">SENDER</th><th colspan="2">RECEIVER</th>
        </tr>
        <tr>
            <th colspan="2"></th><th colspan="2"></th>
        </tr>
        <tr>
            <td>Name:</td><td><input type="text" name="sname" value="<?php echo
$data['sname'];?>" required></td>
```

```

<td>Name:</td><td><input type="text" name="rname" value="<?php echo
$data['rname'];?>" required></td>
</tr>
<tr>
<td>Email:</td><td><input type="text" name="semail" value="<?php echo
$data['semail'];?>" readonly></td>

<td>Email:</td><td><input type="text" name="remail" value="<?php echo
$data['remail'];?>" required></td>
</tr>
<tr>
<td>PhoneNo.:</td><td><input type="number" name="sphone" value="<?php echo
$data['sphone'];?>" required></td>

<td>PhoneNo.:</td><td><input type="number" name="rphone" value="<?php echo
$data['rphone'];?>" required></td>
</tr>
<tr>
<td>Address:</td><td><input type="textfield" name="saddress" value="<?php echo
$data['saddress'];?>" required></td>

<td>Address:</td><td><input type="textfield" name="raddress" value="<?php echo
$data['raddress'];?>" required></td>
</tr><td
colspan="4">× × × × × × × × × × × × × × × × × × × × × ×
</tr>
<td>Weight:</td><td><input type="number" name="wgt" value="<?php echo
$data['weight'];?>" required></td>

<td>ReceiptNo.:</td><td><input type="number" name="billno" value="<?php echo
$data['billno'];?>" required></td>
</tr>
<tr>
<td>Date:</td><td><input type="date" name="date" value="<?php echo date('Y-m-
d'); ?>" readonly /></td>
<td>Items Image:</td><td><input type="file" name="simg" value="<?php echo
$data['image'];?>" ></td>
</tr>
<tr>
<input type="hidden" name="idd" value="<?php echo $data['c_id']; ?>" />
<td colspan="4" align="center"><input type="submit" name="submit"
value="Update" style="background-color: orange; border-radius: 15px; width: 140px; height:
50px;cursor:pointer;"></td>
</tr>
</table>
</div>
</form>
</body>

```

BACKEND CODE

```
-- phpMyAdmin SQL Dump
-- version 5.0.3
-- https://www.phpmyadmin.net/
--
-- Host: 127.0.0.1
-- Generation Time: Dec 31, 2020 at 11:41 AM
-- Server version: 10.4.14-MariaDB
-- PHP Version: 7.4.11

SET SQL_MODE = "NO_AUTO_VALUE_ON_ZERO";
START TRANSACTION;
SET time_zone = "+00:00";

/*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
/*!40101 SET
@OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
/*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION
*/;
/*!40101 SET NAMES utf8mb4 */;

--
-- Database: `courierdb`
--

-----

--
-- Table structure for table `adlogin`
--

CREATE TABLE `adlogin` (
  `email` varchar(50) DEFAULT NULL,
  `password` varchar(50) DEFAULT NULL,
  `a_id` int(11) DEFAULT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;

--
-- Dumping data for table `adlogin`
--

INSERT INTO `adlogin` (`email`, `password`, `a_id`) VALUES
('premkumar1215225@gmail.com', '1215225', 1),
('himanshu.18is027@cambridge.edu.in', '1cd18is027', 2);

-----

--
```

```
-- Table structure for table `admin`  
--
```

```
CREATE TABLE `admin` (  
  `a_id` int(11) NOT NULL,  
  `email` varchar(50) NOT NULL,  
  `name` varchar(50) DEFAULT NULL,  
  `pnumber` int(14) DEFAULT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
```

```
--  
-- Dumping data for table `admin`  
--
```

```
INSERT INTO `admin` (`a_id`, `email`, `name`, `pnumber`) VALUES  
(1, 'premkumar1215225@gmail.com', 'Prem', 63627862),  
(2, 'himanshu.18is027@cambridge.edu.in', 'Himanshu Soni', 123456789);
```

```
-----
```

```
--  
-- Table structure for table `contacts`  
--
```

```
CREATE TABLE `contacts` (  
  `id` int(11) NOT NULL,  
  `email` varchar(50) NOT NULL,  
  `subject` varchar(30) NOT NULL,  
  `msg` varchar(300) NOT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
```

```
--  
-- Dumping data for table `contacts`  
--
```

```
INSERT INTO `contacts` (`id`, `email`, `subject`, `msg`) VALUES  
(1, 'love@gmail.com', 'delay', 'I have courier 2 weeks ago but its not delivered yet..'),  
(2, 'labh.18is033@cambridge.edu.in', 'Delay', 'gjndfjkgnhdfjkgn');
```

```
-----
```

```
--  
-- Table structure for table `courier`  
--
```

```
CREATE TABLE `courier` (  
  `c_id` int(11) NOT NULL,  
  `u_id` int(11) DEFAULT NULL,  
  `semail` varchar(50) DEFAULT NULL,  
  `remai` varchar(50) DEFAULT NULL,
```

```
`sname` varchar(50) DEFAULT NULL,  
`rname` varchar(50) DEFAULT NULL,  
`sphone` varchar(20) DEFAULT NULL,  
`rphone` varchar(20) DEFAULT NULL,  
`saddress` varchar(50) DEFAULT NULL,  
`raddress` varchar(50) DEFAULT NULL,  
`weight` int(11) DEFAULT NULL,  
`billno` int(11) NOT NULL,  
`image` text DEFAULT NULL,  
`date` date NOT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
```

```
--  
-- Dumping data for table `courier`  
--
```

```
INSERT INTO `courier` (`c_id`, `u_id`, `semail`, `remail`, `sname`, `rname`, `sphone`,  
`rphone`, `saddress`, `raddress`, `weight`, `billno`, `image`, `date`) VALUES  
(7, 4, 'love@gmail.com', 'himanshu@gmail.com', 'love', 'himanshu', '06362786223', '6526652',  
'KR puram,Bangalore,Karnataka', 'Boys hostel of Cambridge institute of technology,j', 2, 22,  
'cddd.jpeg', '2020-12-06'),  
(8, 4, 'love@gmail.com', 'gyanshu@gmail.com', 'love', 'gyanshu', '06362786223',  
'06362786223', 'KR puram,Bangalore,Karnataka', 'Boys hostel of Cambridge institute of  
technology,j', 2, 3263, 'fc.png', '2020-12-06');
```

```
-----
```

```
--  
-- Table structure for table `login`  
--
```

```
CREATE TABLE `login` (  
  `email` varchar(50) DEFAULT NULL,  
  `password` varchar(50) DEFAULT NULL,  
  `u_id` int(11) DEFAULT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;
```

```
--  
-- Dumping data for table `login`  
--
```

```
INSERT INTO `login` (`email`, `password`, `u_id`) VALUES  
('premkumar1215225@gmail.com', '12345', 1),  
('love@gmail.com', '12345', 4);
```

```
-----
```

```
--  
-- Table structure for table `users`  
--
```



```

CREATE TABLE `users` (
  `u_id` int(11) NOT NULL,
  `email` varchar(50) NOT NULL,
  `name` varchar(50) DEFAULT NULL,
  `pnumber` int(14) DEFAULT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4;

--
-- Dumping data for table `users`
--

INSERT INTO `users` (`u_id`, `email`, `name`, `pnumber`) VALUES
(1, 'premkumar1215225@gmail.com', 'prem', 56665),
(4, 'love@gmail.com', 'LOVE RAJ', 2147483647);

--
-- Indexes for dumped tables
--

--
-- Indexes for table `adlogin`
--
ALTER TABLE `adlogin`
  ADD KEY `a_id` (`a_id`);

--
-- Indexes for table `admin`
--
ALTER TABLE `admin`
  ADD PRIMARY KEY (`a_id`),
  ADD UNIQUE KEY `email` (`email`);

--
-- Indexes for table `contacts`
--
ALTER TABLE `contacts`
  ADD PRIMARY KEY (`id`);

--
-- Indexes for table `courier`
--
ALTER TABLE `courier`
  ADD PRIMARY KEY (`c_id`),
  ADD UNIQUE KEY `billno` (`billno`),
  ADD KEY `u_id` (`u_id`);

--
-- Indexes for table `login`

```

```

--
ALTER TABLE `login`
  ADD KEY `u_id` (`u_id`);

--
-- Indexes for table `users`
--
ALTER TABLE `users`
  ADD PRIMARY KEY (`u_id`),
  ADD UNIQUE KEY `email` (`email`);

--
-- AUTO_INCREMENT for dumped tables
--

--
-- AUTO_INCREMENT for table `admin`
--
ALTER TABLE `admin`
  MODIFY `a_id` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=3;

--
-- AUTO_INCREMENT for table `contacts`
--
ALTER TABLE `contacts`
  MODIFY `id` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=3;

--
-- AUTO_INCREMENT for table `courier`
--
ALTER TABLE `courier`
  MODIFY `c_id` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=10;

--
-- AUTO_INCREMENT for table `users`
--
ALTER TABLE `users`
  MODIFY `u_id` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=5;

--
-- Constraints for dumped tables
--

--
-- Constraints for table `adlogin`
--
ALTER TABLE `adlogin`

```

```
ADD CONSTRAINT `adlogin_ibfk_1` FOREIGN KEY (`a_id`) REFERENCES `admin`
(`a_id`);
```

```
--
```

```
-- Constraints for table `courier`
```

```
--
```

```
ALTER TABLE `courier`
ADD CONSTRAINT `courier_ibfk_1` FOREIGN KEY (`u_id`) REFERENCES `users`
(`u_id`) ON DELETE CASCADE;
```

```
--
```

```
-- Constraints for table `login`
```

```
--
```

```
ALTER TABLE `login`
ADD CONSTRAINT `login_ibfk_1` FOREIGN KEY (`u_id`) REFERENCES `users`
(`u_id`) ON DELETE CASCADE;
COMMIT;
```

```
/*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */;
/*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */;
/*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */;
```

END OF IMPLEMENTATION CODE OF THE PROJECT

CHAPTER 6

SNAPSHOTS

1.USER LOGIN PAGE

TYPHOON COURIER SERVICE

The Fastest Courier Service Ever

[AdminLogin](#)

Login

Please Fill Your 

Email Address


Password

[Signin](#)

[Reset Password](#)

Don't have an account? [Register here.](#)

2. HOME PAGE

[Home](#) [Price](#) [Courier](#) [Track](#) [Profile](#) [ContactUs](#)AdminPage Logout

This is a Typhoon Courier Management Service

The fastest courier service of India


DBMS MINI PROJECT

By Group 24

Copyright © 2020 Designed By Himanshu Soni and Labh Yadav

ContactUs

3. PRICING OF COURIER

[Home](#) [Price](#) [Courier](#) [Track](#) [Profile](#) [ContactUs](#)AdminPage Logout

Weight in Kg	Price
0-1	120
1-2	200
2-4	250
4-5	300
5-7	400
7-above	500


As per your courier's weight pay the amount on:

1. UPI: abcd@sbi.com
2. GPay: 6362786223
3. PhnPay: 3565656555

Copyright © 2020 Designed By Himanshu Soni and Labh Yadav

ContactUs

4. COURIER SENDING PAGE



[Home](#) [Price](#) [Courier](#) [Track](#) [Profile](#) [ContactUs](#)

[AdminPage](#) [LogOut](#)

Fill The Details Of Sender & Receiver

SENDER

Name:

Sender FullName

Email:

love@gmail.com

PhoneNo.:

sender number

Address:

sender address

Weight:

weights in kg

Date:

16-01-2021

RECEIVER

Name:

Sender FullName

Email:

Receiver EmailId

PhoneNo.:

receiver number

Address:

receiver address

Payment Id:

enter transition num

Items Image:

Choose File

No file chosen

Place Order



Copyright © 2020 Designed By Himanshu Soni and Labh Yadav

[ContactUs](#)

5. TRACK CONSIGNMENT PAGE

[Home](#) [Price](#) [Courier](#) [Track](#) [Profile](#) [ContactUs](#)


[AdminPage](#) [LogOut](#)

No.	Item's Image	Sender Name	Receiver Name	Receiver Email	Action
1		love	himanshu	himanshu@gmail.com	Edit Delete CheckStatus
2		love	gyanshu	gyanshu@gmail.com	Edit Delete CheckStatus

Copyright © 2020 Designed By Himanshu Soni and Labh Yadav

[ContactUs](#)

6. TRACK STATUS OF PARCEL


[Home](#) [Price](#) [Courier](#) [Track](#) [Profile](#) [ContactUs](#)AdminPage [LogOut](#)


Status >> Items Delivered..
HAVE A NICE DAY

GoBack

Copyright © 2020 Designed By Himanshu Soni and Labh Yadav
[ContactUs](#)

7. PROFILE VIEW SECTION

[Home](#) [Price](#) [Courier](#) [Track](#) [Profile](#) [ContactUs](#)AdminPage [LogOut](#)



LOVE RAJ
user


Information

Email	Phone
love@gmail.com	2147483647

Leave it when u can't hold it..

localhost/ccs/home/home.phpCopyright © 2020 Designed By Himanshu Soni and Labh Yadav
[ContactUs](#)

8. CONTACT US SECTION

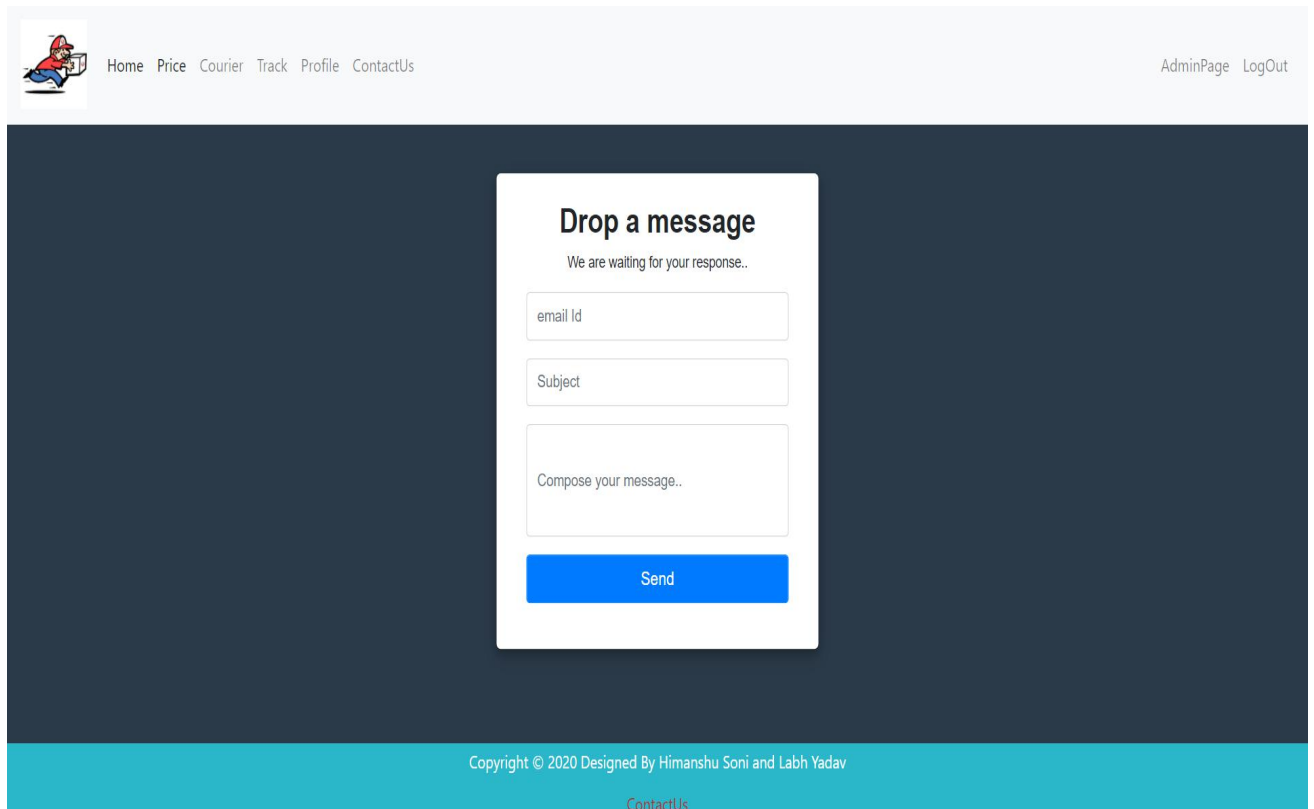

The Contact Us form is centered on a dark blue background. It features a white header with a cartoon character and navigation links. The form itself is a white box with a title, a subtitle, and three input fields: email Id, Subject, and a large text area for the message. A blue Send button is at the bottom. The footer is a teal bar with copyright information and a link to the Contact Us page.

Home Price Courier Track Profile ContactUs AdminPage LogOut

Drop a message

We are waiting for your response..

email Id

Subject


Compose your message..

Send

Copyright © 2020 Designed By Himanshu Soni and Labh Yadav

[ContactUs](#)

9. REGISTER NEW USERS PAGE

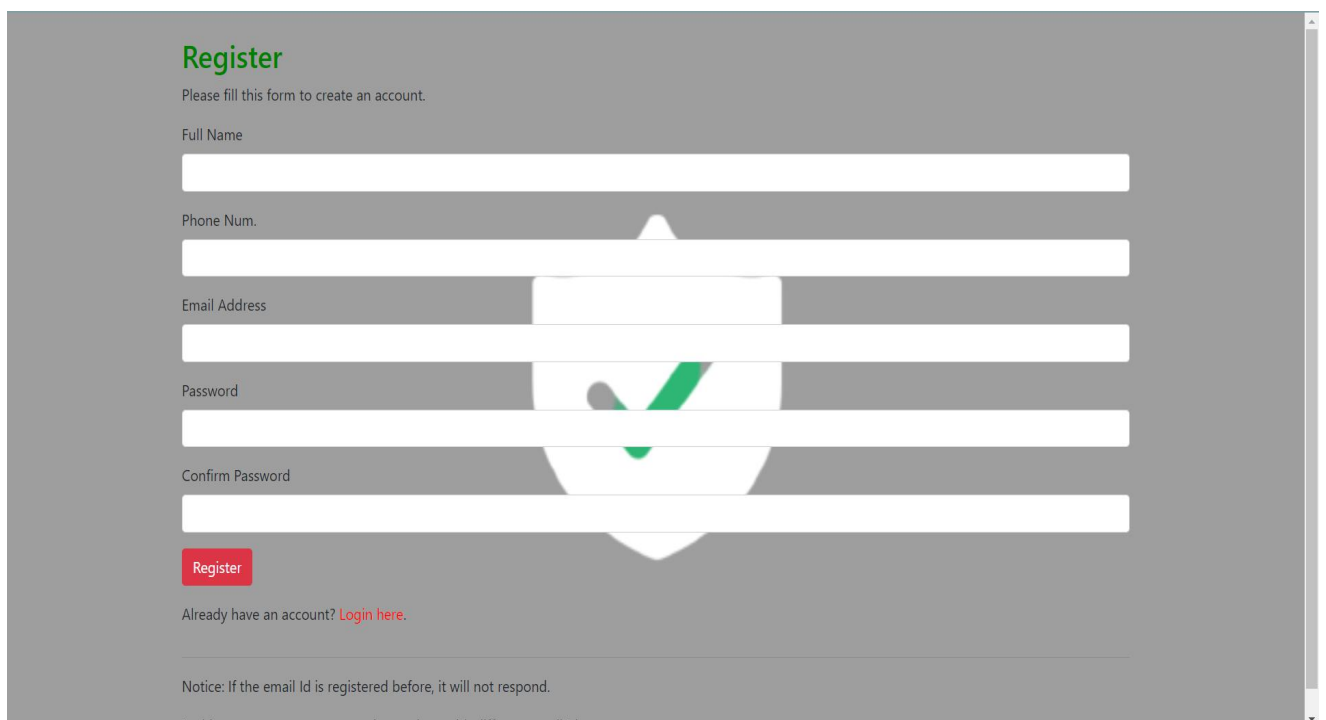

The Register form is on a grey background. It has a green title and a subtitle. There are five input fields: Full Name, Phone Num., Email Address, Password, and Confirm Password. A red Register button is below the fields. A link to the login page is provided for existing users. A notice at the bottom explains that the email Id must be unique.

Register

Please fill this form to create an account.

Full Name

Phone Num.

Email Address

Password

Confirm Password

Register

Already have an account? [Login here.](#)

Notice: If the email Id is registered before, it will not respond.
In this case, reset your password or register with different email Id.

10. ADMIN LOGIN PAGE

[BackToHome](#)

Admin Login

Swagat Nahi Karoge Hamara..

Email_ID:

Password:

11. ADMIN'S DELETE DATA PAGE

[BackToDashboard](#)

Search Data Information

[LogOut](#)

No.	Items Image	Sender Name	Receiver Name	Sender Email	Action
1		love	himanshu	love@gmail.com	Delete
2		love	gyanshu	love@gmail.com	Delete

12. ALL THE USER DETAILS PAGE

[BackToDashboard](#)

Showing All Users

[LogOut](#)

No.	Users Name	Email Id	Action
1	prem	premkumar1215225@gmail.com	DeleteUser
2	LOVE RAJ	love@gmail.com	DeleteUser

13. UPDATE COURIER DETAILS PAGE.

Update The Details As Required

SENDER	RECEIVER
Name: <input type="text" value="love"/>	Name: <input type="text" value="himanshu"/>
Email: <input type="text" value="love@gmail.com"/>	Email: <input type="text" value="himanshu@gmail.com"/>
PhoneNo.: <input type="text" value="06362786223"/>	PhoneNo.: <input type="text" value="6526652"/>
Address: <input type="text" value="KR puram,Bangalore,Karn"/>	Address: <input type="text" value="Boys hostel of Cambridge"/>
XX	
Weight: <input type="text" value="2"/>	ReceiptNo.: <input type="text" value="22"/>
Date: <input type="text" value="16-01-2021"/>	Items Image: <input type="button" value="Choose File"/> No file chosen
<input type="button" value="Update"/>	

14. LIST OF ALL THE TABLES IN PROJECT

The screenshot shows the phpMyAdmin interface for a database named 'courierdb'. The left sidebar displays the database structure, including tables like 'adlogin', 'admin', 'contacts', 'courier', 'login', 'users', 'information_schema', 'mysql', 'performance_schema', 'phpmyadmin', and 'test'. The main panel shows the 'Tables' tab selected, displaying a list of tables with their respective actions (Browse, Structure, Search, Insert, Empty, Drop). The table 'courier' is highlighted. Below the table list, there is a 'Filters' section with a search box and a 'Check all' checkbox. The bottom of the interface shows a 'Print' button and a 'Data dictionary' link.

Table	Action	Rows	Type	Collation	Size	Overhead
adlogin	Browse Structure Search Insert Empty Drop	2	InnoDB	utf8mb4_general_ci	32.0 K	-
admin	Browse Structure Search Insert Empty Drop	2	InnoDB	utf8mb4_general_ci	32.0 K	-
contacts	Browse Structure Search Insert Empty Drop	2	InnoDB	utf8mb4_general_ci	16.0 K	-
courier	Browse Structure Search Insert Empty Drop	1	InnoDB	utf8mb4_general_ci	48.0 K	-
login	Browse Structure Search Insert Empty Drop	2	InnoDB	utf8mb4_general_ci	32.0 K	-
users	Browse Structure Search Insert Empty Drop	2	InnoDB	utf8mb4_general_ci	32.0 K	-
6 tables	Sum	11	InnoDB	utf8mb4_general_ci	192.0 K	0 B

CONCLUSION


System development is also considered as a process backed by engineering approach. We have tried to incorporate & develop new particles for our education particles have been followed not during the but coding but also during the analysis, design phases & in documentation.

Courier agency is considered as an expansion of business relations. It contributes a lot by providing quick & fast services of sending documents letters (formal & informal both) to business as it enables any business to flourish

Following modification or upgrades can be done in system.

- 1) More than one company can be integrated through this software.
- 2) Web services can be used to know exact delivery status of packets.
- 3) Client can check the repacked delivery status online.
- 4) Distributed database approach in place of centralized approach


References and Bibliography:

 <http://www.bluedart.com/>

 <http://www.xamppserver.com/en/>

 <http://www.php.net/>

<http://youtube.com/>

 <http://www.tutorialspoint.com/mysql/>

<https://apache.org/docs/2.0/misc/tutorials.html>