

Sonne: Automated Installation Guide

Local AI assistant for Discord

This guide configures Discord and installs Sonne on an existing Linux system. The installer handles Docker, the model download and service configuration. Linux commands and Discord messages are identified separately throughout.

Before you begin

System	Ubuntu 24.04 LTS or Debian 13; 64-bit Intel/AMD (amd64) or ARM64.
Resources	Qwen: approximately 8 GiB RAM and 15 GiB free disk. Gemma: approximately 16 GiB RAM and 20 GiB free disk. Internet access is required.
Access	A regular Linux account with <code>sudo</code> privileges; a Discord account with permission to add a bot and create a text channel on the chosen server.

Keep a private note of the bot token and the four types of ID collected below. The token is a password for the bot; do not include it in shared documents, screenshots or support messages. Use your own IDs; numbers in the figures are examples.

1. Create the Discord application

Open the Discord Developer Portal and sign in. Select **Create / New Application**, enter **Sonne**, accept the displayed terms and create the application. Under **General Information**, copy and save the **Application ID**.

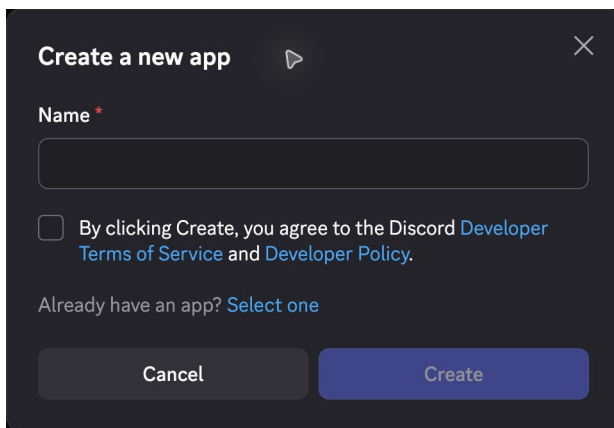


Figure 1. Create the application.




Figure 2. Copy your Application ID.



Figure 3. The token control on the Bot page.

2. Save the bot token and enable message content

Select **Bot** in the application's sidebar and copy the token. If no token is available to copy, select **Reset Token** and complete the confirmation. Save the new token immediately; resetting it invalidates the previous one.

Enable **Message Content Intent**. Leave **Presence Intent** and **Server Members Intent** off. Select **Save Changes** if prompted.



Figure 4. Message Content Intent enabled.

Check: You have saved the Application ID and bot token.

Configure Discord access

3. Invite the bot to your server

Open **OAuth2 / URL Generator** in the Developer Portal. Select **bot** and **applications.commands** under **Scopes**.

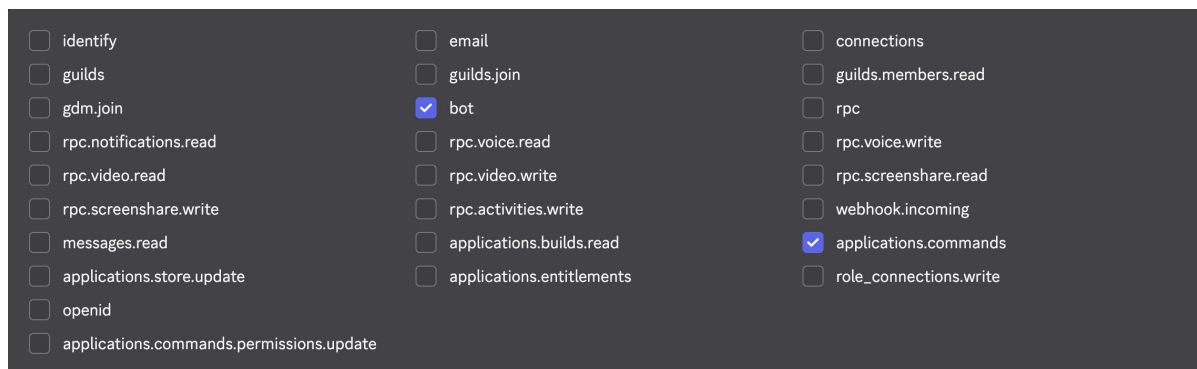


Figure 5. The two required scopes selected.

Under **Bot Permissions**, select **View Channels**, **Send Messages**, **Read Message History**, **Embed Links** and **Attach Files**. Leave **Administrator** unchecked. Open the **Generated URL** in your browser, choose your server and authorize the bot.

In Discord, select **+** beside **Text Channels**, create a text channel named **sonne** and allow the bot and intended users to view it and send messages.

4. Copy the server, channel and user IDs

In Discord, open **User Settings** (gear beside your username), then **Advanced**, and enable **Developer Mode**.

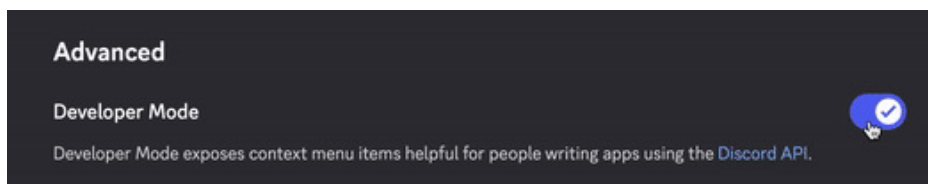


Figure 6. Developer Mode enables the Copy ID menu options.

Right-click the **server icon**: **Copy Server ID**; the **sonne** channel: **Copy Channel ID**; your name in a message or member list: **Copy User ID**. Save each ID in a text file or note, labeled **Server ID**, **Channel ID** or **User ID**, for use during installation. Repeat for additional permitted users; include yourself for testing.

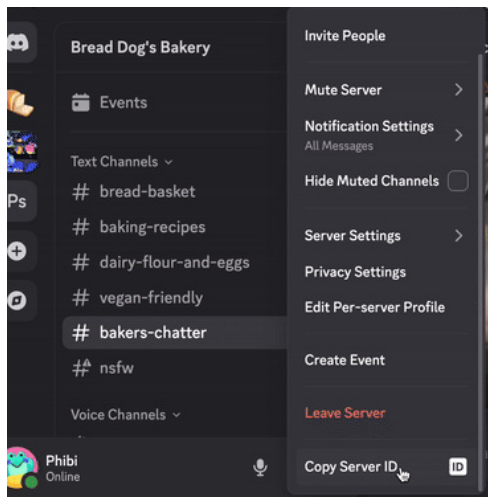


Figure 7. Copy Server ID.

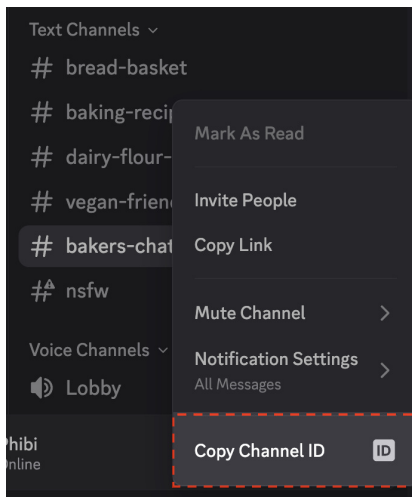


Figure 8. Copy Channel ID.

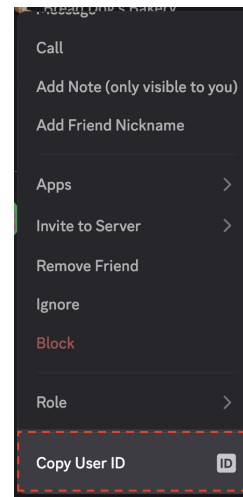


Figure 9. Copy User ID.

Check: Your note contains the token, Application ID, Server ID, Channel ID and at least one permitted User ID.

Install Sonne on Linux

5. Open a Linux terminal

On the target Linux system, open **Terminal** from the applications menu. If Linux runs in a virtual machine or on another computer, use a terminal in that Linux environment. Sign in as your regular user.

Run each command below on its own line and press **Enter**. Wait for the command prompt to return before entering the next command. To paste in a typical Linux terminal, use **Ctrl+Shift+V** or right-click and select **Paste**. When **sudo** requests a password, enter your **Linux login password** and press Enter. No characters or asterisks appear while you type.

6. Download and run the installer

The download folder `~/sonne-installer` must not already exist. The `~` symbol means your Linux home folder.

```
sudo apt-get update
sudo apt-get install -y git
git clone https://github.com/river-team-2026/Sonne.git ~/sonne-installer
cd ~/sonne-installer
bash scripts/install-sonne.sh
```

Run the script exactly as shown. First choose a model: **1 for Qwen3.5 2B** (default; about 1.9 GB download), or **2 for Gemma 4 E2B IT QAT** (about 4.3 GB download). Use the RAM requirements on page 1. The script requests administrative access when needed. At each prompt, paste the corresponding value and press Enter:

Installer prompt	Value to enter
Discord bot token	Token saved in step 2; input is hidden.
Application ID	Application ID from General Information, step 1.
Server ID	ID of the server to which you invited the bot.
Channel ID	ID of the sonne text channel.
Permitted User IDs	Your User ID and any additional permitted User IDs, separated by commas with no spaces. For one user, enter only that user's ID.

Downloads and initial model loading may take several minutes. Keep the terminal open. The installer creates the running installation in `~/agents/sonne`; this is separate from the download folder. Later runs keep the saved model. To change it, rerun with `-model qwen` or `-model gemma`; the bot is paused during setup. User files and credentials are retained. Both choices use the checks on the next page.

Check: The installer reports both messages below, without an error, before returning to the command prompt:

```
Local model routing and Discord probe passed. Verify a real mention and file/image tasks next.
Installed in /home/<your-user>/agents/sonne
```

The installation path contains your actual Linux home folder, which may differ from this example. If the installer reports *Using sudo for Docker now*, sign out of Linux completely and sign back in, or reconnect your SSH session, before running the Docker commands on the next page. Closing the terminal alone is insufficient. If installation stops, follow the recovery steps below.

Verify the installation

7. Test a Discord reply

In the **sonne** channel, use an account whose User ID you entered. Type **@Sonne** and **select the bot from Discord's suggestions** to create a real mention. Then send:

```
@Sonne Reply with exactly: sonne-ok
```

Check: A visible reply contains **sonne-ok**. The first CPU response may take several minutes; avoid sending duplicate requests while it is processing.

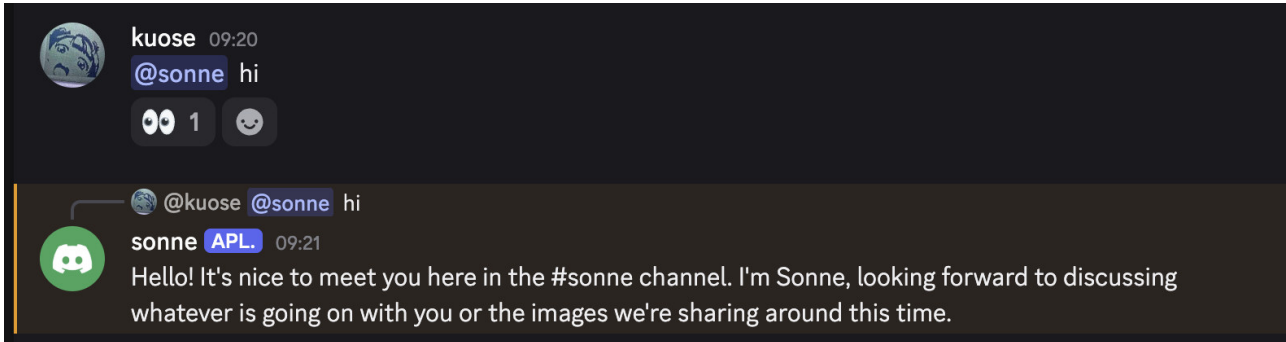


Figure 10. Ordinary message delivery observed during deployment. Use the prompts on this page for the acceptance checks.

8. Test an image and a saved file

In the Linux home folder, open **agents / sonne / examples**. Attach **vision-check.png** to a Discord message, mention the bot and ask it to read the large label and identify the red shape. If Discord runs on another computer, transfer the image there first.

Check: The response identifies **SONNE 42** and a **red square**. Verify both details; local models can misidentify image content.

Next, send the following message, using the same mention method:

```
@Sonne Create /workspace/files/smoke.txt containing exactly SONNE FILE OK.  
Read it back.
```

In the **Linux terminal**, check the actual saved file:

```
cd ~/agents/sonne  
cat workspace/files/smoke.txt
```

Check: The terminal prints **SONNE FILE OK**. If the file already exists, confirm the bot's overwrite request or use a new filename in both places.

Recovery and troubleshooting

Symptom	Action
Download interrupted	Return to <code>~/sonne-installer</code> and run <code>bash scripts/install-sonne.sh</code> again. Do not repeat <code>git clone</code> .
Docker permission denied	Sign out of Linux completely and sign back in, or reconnect SSH, then retry the command.
Discord probe failed	Correct the token or IDs using <code>nano ~/agents/sonne/.env</code> . Save with Ctrl+O , Enter; exit with Ctrl+X , then rerun the installer.
No Discord reply	Check the real mention, permitted User ID, Channel ID, channel permissions and Message Content Intent. Then inspect status and logs below.

Run these commands in the **Linux terminal**:

```
cd ~/agents/sonne  
docker compose ps  
docker compose logs --tail=100 openclaw
```

ollama and **openclaw** should both be running and healthy. If a check still fails, retain the exact error message and the failed step for support. Remove tokens or other credentials before sharing diagnostic output.