

Assignment no:5

Problem Statement: Create a Public Bucket in AWS, upload a file and give the necessary permission to check if the URL is working or not.

Solution Process:

1. Go to the AWS console and search S3 and click on that.
2. Then click on create bucket, after that click the region and set the region as “Mumbai”.
3. Give a unique bucket name.

Create bucket [Info](#)

Buckets are containers for data stored in S3.

General configuration

AWS Region
Asia Pacific (Mumbai) ap-south-1

Bucket type [Info](#)

☒ **General purpose**
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ **Directory**
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket name [Info](#)
riybucket1234
Bucket name must be unique within the global namespace and follow the bucket naming rules. [See rules for bucket naming](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.
[Choose bucket](#)
Format: s3://bucket/prefix

4. Now click on the ACLs Enabled and uncheck the Block all public access.

Object Ownership [Info](#)

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

☐ **ACLs disabled (recommended)**
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☒ **ACLs enabled**
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

Object Ownership


☒ **Bucket owner preferred**
If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.

☐ **Object writer**
The object writer remains the object owner.


[If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. \[Learn more\]\(#\)](#)

Block Public Access settings for this bucket


5. Then click on the bucket name.

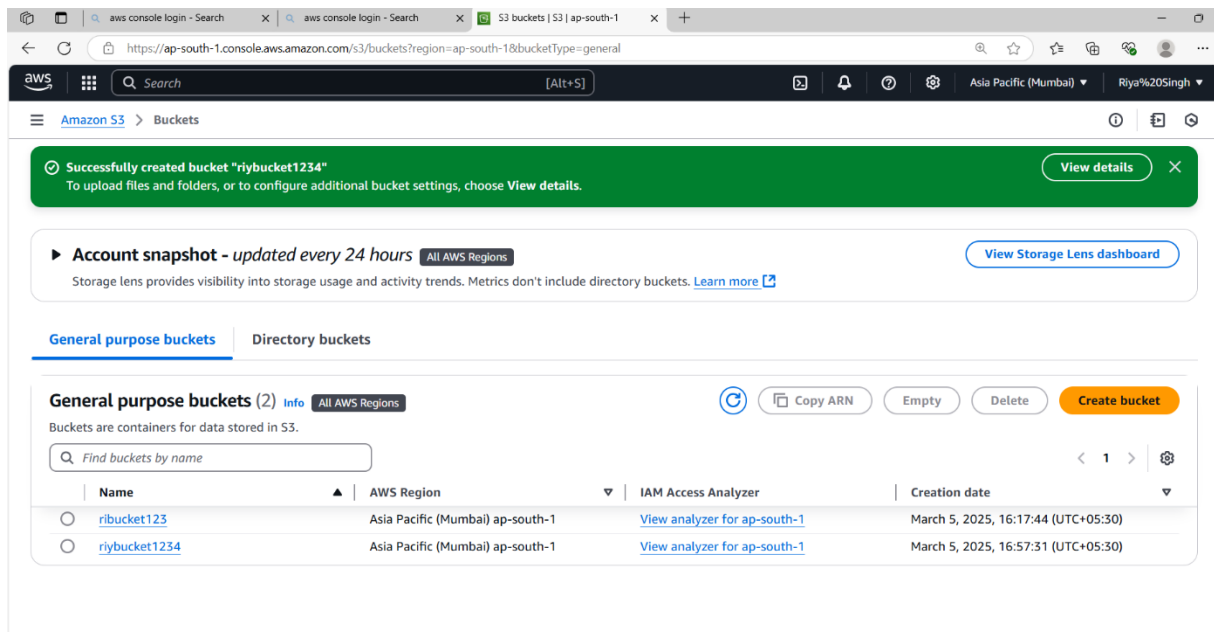

6. Now add files in the bucket. Choose any document or any picture from your pc and upload that.

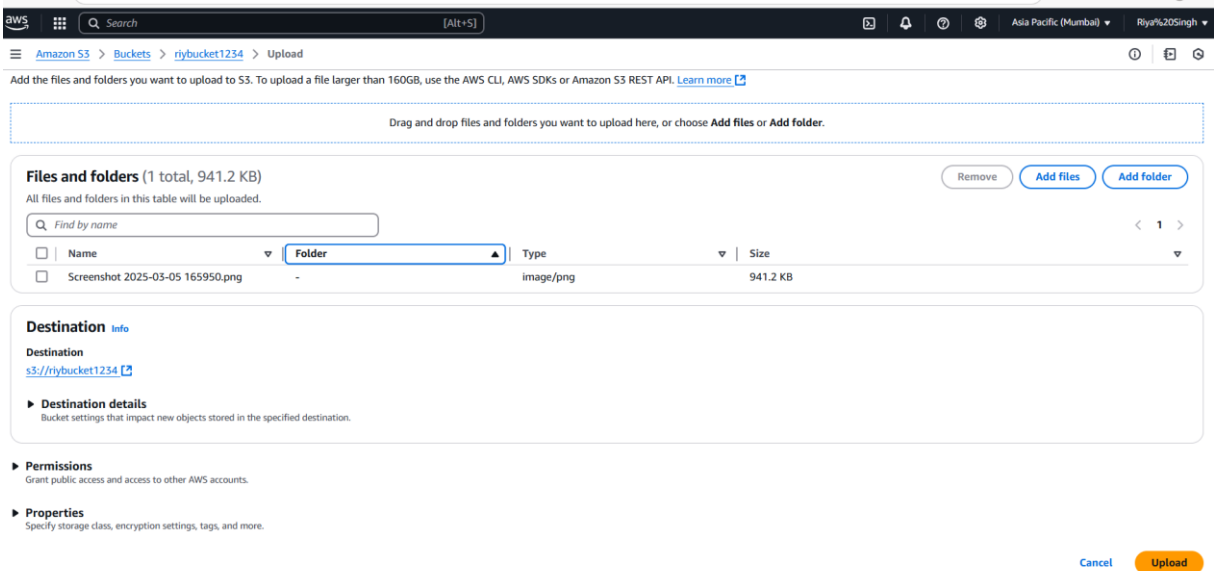

7. After uploading the file, click close on the next page.

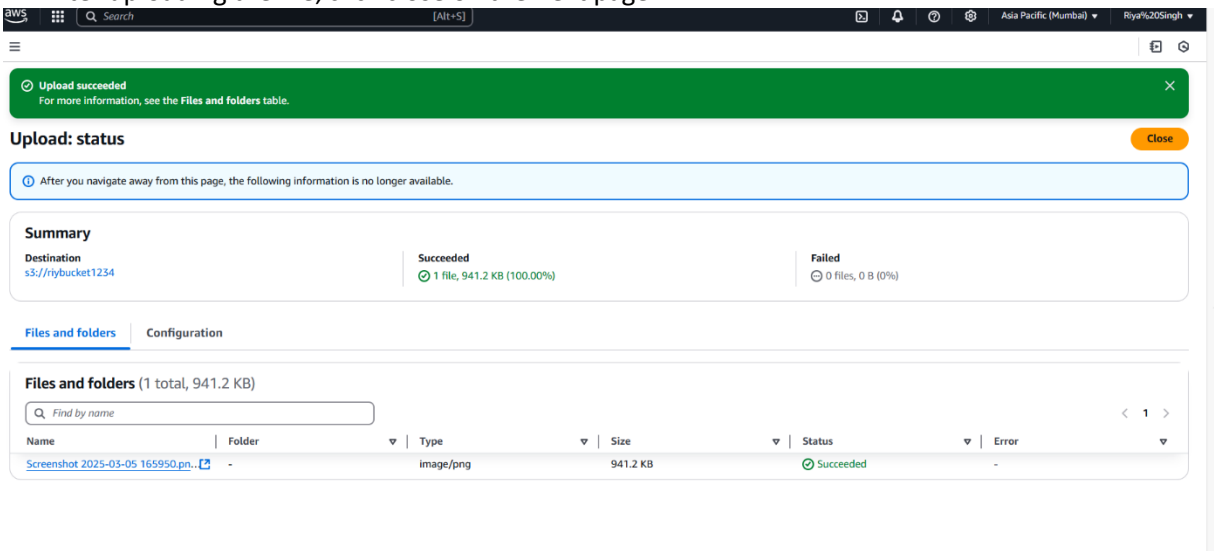


8. Then go to S3 and click the General purpose buckets and click the doc which you uploaded recently.


9. Then copy the URL of that uploaded doc or files.

10. Now open an incognito tab and paste the URL and you have permission to deny page.




11. Now again you upload another file, and in this page go for permission and access the Grant public access then upload.

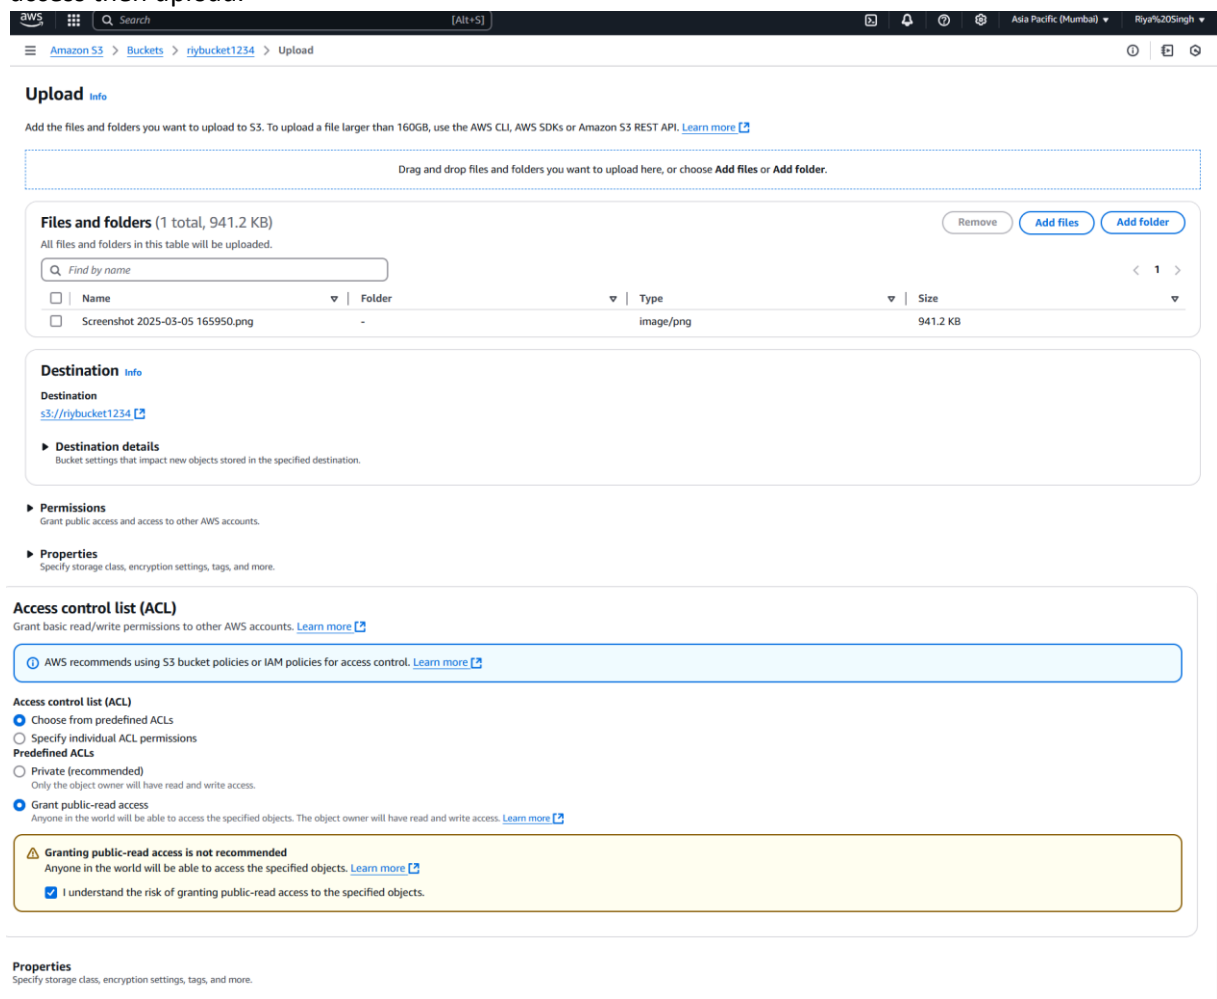

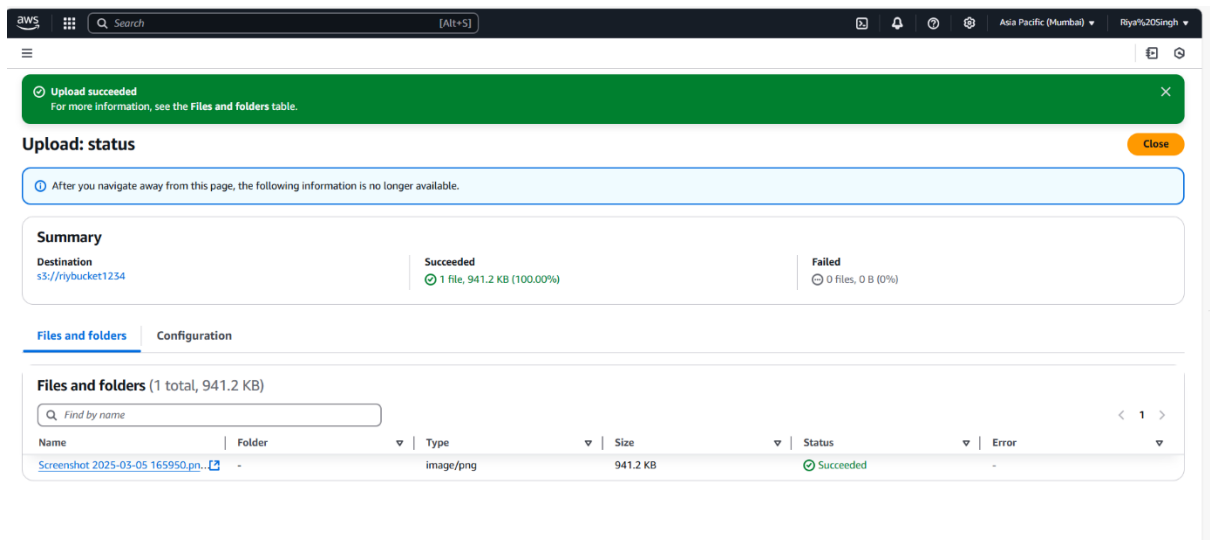

12. Now click on the new file which you have been added recently and copy the URL of that file.

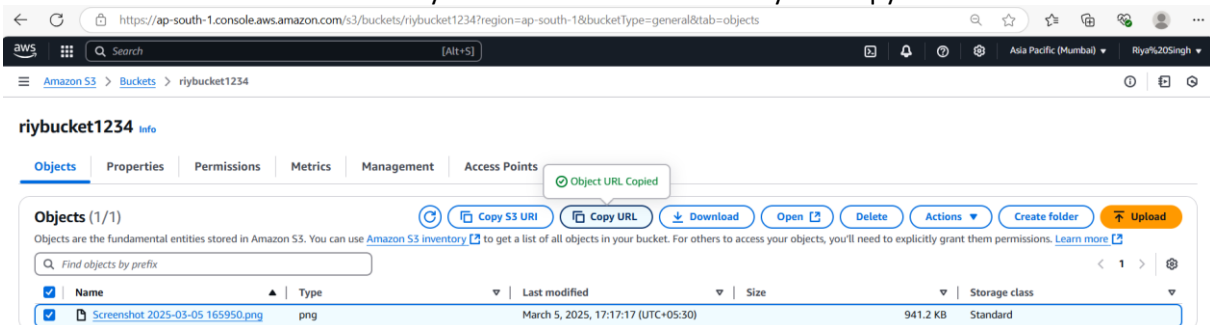

13. Paste the URL on the new incognito tab and you will get the document that you have uploaded.

