


Assignment No:4

Problem Statement: Create a Private Bucket in AWS, upload a file and check by reassign URL whether you can access the file or not.

Solution process:

1. Go to the AWS console and search S3 and click on that.
2. Then click on create bucket, after that click the region and set the region as “Mumbai”.
3. Give a unique bucket name and check the Block for all public access.

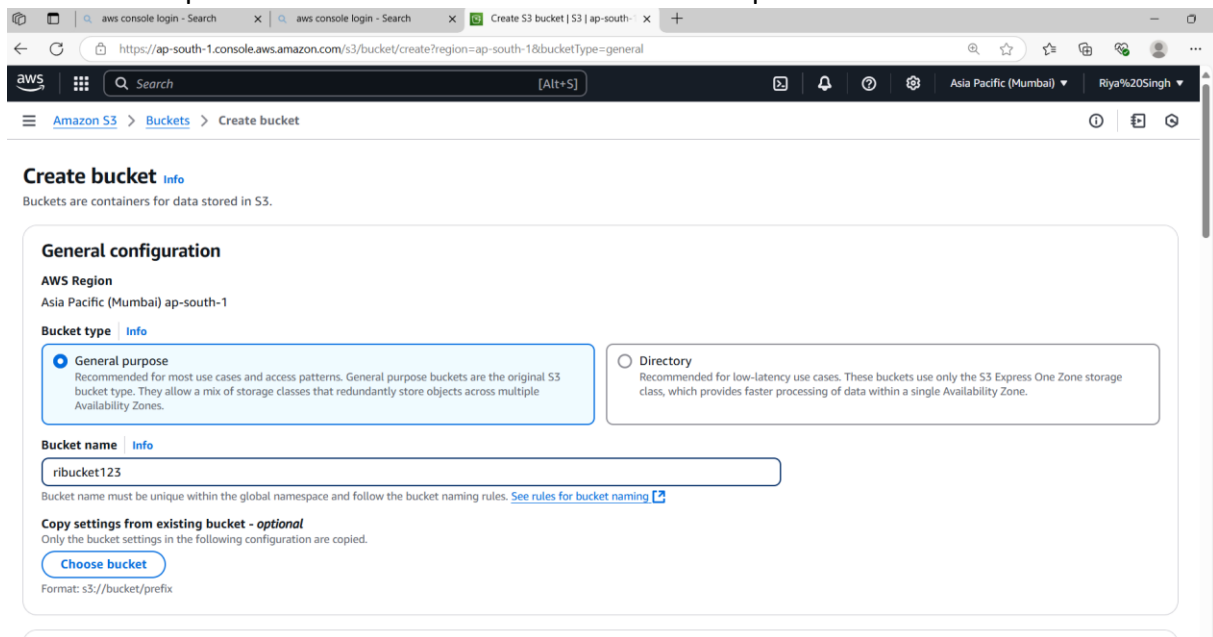

Create bucket [Info](#)

Buckets are containers for data stored in S3.

General configuration

AWS Region
Asia Pacific (Mumbai) ap-south-1

Bucket type [Info](#)


☒ **General purpose**
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ **Directory**
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket name [Info](#)
ribucket123
Bucket name must be unique within the global namespace and follow the bucket naming rules. [See rules for bucket naming](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.
[Choose bucket](#)
Format: s3://bucket/prefix

4. After that click on the bucket name.

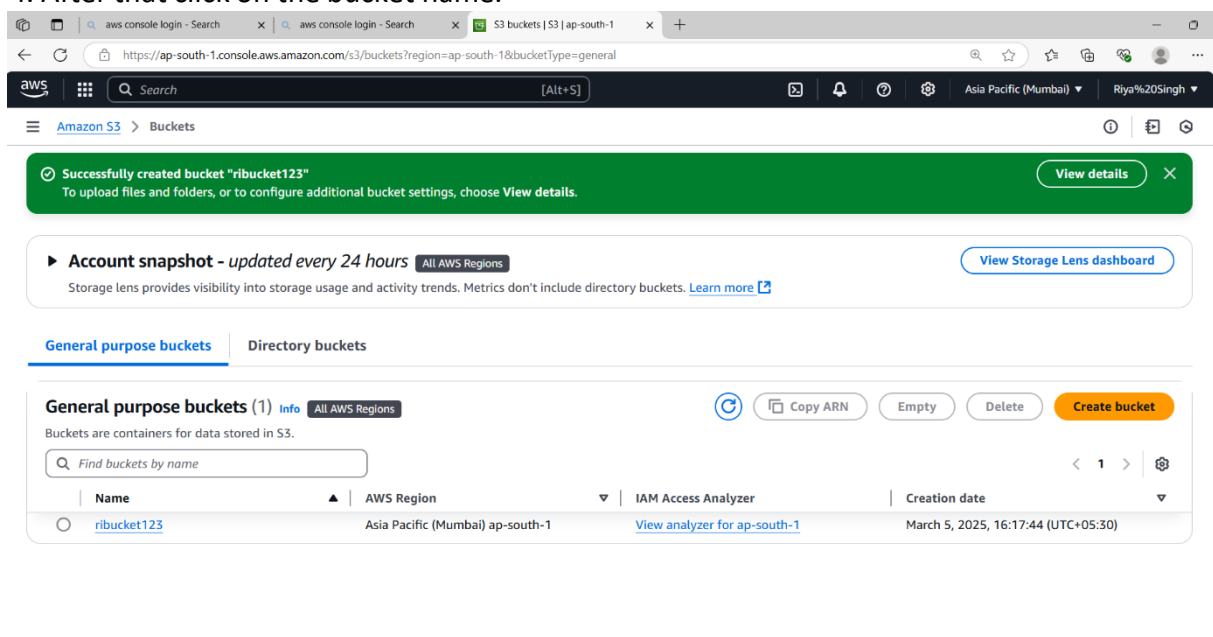

Successfully created bucket "ribucket123"
To upload files and folders, or to configure additional bucket settings, choose [View details](#).

► **Account snapshot - updated every 24 hours** [All AWS Regions](#) [View Storage Lens dashboard](#)
Storage lens provides visibility into storage usage and activity trends. Metrics don't include directory buckets. [Learn more](#)


General purpose buckets | **Directory buckets**

General purpose buckets (1) [Info](#) [All AWS Regions](#)


Buckets are containers for data stored in S3.

	Name	AWS Region	IAM Access Analyzer	Creation date
☐	ribucket123	Asia Pacific (Mumbai) ap-south-1	View analyzer for ap-south-1	March 5, 2025, 16:17:44 (UTC+05:30)

5. Now add files on the bucket. Choose any documents or any picture from your pc and upload that.

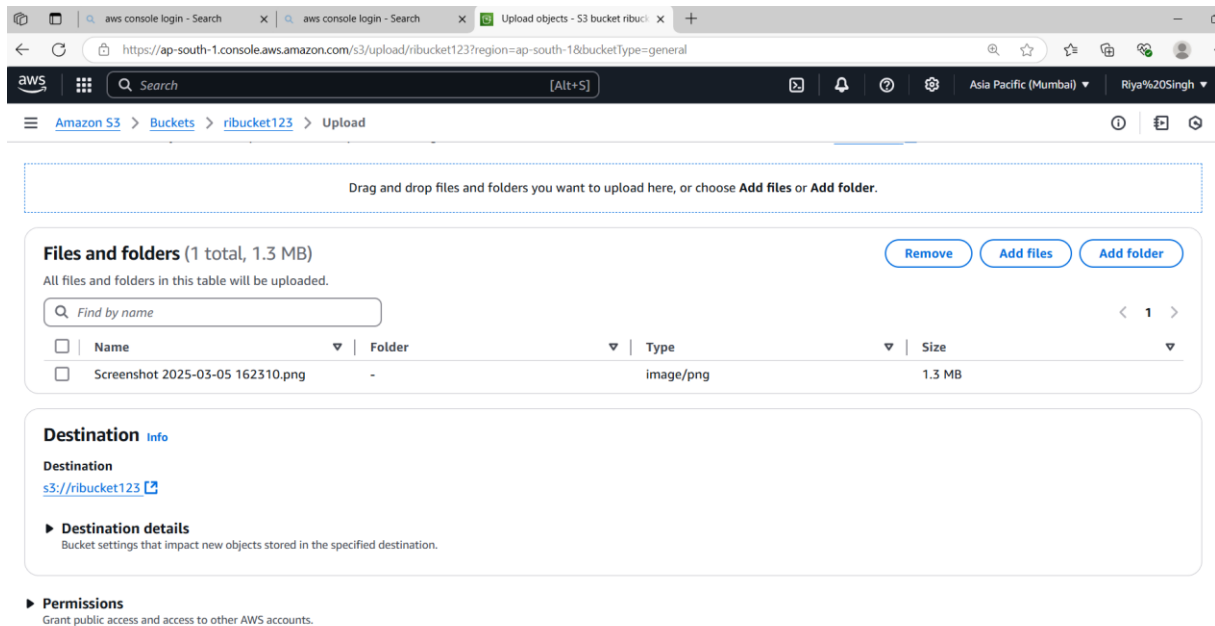

6. After uploading the file, click close on the next page.

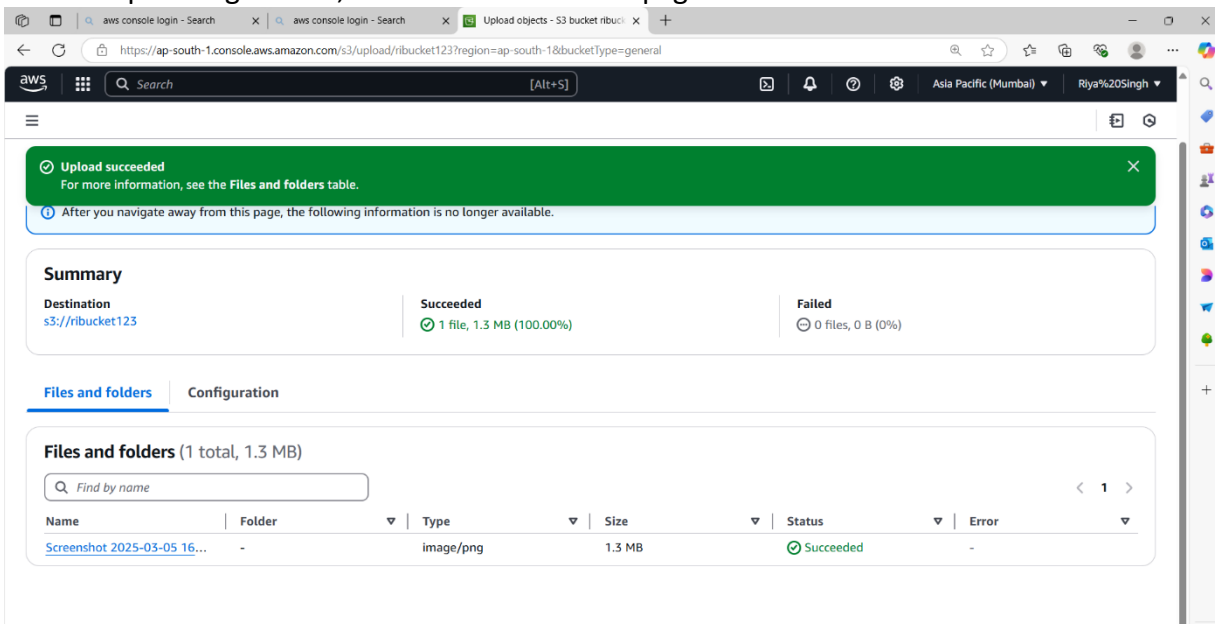

7. Then go to s3 and click the General purpose buckets and click the doc which you uploaded recently.

8. Then copy the URL of that uploaded doc or files.

aws console login - Search

aws console login - Search

ribucket123 - S3 bucket | S3 | ap-...

https://ap-south-1.console.aws.amazon.com/s3/buckets/ribucket123?region=ap-south-1&bucketType=general&tab=objects

aws

Search

[Alt+S]

Asia Pacific (Mumbai)

Riya%20Singh

Amazon S3

Buckets

ribucket123

Amazon S3

General purpose buckets

Directory buckets

Table buckets

Access Grants

Access Points

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

IAM Access Analyzer for S3

Block Public Access settings for this account

Storage Lens

Dashboards

Storage Lens groups

AWS Organizations settings

ribucket123

Info

Objects

Properties

Permissions

Metrics

Management

Access Points

Object URL Copied

Objects (1/1)

Copy S3 URI

Copy URL

Download

Open

Delete

Actions

Create folder


Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix


	Name	Type	Last modified	Size	Storage class
☒	Screenshot 2025-03-05 162310.png	png	March 5, 2025, 16:24:39 (UTC+05:30)	1.3 MB	Standard

9. Now open an incognito tab and paste the URL and you have permission to deny page.

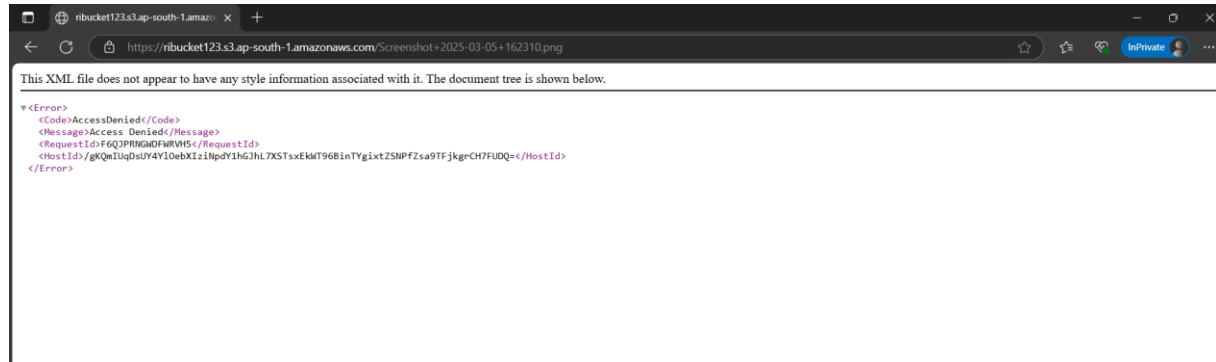

10. Again go back to the main and go for the “Action” option, after clicking on that click on the “Share with a presigned URL” option.

11. Now give a time interval and click on create presigned URL.

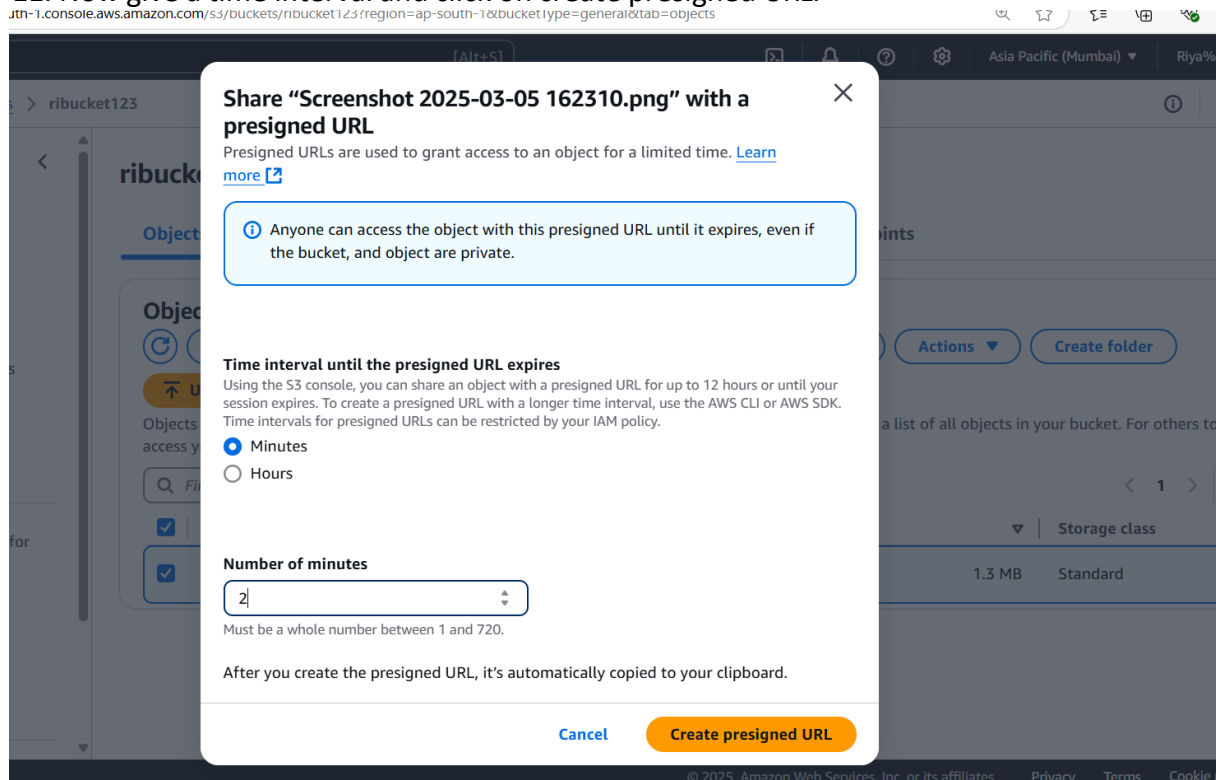

12. Now copy the presigned URL and paste on a new incognito tab and you get the

