

Web Server

(Debian GNU/Linux 9)

Oleh:

Idris Winarno

User Directory

Instalasi

apt-get install apache2 php

```
The following additional packages will be installed:
  apache2-bin apache2-data apache2-utils libapache2-mod-php7.0
  php-common php7.0 php7.0-cli php7.0-common php7.0-json
  php7.0-opcache php7.0-readline ssl-cert
Suggested packages:
  apache2-doc apache2-suexec-pristine | apache2-suexec-custom
  php-pear openssl-blacklist
The following NEW packages will be installed:
  apache2 apache2-data apache2-utils libapache2-mod-php7.0 php
  php-common php7.0 php7.0-cli php7.0-common php7.0-json
  php7.0-opcache php7.0-readline ssl-cert
The following packages will be upgraded:
  apache2-bin
1 upgraded, 13 newly installed, 0 to remove and 427 not upgraded.
Need to get 5,392 kB of archives.
After this operation, 16.0 MB of additional disk space will be used
.
Do you want to continue? [Y/n] █
```

Konfigurasi

a2enmod userdir

systemctl restart apache2

mkdir /etc/skel/public_html

adduser test

```
root@debian:/home/idris# a2enmod userdir
Enabling module userdir.
To activate the new configuration, you need to run:
    systemctl restart apache2
root@debian:/home/idris# systemctl restart apache2
root@debian:/home/idris# mkdir /etc/skel/public_html
root@debian:/home/idris# adduser test
Adding user `test' ...
Adding new group `test' (1001) ...
Adding new user `test' (1001) with group `test' ...
Creating home directory `/home/test' ...
Copying files from `/etc/skel' ...
Enter new UNIX password:
Retype new UNIX password:
passwd: password updated successfully
Changing the user information for test
Enter the new value, or press ENTER for the default
    Full Name []:
    Room Number []:
    Work Phone []:
    Home Phone []:
    Other []:
Is the information correct? [Y/n] y
root@debian:/home/idris#
```

Ujicoba

 localhost/~test/ 

Index of /~test

<u>Name</u>	<u>Last modified</u>	<u>Size</u>	<u>Description</u>
 Parent Directory		-	

Apache/2.4.25 (Debian) Server at localhost Port 80

Virtual Hosting

Persiapan

vim /etc/hosts

```
127.0.0.1      localhost debian test.com test1.com test2.com
::1           localhost ip6-localhost ip6-loopback
ff02::1       ip6-allnodes
ff02::2       ip6-allrouters
~
```

ping test.com

```
root@debian:/home/idris# ping test.com
PING localhost (127.0.0.1): 56 data bytes
64 bytes from 127.0.0.1: icmp_seq=0 ttl=64 time=0.049 ms
64 bytes from 127.0.0.1: icmp_seq=1 ttl=64 time=0.052 ms
64 bytes from 127.0.0.1: icmp_seq=2 ttl=64 time=0.047 ms
^C--- localhost ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 0.047/0.049/0.052/0.000 ms
```

Persiapan

```
# cd /var/www/html
```

```
# mkdir test.com test1.com test2.com
```

```
# echo "<h1>ini test.com</h1>" > test.com/index.html
```

```
# echo "<h1>ini test1.com</h1>" > test1.com/index.html
```

```
# echo "<h1>ini test2.com</h1>" > test2.com/index.html
```

```
root@debian:~# cd /var/www/html/
root@debian:/var/www/html# mkdir test.com test1.com test2.com
root@debian:/var/www/html# echo "<h1>ini test.com</h1>" > test.com/index.html
root@debian:/var/www/html# echo "<h1>ini test1.com</h1>" > test1.com/index.html
root@debian:/var/www/html# echo "<h1>ini test2.com</h1>" > test2.com/index.html
root@debian:/var/www/html# █
```

Konfigurasi(1)

```
# cd /etc/apache2/sites-available
# cp 000-default.conf test.com.conf
# cp 000-default.conf test1.com.conf
# cp 000-default.conf test2.com.conf
```

```
root@debian:~# cd /etc/apache2/sites-available/
root@debian:/etc/apache2/sites-available# ls -l
total 12
-rw-r--r-- 1 root root 1332 Nov  3  2018 000-default.conf
-rw-r--r-- 1 root root 6338 Jun 16  2019 default-ssl.conf
root@debian:/etc/apache2/sites-available# cp 000-default.conf test.com.conf
root@debian:/etc/apache2/sites-available# cp 000-default.conf test1.com.conf
root@debian:/etc/apache2/sites-available# cp 000-default.conf test2.com.conf
root@debian:/etc/apache2/sites-available# █
```


Konfigurasi(2)

vim test.com.conf

```
<VirtualHost *:80>
# The ServerName directive sets the request scheme, hostname and port that
# the server uses to identify itself. This is used when creating
# redirection URLs. In the context of virtual hosts, the ServerName
# specifies what hostname must appear in the request's Host: header to
# match this virtual host. For the default virtual host (this file) this
# value is not decisive as it is used as a last resort host regardless.
# However, you must set it for any further virtual host explicitly.
ServerName test.com

ServerAdmin webmaster@localhost
DocumentRoot /var/www/html/test.com

# Available loglevels: trace8, ..., tracel, debug, info, notice, warn,
# error, crit, alert, emerg.
# It is also possible to configure the loglevel for particular
# modules, e.g.
#LogLevel info ssl:warn
```

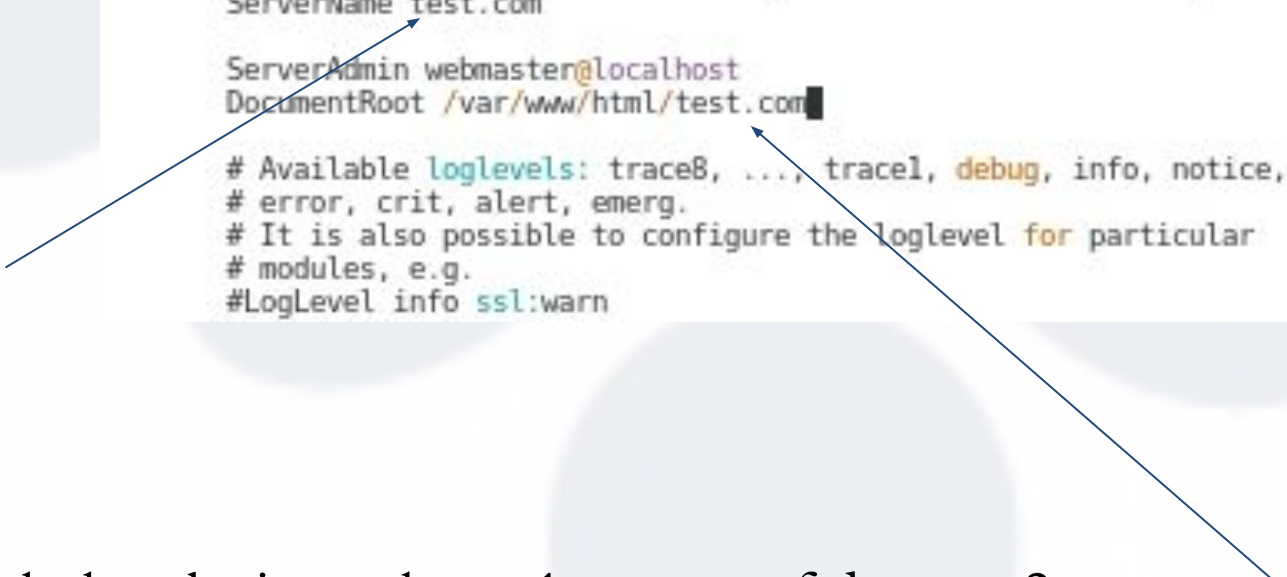

(lakukan lagi untuk test1.com.conf dan test2.com.conf)

Konfigurasi(3)

```
# a2ensite test.com
```


```
# a2ensite test1.com
```

```
# a2ensite test2.com
```

```
# systemctl reload apache2
```

```
root@debian:/etc/apache2/sites-available# a2ensite test1.com
Enabling site test1.com.
To activate the new configuration, you need to run:
    systemctl reload apache2
root@debian:/etc/apache2/sites-available# a2ensite test.com
Enabling site test.com.
To activate the new configuration, you need to run:
    systemctl reload apache2
root@debian:/etc/apache2/sites-available# a2ensite test2.com
Enabling site test2.com.
To activate the new configuration, you need to run:
    systemctl reload apache2
root@debian:/etc/apache2/sites-available# systemctl reload apache2
```

Ujicoba

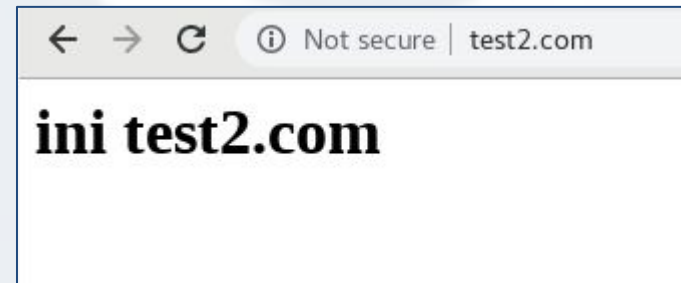

ISPConfig Hosting Control Panel

Operating System

- CentOS
- Debian
- Fedora
- OpenSuSE
- Ubuntu


Features

- Manage single or multiple servers from one control panel.
- web server management for Apache HTTP Server and Nginx.
- Mail server management (with virtual mail users) with spam and antivirus filter using Postfix (software) and Dovecot (software).
- DNS server management (BIND, Powerdns). Configuration mirroring and clusters.
- Administrator, reseller, client and mail-user login.
- Virtual server management for OpenVZ Servers.
- Website statistics with Webalizer and AWStats.

Installation..... so simple...

- `# cd /tmp`
- `# sysctl -w net.ipv6.conf.all.disable_ipv6=1`
(untuk mematikan ipv6 sementara waktu)
- `# export http_proxy=http://proxy3.pens.ac.id:3128`
- `# export https_proxy=http://proxy3.pens.ac.id:3128`
(login dulu proxy3 via web browser)
- `# wget --no-check-certificate -O installer.tgz`
`"https://github.com/servisys/ispconfig_setup/tarball/master"`
- `# tar zxvf installer.tgz`
- `# cd *ispconfig*`
- `# bash install.sh`

Result

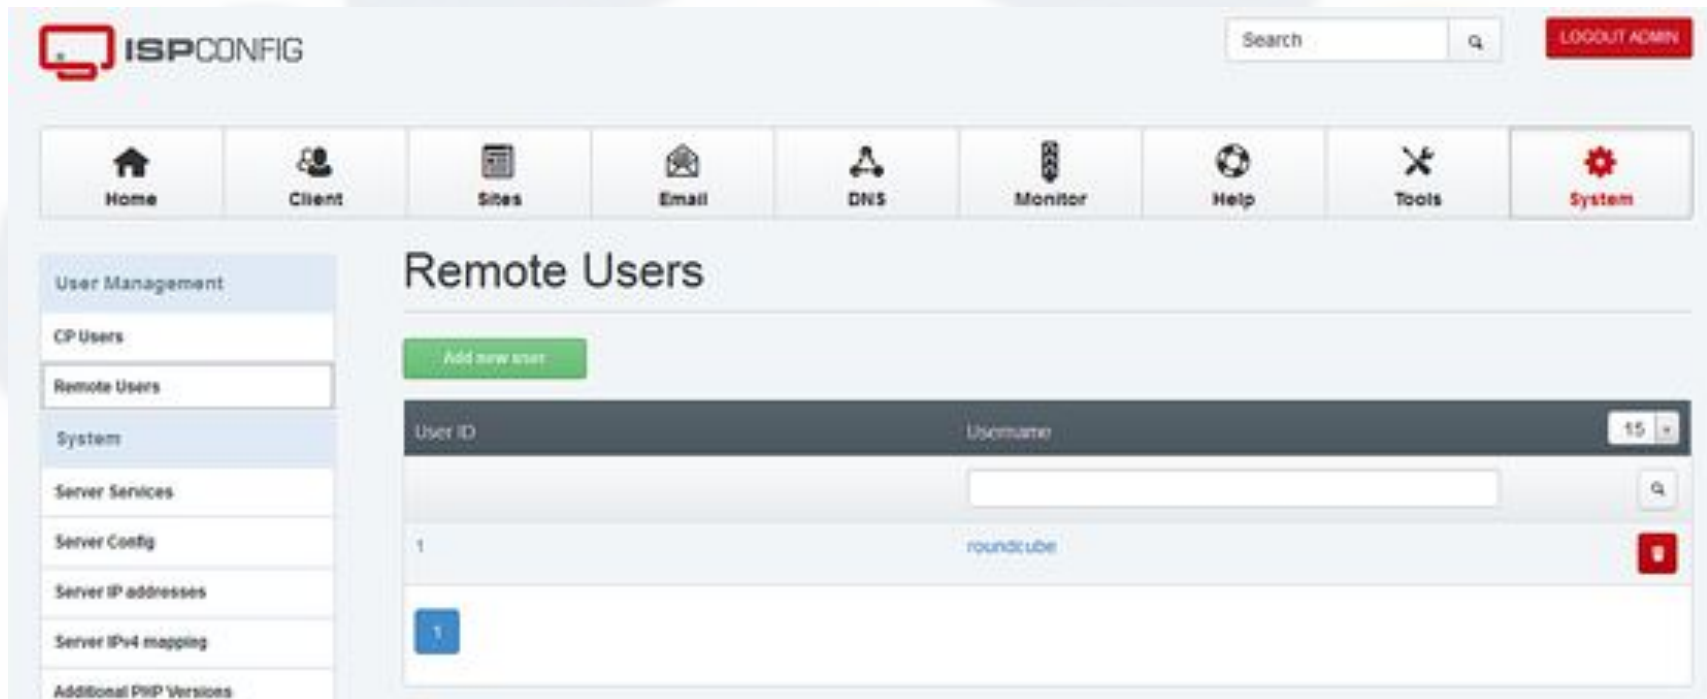

The image shows the ISPConfig web interface. At the top, there is a header with the ISPConfig logo, a search bar, and a 'Logout Admin' button. Below the header is a navigation bar with icons for Home, Client, Sites, Email, DNS, Monitor, Help, Tools, and System. The left sidebar contains a 'User Management' section with links for CP Users, Remote Users, System, Server Services, Server Config, Server IP addresses, Server IPv4 mapping, and Additional PHP Versions. The main content area is titled 'Remote Users' and features a green 'Add new user' button. Below this is a table with columns 'User ID' and 'Username'. The table contains one entry with User ID '1' and Username 'roundcube'. A search bar is located above the table. A red trash icon is visible next to the entry. A blue button with the number '1' is located below the table.

ISPCONFIG

Search

Home Client Sites Email DNS Monitor Help Tools **System**

User Management

- CP Users
- Remote Users
- System
- Server Services
- Server Config
- Server IP addresses
- Server IPv4 mapping
- Additional PHP Versions

Remote Users

User ID	Username
1	roundcube

Reference

- <https://www.howtoforge.com/tutorial/ispconfig-automated-install-script/>
- <https://en.wikipedia.org/wiki/ISPConfig>