

Workshop Proxy Server

Oleh:

Idris Winarno

Instalasi

- # apt-get update
- # apt-get install squid3

```
root@debian:/home/student# apt-get install squid3
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following extra packages will be installed:
  libcap2 libltdl7 libnetfilter-conntrack3 squid-langpack squid3-common
Suggested packages:
  squidclient squid-cgi squid-purge resolvconf smbclient ufw winbindd
The following NEW packages will be installed:
  libcap2 libltdl7 libnetfilter-conntrack3 squid-langpack squid3 squid3-common
0 upgraded, 6 newly installed, 0 to remove and 0 not upgraded.
Need to get 2574 kB of archives.
After this operation, 9008 kB of additional disk space will be used.
```

Keywords:

- File konfigurasi: /etc/squid3/squid.conf
- “# INSERT YOUR OWN RULE(S) HERE TO ALLOW ACCESS FROM YOUR CLIENTS”
- Setiap kali ada perubahan konfigurasi:
service squid3 reload

ACL (ACCESS CONTROL LIST)

Konfigurasi

```
#  
# INSERT YOUR OWN RULE(S) HERE TO ALLOW ACCESS FROM YOUR CLIENTS  
#  
  
acl komputerku src 10.252.108.200/32  
acl jaringanku src 10.252.108.0/24  
acl domain_tolak dstdomain .student.pens.ac.id  
  
http_access allow komputerku  
http_access deny domain_tolak  
http_access deny jaringanku
```

PROXY AUTH (BASIC)

Instalasi apache2 untuk httpasswd

- Instalasi apache

apt-get install apache2

- Buat file password

httpasswd -c /etc/squid3/passwd idris

```
root@debian:/home/student# httpasswd -c /etc/squid3/passwd idris
New password:
Re-type new password:
Adding password for user idris
root@debian:/home/student# httpasswd /etc/squid3/passwd winarno
New password:
Re-type new password:
Adding password for user winarno
```

- Testing


```
[root@debian:/home/student# /usr/lib/squid3/basic_ncsa_auth /etc/squid3/passwd idris idris
OK
```

Konfigurasi

```
#  
# INSERT YOUR OWN RULE(S) HERE TO ALLOW ACCESS FROM YOUR CLIENTS  
#  
  
auth_param basic program /usr/lib/squid3/basic_ncsa_auth /etc/squid3/passwd  
auth_param basic children 5  
auth_param basic realm Masukkan Password  
auth_param basic credentialsttl 2 hour  
  
acl katakunci proxy_auth REQUIRED  
  
http_access allow katakunci
```

TRANSPARENT PROXY

Topology

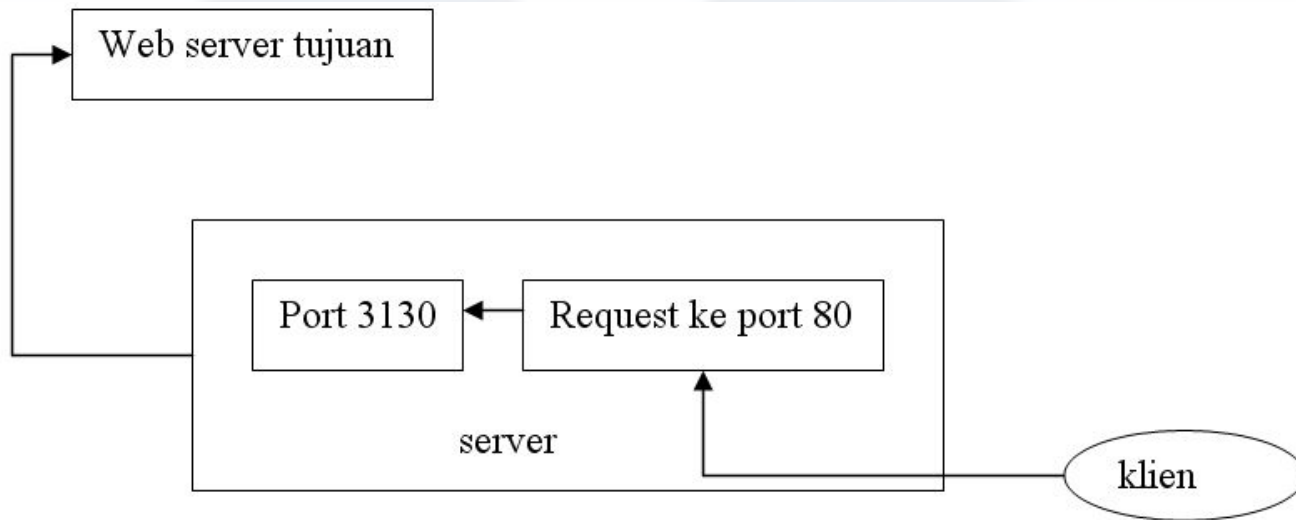

```
# vim /etc/sysctl.conf
```

```
# sysctl -p
```

```
# Uncomment the next line to enable packet forwarding for IPv4
net.ipv4.ip_forward=1

# Uncomment the next line to enable packet forwarding for IPv6
-- INSERT --
```

```
root@debian:/home/student# sysctl -p
net.ipv4.ip_forward = 1
```

Konfigurasi

```
# Squid normally listens to port 3128
http_port 3128 transparent

# TAG: https_port
# Note: This option is only available if Squid is rebuilt with the
#       --enable-ssl
#
-- INSERT --
```

Step 3. Edit file `/etc/squid/squid.conf`, add the word "transparent" on "http_1622,27

```
#
# INSERT YOUR OWN RULE(S) HERE TO ALLOW ACCESS FROM YOUR CLIENTS
#

acl transparent_net src 10.252.108.0/24

http_access allow transparent_net
```

```
iptables -t nat -A PREROUTING -s 10.252.108.0/24 -p tcp --dport 80 -j REDIRECT --to-port 3128
```

Client



```
route add default gw 10.252.108.43
```