

Workshop Analisis & Manajemen

Log

Oleh:

Idris Winarno

AWSTATS

Instalasi Web Server

- # apt-get install apache2
- # nslookup <ip addr>

```
root@debian:/home/student# ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
2: ens32: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen 1000
    link/ether 00:0c:29:23:c8:bf brd ff:ff:ff:ff:ff:ff
    inet 10.252.108.200/24 brd 10.252.108.255 scope global ens32
        valid_lft forever preferred_lft forever
    inet6 fe80::20c:29ff:fe23:c8bf/64 scope link
        valid_lft forever preferred_lft forever
root@debian:/home/student# nslookup 10.252.108.200
Server:                202.9.85.4
Address:                202.9.85.4#53

200.108.252.10.in-addr.arpa    name = com0.c307.eepis-its.edu.
```

Instalasi Web Server

- # apt-get install apache2
- # nslookup <ip addr>

```
root@debian:/home/student# ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
2: ens32: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen 1000
    link/ether 00:0c:29:23:c8:bf brd ff:ff:ff:ff:ff:ff
    inet 10.252.108.200/24 brd 10.252.108.255 scope global ens32
        valid_lft forever preferred_lft forever
    inet6 fe80::20c:29ff:fe23:c8bf/64 scope link
        valid_lft forever preferred_lft forever
root@debian:/home/student# nslookup 10.252.108.200
Server:                202.9.85.4
Address:                202.9.85.4#53

200.108.252.10.in-addr.arpa    name = com0.c307.eepis-its.edu.
```



- Buat vHost untuk domain (misal: com0.c307.eepis-its.edu)

Instalasi AWStats

- # apt-get install awstats

```
root@debian:/etc/apache2/sites-available# apt-get install awstats
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following additional packages will be installed:
  libnet-xwhois-perl
Suggested packages:
  libnet-dns-perl libnet-ip-perl libgeo-ipfree-perl liburi-perl
The following NEW packages will be installed:
  awstats libnet-xwhois-perl
0 upgraded, 2 newly installed, 0 to remove and 0 not upgraded.
Need to get 2,023 kB of archives.
After this operation, 7,012 kB of additional disk space will be used.
Do you want to continue? [Y/n]
```

- Aktifkan modul CGI dan restart web server

```
root@debian:/etc/apache2/sites-available# a2enmod cgi
AH00558: apache2: Could not reliably determine the server's fully qualified domain name, using 127.0.1.1. Set the 'ServerName' d
irective globally to suppress this message
Your MPM seems to be threaded. Selecting cgid instead of cgi.
Enabling module cgid.
To activate the new configuration, you need to run:
  systemctl restart apache2
root@debian:/etc/apache2/sites-available# systemctl restart apache2
root@debian:/etc/apache2/sites-available#
```

Konfigurasi AWStats

- `#cp /etc/awstats/awstats.conf`
`/etc/awstats/awstats.com0.c307.eepis-its.edu.conf`
- `#vim /etc/awstats/awstats.com0.c307.eepis-its.edu.conf`

```
# Change to Apache log file, by default it's /var/log/apache2/access.log  
LogFile="/var/log/apache2/access.log"
```

```
# Change to the website domain name  
SiteDomain="com0.c307.eepis-its.edu"  
HostAliases="www.com0.c307.eepis-its.edu localhost 127.0.0.1"
```


```
# When this parameter is set to 1, AWStats adds a button on report page to allow to "update"  
statistics from a web browser  
AllowToUpdateStatsFromBrowser=1
```

Uji coba

- # /usr/lib/cgi-bin/awstats.pl -config=com0.c307.eepis-its.edu -update

```
root@debian:/etc/awstats# /usr/lib/cgi-bin/awstats.pl -config=com0.c307.eepis-its.edu -update
Create/Update database for config "/etc/awstats/awstats.com0.c307.eepis-its.edu.conf" by AWStats version 7.6 (build 20161204)
From data in log file "/var/log/apache2/access.log"...
Phase 1 : First bypass old records, searching new record...
Searching new records from beginning of log file...
Phase 2 : Now process new records (Flush history on disk after 20000 hosts)...
Jumped lines in file: 0
Parsed lines in file: 3
Found 0 dropped records,
Found 0 comments,
Found 0 blank records,
Found 0 corrupted records,
Found 0 old records,
Found 3 new qualified records.
root@debian:/etc/awstats#
```

- Buka browser pada alamat: [http://\(domain\)/cgi-bin/awstats.pl](http://(domain)/cgi-bin/awstats.pl)

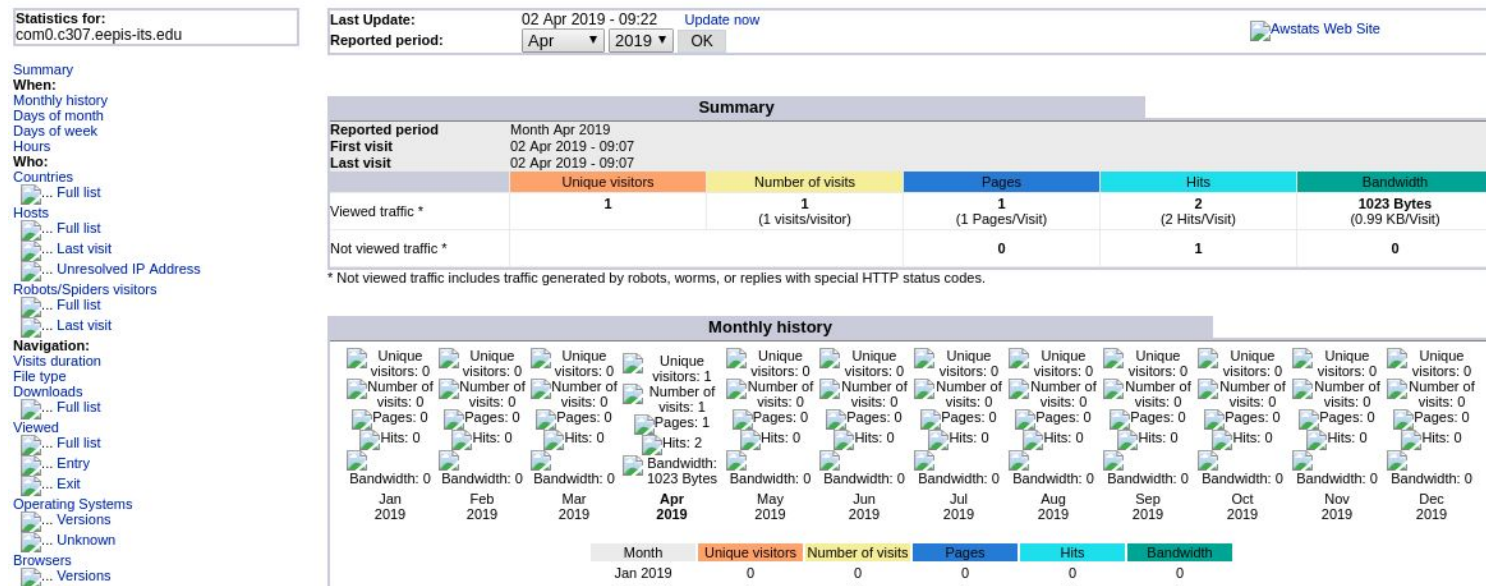


Troubleshooting

- Edit file konfigurasi vHost
- # vim /etc/apache2/sites-enabled/com0.c307.eepis-its.edu.conf
- Tambahkan: Alias /awstats-icon /usr/share/awstats/icon

```
ServerName com0.c307.eepis-its.edu
ServerAdmin webmaster@localhost
DocumentRoot /var/www/html/com0

Alias /awstats-icon /usr/share/awstats/icon/
```

- Restart apache2: # systemctl reload apache2

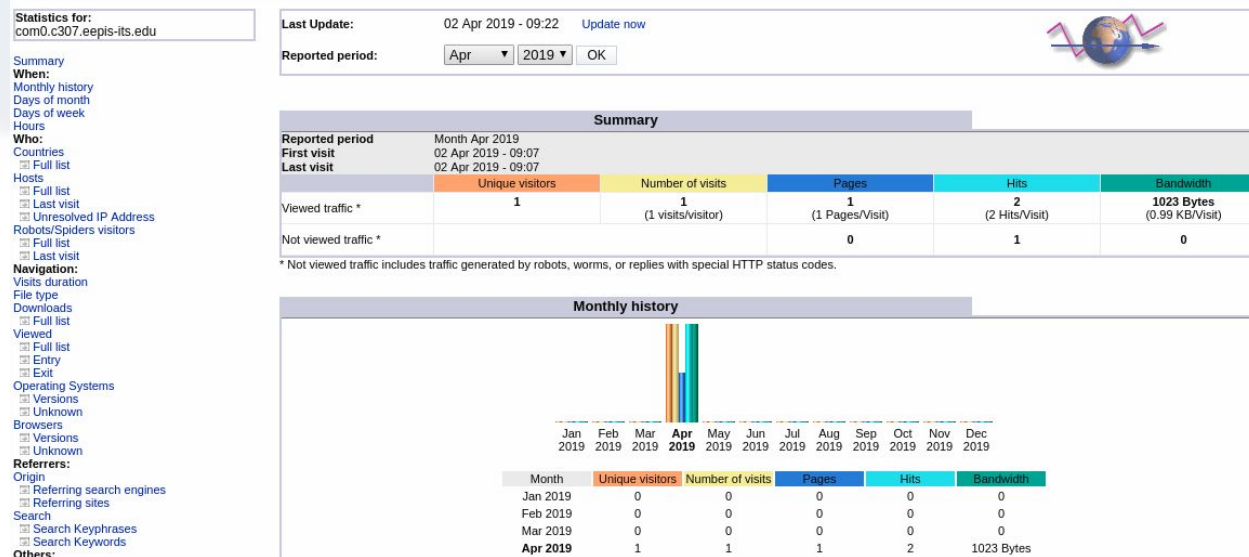

Troubleshooting: ????

- Klik menu “Update now”



Last Update: 02 Apr 2019 - 09:22 [Update now](#)

Reported period:

Error: Couldn't open server log file "/var/log/apache2/access.log" : Permission denied

Setup ('/etc/awstats/awstats.com0.c307.eepis-its.edu.conf' file, web server or permissions) may be wrong.
Check config file, permissions and AWStats documentation (in 'docs' directory).

- Bagaimana solusinya????

SARG

Instalasi SQUID + SARG

- Buka kembali file Week-5.2.pdf (Workshop Proxy Server)
- Konfigurasi proxy server untuk akses dengan menggunakan skema autentikasi *basic*.
- Akses/Ujicoba kan proxy
- Instalasi SARG: # apt-get install sarg

```
root@debian:/home/student# apt-get install sarg
Reading package lists... Done
Building dependency tree
Reading state information... Done
Suggested packages:
  squidguard libapache2-mod-php5
The following NEW packages will be installed:
  sarg
0 upgraded, 1 newly installed, 0 to remove and 0 not upgraded.
Need to get 0 B/169 kB of archives.
After this operation, 442 kB of additional disk space will be used.
Selecting previously unselected package sarg.
(Reading database ... 38771 files and directories currently installed.)
Preparing to unpack .../sarg_2.3.10-2_amd64.deb ...
Unpacking sarg (2.3.10-2) ...
Setting up sarg (2.3.10-2) ...
Processing triggers for man-db (2.7.6.1-2) ...
```

Konfigurasi SARG

- # vim /etc/sarg/sarg.conf

```
output_dir /var/www/html/squid-reports
# output_dir /var/lib/sarg
resolve_ip yes
```

- # sarg -c /etc/sarg/sarg.conf
- Buka [http://\(domain\)/squid-reports](http://(domain)/squid-reports)



Squid Analysis Report Generator

Squid User Access Reports

FILE/PERIOD	CREATION DATE	USERS	BYTES	AVERAGE
2019Apr02-2019Apr02	Tue 02 Apr 2019 10:25:47 AM WIB	1	3.66M	3.66M

Generated by [sarg-2.3.10 Apr-12-2015](#) on Apr/02/2019 10:25



Squid Analysis Report Generator

Squid User Access Reports

Period: 2019 Apr 02

Sort: bytes, reverse

Top users

Top sites

Sites & Users


Authentication Failures

NUM	USERID	CONNECT	BYTES	%BYTES	IN-CACHE-OUT	ELAPSED TIME	MILLISEC	%TIME
1	idris	138	3.66M	100.00%	33.31% 66.69%	00:20:21	1,221,876	100.00%
TOTAL		138	3.66M		33.31% 66.69%	00:20:21	1,221,876	
AVERAGE		138	3.66M			00:20:21	1,221,876	

Generated by [sarg-2.3.10 Apr-12-2015](#) on Apr/02/2019 10:25

SYSLOG

Topologi

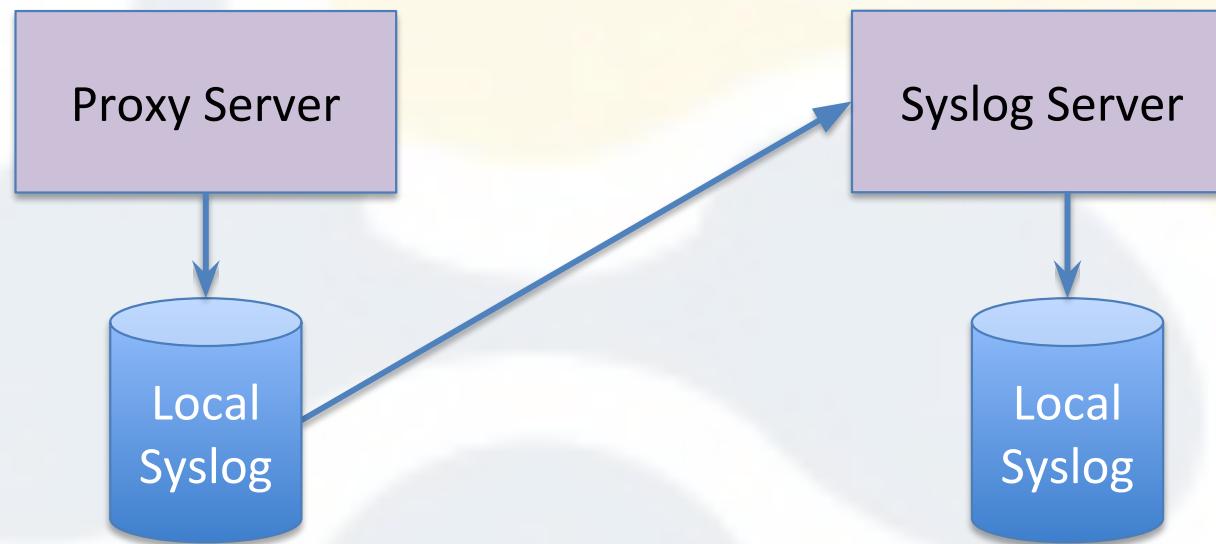

Instalasi & Konfigurasi rsyslog

- # apt-get install rsyslog
- # vim /etc/rsyslog.conf

```
# provides UDP syslog reception
module(load="imudp")
input(type="imudp" port="514")

# provides TCP syslog reception
module(load="imtcp")
input(type="imtcp" port="514")

#$AllowedServer UDP, 127.0.0.1, 10.252.209.0/24, 10.252.108.0/24
#$AllowedServer TCP, 127.0.0.1, 10.252.209.0/24, 10.252.108.0/24

$template FILENAME, "/var/log/%fromhost-ip%/%programname%.log"
*. * ?FILENAME

#####
#### GLOBAL DIRECTIVES ####
#####

#
```

- Restart rsyslog: # /etc/init.d/rsyslog restart
- Check apakah rsyslog sudah berjalan

26.1

```
root@debian:/home/student# /etc/init.d/rsyslog restart
[ ok ] Restarting rsyslog (via systemctl): rsyslog.service.
root@debian:/home/student# netstat -npltu
Active Internet connections (only servers)
Proto Recv-Q Send-Q Local Address           Foreign Address         State       PID/Program name
tcp        0      0 0.0.0.0:22              0.0.0.0:*               LISTEN      435/sshd
tcp        0      0 0.0.0.0:514             0.0.0.0:*               LISTEN      519/rsyslogd
tcp6       0      0 :::22                  :::*                    LISTEN      435/sshd
tcp6       0      0 :::514                  :::*                    LISTEN      519/rsyslogd
udp        0      0 0.0.0.0:514             0.0.0.0:*               *          519/rsyslogd
udp        0      0 0.0.0.0:68              0.0.0.0:*               *          451/dhclient
udp6       0      0 :::514                  :::*                    *          519/rsyslogd
```

Konfigurasi Proxy

- # vim /etc/squid3/squid.conf

```
#           access_log daemon:/var/log/squid/access.log squid
#Default:
# access_log daemon:/var/log/squid/access.log squid
access_log syslog:local2.* squid

# TAG: icap_log
#       ICAP log files record ICAP transaction summaries, one line per
#       transaction.
#
#       The icap_log option format is:
#       icap_log <filepath> [<logformat name> [acl acl ...]]
#       icap_log none [acl acl ...]]
#
#       Please see access_log option documentation for details. The two
#       kinds of logs share the overall configuration approach and many
#       features.
```

3945,1

- Restart squid: # /etc/init.d/squid restart
- # vim /etc/rsyslog.conf

```
# Emergencies are sent to everybody logged in.
#
*.emerg                                :omusrmsg:*
local2.* @10.252.209.111:514
~
~
```

-- INSERT --

93,1

- Restart rsyslog: # /etc/init.d/rsyslog restart

Ujicoba

- Pada komputer syslog server: # cd /var/log/
- Lihat isi file: # ls

```
[root@debian:/var/log# cd 10.252.209.249/
[root@debian:/var/log/10.252.209.249# ls
(squid-1).log
[root@debian:/var/log/10.252.209.249# cat \(squid-1\)log
2019-04-02T12:39:41+07:00 debian (squid-1): 1554183581.529      58 10.252.214.49
2019-04-02T12:39:41+07:00 debian (squid-1): 1554183581.529      58 10.252.214.49
2019-04-02T12:40:04+07:00 debian (squid-1): 1554183604.611     108 10.252.214.49
2019-04-02T12:40:04+07:00 debian (squid-1): 1554183604.611     108 10.252.214.49
2019-04-02T12:40:06+07:00 debian (squid-1): 1554183606.882      19 10.252.214.49
2019-04-02T12:40:06+07:00 debian (squid-1): 1554183606.882      19 10.252.214.49
2019-04-02T12:40:09+07:00 debian (squid-1): 1554183609.365      27 10.252.214.49
2019-04-02T12:40:09+07:00 debian (squid-1): 1554183609.365      27 10.252.214.49
2019-04-02T12:40:10+07:00 debian (squid-1): 1554183610.565      11 10.252.214.49
2019-04-02T12:40:10+07:00 debian (squid-1): 1554183610.565      11 10.252.214.49
2019-04-02T12:40:11+07:00 debian (squid-1): 1554183611.538       5 10.252.214.49
2019-04-02T12:40:11+07:00 debian (squid-1): 1554183611.538       5 10.252.214.49
2019-04-02T12:40:30+07:00 debian (squid-1): 1554183630.437      39 10.252.214.49
2019-04-02T12:40:30+07:00 debian (squid-1): 1554183630.437      39 10.252.214.49
2019-04-02T12:40:41+07:00 debian (squid-1): 1554183641.405    61644 10.252.214.49
2019-04-02T12:40:41+07:00 debian (squid-1): 1554183641.405    61644 10.252.214.49
2019-04-02T12:40:41+07:00 debian (squid-1): 1554183641.408    60402 10.252.214.49
2019-04-02T12:40:41+07:00 debian (squid-1): 1554183641.408    60402 10.252.214.49
```

TERIMA KASIH