


Nama : Rizqi Fajri Sya'ban

NPM : 2428240109

Topik 7 — Restoran: Menu

Hasil Pengujian :

1. Method : GET

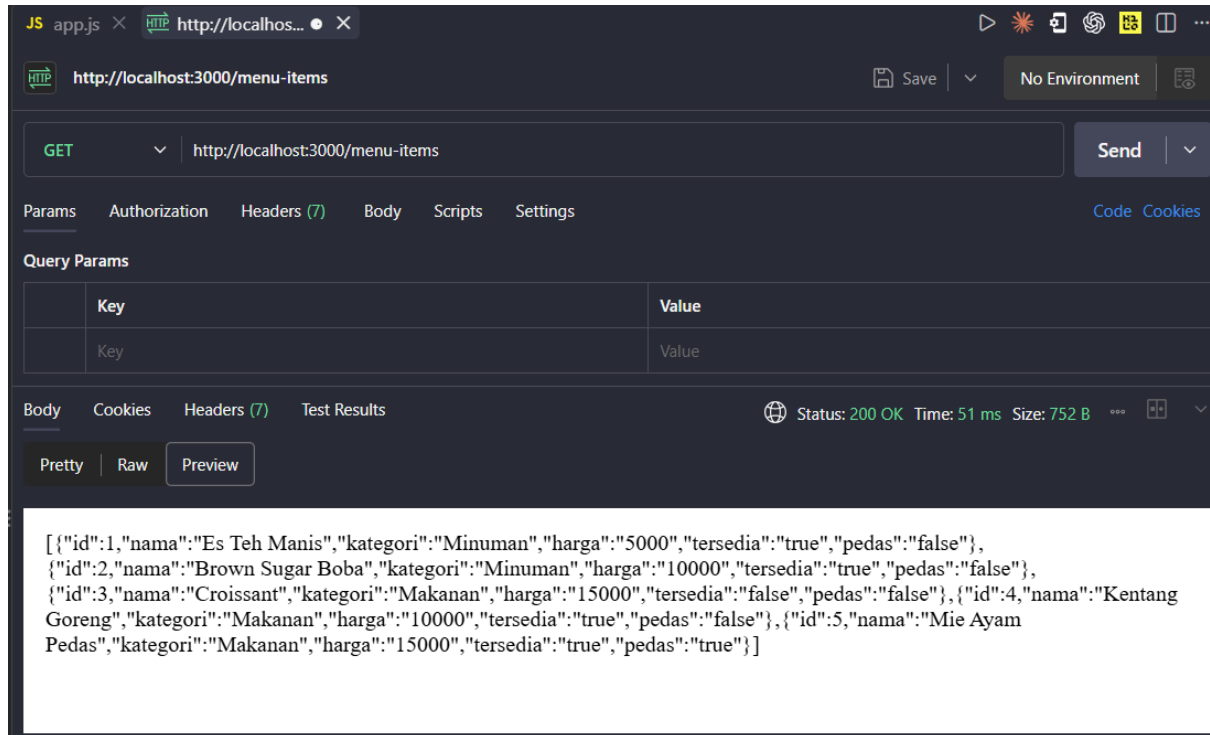

Endpoint : <http://localhost:3000/menu-items>


Data Request : -

Status Diharapkan : 200

Status hasil : 200

Keterangan : Sesuai

2. Method : GET

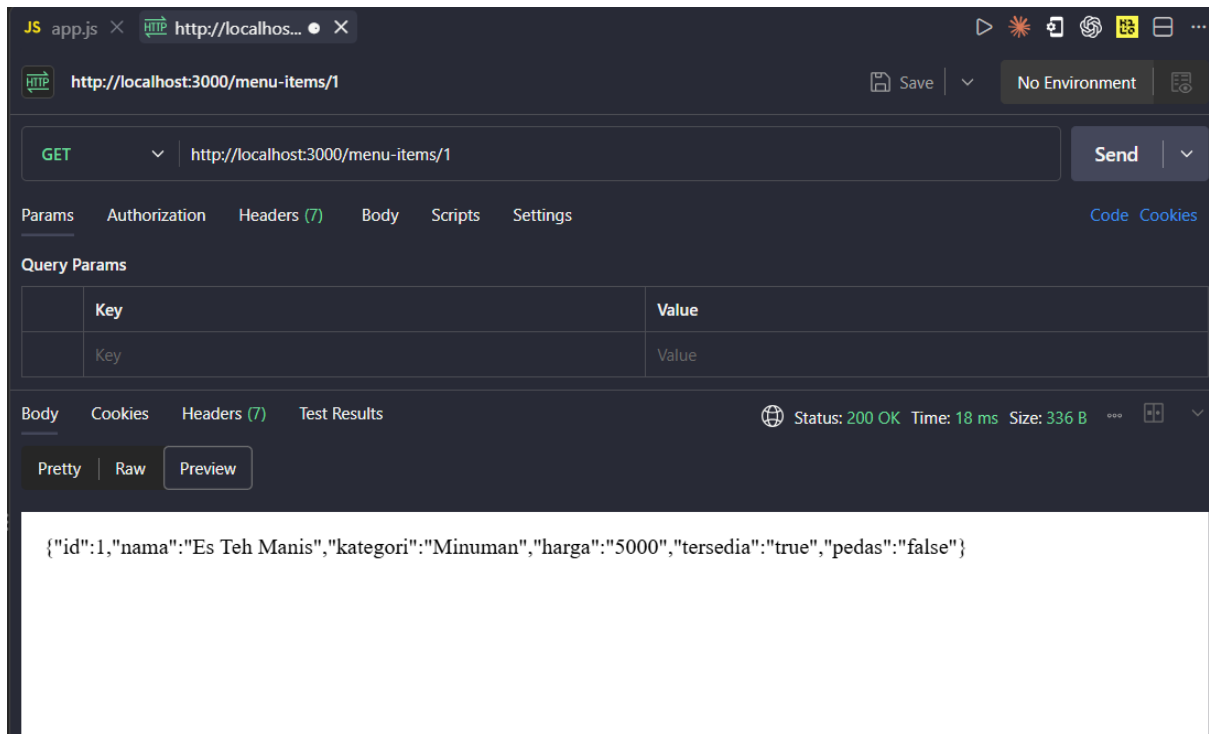

Endpoint : <http://localhost:3000/menu-items/1>


Data Request : -

Status Diharapkan : 200

Status hasil : 200

Keterangan : Sesuai

3. Method : GET

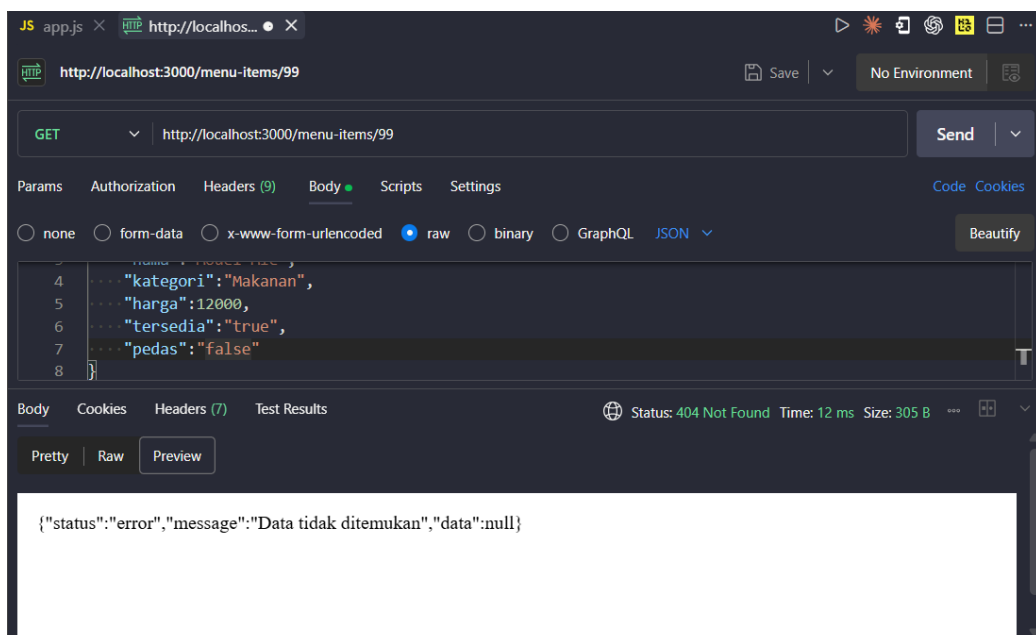

Endpoint : <http://localhost:3000/menu-items/99>


Data Request : -

Status Diharapkan : 404

Status hasil : 404

Keterangan : Sesuai

4. Method : GET

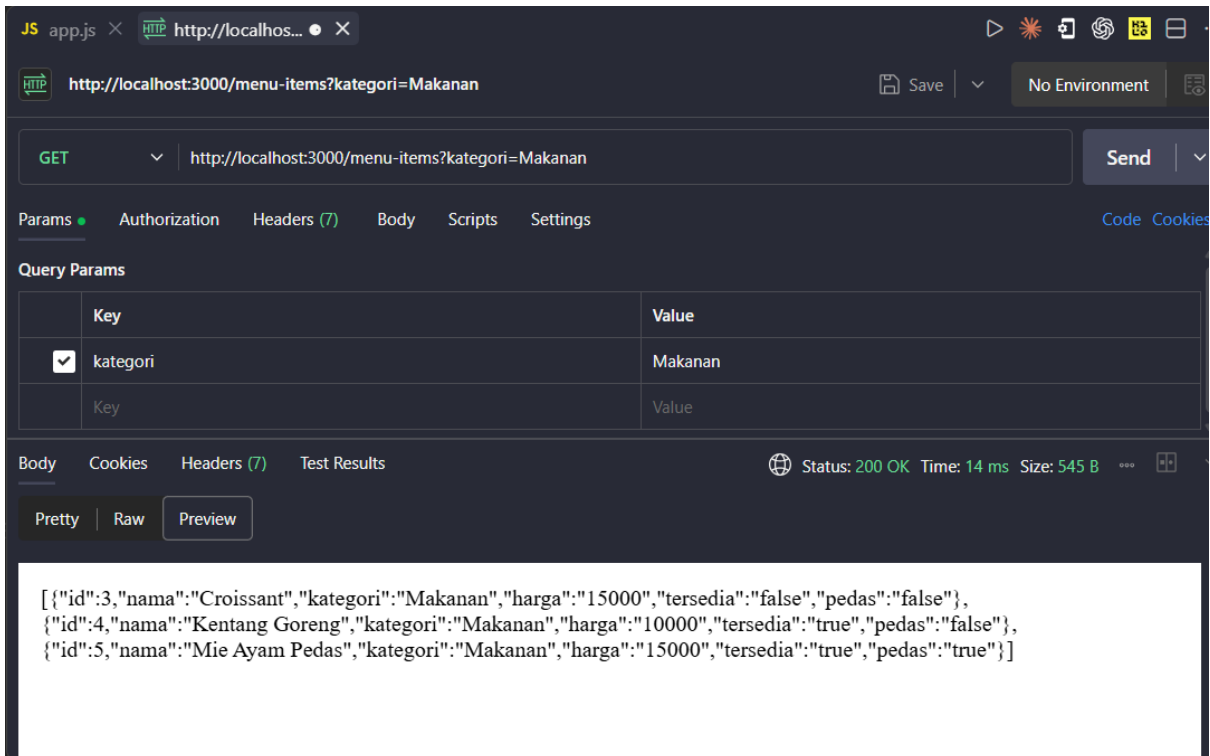

The screenshot shows a web browser with the address bar displaying `http://localhost:3000/menu-items?kategori=Makanan`. The browser's developer tools are open, showing the 'Params' tab with the query parameter `kategori=Makanan`. The 'Body' tab is selected, displaying the response in 'Pretty' format. The response is a JSON array of three food items:

```
[{"id":3,"nama":"Croissant","kategori":"Makanan","harga":"15000","tersedia":"false","pedas":"false"}, {"id":4,"nama":"Kentang Goreng","kategori":"Makanan","harga":"10000","tersedia":"true","pedas":"false"}, {"id":5,"nama":"Mie Ayam Pedas","kategori":"Makanan","harga":"15000","tersedia":"true","pedas":"true"}]
```

Endpoint : <http://localhost:3000/menu-items?kategori=Makanan>


Data Request : -

Status Diharapkan : 200

Status hasil : 200

Keterangan : Sesuai

5. Method : POST

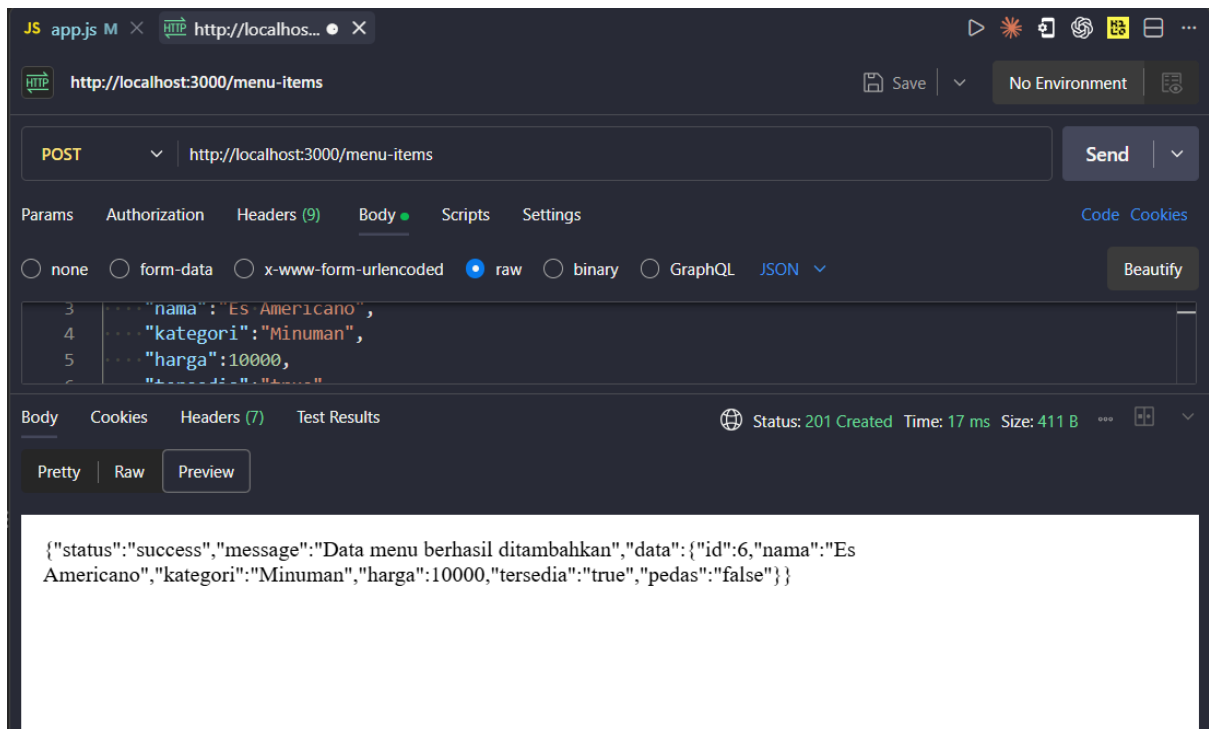

Endpoint : <http://localhost:3000/menu-items>

Data Request : {

 "id":6,

 "nama":"Es Americano",

 "kategori":"Minuman",

 "harga":10000,

 "tersedia":"true",

 "pedas":"false"


}

Status Diharapkan : 201

Status hasil : 201

Keterangan : Sesuai

6. Method : POST

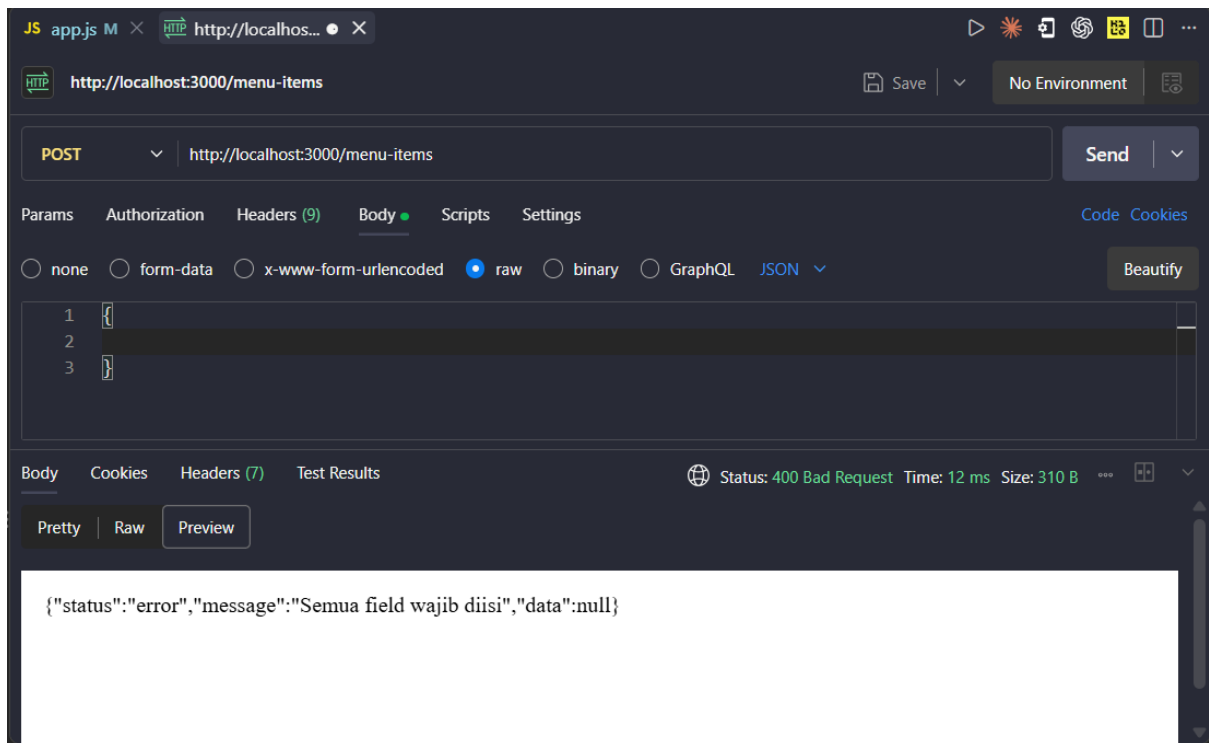

Endpoint : <http://localhost:3000/menu-items>


Data Request : {
}

Status Diharapkan : 400

Status hasil : 400

Keterangan : Sesuai

7. Method : PUT

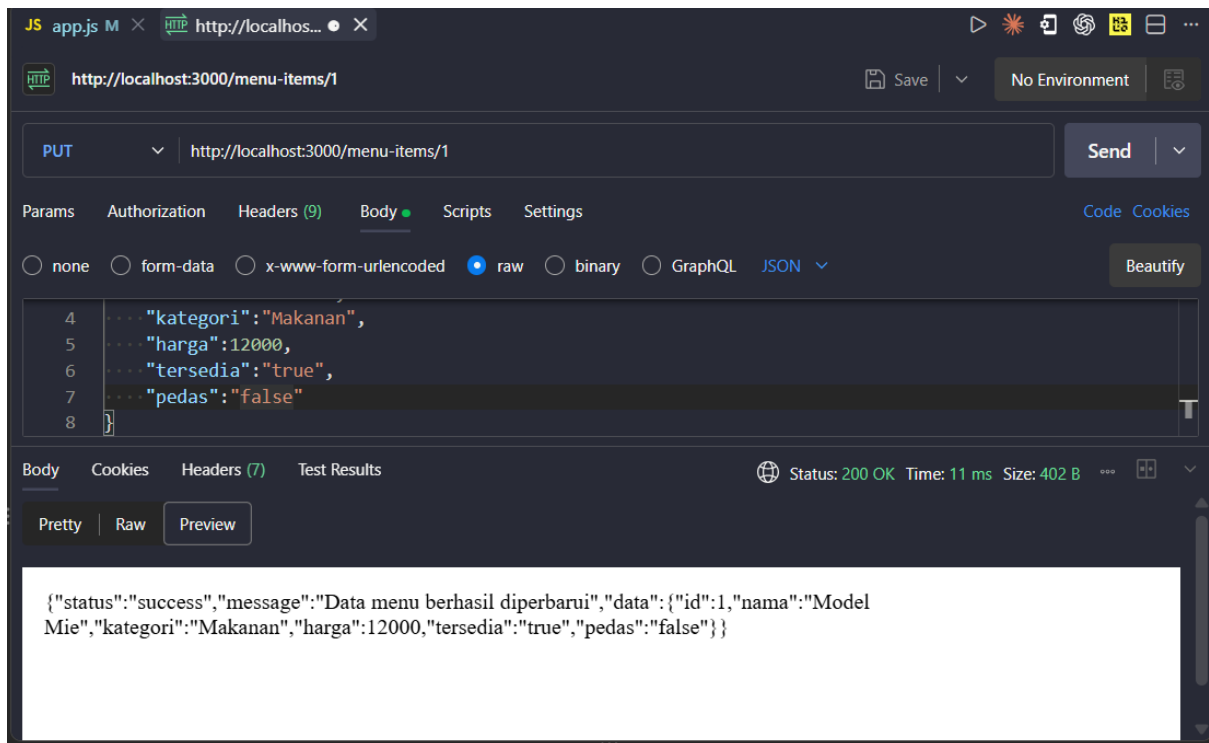

Endpoint : <http://localhost:3000/menu-items/1>

Data Request : {

"id":1,

"nama":"Model Mie",

"kategori":"Makanan",

"harga":12000,

"tersedia":"true",

"pedas":"false"


}

Status Diharapkan : 200

Status hasil : 200

Keterangan : Sesuai

8. Method : PUT

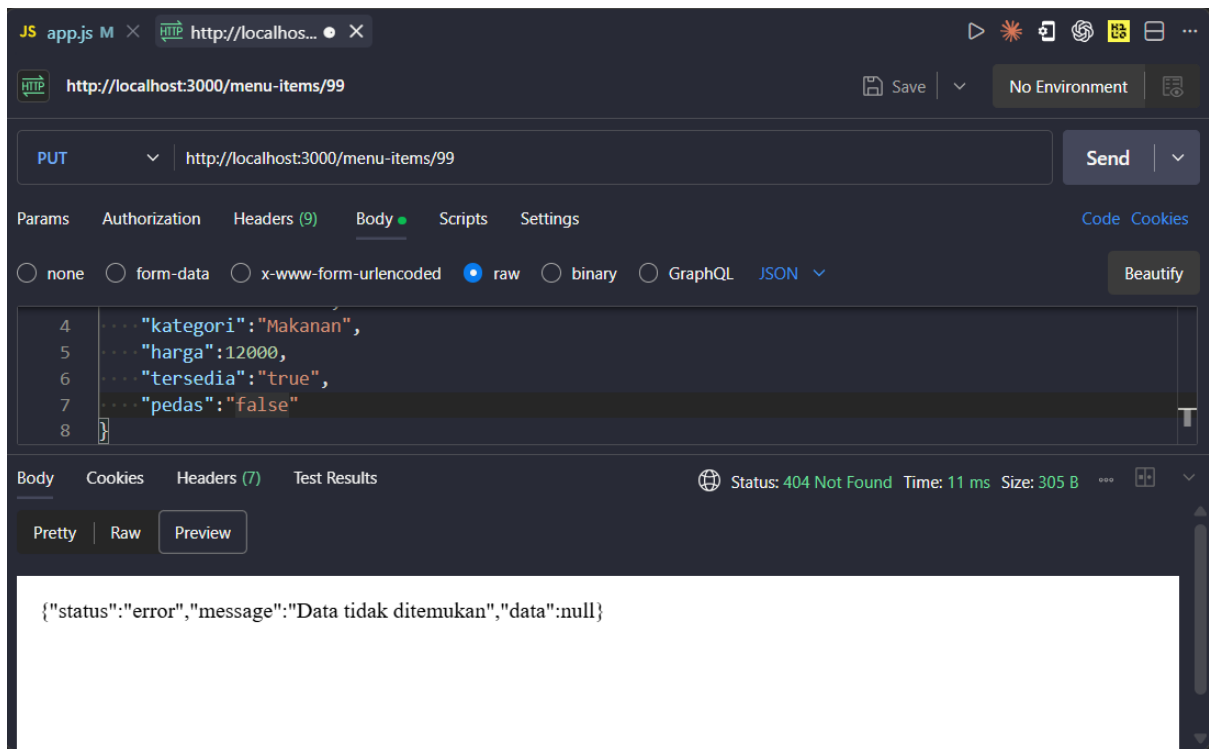

Endpoint : <http://localhost:3000/menu-items/99>

Data Request : {

 "id":99,

 "nama":"Tekwan Mie",

 "kategori":"Makanan",

 "harga":12000,

 "tersedia":"true",

 "pedas":"false"


}

Status Diharapkan : 404

Status hasil : 404

Keterangan : Sesuai

9. Method : DELETE

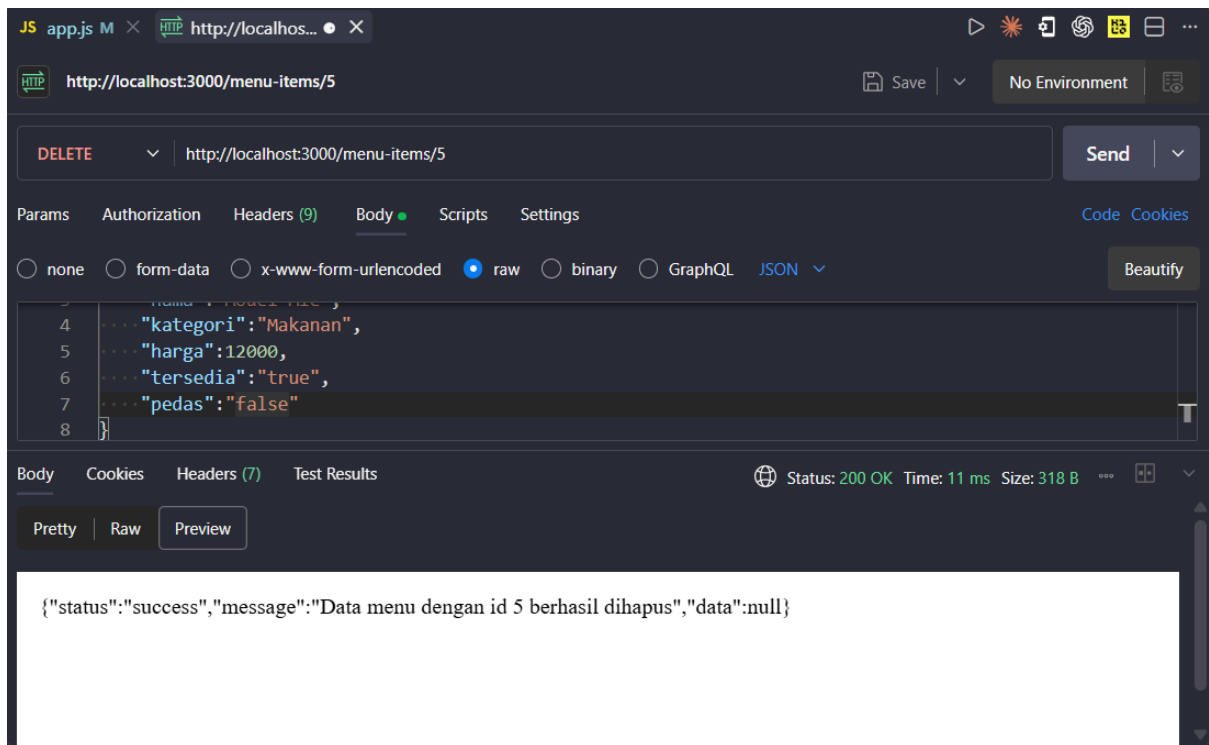

Endpoint : <http://localhost:3000/menu-items/5>


Data Request : -

Status Diharapkan : 200

Status hasil : 200

Keterangan : Sesuai

10. Method : DELETE

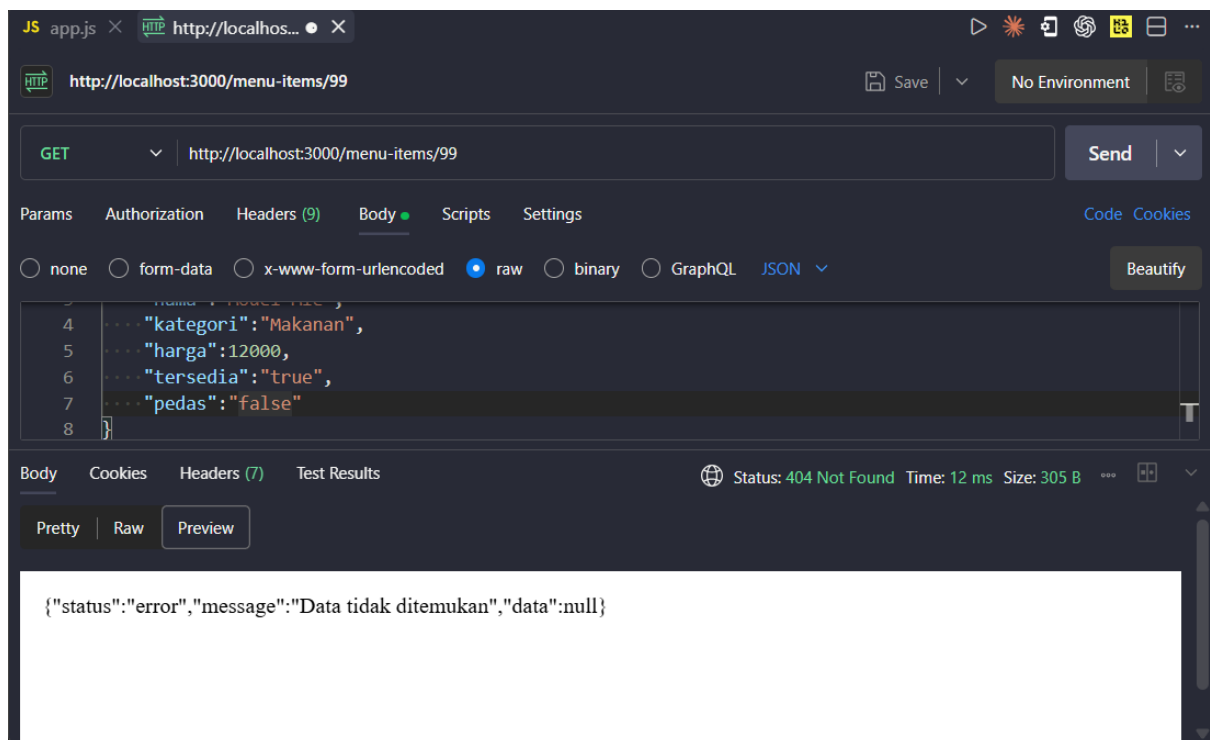

Endpoint : <http://localhost:3000/menu-items/99>

Data Request : -

Status Diharapkan : 404

Status hasil : 404

Keterangan : Sesuai

Pembahasan :