

VERYCON Pro


AC EV CHARGER CONTROLLER

*Build bespoke EV Charging Solutions
armed with next-generation feature
suite and faster time-to-market access!*



VerdeMobility's Verycon Pro Charge Controller is enabling OEMs build safe and purpose-friendly EV charging solutions that are suitable for different use cases. The controller hosts an array of connectivity options, helping businesses turbocharge their [#SwitchtoElectric](#) journey quickly and easily.

Features

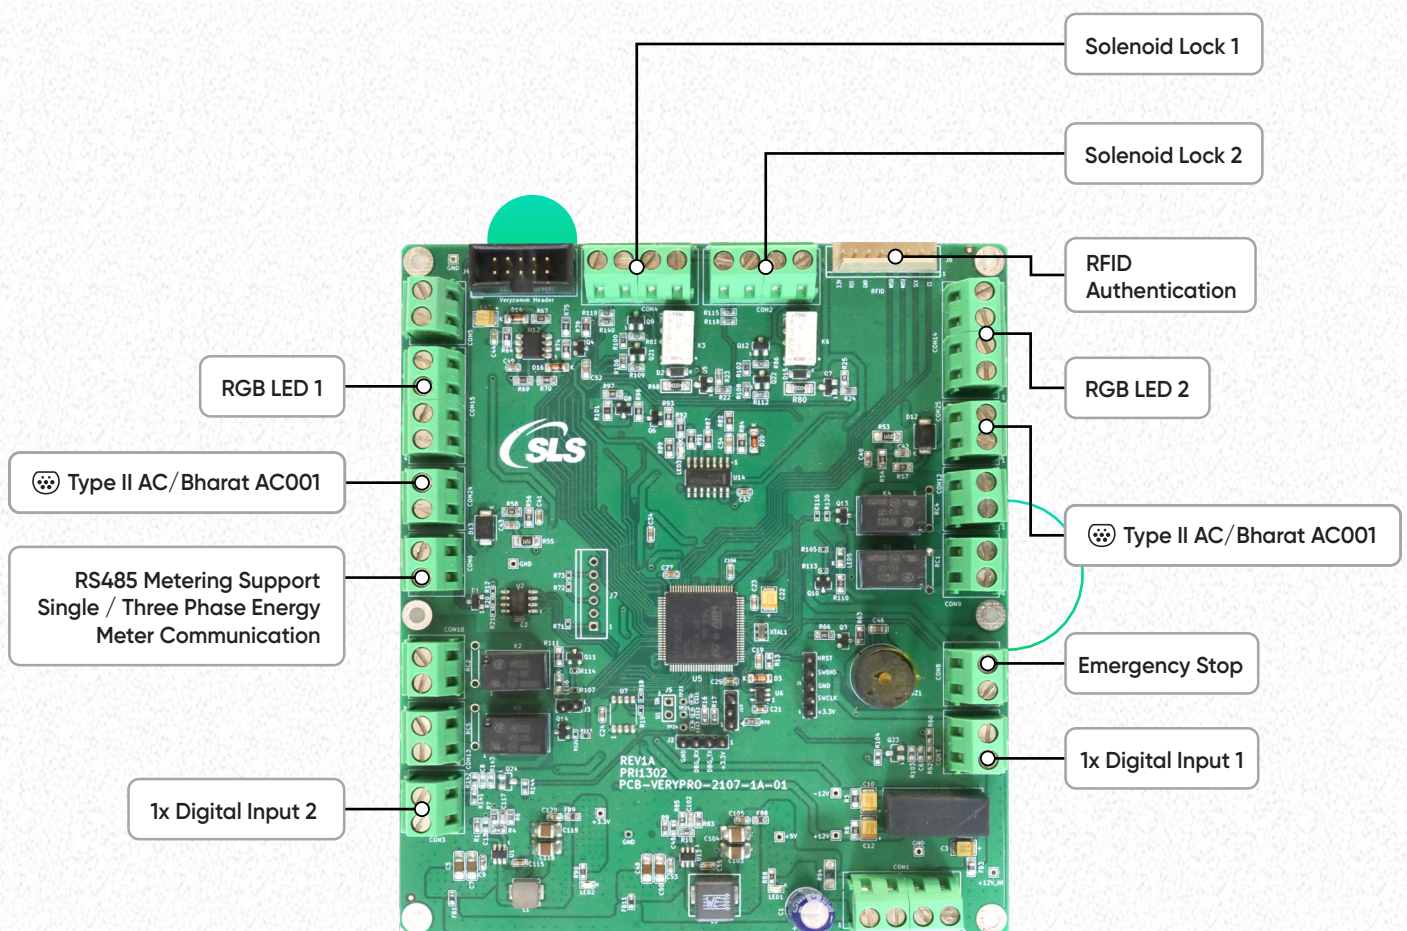

Technical Specifications

Parameter		Specifications
• Charge controller standard	>	IEC61851-22 (Mode 33)
• Max no of outputs	>	2 Nos
• Compatible Connector/ Socket Type	>	Type 2 AC Socket
• Communication	> > >	Ethernet GSM WiFi
• Visual indication	>	RGB LEDs
• Display	> >	4.3" Graphics display via I2C 20 x 4 Character LCD via I2C
• Energy meter	>	External
• Battery backup	>	Supported
• Operating DC power	>	Upto 12 V, 2A
• CP/PP interface	> >	x2 Control Pilot support x2 Proximity Pilot support
• Relay output	> > > > >	x2 CP/PP interface for Type-2 dual gun x2 Relay output for contactor control as per IEC61851 x2 Relay output for solenoid lock controlling x2 Relay output for ventilation control as per IEC61851 x2 RGB LED interface
• Current output	> >	Upto 32A, 1 Phase Upto 80A, 3 Phase
• RFID	>	Supported via SPI
• OCPP	>	OCPP 1.6J, upgradable to 2.0 through FOTA
• Emergency stop	>	Supported
• DIMENSIONS (L x B x H)	>	120 x 136.5 (mm)

LET'S CONNECT



USA OFFICE

511 N. Washington Avenue,
Marshall, Texas 75670.



INDIA OFFICE

Plot#32, Zone-D/4, Phase-1,
GIDC Estate, V.U. Nagar,
Gujarat - 388 121



UK OFFICE

20 Mortlake, 20 Mortlake High
Street, London, SW14 8JN



info@verdemobility.com



www.verdemobility.com



02692 232 501 Ext : 47 |
+91 7486031238

