

HW0 LA Review in R

RJ Cass

```
library('ggplot2')  
library('dplyr')
```

Attaching package: 'dplyr'

The following objects are masked from 'package:stats':

filter, lag

The following objects are masked from 'package:base':

intersect, setdiff, setequal, union

```
data <- vroom::vroom("BirthWeights.txt")
```

Rows: 832 Columns: 5

-- Column specification -----

Delimiter: " "

chr (2): Race, Gen

dbl (3): BirthWeight, Mage, Gage


i Use `spec()` to retrieve the full column specification for this data.

i Specify the column types or set `show\_col\_types = FALSE` to quiet this message.

1.


```
ggplot(data, aes(x=Mage, y=BirthWeight)) +  
  geom_point() +  
  geom_smooth(method="lm", se=FALSE)
```

`geom\_smooth()` using formula = 'y ~ x'

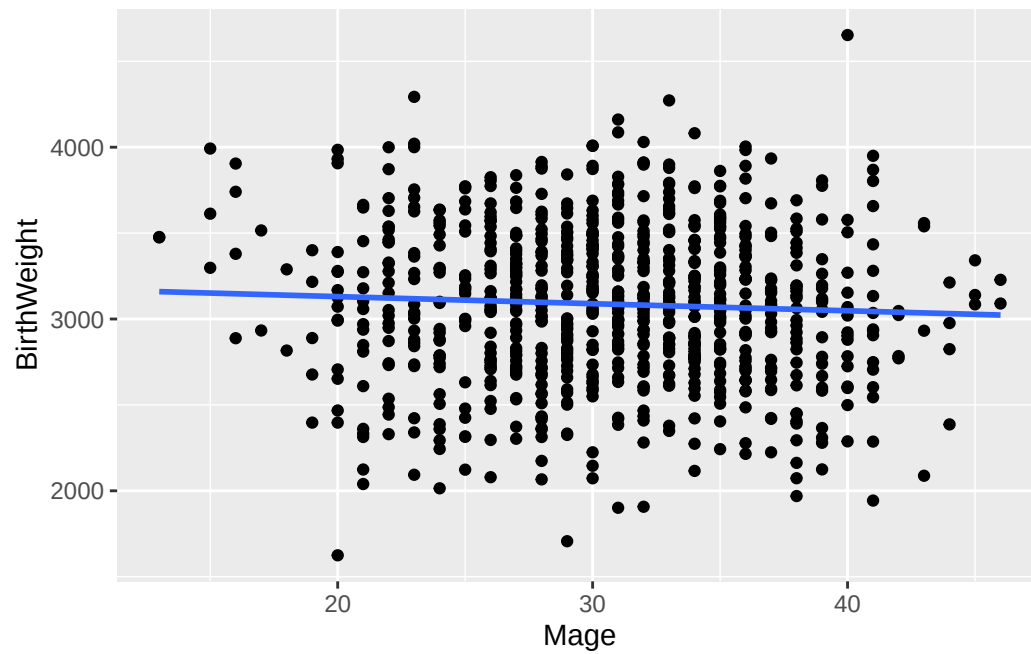

2.


```
ggplot(data, aes(x=Race, y=BirthWeight)) +  
  geom_boxplot()
```

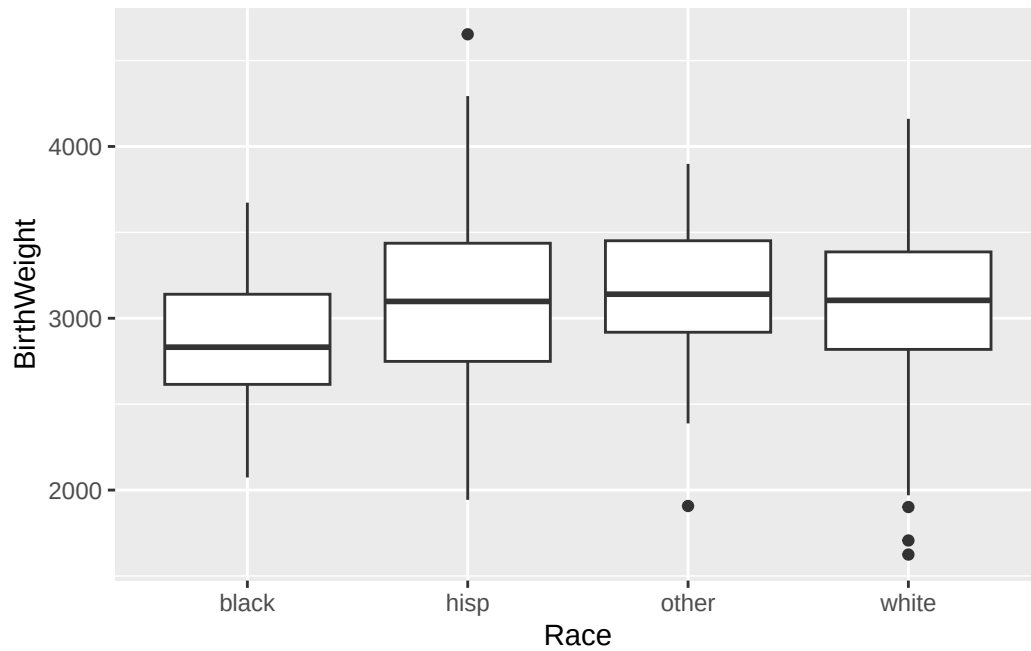

3.

```
ggplot(data, aes(x = Gage, y = BirthWeight, color = Race)) +  
  geom_point(alpha = 0.6) +  
  geom_smooth(method = "lm", se = FALSE) +  
  labs(x = 'Gestational Age', y = "Weight at Birth (g)")
```

`geom\_smooth()` using formula = 'y ~ x'

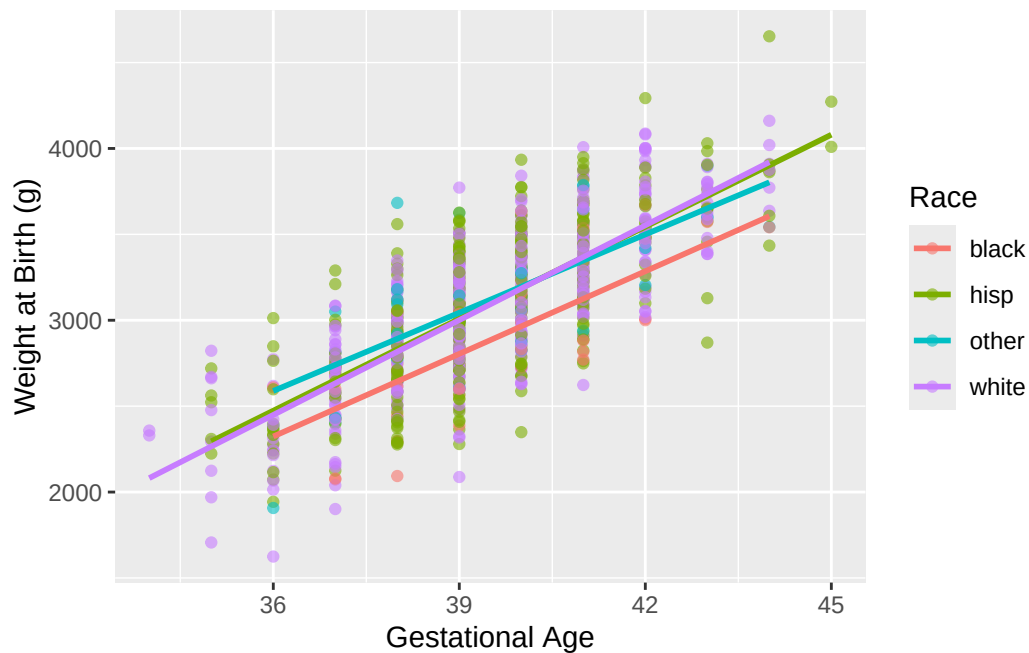

4.

```
data %>%
  group_by(Gen) %>%
  summarise(correlation = cor(BirthWeight, Mage))
```

```
# A tibble: 2 x 2
  Gen      correlation
  <chr>      <dbl>
1 Female -0.0261
2 Male   -0.0745
```

5.

```
GGally::ggpairs(data)
```

```
`stat_bin()` using `bins = 30`. Pick better value `binwidth`.
`stat_bin()` using `bins = 30`. Pick better value `binwidth`.
```

```
`stat_bin()` using `bins = 30`. Pick better value `binwidth`.
`stat_bin()` using `bins = 30`. Pick better value `binwidth`.
`stat_bin()` using `bins = 30`. Pick better value `binwidth`.
`stat_bin()` using `bins = 30`. Pick better value `binwidth`.
```

