


=> React: High-End JS library

↳ 1) Single Page Application


2) Component Driven

=> [`npm create vite@latest`]

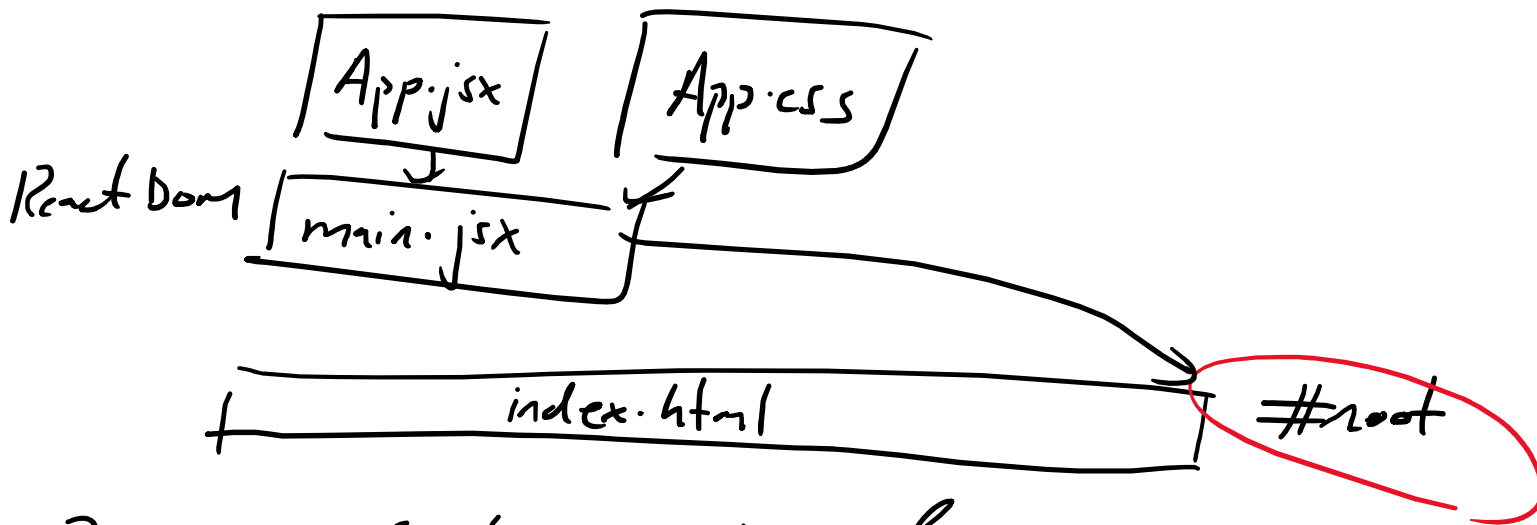

Render: Create something from a script.

Components: Pieces of webpage divisions.

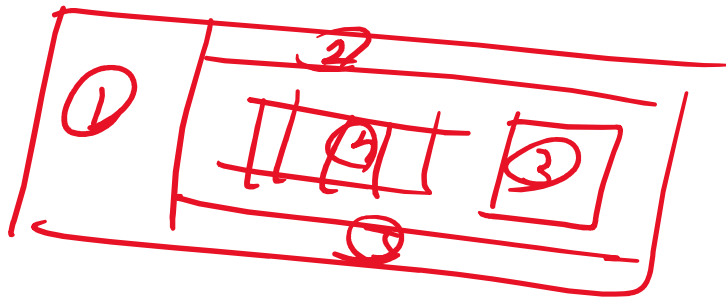

$\Rightarrow$ Stateful Components & Stateless Compⁿ

↓

Class-Driven

↓

Functional

$\Rightarrow$ Props : Passing Property

⇒ State: Object to pass for rendering.
(State is only used in class-driven)