

CSMC 412

Operating Systems **Prof. Ashok K Agrawala**

© 2005 Ashok Agrawala
Set 11

File System Implementation

- File-System Structure
- File-System Implementation
- Directory Implementation
- Allocation Methods
- Free-Space Management
- Efficiency and Performance
- Recovery
- Log-Structured File Systems
- NFS
- Example: WAFL File System


Objectives

- To describe the details of implementing local file systems and directory structures
- To describe the implementation of remote file systems
- To discuss block allocation and free-block algorithms and trade-offs

File-System Structure

- File structure
 - Logical storage unit
 - Collection of related information
- File system resides on secondary storage (disks)
- File system organized into layers
- **File control block** – storage structure consisting of information about a file

Layered File System

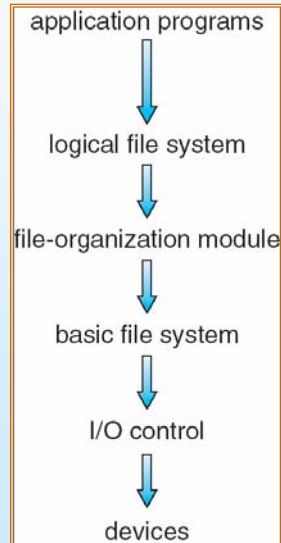


A Typical File Control Block

file permissions
file dates (create, access, write)
file owner, group, ACL
file size
file data blocks or pointers to file data blocks

In-Memory File System Structures

- The following figure illustrates the necessary file system structures provided by the operating systems.
- Figure 12-3(a) refers to opening a file.
- Figure 12-3(b) refers to reading a file.


In-Memory File System Structures

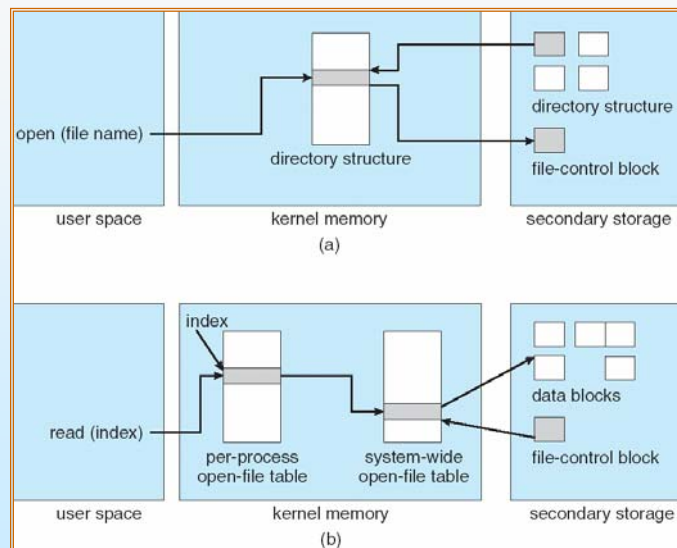

Virtual File Systems

- Virtual File Systems (VFS) provide an object-oriented way of implementing file systems.
- VFS allows the same system call interface (the API) to be used for different types of file systems.
- The API is to the VFS interface, rather than any specific type of file system.

Schematic View of Virtual File System

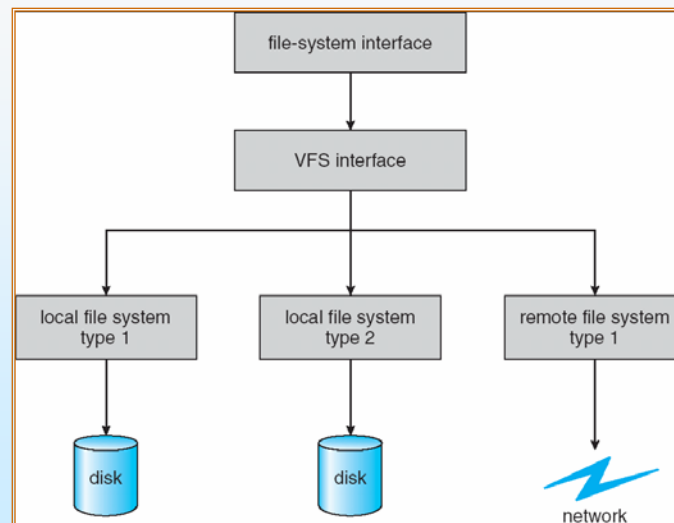

Directory Implementation

- **Linear list** of file names with pointer to the data blocks.
 - simple to program
 - time-consuming to execute
- **Hash Table** – linear list with hash data structure.
 - decreases directory search time
 - **collisions** – situations where two file names hash to the same location
 - fixed size

Allocation Methods

- An allocation method refers to how disk blocks are allocated for files:
- **Contiguous allocation**
- **Linked allocation**
- **Indexed allocation**

Contiguous Allocation

- Each file occupies a set of contiguous blocks on the disk
- Simple – only starting location (block #) and length (number of blocks) are required
- Random access
- Wasteful of space (dynamic storage-allocation problem)
- Files cannot grow


Contiguous Allocation

- Mapping from logical to physical



Block to be accessed = ! + starting address
Displacement into block = R

Contiguous Allocation of Disk Space

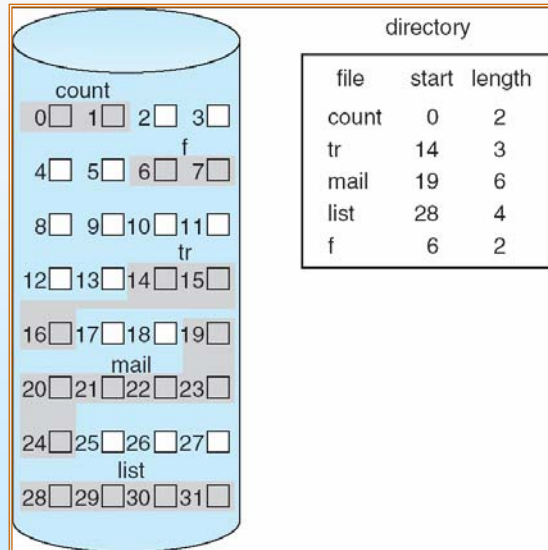

Operating System Concepts

11.15

Silberschatz, Galvin and Gagne ©2005

Extent-Based Systems

- Many newer file systems (I.e. Veritas File System) use a modified contiguous allocation scheme
- Extent-based file systems allocate disk blocks in **extents**
- An **extent** is a contiguous block of disks
 - Extents are allocated for file allocation
 - A file consists of one or more extents.


Operating System Concepts

11.16

Silberschatz, Galvin and Gagne ©2005


Linked Allocation

- Each file is a linked list of disk blocks: blocks may be scattered anywhere on the disk.



Linked Allocation (Cont.)

- Simple – need only starting address
- Free-space management system – no waste of space
- No random access
- Mapping




Block to be accessed is the Qth block in the linked chain of blocks representing the file.

Displacement into block = $R + 1$

File-allocation table (FAT) – disk-space allocation used by MS-DOS and OS/2.

Linked Allocation

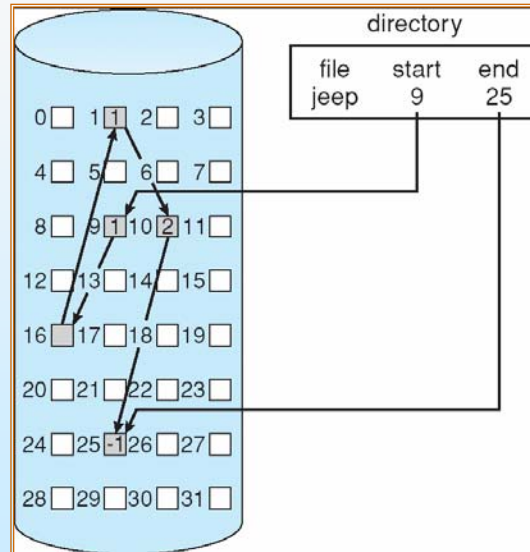


Operating System Concepts

11.19

Silberschatz, Galvin and Gagne ©2005

File-Allocation Table

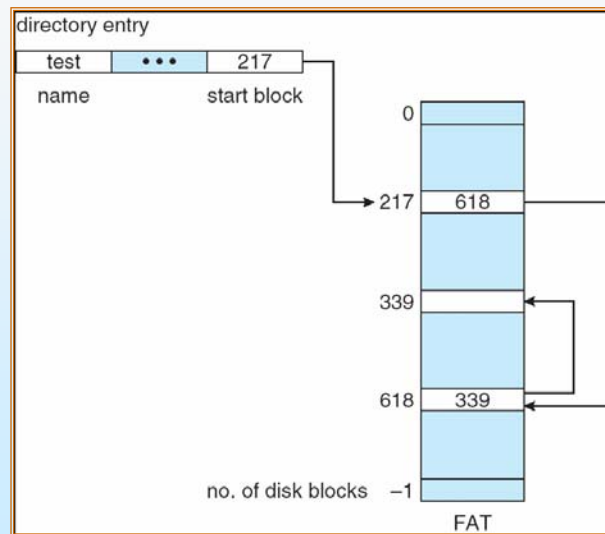


Operating System Concepts

11.20


Silberschatz, Galvin and Gagne ©2005

Indexed Allocation

- Brings all pointers together into the *index block*.
- Logical view.




Example of Indexed Allocation

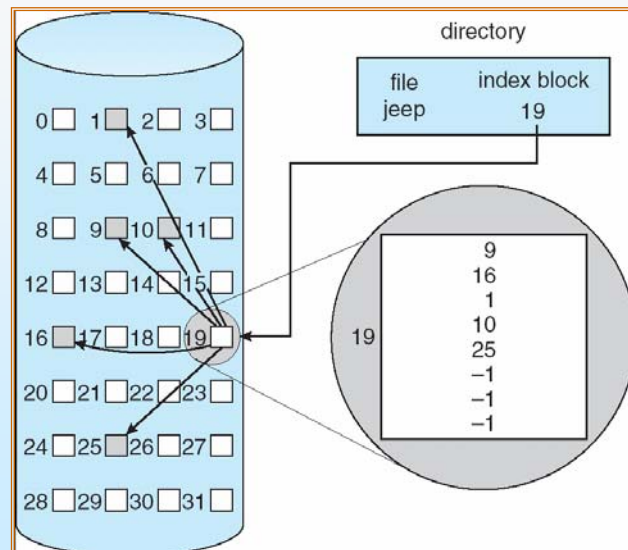

Indexed Allocation (Cont.)


- Need index table
- Random access
- Dynamic access without external fragmentation, but have overhead of index block.
- Mapping from logical to physical in a file of maximum size of 256K words and block size of 512 words. We need only 1 block for index table.




Q = displacement into index table
 R = displacement into block

Indexed Allocation – Mapping (Cont.)

- Mapping from logical to physical in a file of unbounded length (block size of 512 words).
- Linked scheme – Link blocks of index table (no limit on size).



Q_1 = block of index table
 R_1 is used as follows:



Q_2 = displacement into block of index table
 R_2 displacement into block of file:

Indexed Allocation – Mapping (Cont.)

- Two-level index (maximum file size is 512^3)

$$LA / (512 \times 512) \begin{cases} Q_1 \\ R_1 \end{cases}$$

Q_1 = displacement into outer-index


R_1 is used as follows:

$$R_1 / 512 \begin{cases} Q_2 \\ R_2 \end{cases}$$


Q_2 = displacement into block of index table

R_2 displacement into block of file:

Indexed Allocation – Mapping (Cont.)

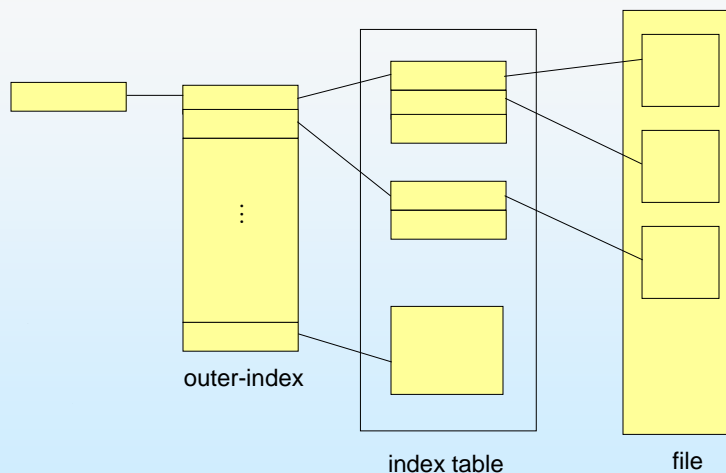

Combined Scheme: UNIX (4K bytes per block)

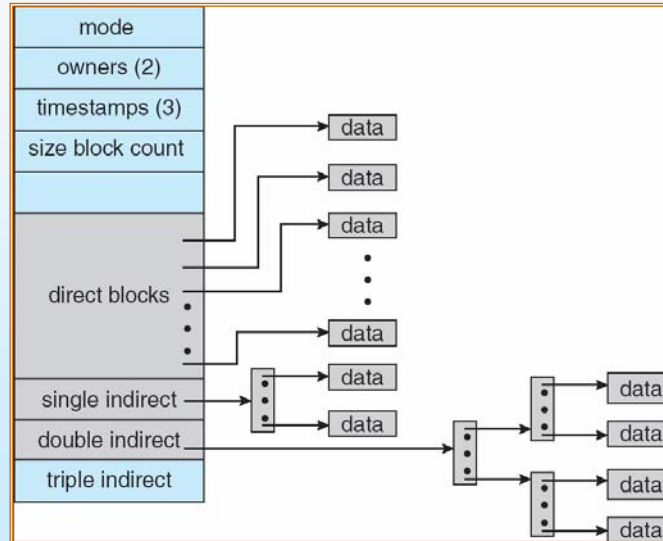

Operating System Concepts

11.27

Silberschatz, Galvin and Gagne ©2005

Free-Space Management

- Bit vector (n blocks)



$$\text{bit}[i] = \begin{cases} 0 \Rightarrow \text{block}[i] \text{ free} \\ 1 \Rightarrow \text{block}[i] \text{ occupied} \end{cases}$$

Block number calculation

(number of bits per word) *
(number of 0-value words) +
offset of first 1 bit

Operating System Concepts

11.28

Silberschatz, Galvin and Gagne ©2005

Free-Space Management (Cont.)

- Bit map requires extra space
 - Example:
 - block size = 2^{12} bytes
 - disk size = 2^{30} bytes (1 gigabyte)
 - $n = 2^{30}/2^{12} = 2^{18}$ bits (or 32K bytes)
- Easy to get contiguous files
- Linked list (free list)
 - Cannot get contiguous space easily
 - No waste of space
- Grouping
- Counting


Free-Space Management (Cont.)

- Need to protect:
 - Pointer to free list
 - Bit map
 - ▶ Must be kept on disk
 - ▶ Copy in memory and disk may differ
 - ▶ Cannot allow for block[i] to have a situation where $\text{bit}[i] = 1$ in memory and $\text{bit}[i] = 0$ on disk
 - Solution:
 - ▶ Set $\text{bit}[i] = 1$ in disk
 - ▶ Allocate block[i]
 - ▶ Set $\text{bit}[i] = 1$ in memory

Directory Implementation

- Linear list of file names with pointer to the data blocks
 - simple to program
 - time-consuming to execute
- Hash Table – linear list with hash data structure
 - decreases directory search time
 - **collisions** – situations where two file names hash to the same location
 - fixed size

Linked Free Space List on Disk

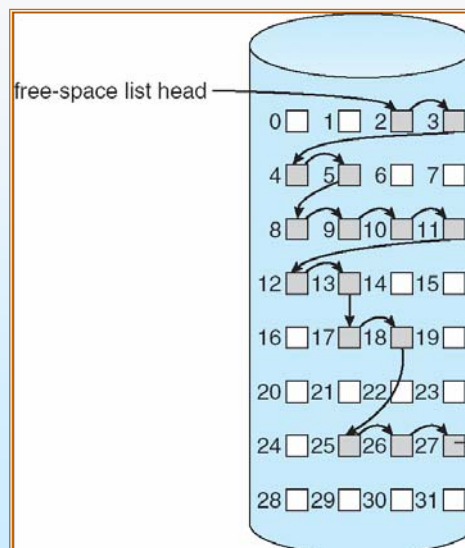


Efficiency and Performance

- Efficiency dependent on:
 - disk allocation and directory algorithms
 - types of data kept in file's directory entry
- Performance
 - disk cache – separate section of main memory for frequently used blocks
 - free-behind and read-ahead – techniques to optimize sequential access
 - improve PC performance by dedicating section of memory as virtual disk, or RAM disk

Page Cache

- A **page cache** caches pages rather than disk blocks using virtual memory techniques
- Memory-mapped I/O uses a page cache
- Routine I/O through the file system uses the buffer (disk) cache
- This leads to the following figure

I/O Without a Unified Buffer Cache

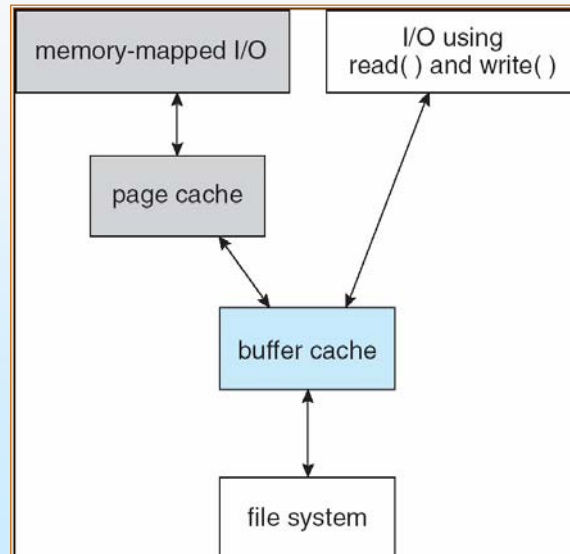

Operating System Concepts

11.35

Silberschatz, Galvin and Gagne ©2005

Unified Buffer Cache


- A unified buffer cache uses the same page cache to cache both memory-mapped pages and ordinary file system I/O

Operating System Concepts

11.36

Silberschatz, Galvin and Gagne ©2005

I/O Using a Unified Buffer Cache

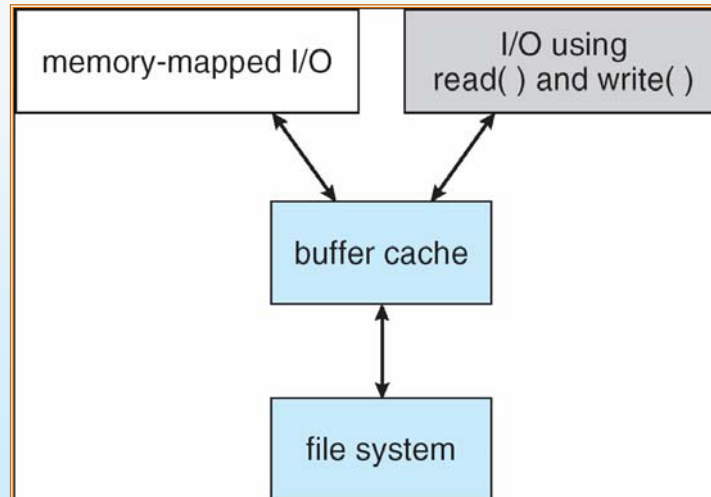

Recovery

- Consistency checking – compares data in directory structure with data blocks on disk, and tries to fix inconsistencies
- Use system programs to **back up** data from disk to another storage device (floppy disk, magnetic tape, other magnetic disk, optical)
- Recover lost file or disk by **restoring** data from backup

Log Structured File Systems

- **Log structured** (or journaling) file systems record each update to the file system as a **transaction**
- All transactions are written to a **log**
 - A transaction is considered **committed** once it is written to the log
 - However, the file system may not yet be updated
- The transactions in the log are asynchronously written to the file system
 - When the file system is modified, the transaction is removed from the log
- If the file system crashes, all remaining transactions in the log must still be performed

The Sun Network File System (NFS)

- An implementation and a specification of a software system for accessing remote files across LANs (or WANs)
- The implementation is part of the Solaris and SunOS operating systems running on Sun workstations using an unreliable datagram protocol (UDP/IP protocol and Ethernet)


NFS (Cont.)

- Interconnected workstations viewed as a set of independent machines with independent file systems, which allows sharing among these file systems in a transparent manner
 - A remote directory is mounted over a local file system directory
 - ▶ The mounted directory looks like an integral subtree of the local file system, replacing the subtree descending from the local directory
 - Specification of the remote directory for the mount operation is nontransparent; the host name of the remote directory has to be provided
 - ▶ Files in the remote directory can then be accessed in a transparent manner
 - Subject to access-rights accreditation, potentially any file system (or directory within a file system), can be mounted remotely on top of any local directory

NFS (Cont.)

- NFS is designed to operate in a heterogeneous environment of different machines, operating systems, and network architectures; the NFS specifications independent of these media
- This independence is achieved through the use of RPC primitives built on top of an External Data Representation (XDR) protocol used between two implementation-independent interfaces
- The NFS specification distinguishes between the services provided by a mount mechanism and the actual remote-file-access services

Three Independent File Systems

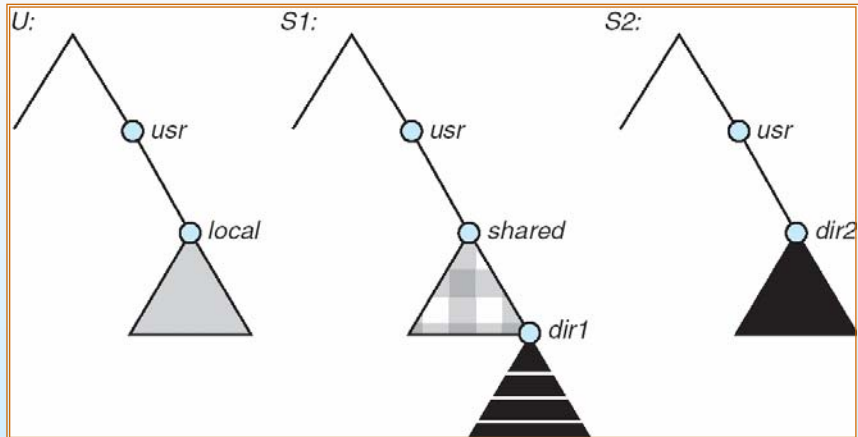


Operating System Concepts

11.43

Silberschatz, Galvin and Gagne ©2005

Mounting in NFS

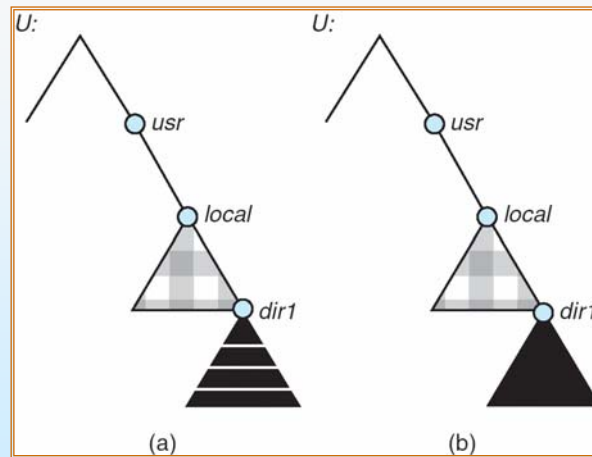

Mounts

Cascading mounts

Operating System Concepts

11.44

Silberschatz, Galvin and Gagne ©2005

NFS Mount Protocol

- Establishes initial logical connection between server and client
- Mount operation includes name of remote directory to be mounted and name of server machine storing it
 - Mount request is mapped to corresponding RPC and forwarded to mount server running on server machine
 - Export list – specifies local file systems that server exports for mounting, along with names of machines that are permitted to mount them
- Following a mount request that conforms to its export list, the server returns a file handle—a key for further accesses
- File handle – a file-system identifier, and an inode number to identify the mounted directory within the exported file system
- The mount operation changes only the user's view and does not affect the server side


NFS Protocol

- Provides a set of remote procedure calls for remote file operations. The procedures support the following operations:
 - searching for a file within a directory
 - reading a set of directory entries
 - manipulating links and directories
 - accessing file attributes
 - reading and writing files
- NFS servers are **stateless**; each request has to provide a full set of arguments
(NFS V4 is just coming available – very different, stateful)
- Modified data must be committed to the server's disk before results are returned to the client (lose advantages of caching)
- The NFS protocol does not provide concurrency-control mechanisms

Three Major Layers of NFS Architecture

- UNIX file-system interface (based on the **open**, **read**, **write**, and **close** calls, and **file descriptors**)
- *Virtual File System* (VFS) layer – distinguishes local files from remote ones, and local files are further distinguished according to their file-system types
 - The VFS activates file-system-specific operations to handle local requests according to their file-system types
 - Calls the NFS protocol procedures for remote requests
- NFS service layer – bottom layer of the architecture
 - Implements the NFS protocol

Schematic View of NFS Architecture

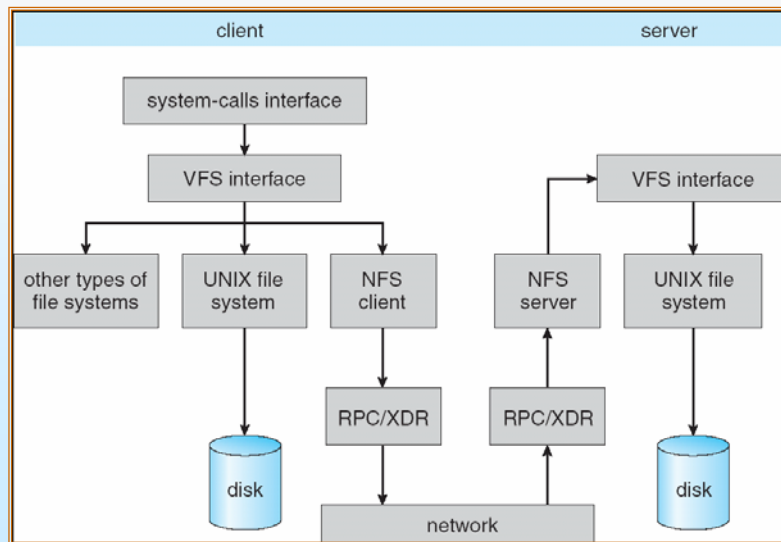

NFS Path-Name Translation

- Performed by breaking the path into component names and performing a separate NFS lookup call for every pair of component name and directory vnode
- To make lookup faster, a directory name lookup cache on the client's side holds the vnodes for remote directory names


NFS Remote Operations

- Nearly one-to-one correspondence between regular UNIX system calls and the NFS protocol RPCs (except opening and closing files)
- NFS adheres to the remote-service paradigm, but employs buffering and caching techniques for the sake of performance
- File-blocks cache – when a file is opened, the kernel checks with the remote server whether to fetch or revalidate the cached attributes
 - Cached file blocks are used only if the corresponding cached attributes are up to date
- File-attribute cache – the attribute cache is updated whenever new attributes arrive from the server
- Clients do not free delayed-write blocks until the server confirms that the data have been written to disk

Example: WAFL File System

- Used on Network Appliance “Filers” – distributed file system appliances
- “Write-anywhere file layout”
- Serves up NFS, CIFS, http, ftp
- Random I/O optimized, write optimized
 - NVRAM for write caching
- Similar to Berkeley Fast File System, with extensive modifications

The WAFL File Layout

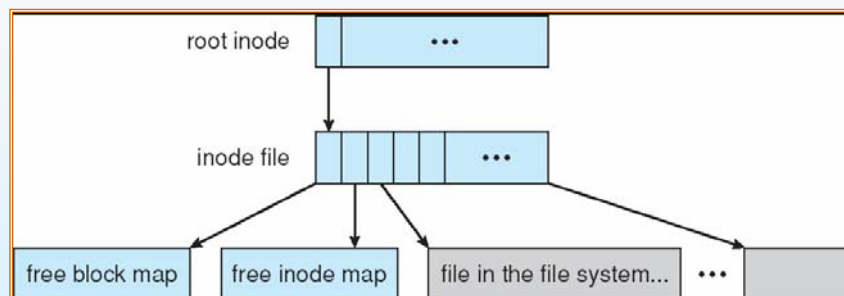

Snapshots in WAFL

