

Patterns

Repository pattern:

[link](#)

Databases are behind a repository layer.

DbContext lifetime is controlled in the repository.

Observer pattern:

[link](#)

In circuit state variables are observed using the repository pattern.

CQRS (command query responsibility segregation) pattern:

[link](#)


Seperation of query (fetch data) and update data to data stores.

Data consumers should not have to know about how to store data.

Clean Architecture

In clean architecture, the control and dependency flow move inward toward the business logic. All outward-facing components (such as data access, external services, and the UI) depend on the inner layers.

Furthermore, the business logic is separated into single-responsibility use cases.

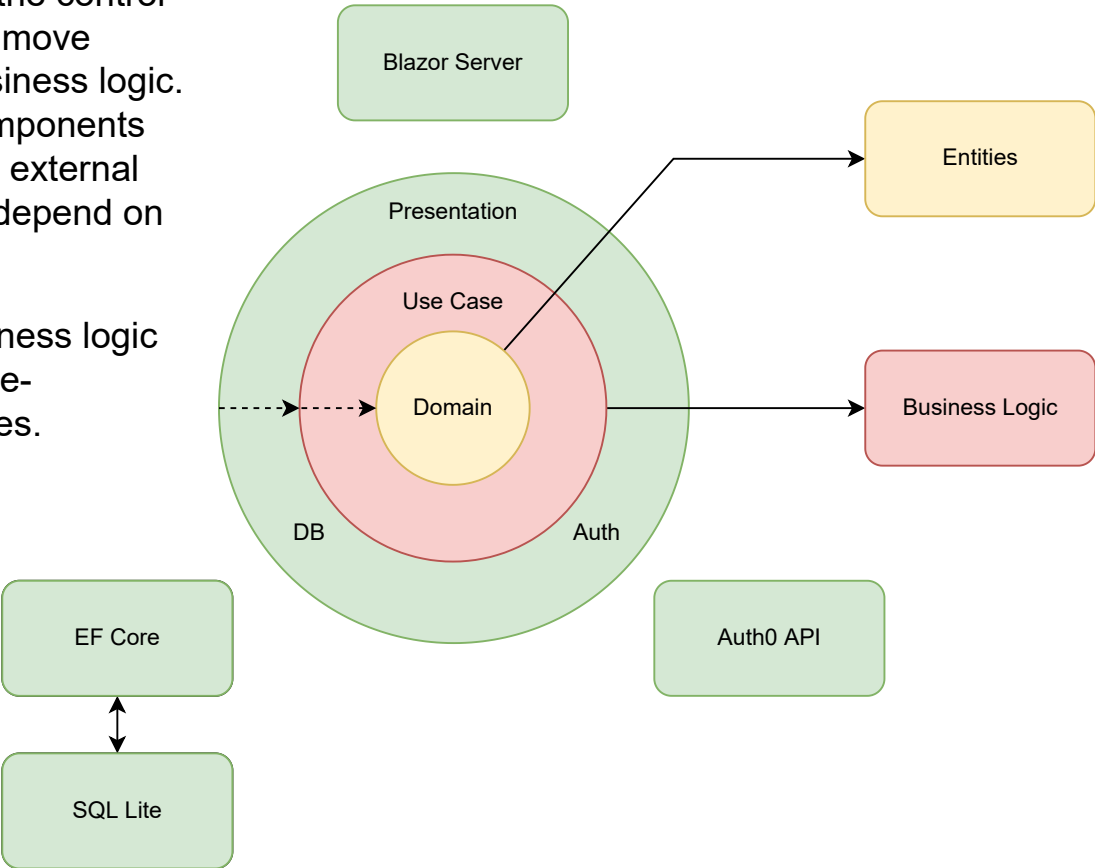

Dependencies

