

ID	Date	Category	Amount	Status
1001	2023-10-27	Sales	\$1,500.00	Verified
1002	2023-10-28	Service	\$450.50	Verified
1003	2023-10-29	Product	\$2,100.75	Verified
1004	2023-10-30	Consult	\$899.00	Verified

Automating the Unpredictable

A smarter way to clean messy files with Power Query

The Unpredictable Data Dump

	A	B	C	D	E	F	G	H
1	junk head	junk head	junk head	junk head	junk head	junk head	junk headers	
2	junk head	junk head	junk head	junk head	junk head	junk head	junk headers	
3	junk head	junk head	junk head	junk head	junk head	junk head	junk headers	
4	junk head	junk head	junk head	junk head	junk head	junk head	junk headers	
5	junk head	junk head	junk head	junk head	junk head	junk head	junk headers	
6	junk head	junk head	junk head	junk head	junk head	junk head	junk headers	
7	junk head	junk head	junk head	junk head	junk head	junk head	junk headers	
8	header1	header2	header3	header4	header5	header6	header7	
9	68	44	82	39	57	24	62	
10	47	77	34	97	20	84	86	
11	76	94	89	57	56	43	32	
12	72	35	86	45	90	51	35	
13	41	41	53	95	37	71	2	
15	30	100	58	63	47	49	17	

**Real data
hides at
Row 8**

**Real data
shifts to Row 6**

	A	B	C	D	E	F	G	H
1	junk head	junk head	junk head	junk head	junk head	junk head	junk headers	
2	junk head	junk head	junk head	junk head	junk head	junk head	junk headers	
3	junk head	junk head	junk head	junk head	junk head	junk head	junk headers	
4	junk head	junk head	junk head	junk head	junk head	junk head	junk headers	
5	junk head	junk head	junk head	junk head	junk head	junk head	junk headers	
6	header1	header2	header3	header4	header5	header6	header7	
7	53	58	31	40	43	95	96	
9	61	76	81	87	28	63	76	
10	37	34	48	47	65	34	40	
11	27	99	49	93	41	21	66	
12	71	84	71	58	48	69	91	
13	72	54	98	69	81	39	90	
14	68	42	59	41	62	43	81	

Enterprise data exports are rarely consistent. The variability of metadata, blank rows, and system timestamps is the real enemy of automation.

Why Traditional Fixes Fail

Automation Diagnostic Matrix

METHOD	SPECS	VERDICT
 Manual Copy/Paste	Speed: Extremely Slow Scalability: Fails with volume.	Tedious and prone to human error.
 Standard Power Query ("Remove Top 3 Rows")	Speed: Fast (when it works) Scalability: Good.	Highly breakable. Standard logic is rigid; if the next file has 5 junk rows instead of 3, the entire automated process crashes.

**Dumb automation does exactly what you tell it to do.
We need a tool that can actually think.**

The Smart Hunter

	A	B	C	D	E	F	G	H
1	junk head	junk head	junk head	junk head	junk head	junk head	junk head	junk headers
2	junk head	junk head	junk head	junk head	junk head	junk head	junk head	junk headers
3	junk head	junk head	junk head	junk head	junk head	junk head	junk head	junk headers
4	junk head	junk head	junk head	junk head	junk head	junk head	junk head	junk headers
6	junk head	junk head	junk head	junk head	junk head	junk head	junk head	junk headers
7	junk head	junk head	junk head	junk head	junk head	junk head	junk head	junk headers
8	header1	header2	header2	header4	header5	header6	header7	
9	68	44	82	39	57	24	62	
10	47	77	34	97	20	84	86	
11	76	94	89	57	56	43	32	
12	72	35	86	45	90	51	35	
13	41	41	53	95	37	71	62	
14	30	100	58	63	47	49	87	

**Shift the Paradigm:
Stop deleting a fixed
number of rows. Start
hunting for an anchor point.**

Instead of relying on rigid row counts, we deploy a dynamic tool that scans every file, locates your specific column header, and automatically adapts to its position.

Scan, Lock, and Sweep

Step 1: The Target

 Target = 'header1'

You define the anchor. We tell the tool exactly what column name indicates the start of the real data.

Step 2: The Scan


```
1 'header1', 'data' 1'  
2 'header2', 'data' 2'  
3 'header3', 'data' 3'  
4 'header4', 'data' 4'  
5 'header5', 'data' 5'  
6 'header6', 'data' 6'  
7 'header7', 'data' 7'  
8 'header1'
```



The tool reads down the file and locks in the exact row number where the target lives.


Step 3: The Sweep

```
1 'header1', 'data' 1'  
2 'header2', 'data' 2'  
3 'header3', 'data' 3'  
4 'header4', 'data' 4'  
5 'header5', 'data' 5'  
6 'header6', 'data' 6'  
7 'header7', 'data' 7'  
8 'header1' 'data', egg,  
9 'header2' 'data' 4, oct.
```

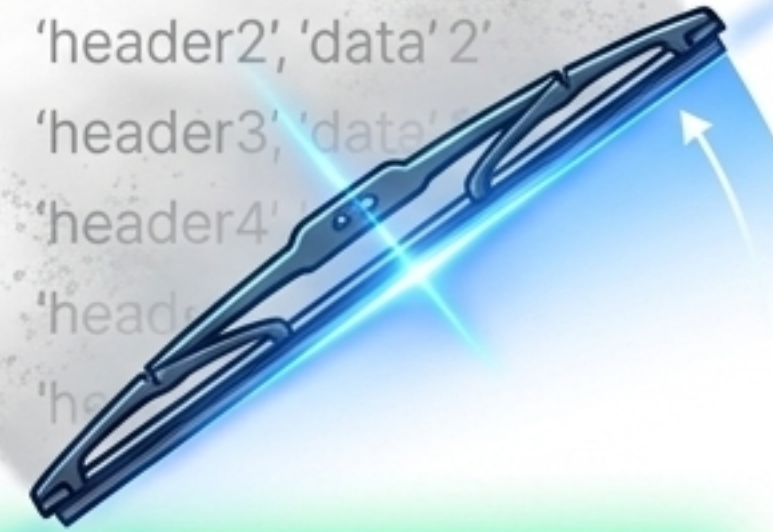

It automatically sweeps away all "noise" above your target row, leaving a pristine dataset.

Simple Controls for Complex Tasks

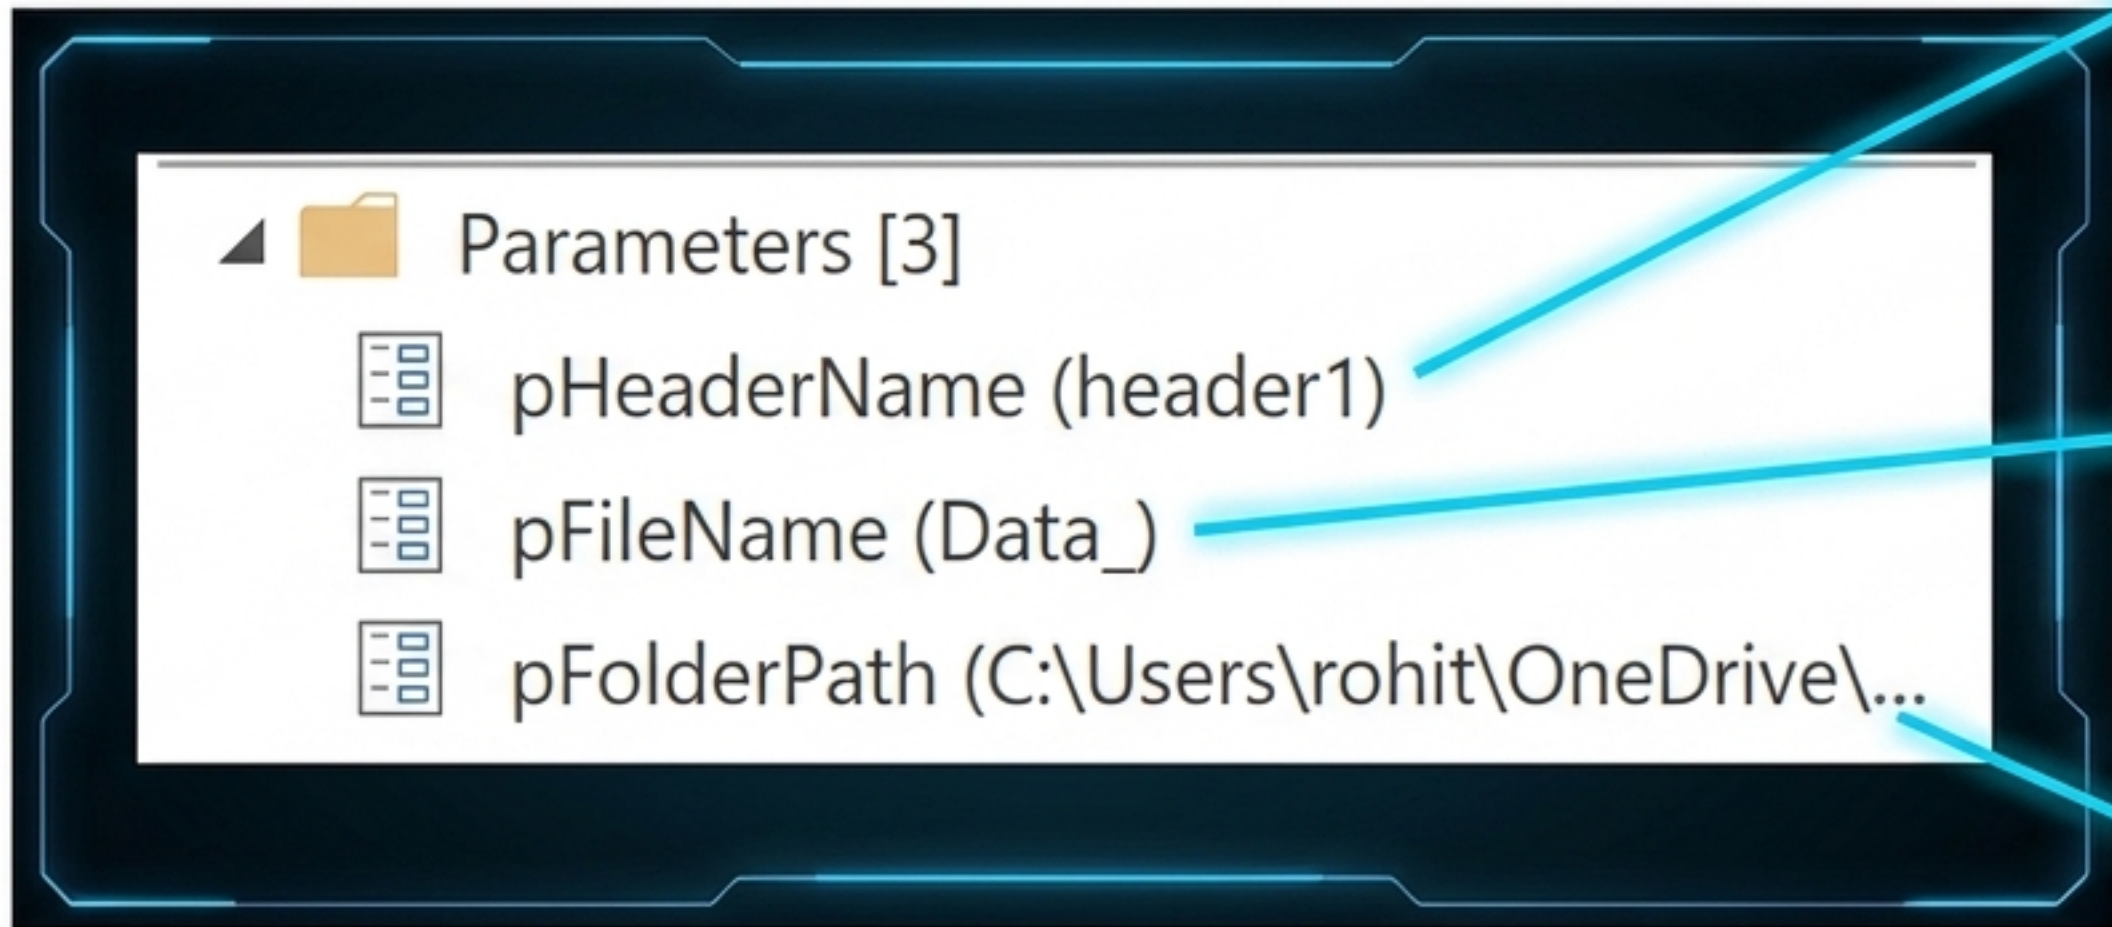

The Anchor.

Simply type the name of your first column (e.g., 'header1'). The engine will find it anywhere.

The Filter.

Tell the system which files to grab (e.g., files starting with 'Data_').

The Location.

Drop the path to your messy data folder here.

Zero coding required. Once the engine is built, you only ever interact with these **three simple text boxes**.

Unified, Clean, Ready to Analyze

Name	Name.1	header1	header2	header3	header4	header5	header6	header7
Data_DynamicHeaderRow.xlsx	Sheet1	84	45	44	91	92	29	45
Data_DynamicHeaderRow.xlsx	Sheet1	62	72	69	39	40	92	90
Data_DynamicHeaderRow.xlsx	Sheet1	74	31	42	86	82	33	54
Data_DynamicHeaderRow.xlsx	Sheet1	37	49	22	52	56	56	86
Data_DynamicHeaderRow.xlsx	Sheet1	66	58	46	84	44	61	98
Data_DynamicHeaderRow.xlsx	Sheet1	43	60	39	85	99	26	58
Data_DynamicHeaderRow.xlsx	Sheet1	64	81	56	36	52	33	75
Data_DynamicHeaderRow.xlsx	Sheet1	78	75	54	81	80	30	82
Data_DynamicHeaderRow.xlsx	Sheet1	51	100	76	23	42	32	62
Data_DynamicHeaderRow.xlsx	Sheet2	20	39	77	91	98	38	82
Data_DynamicHeaderRow.xlsx	Sheet2	47	44	44	33	93	61	49
Data_DynamicHeaderRow.xlsx	Sheet2	20	43	67	96	77	27	20
Data_DynamicHeaderRow.xlsx	Sheet2							8
Data_DynamicHeaderRow.xlsx	Sheet2							8
Data_DynamicHeaderRow.xlsx	Sheet2							0
Data_DynamicHeaderRow.xlsx	Sheet2							5
Data_DynamicHeaderRow.xlsx	Sheet2							2
Data_DynamicHeaderRow.xlsx	Sheet2							8
Data_DynamicHeaderRow.xlsx	Sheet3							2
Data_DynamicHeaderRow.xlsx	Sheet3							5
Data_DynamicHeaderRow.xlsx	Sheet3	68	49	96	57	22	63	64
Data_DynamicHeaderRow.xlsx	Sheet3	89	32	29	49	21	71	

The Payoff: Dozens of messy sheets from multiple files, instantaneously stacked into one perfect master table. Not a single junk row in sight.

The 'Set and Forget' ROI



Hours to Seconds.

Eliminate the Monday morning grind of manually deleting rows and prepping reports.



Format-Proof.

Built to automatically adapt when source systems change their output structures or add unpredictable metadata.



2 Files or 2,000.

The logic scales effortlessly. Drop new files into the folder and hit refresh.

Stop cleaning data. Start analyzing it.