Excitation-Current Coordinate Reduction: Complete Reconstruction Atlas

Winding Factor Research Study

24 October 2026

One page per dataset, excitation group and method (A–H). The main paper defines the models, point-based metrics, support rules and independent prediction experiment. This atlas retains the existing A–H reconstruction record. Interactive contour-centroid diagnostics, group-selection controls and follow-up local-factor fields are separate displays and do not add atlas pages.

Both flux components are shown. Left: original (blue) and shared-table reconstruction (orange). Right: signed error over physical stator currents. Units are mVs. Missing regions are not extrapolated. Colour limits are shared across each dataset.

The figures interpolate each original group's measured excitation alongside its flux. A nominal group label is not substituted for the pointwise measured current. The 41-by-41 display grid is distinct from the 81-by-81 stored reduced grid.

Axis labels use "current in A" and "flux linkage in mVs". The d-flux 3D view exchanges the displayed d- and q-current axes to expose the surface; the error maps retain their physical d/q arrangement.

Set 1, method A, excitation 2 A

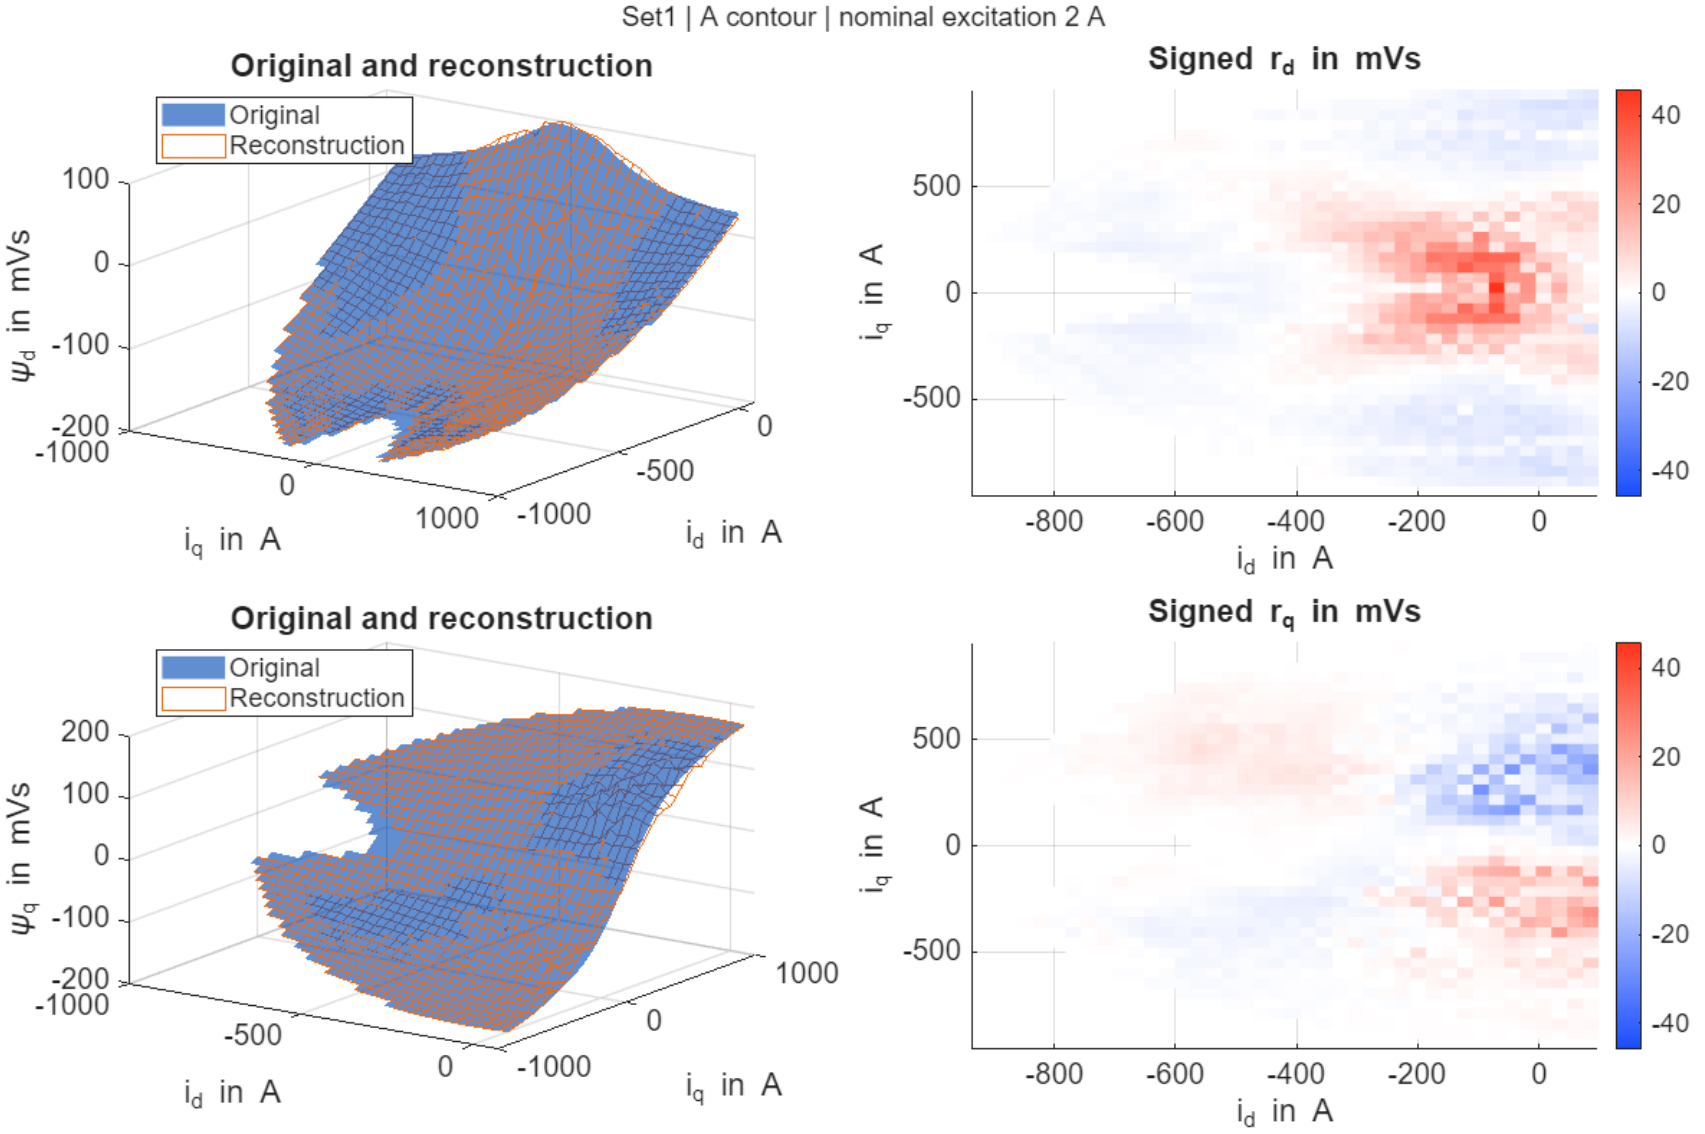

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method B, excitation 2 A

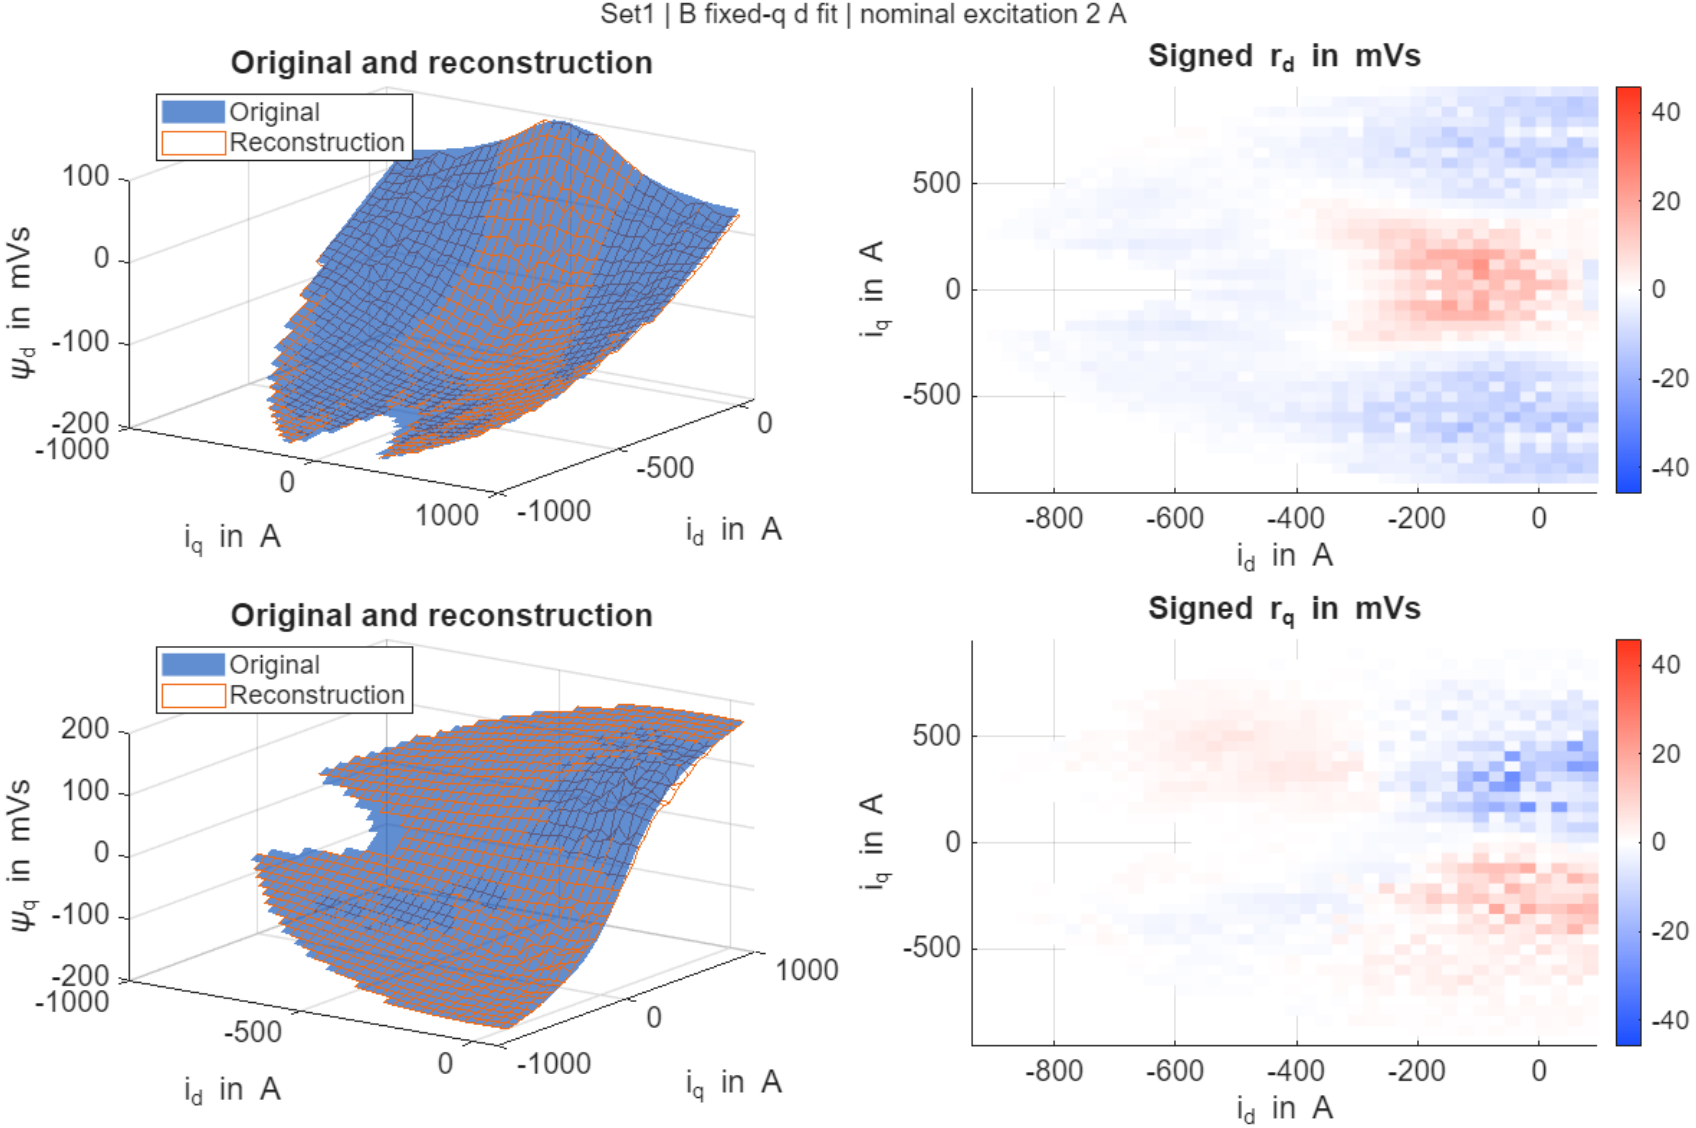

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method C, excitation 2 A

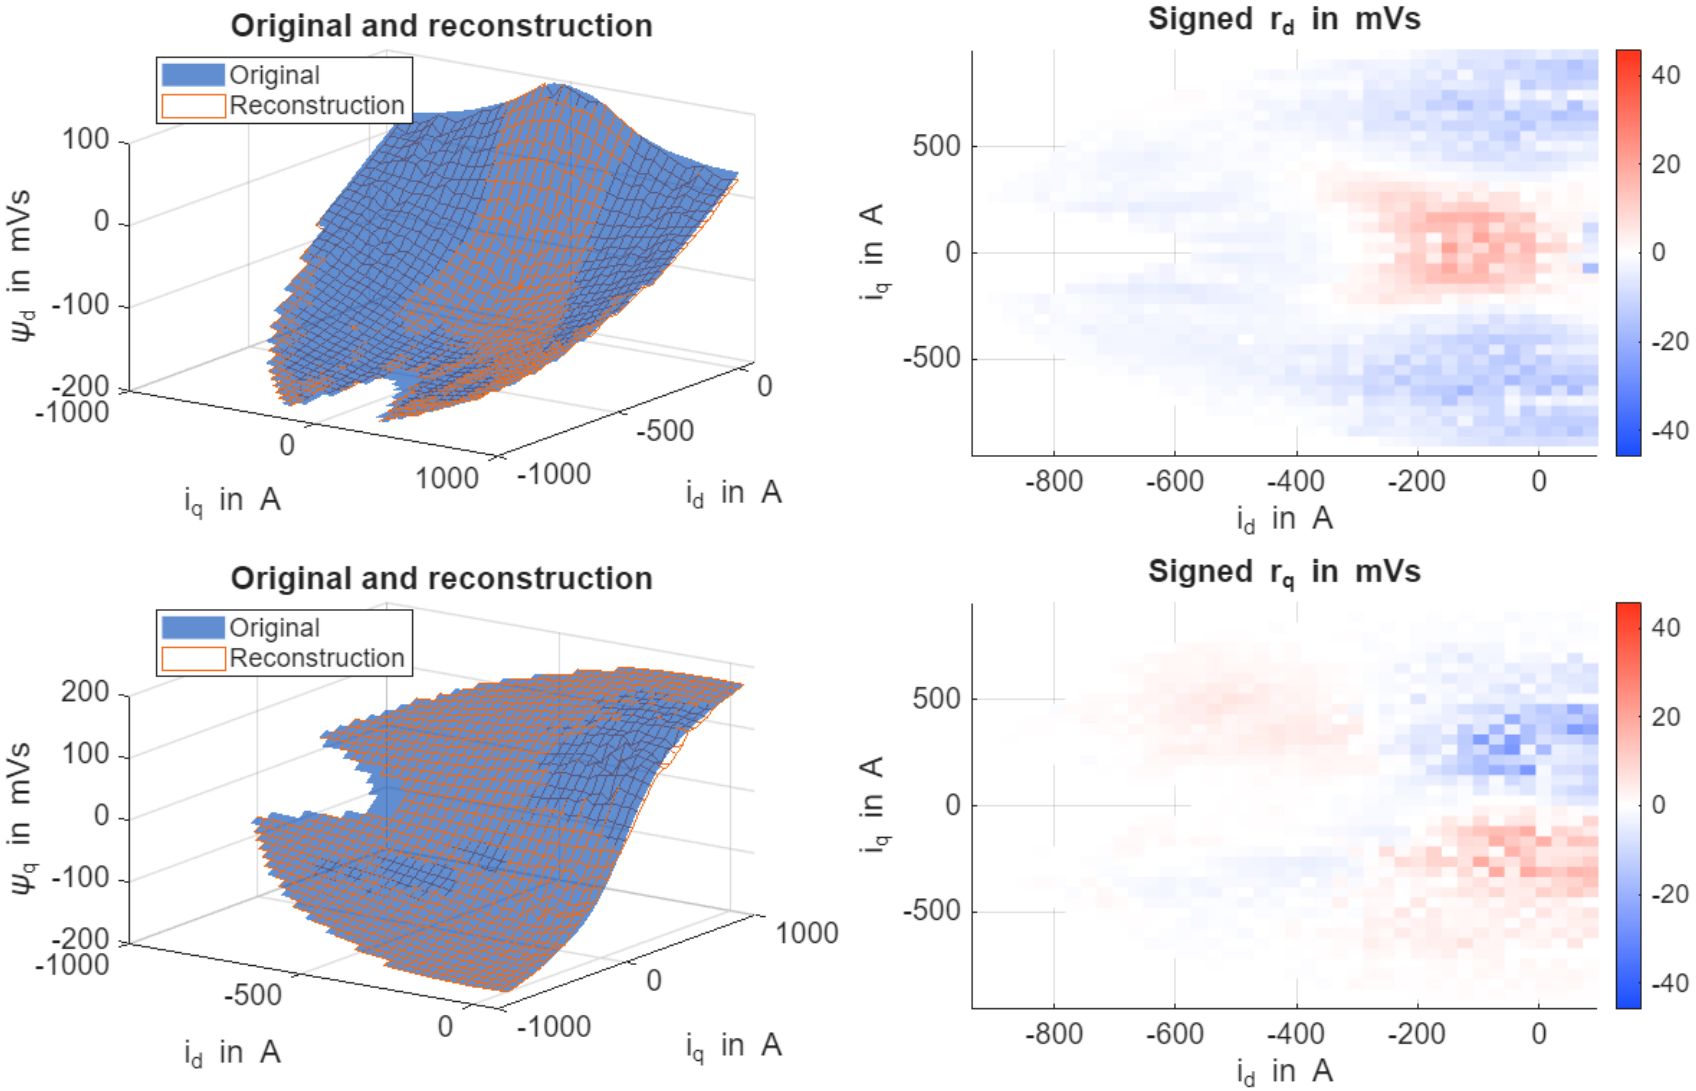

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method D, excitation 2 A

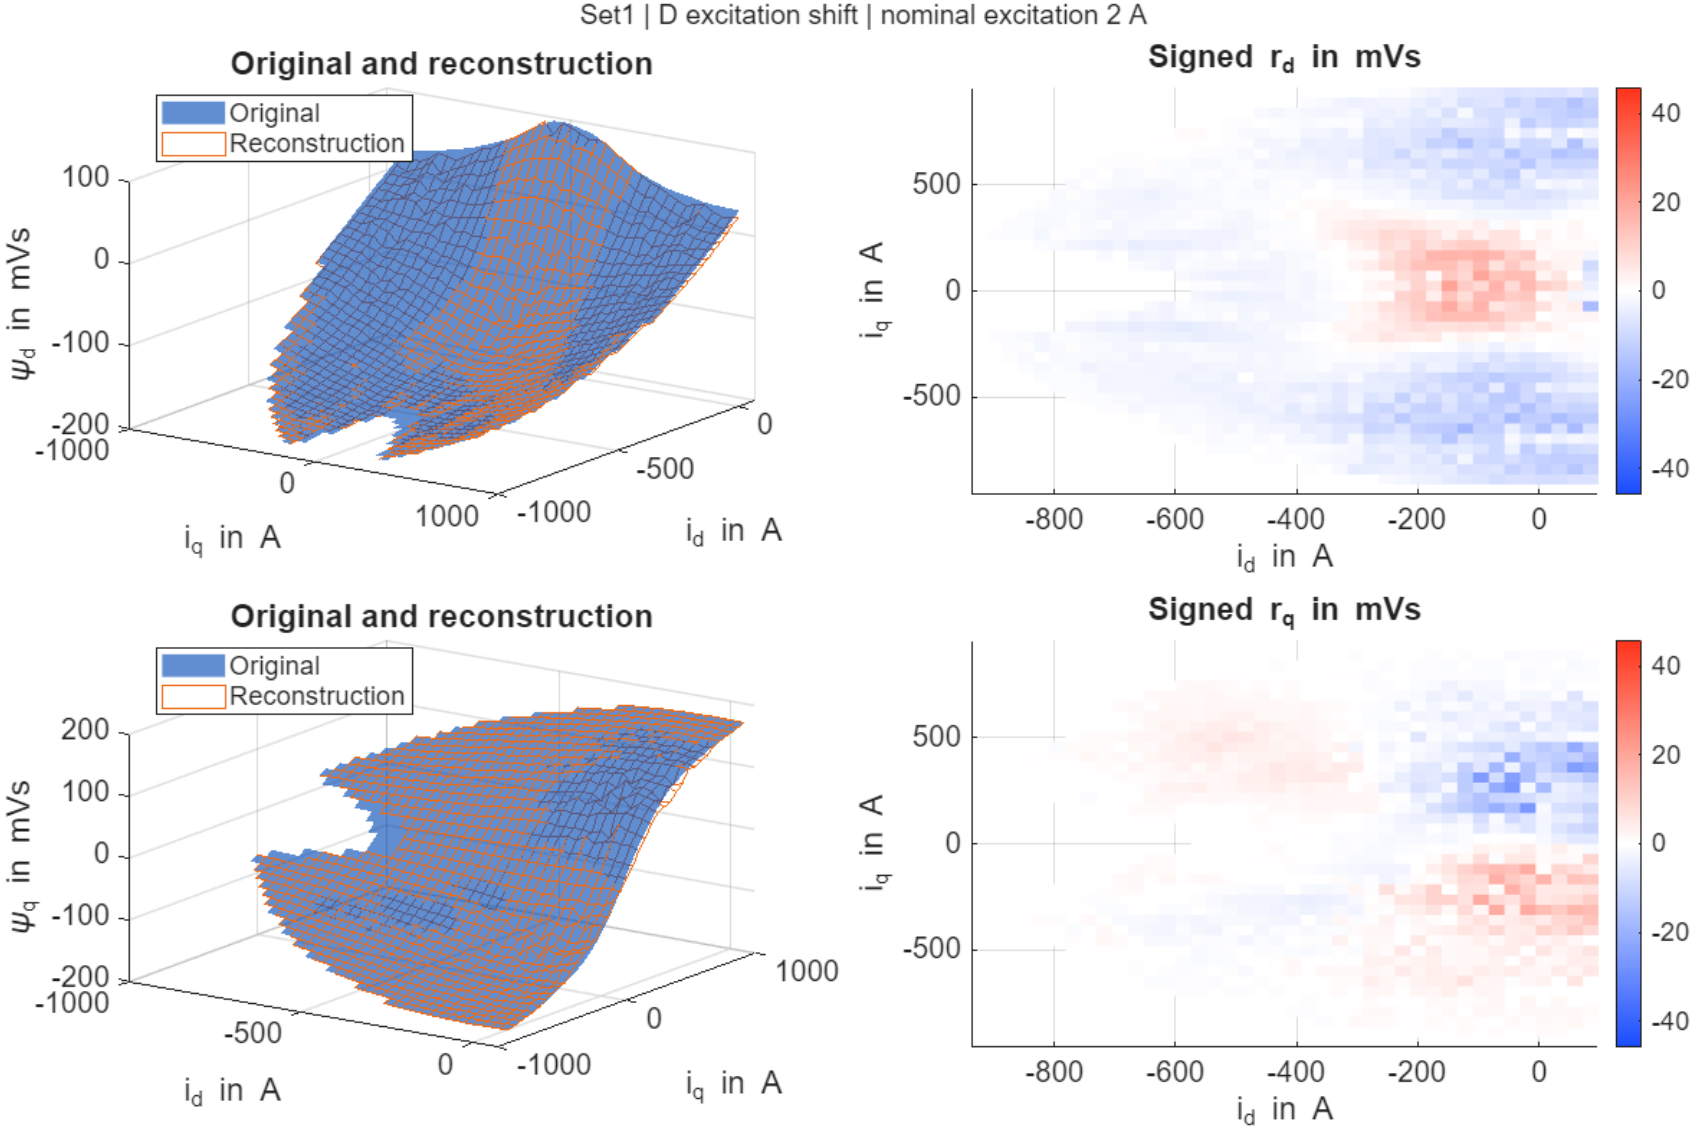

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method E, excitation 2 A

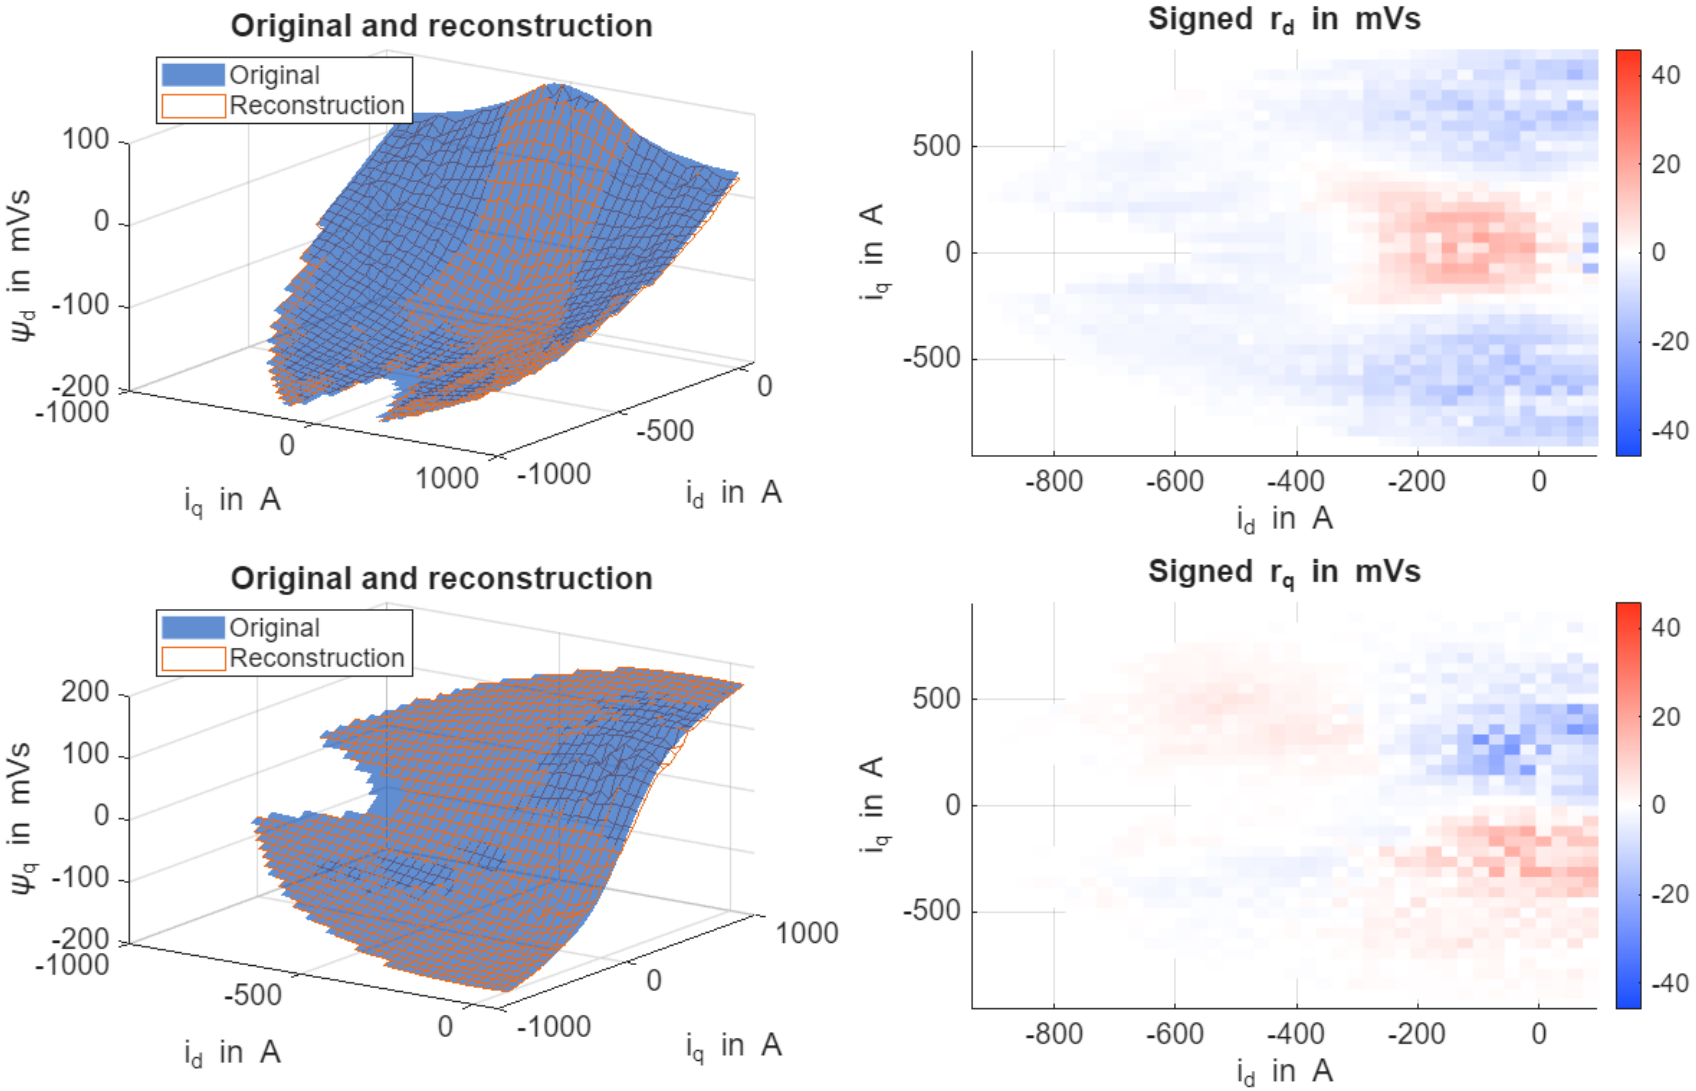

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method F, excitation 2 A

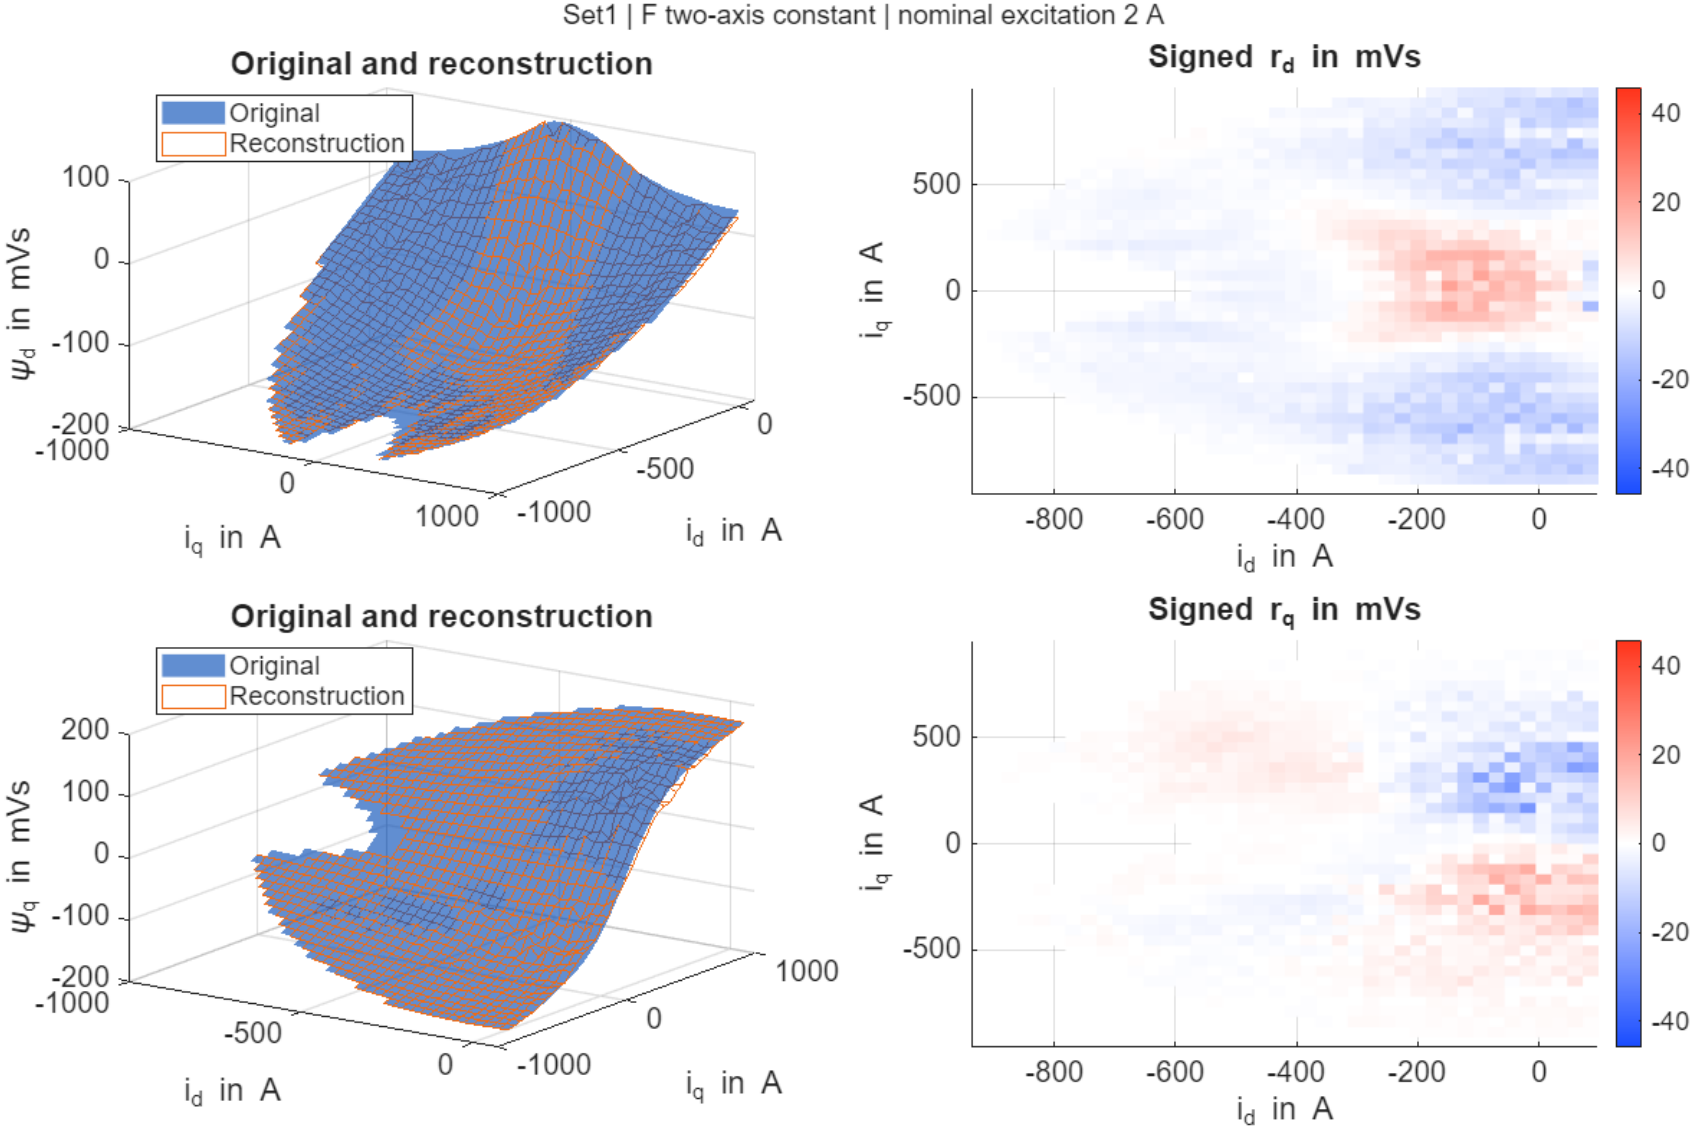

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method G, excitation 2 A

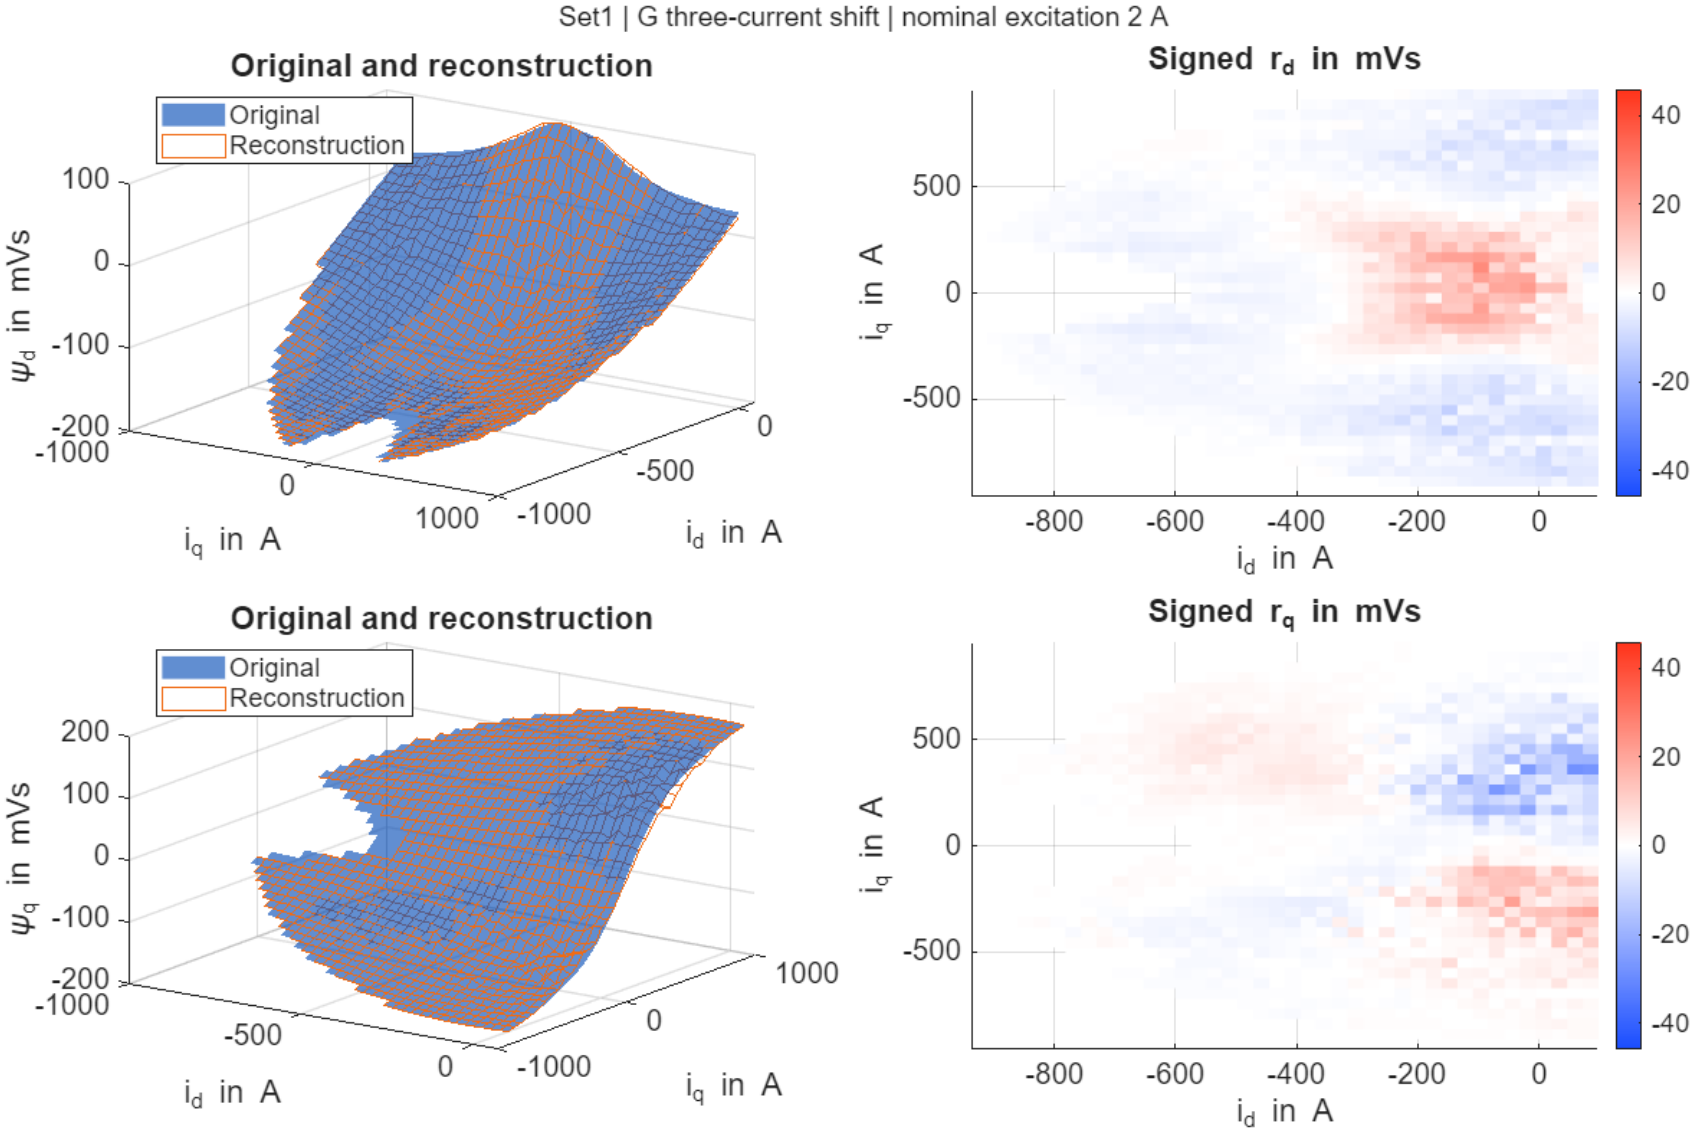

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method H, excitation 2 A

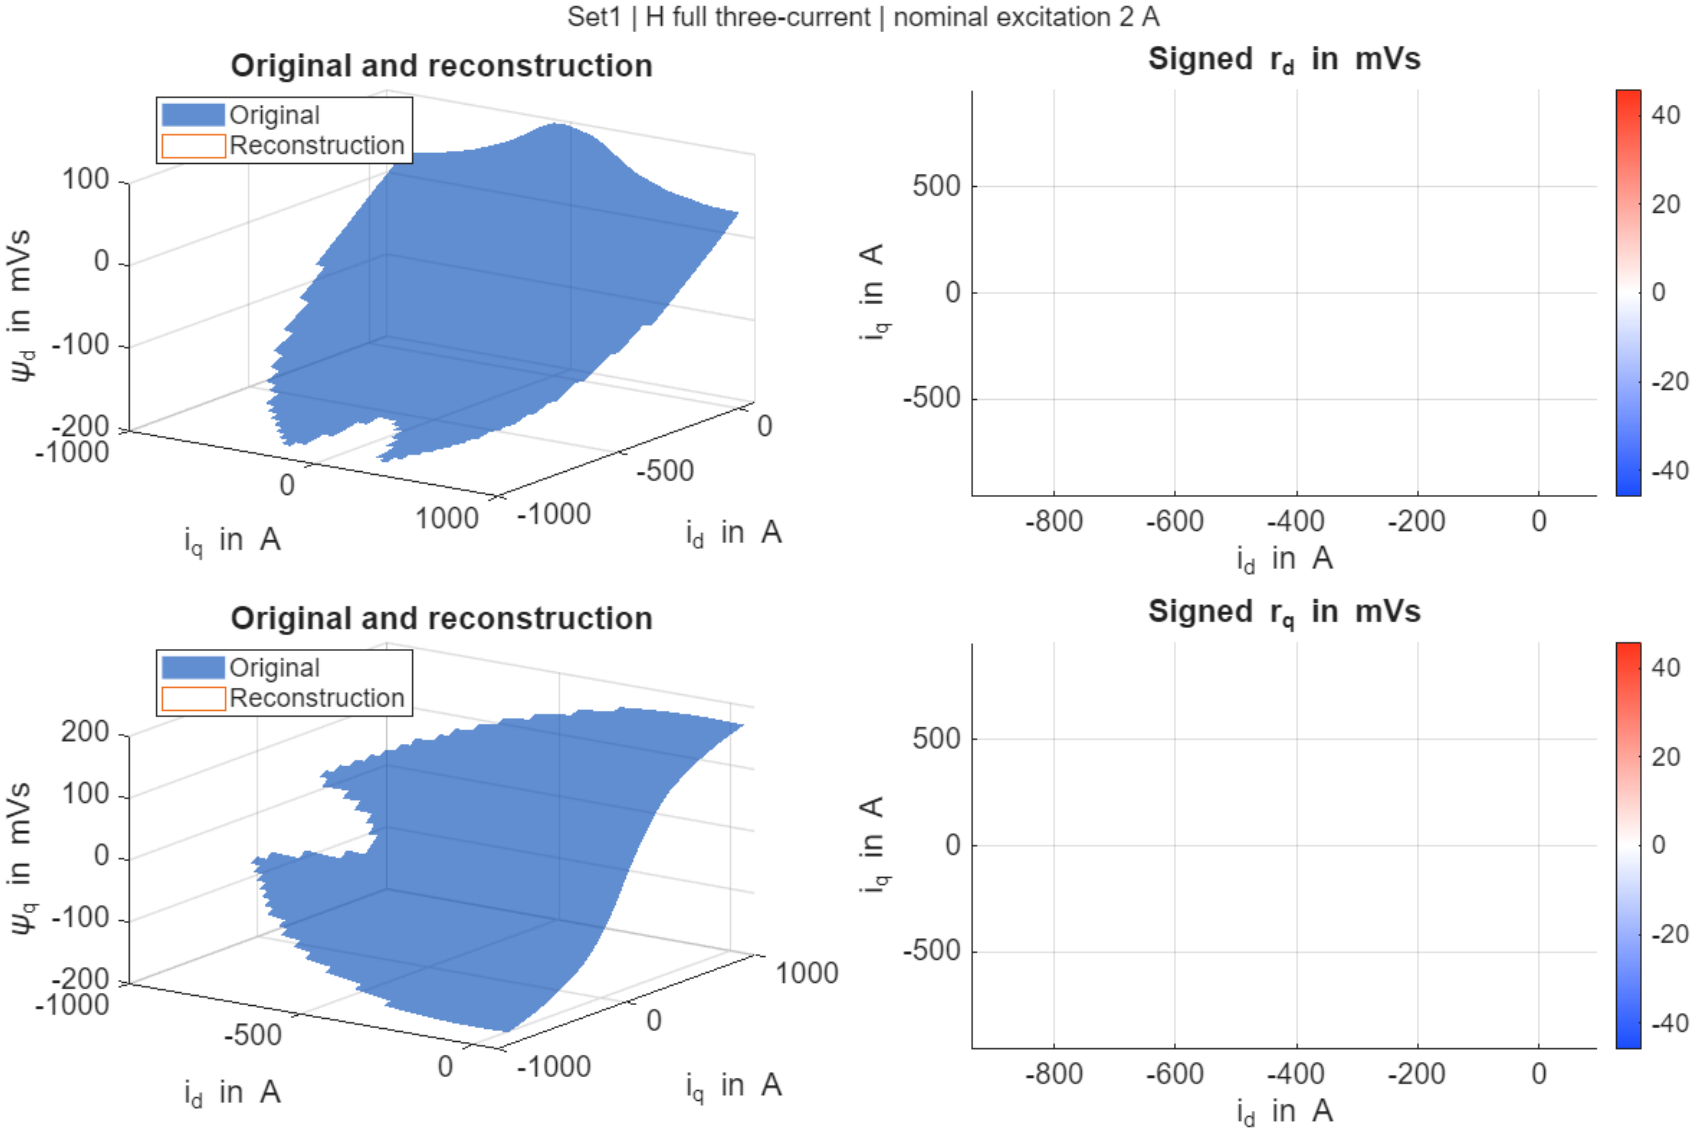

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method A, excitation 5 A

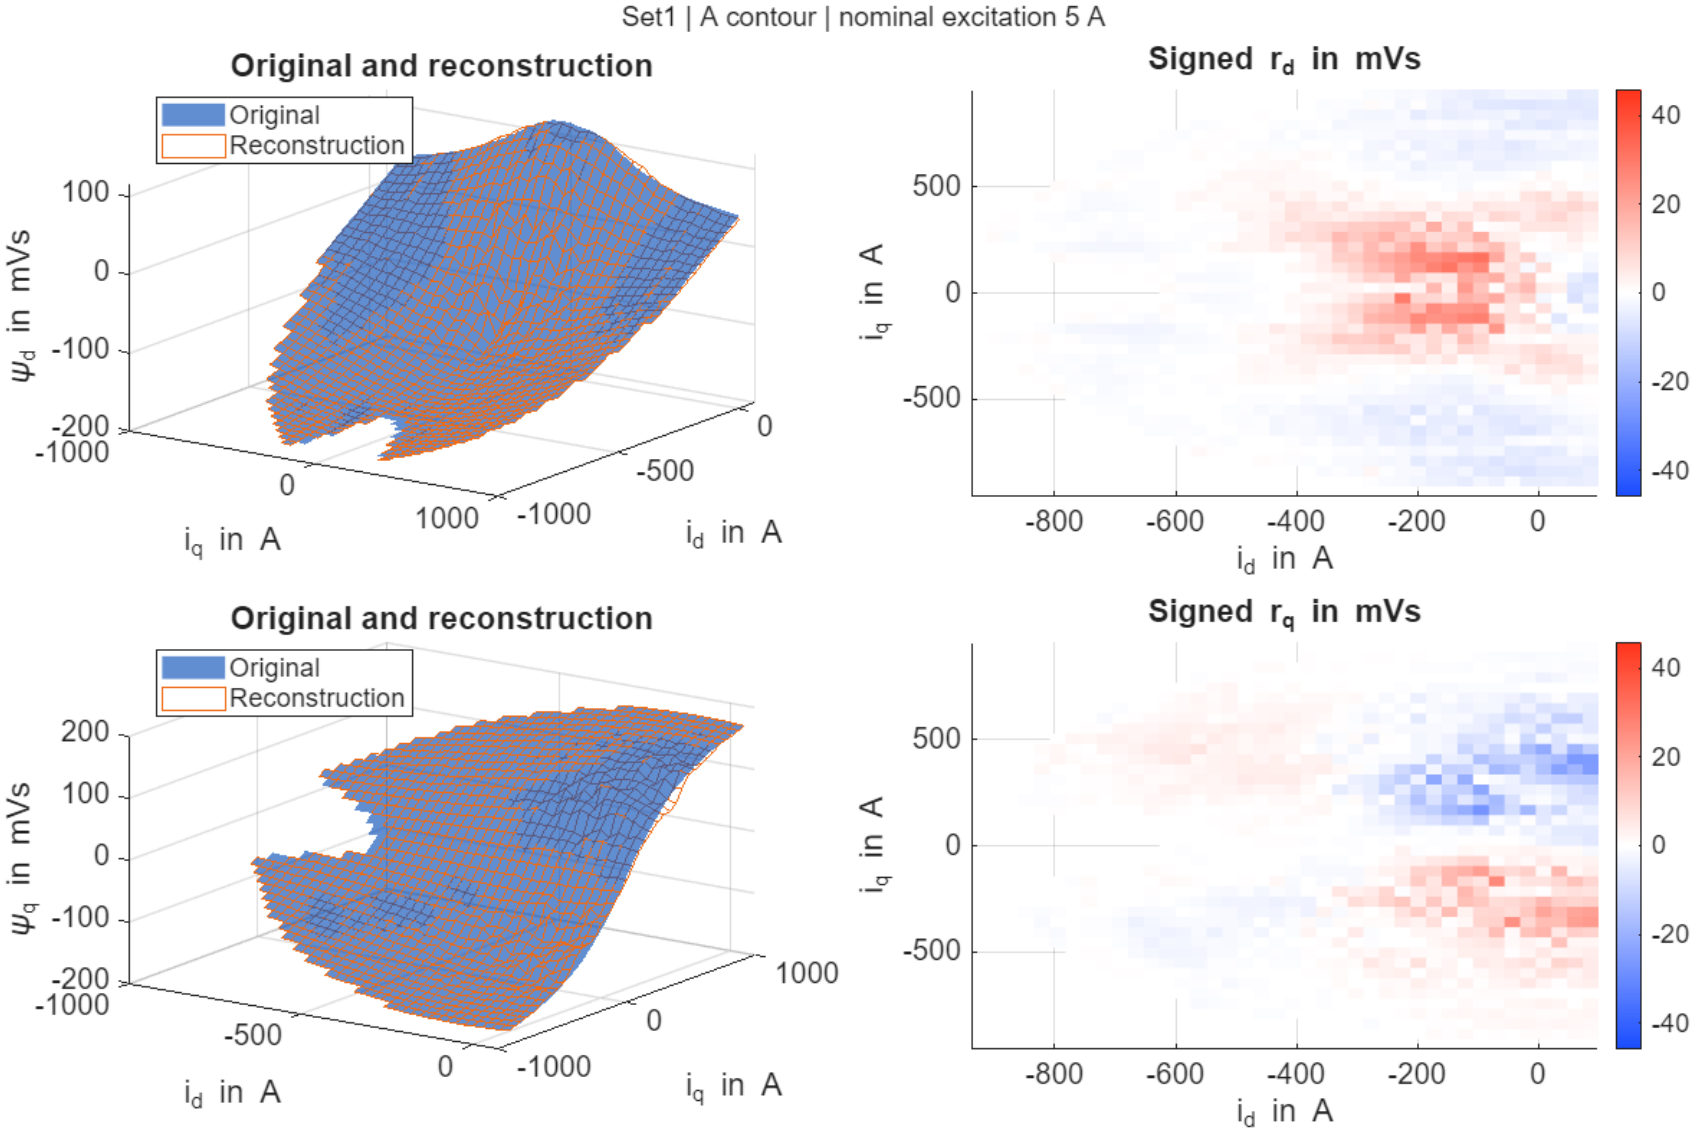

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method B, excitation 5 A

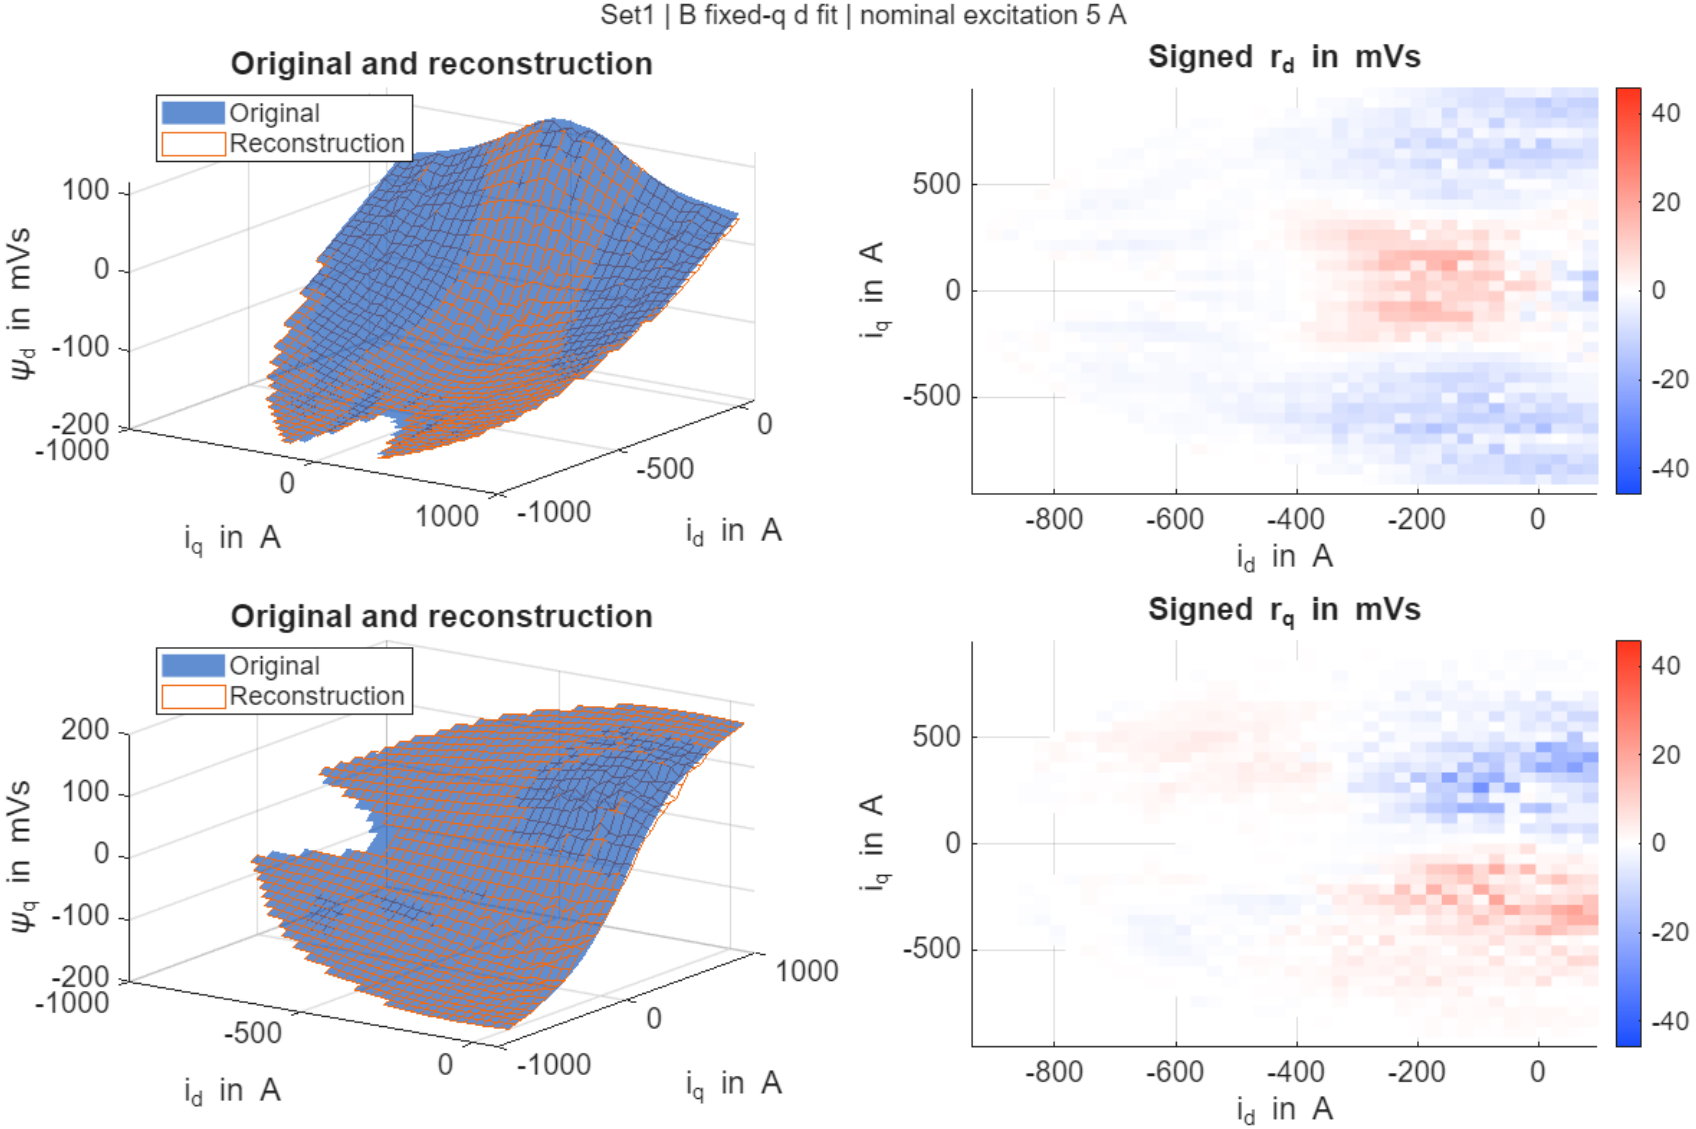

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method C, excitation 5 A

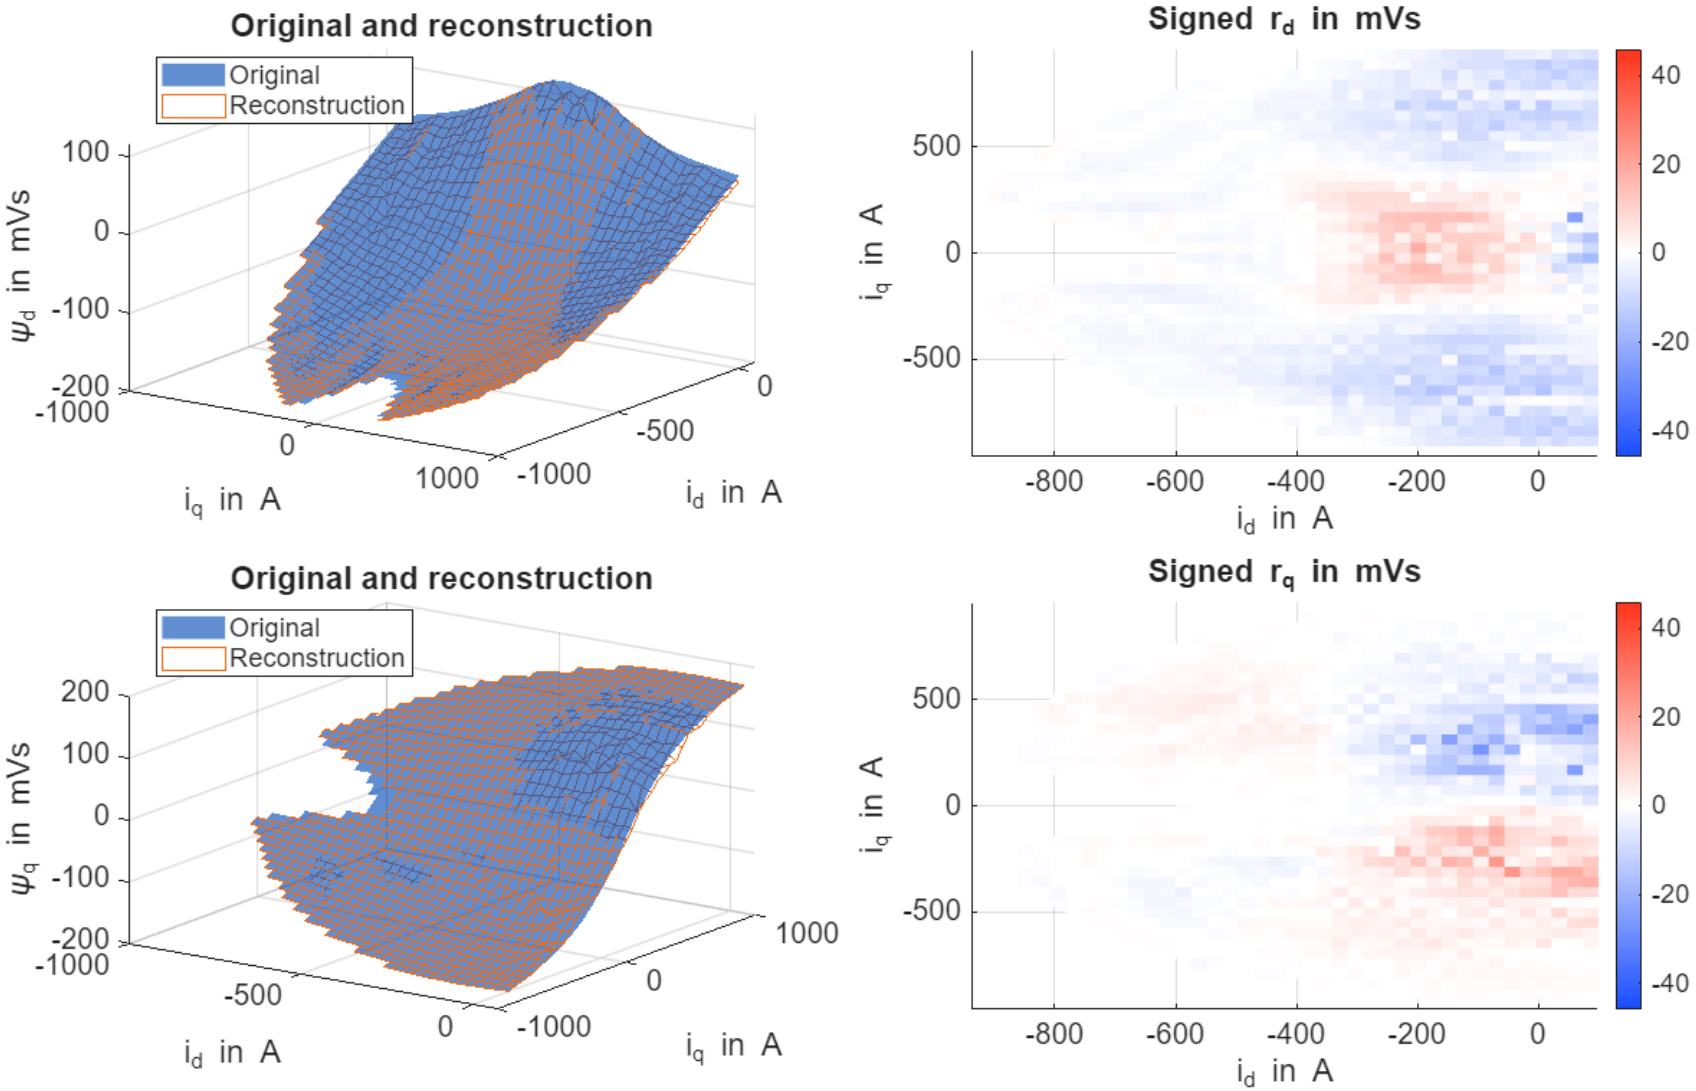

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method D, excitation 5 A

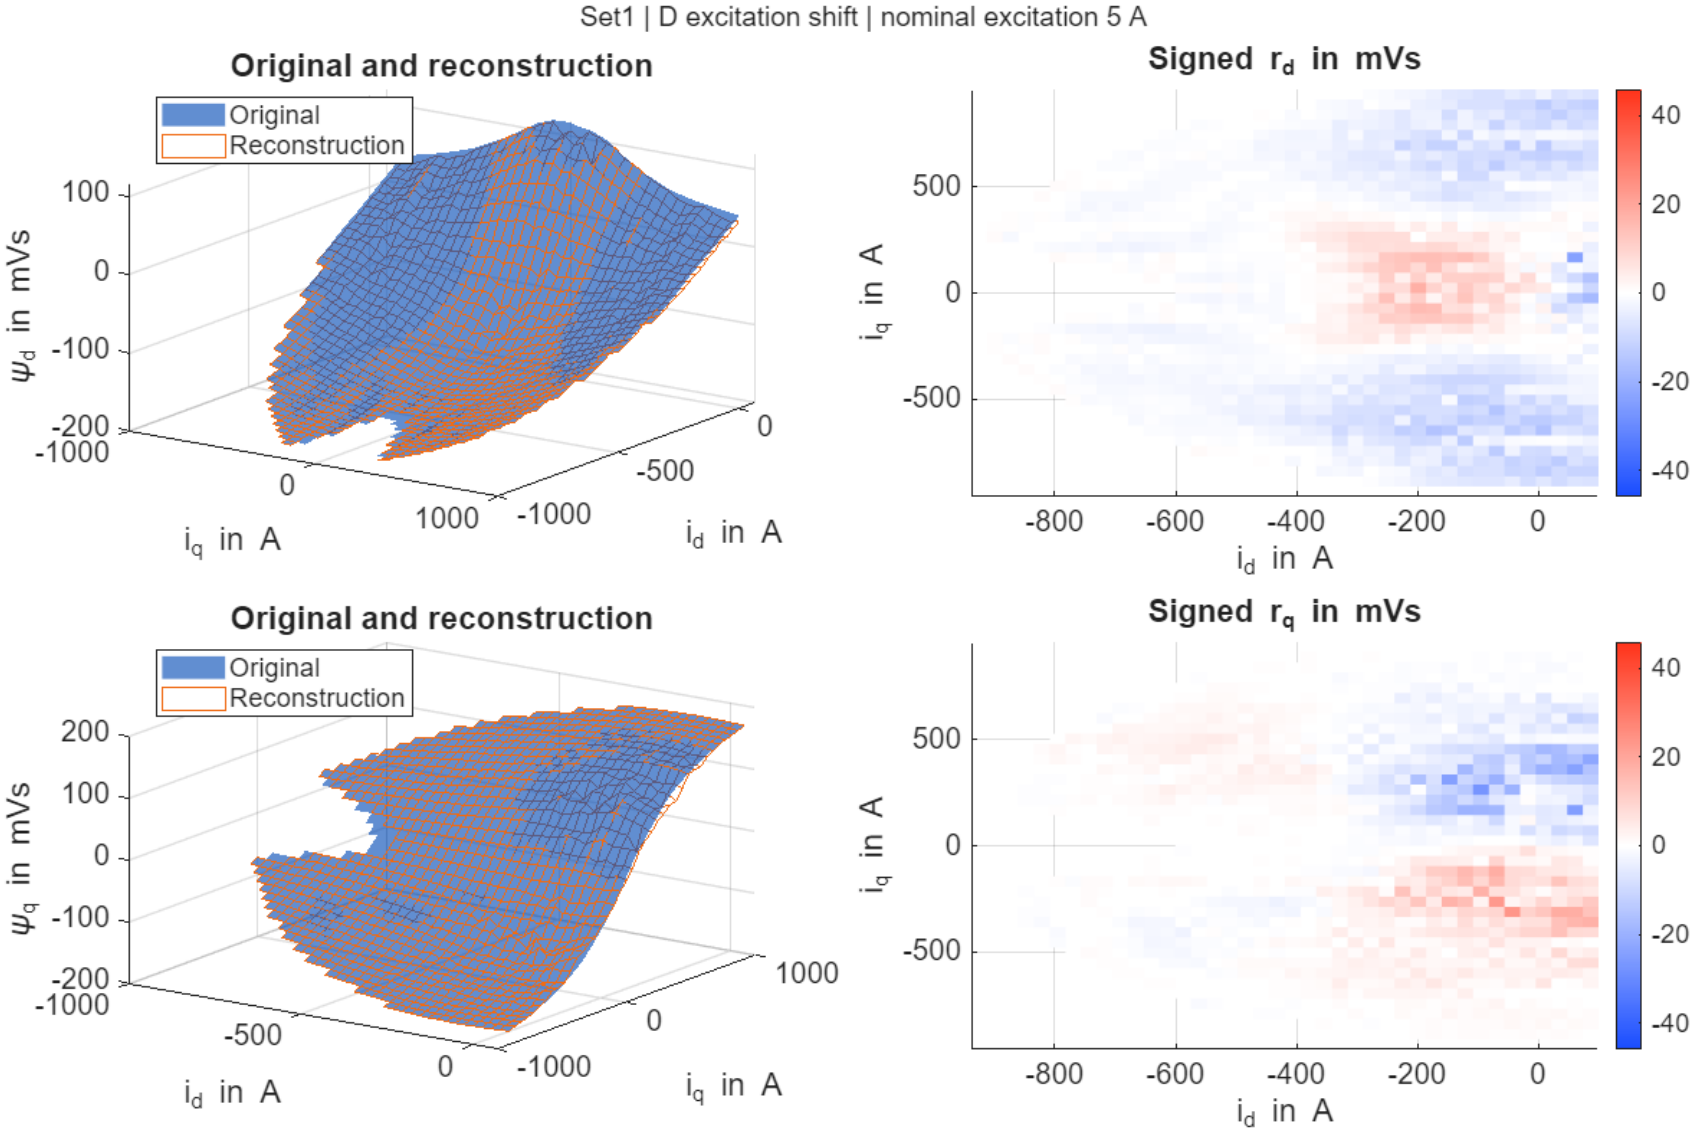

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method E, excitation 5 A

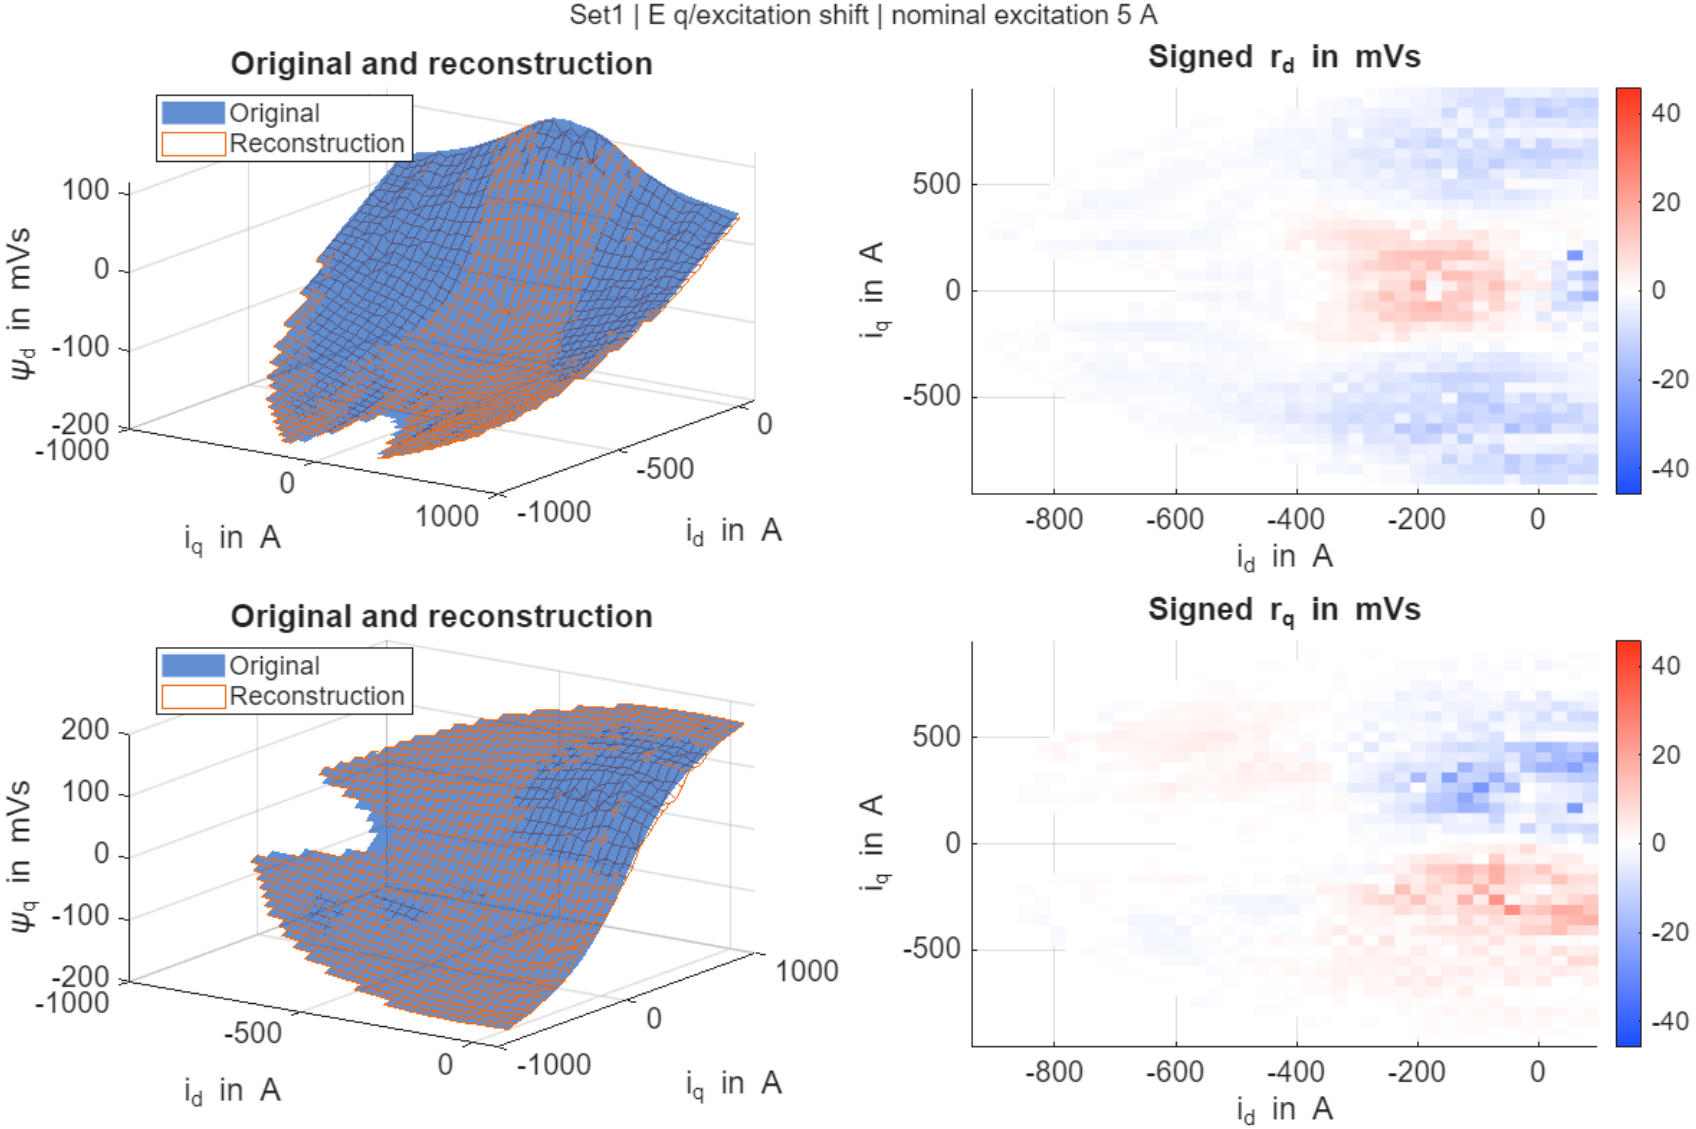

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method F, excitation 5 A

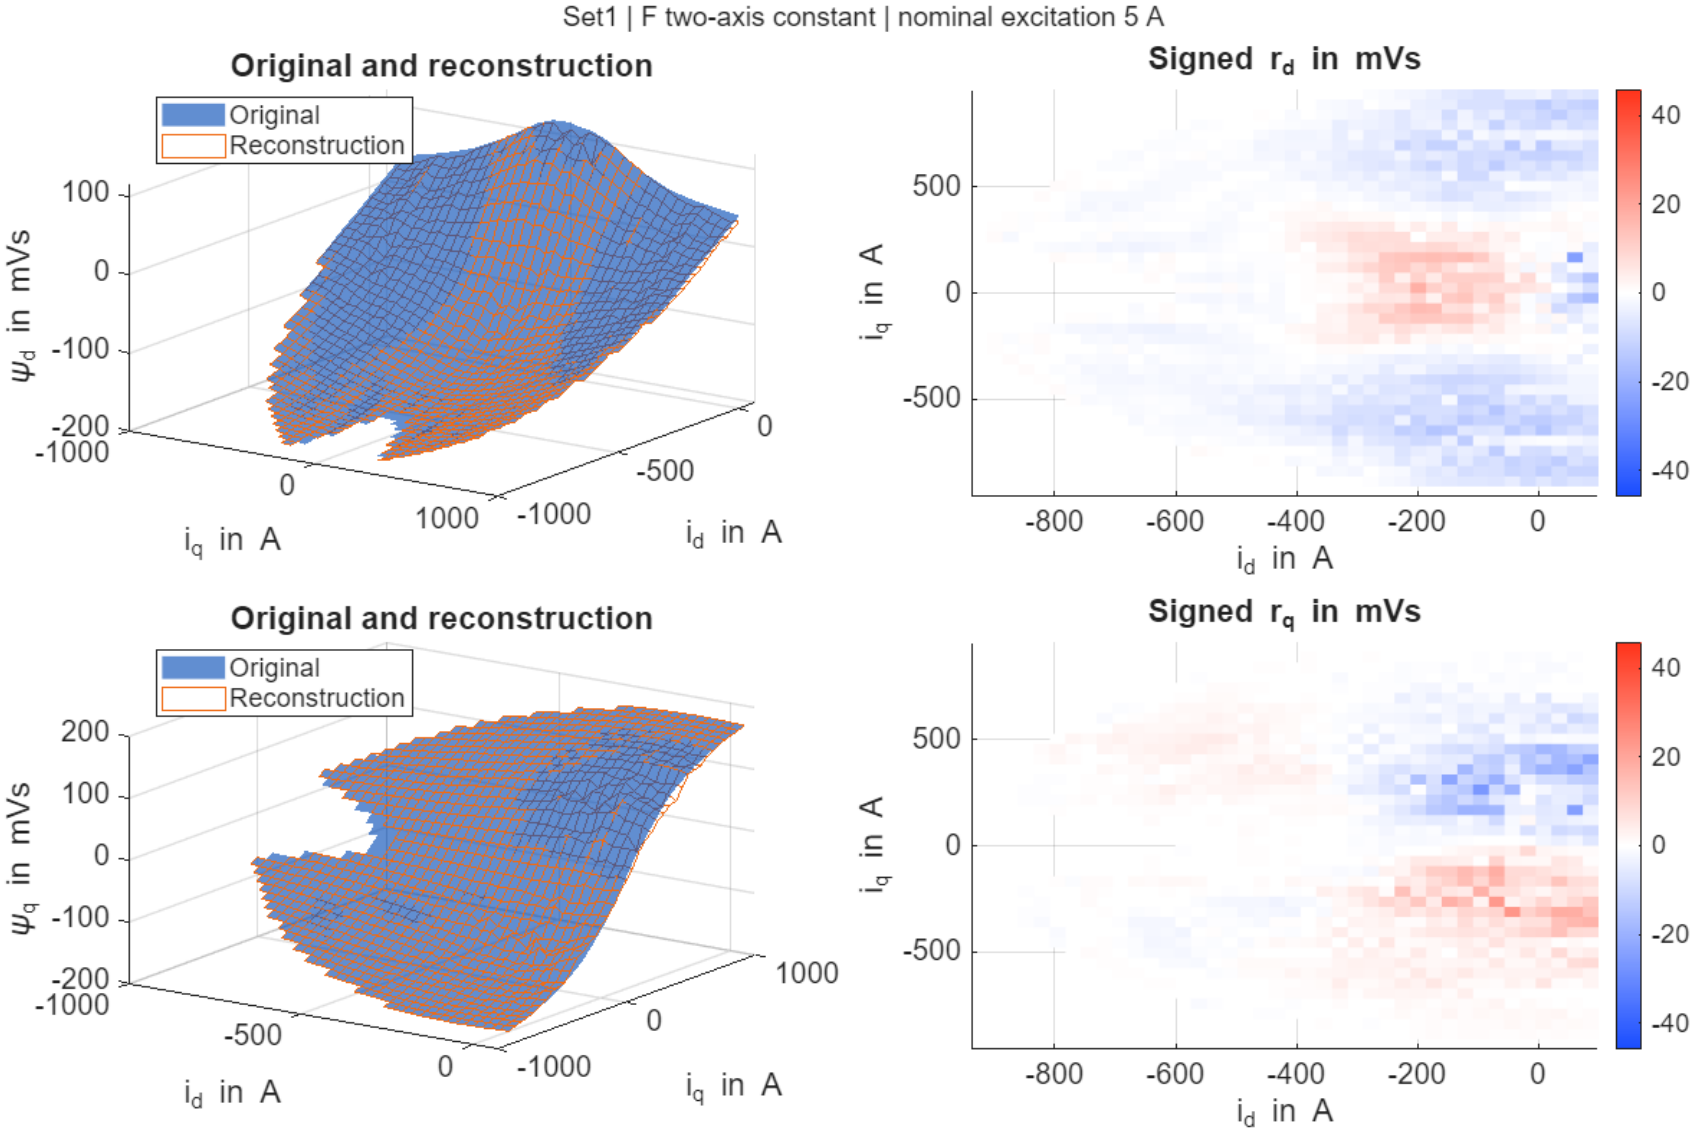

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method G, excitation 5 A

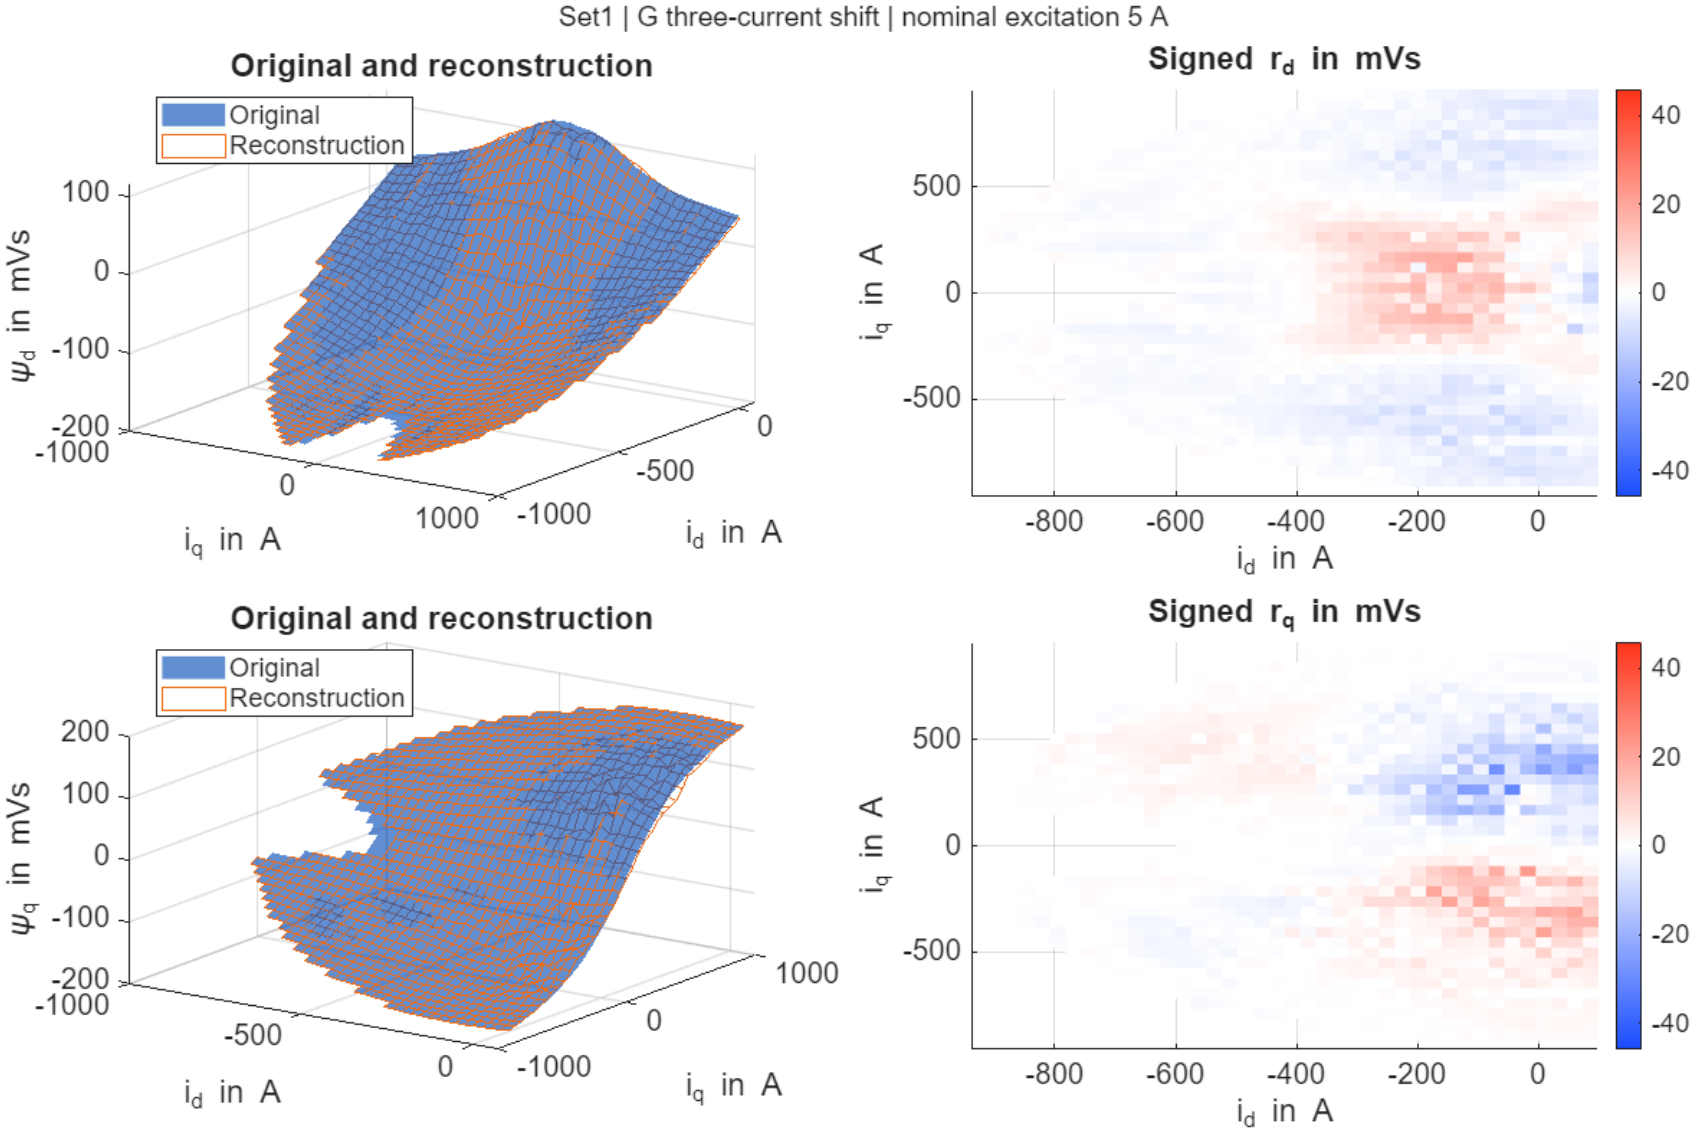

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method H, excitation 5 A

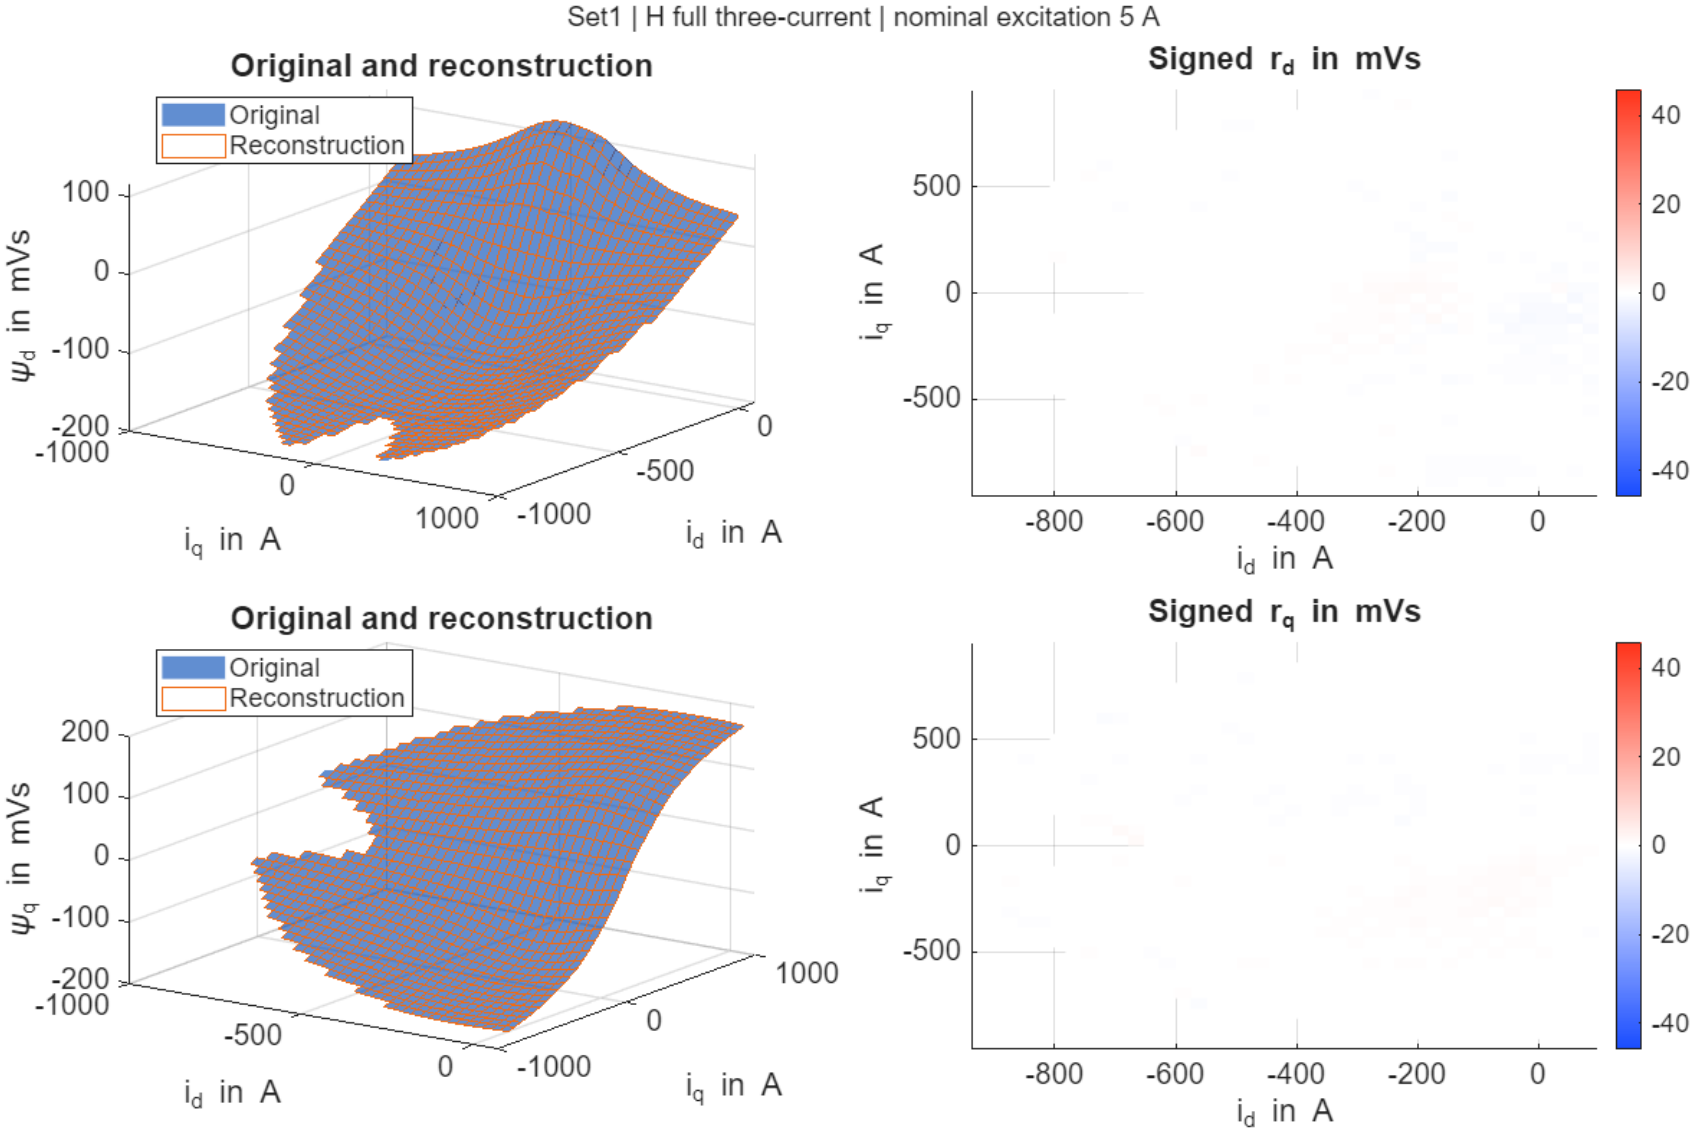

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method A, excitation 8 A

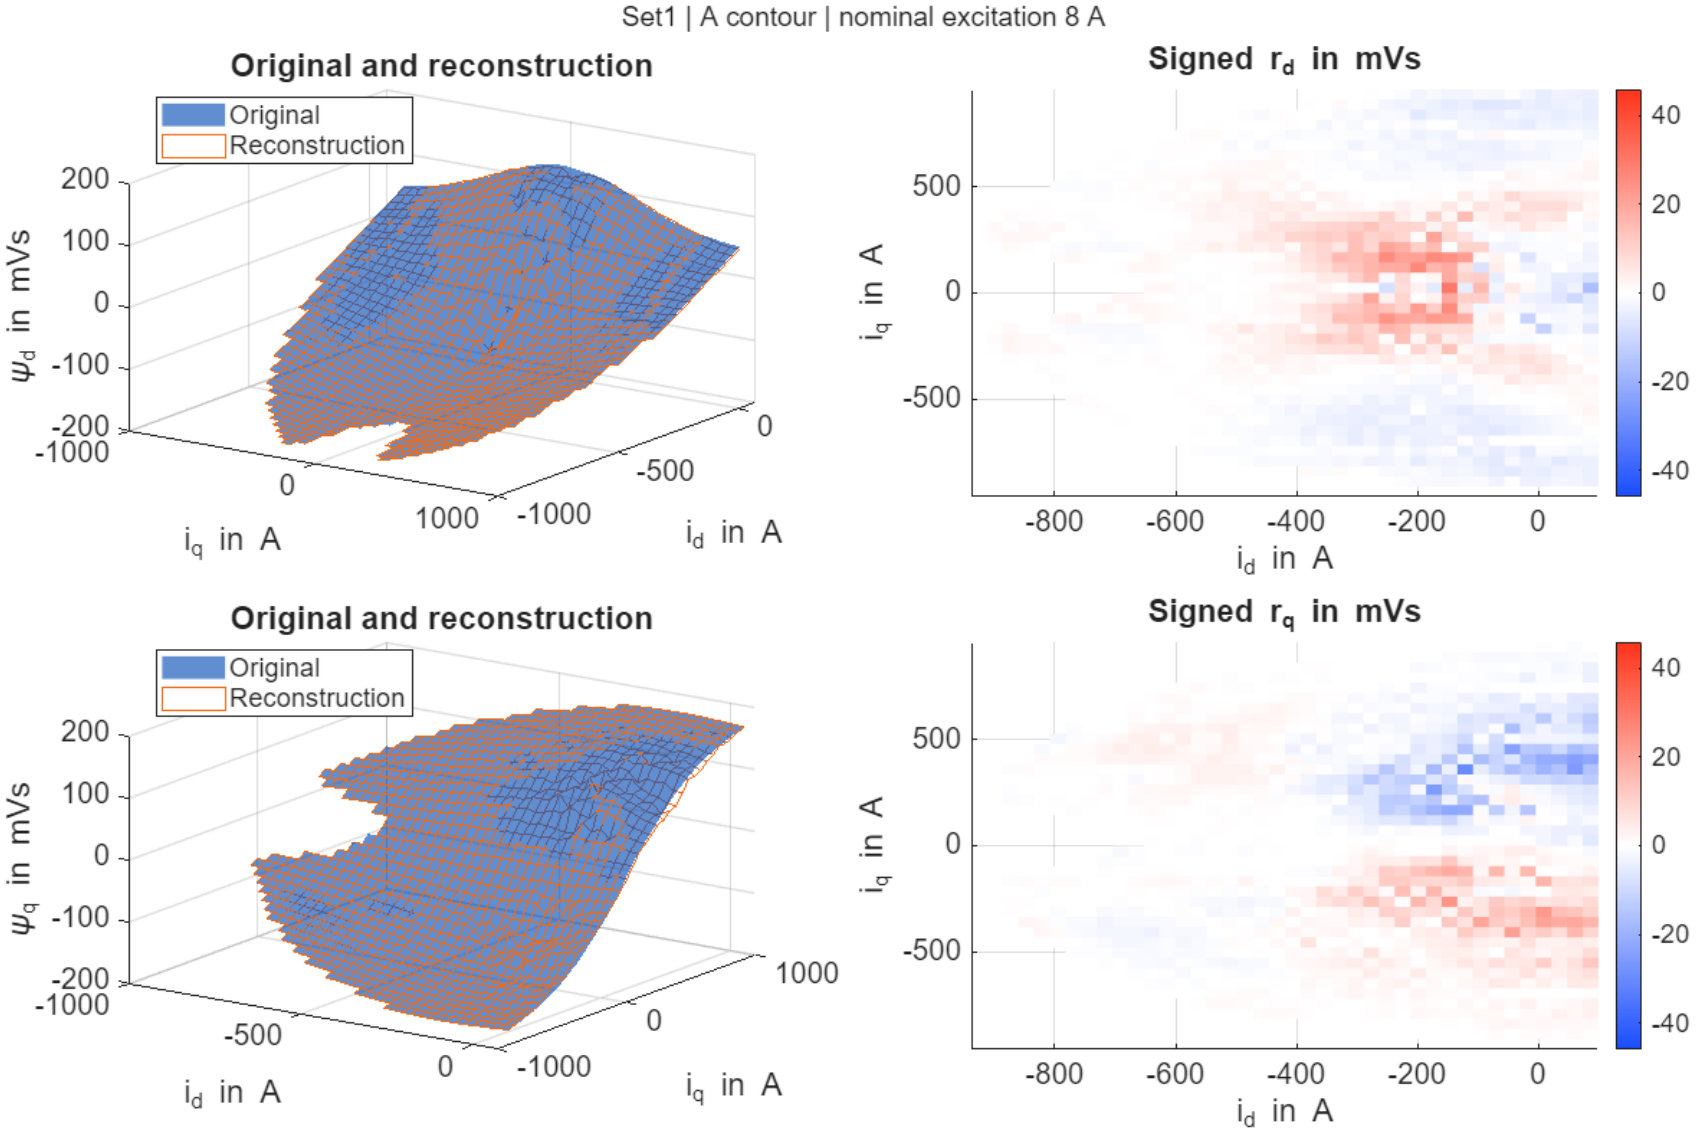

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method B, excitation 8 A

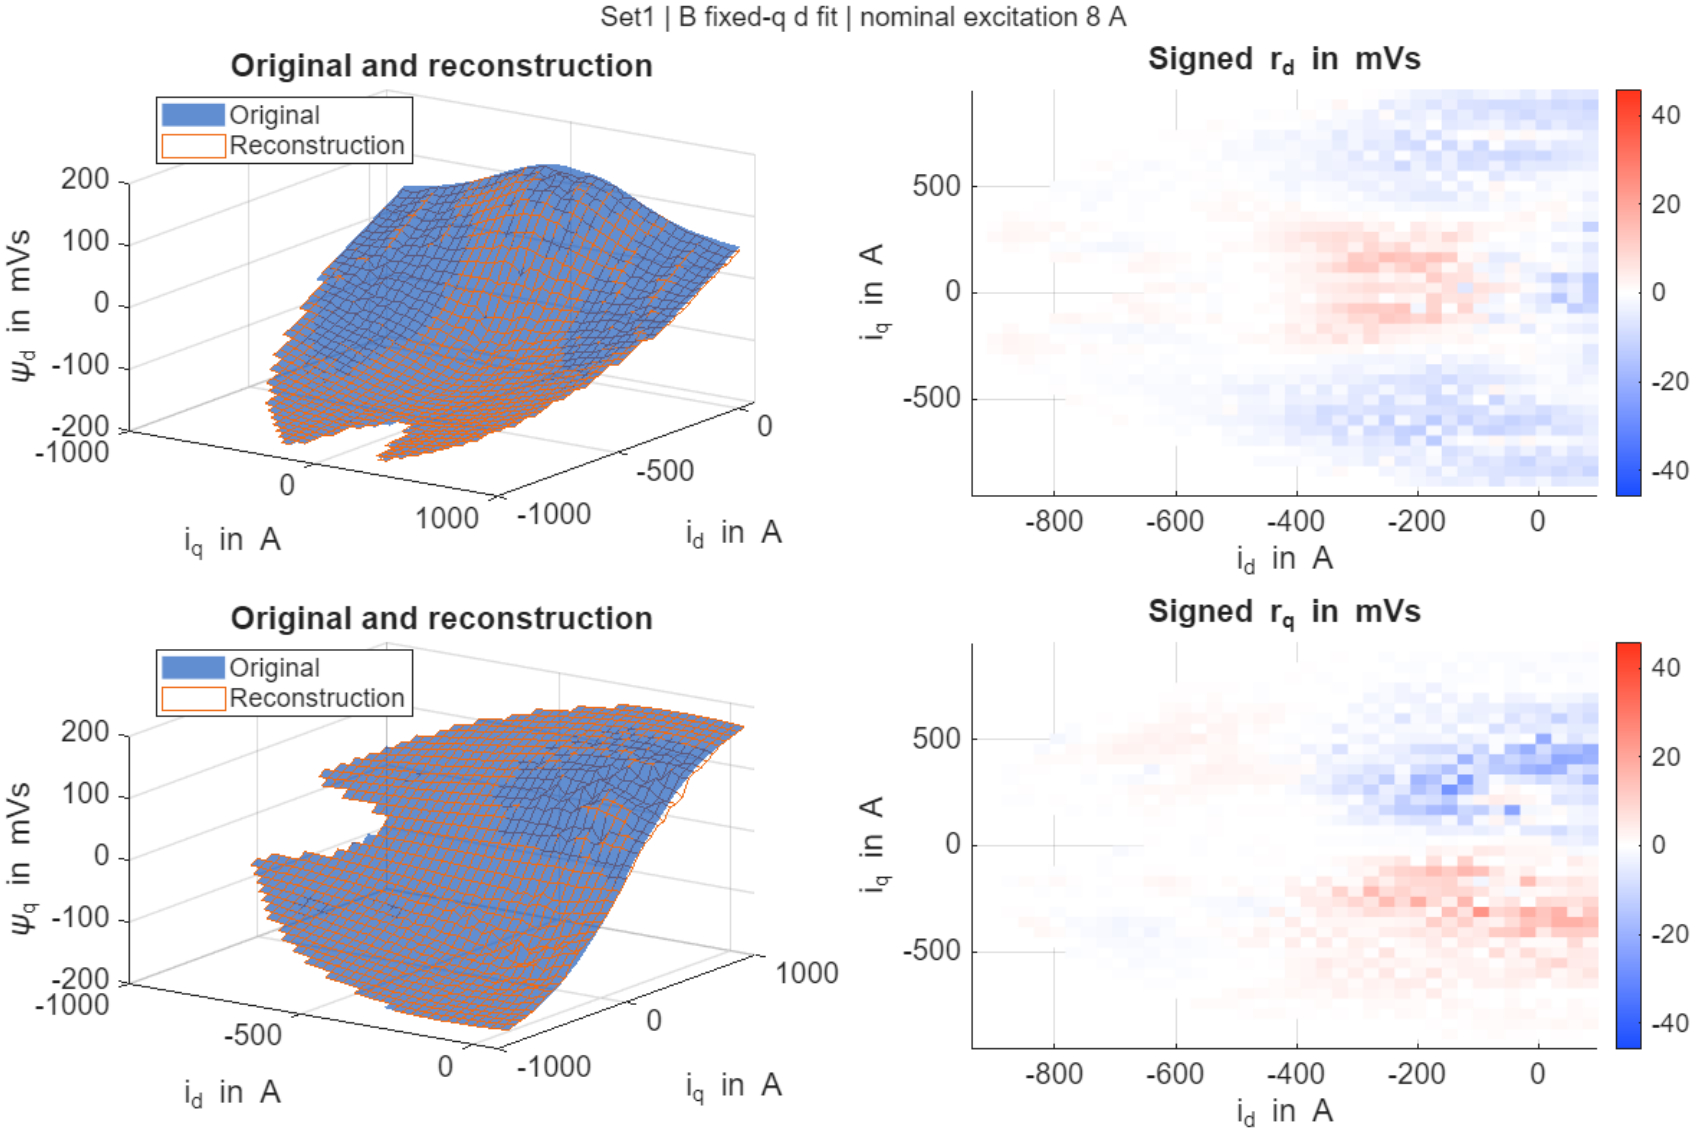

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method C, excitation 8 A

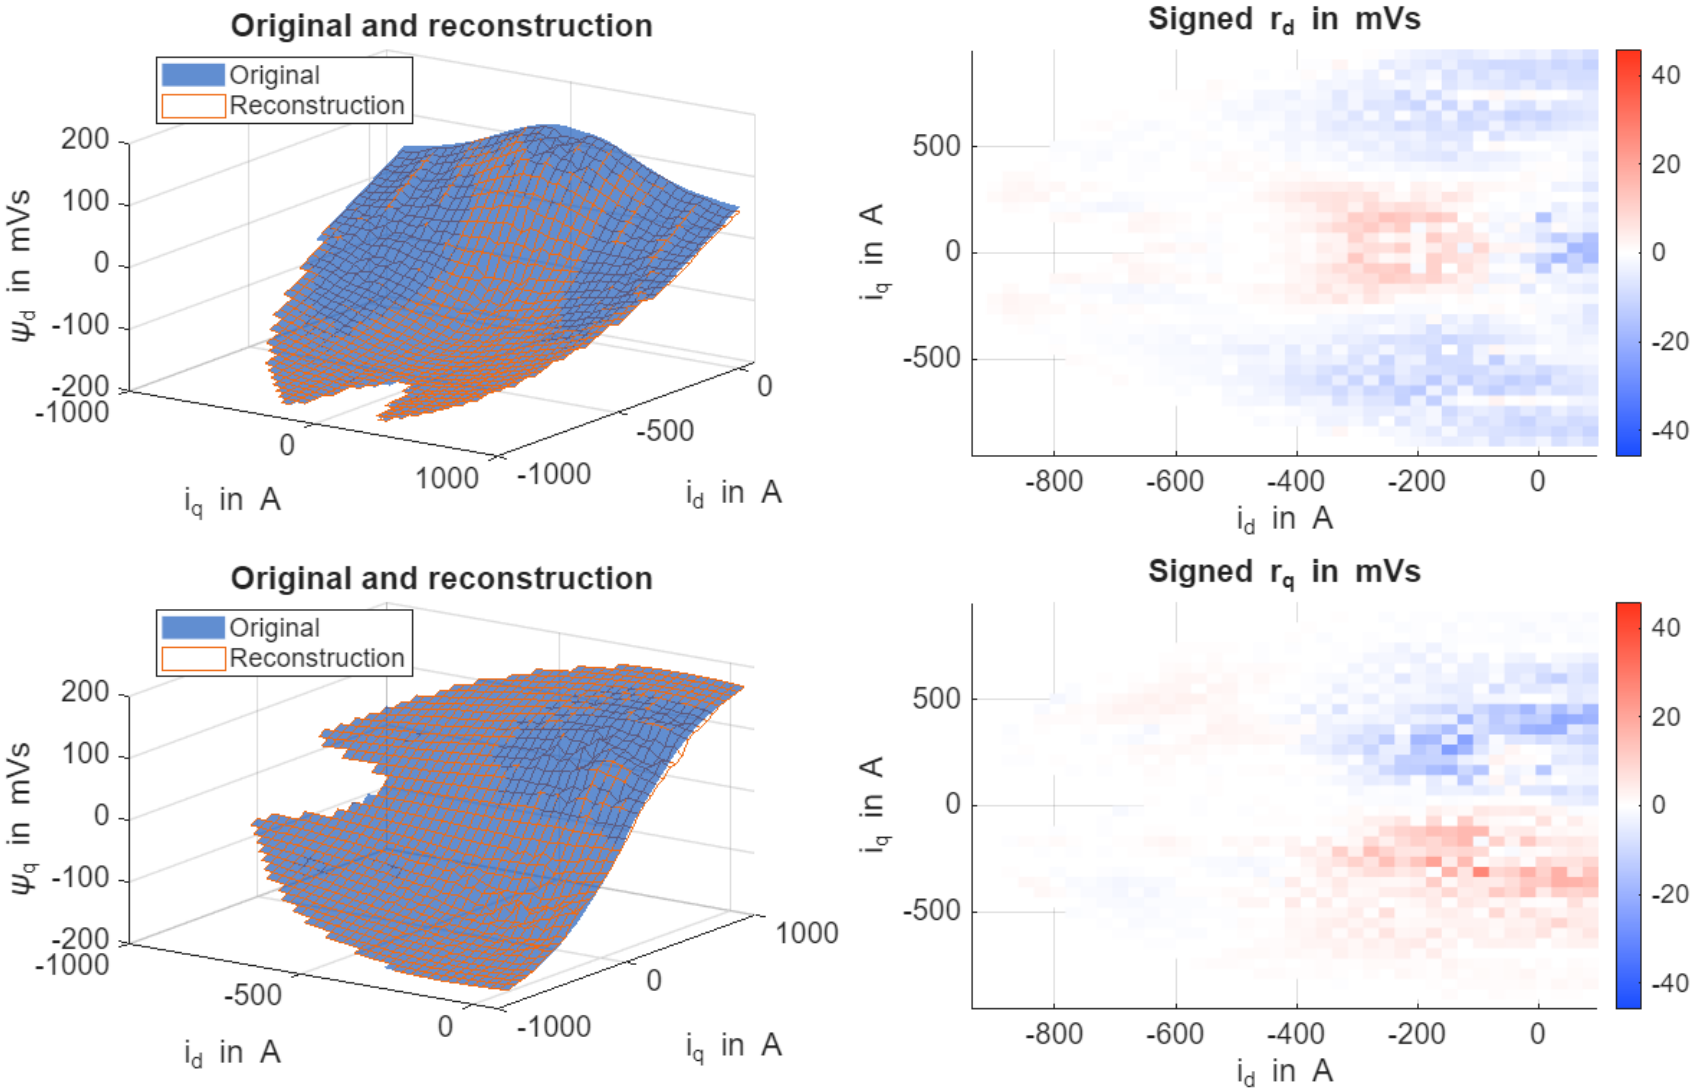

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method D, excitation 8 A

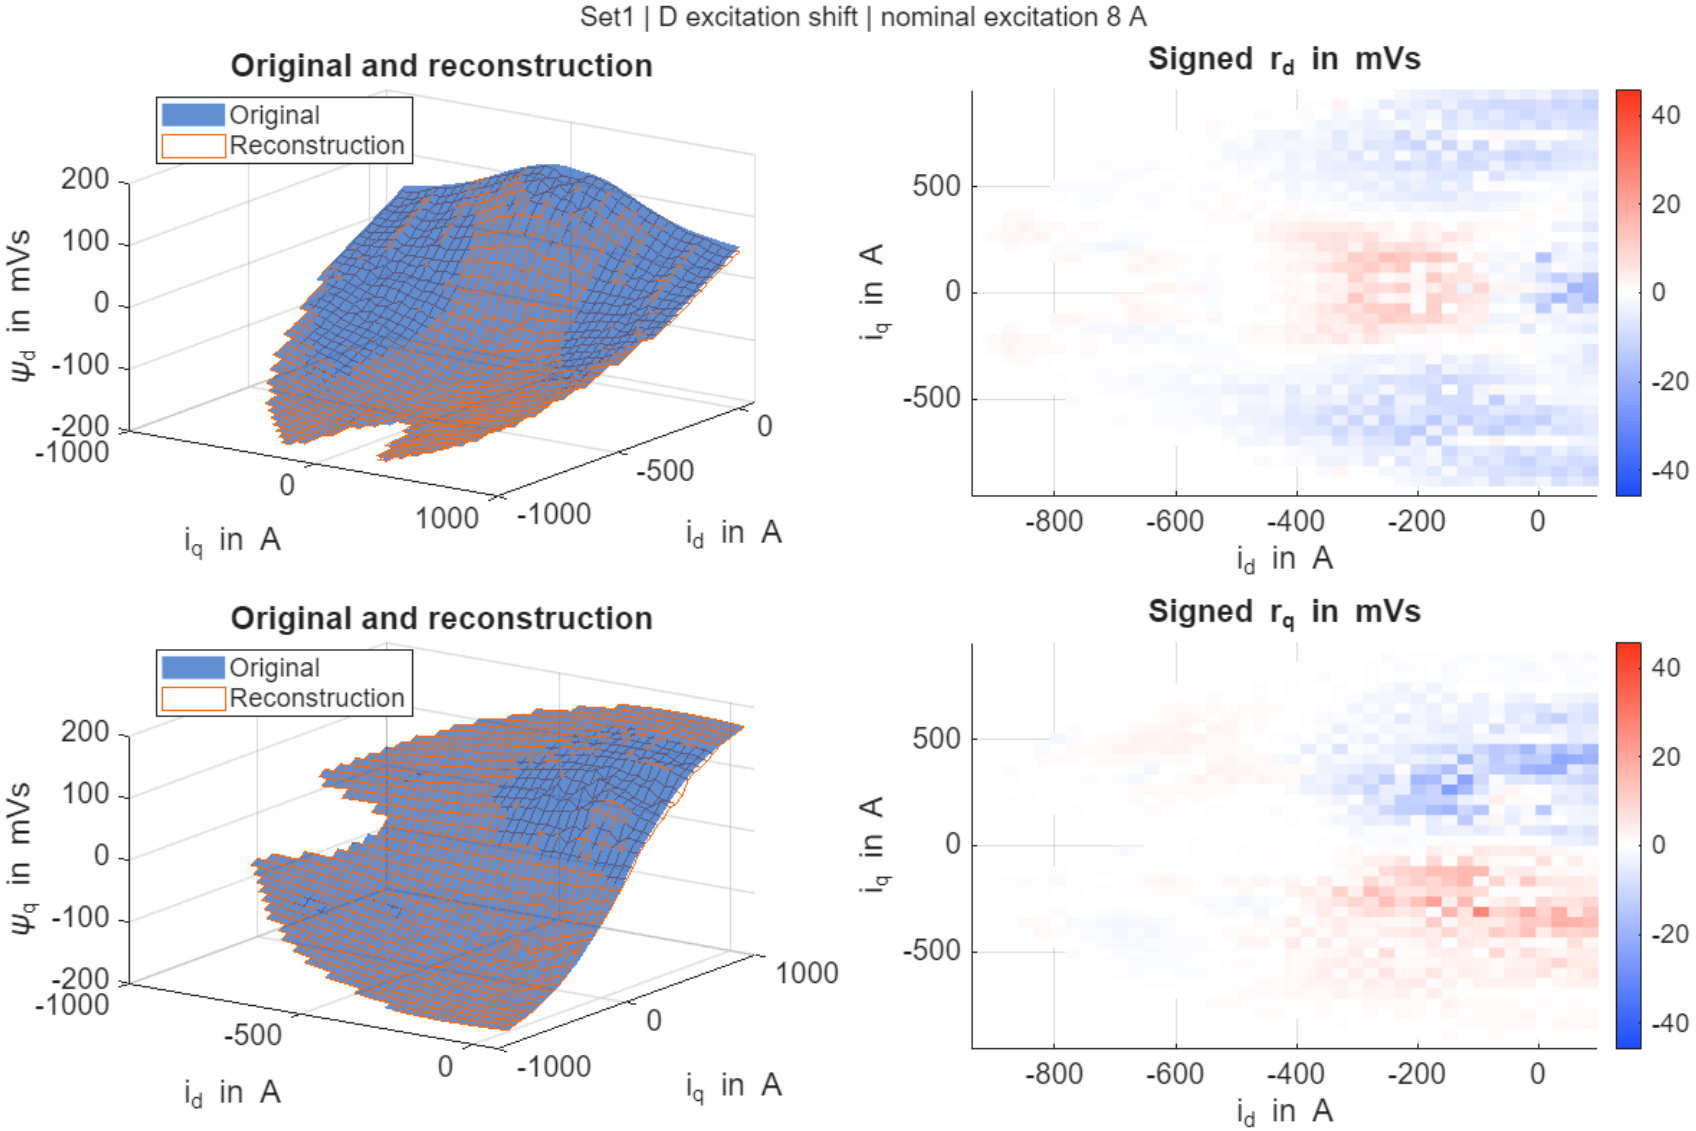

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method E, excitation 8 A

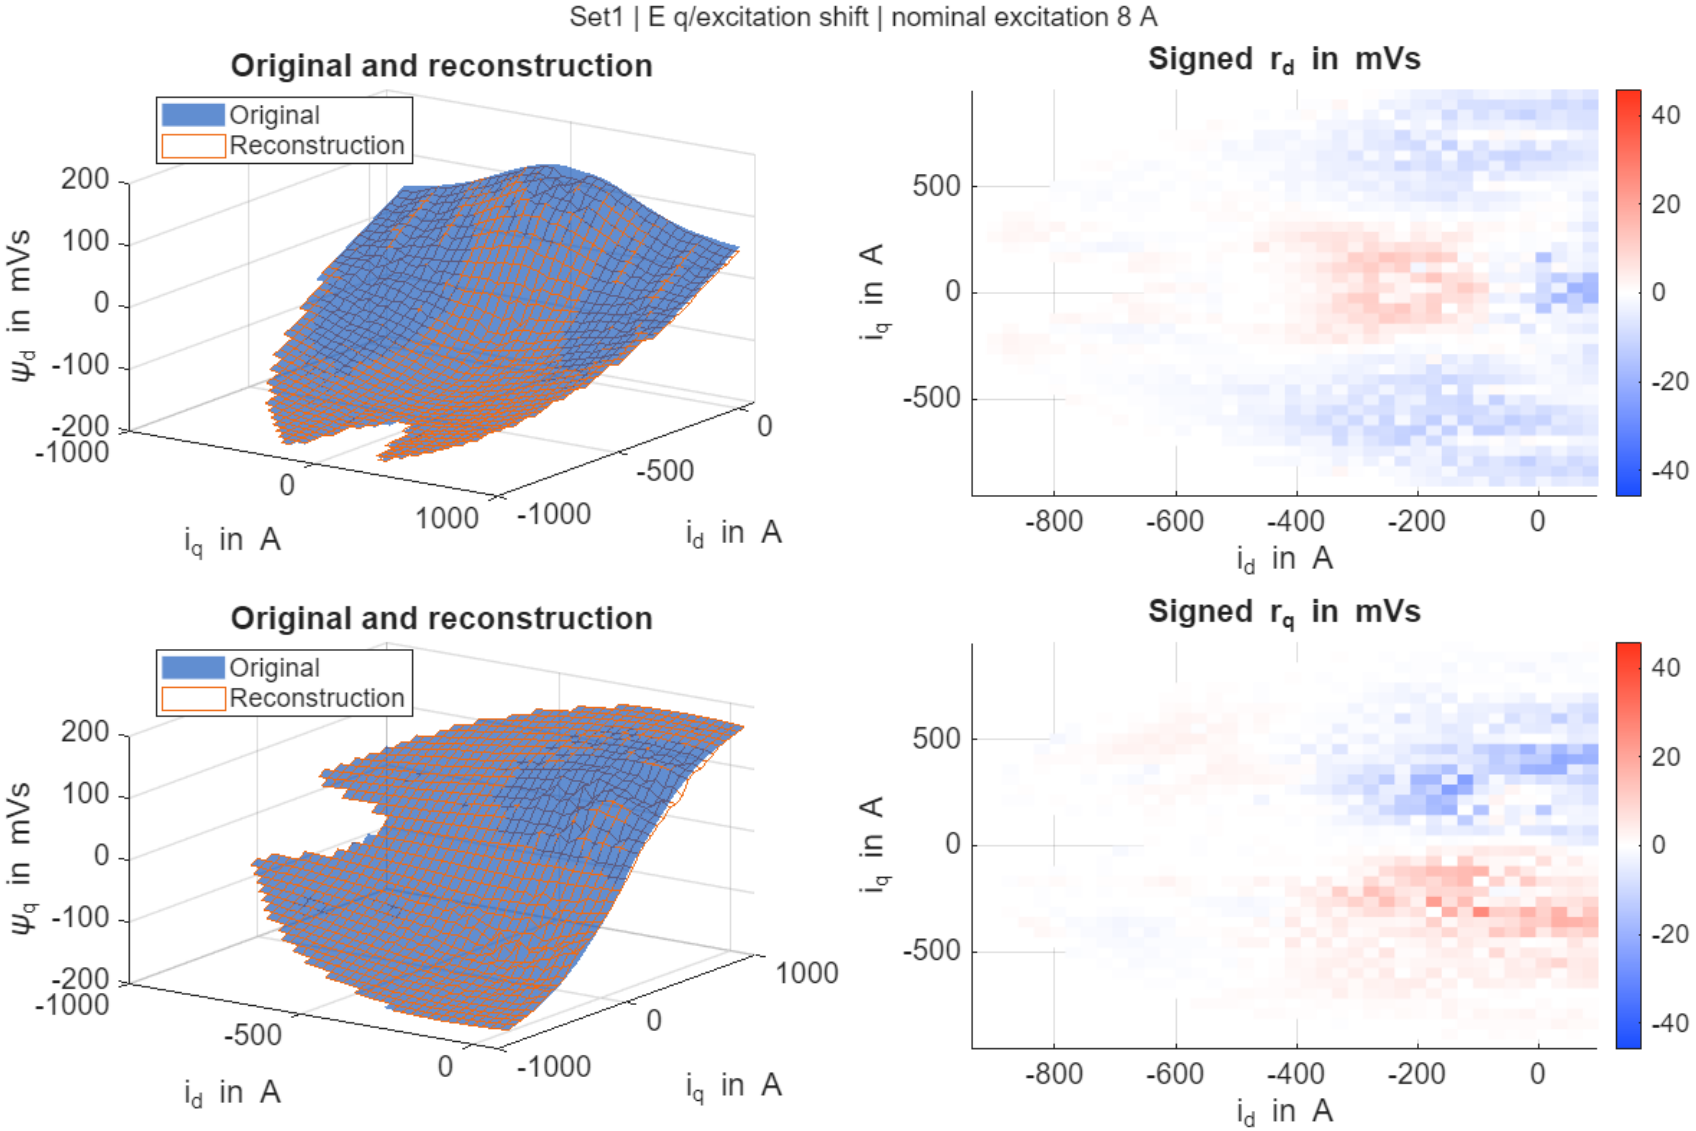

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method F, excitation 8 A

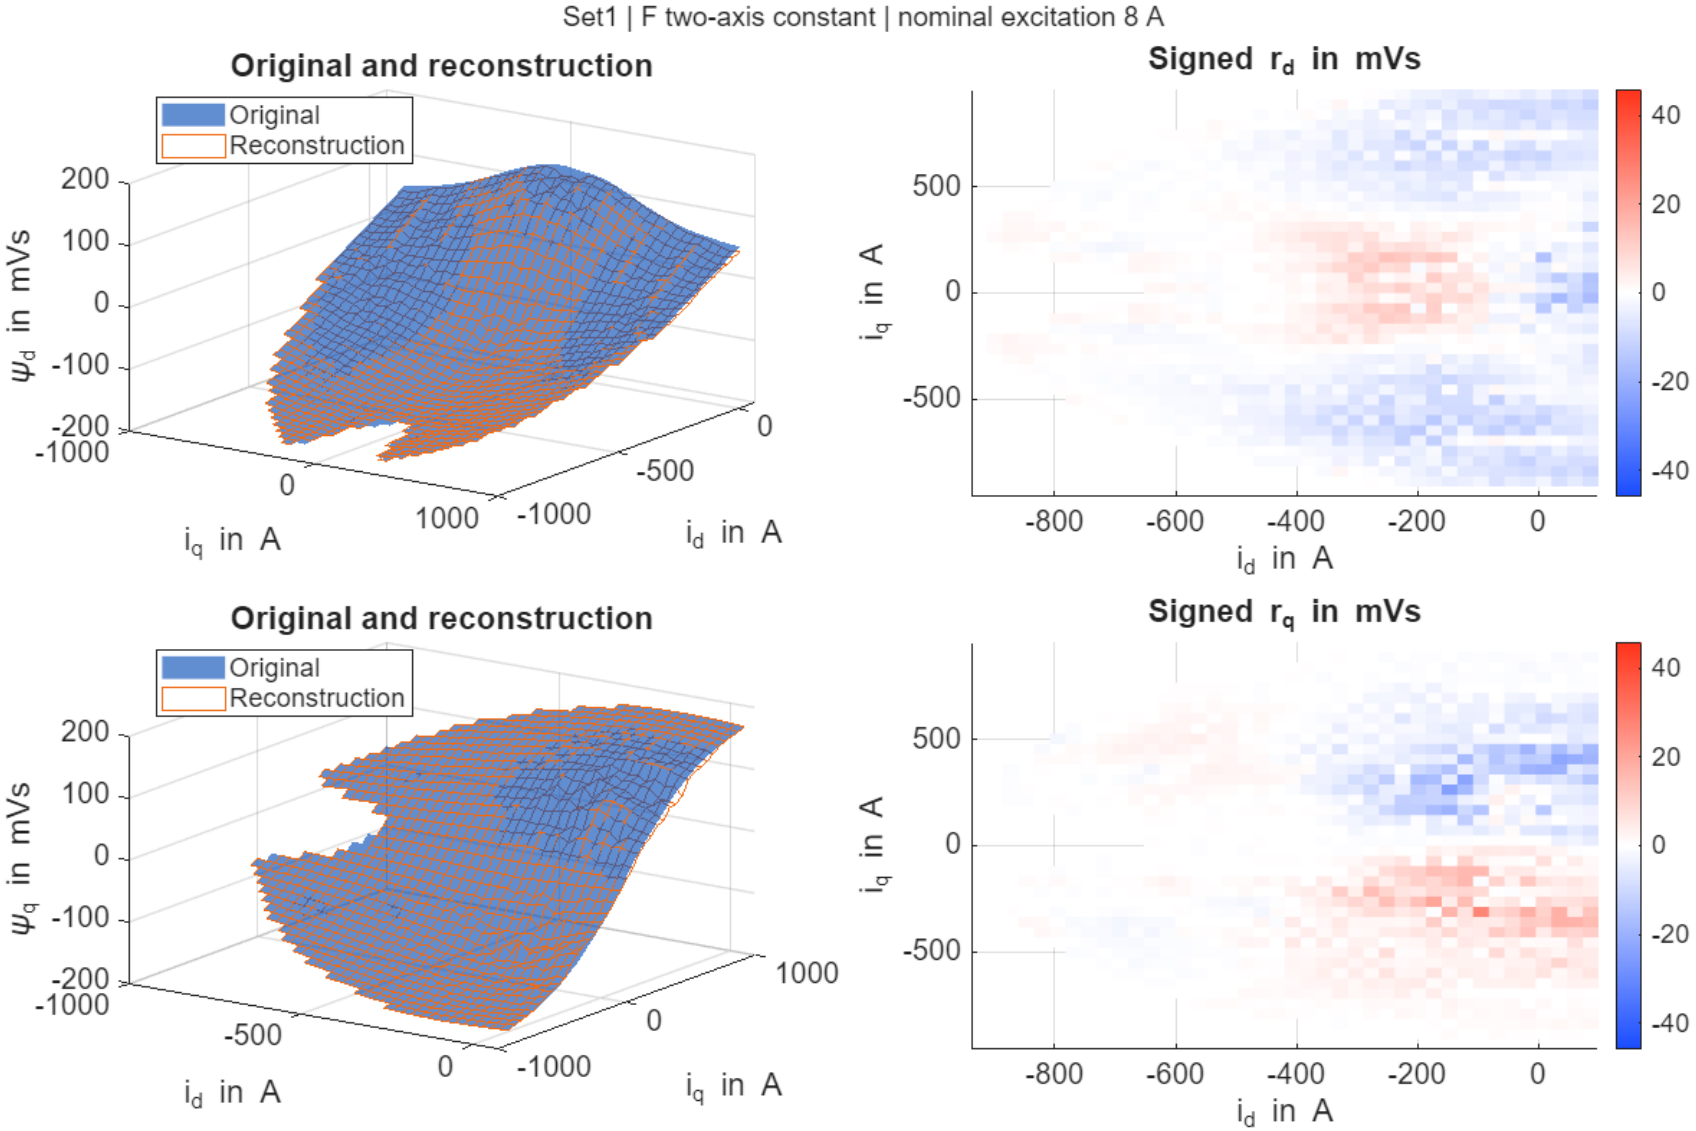

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method G, excitation 8 A

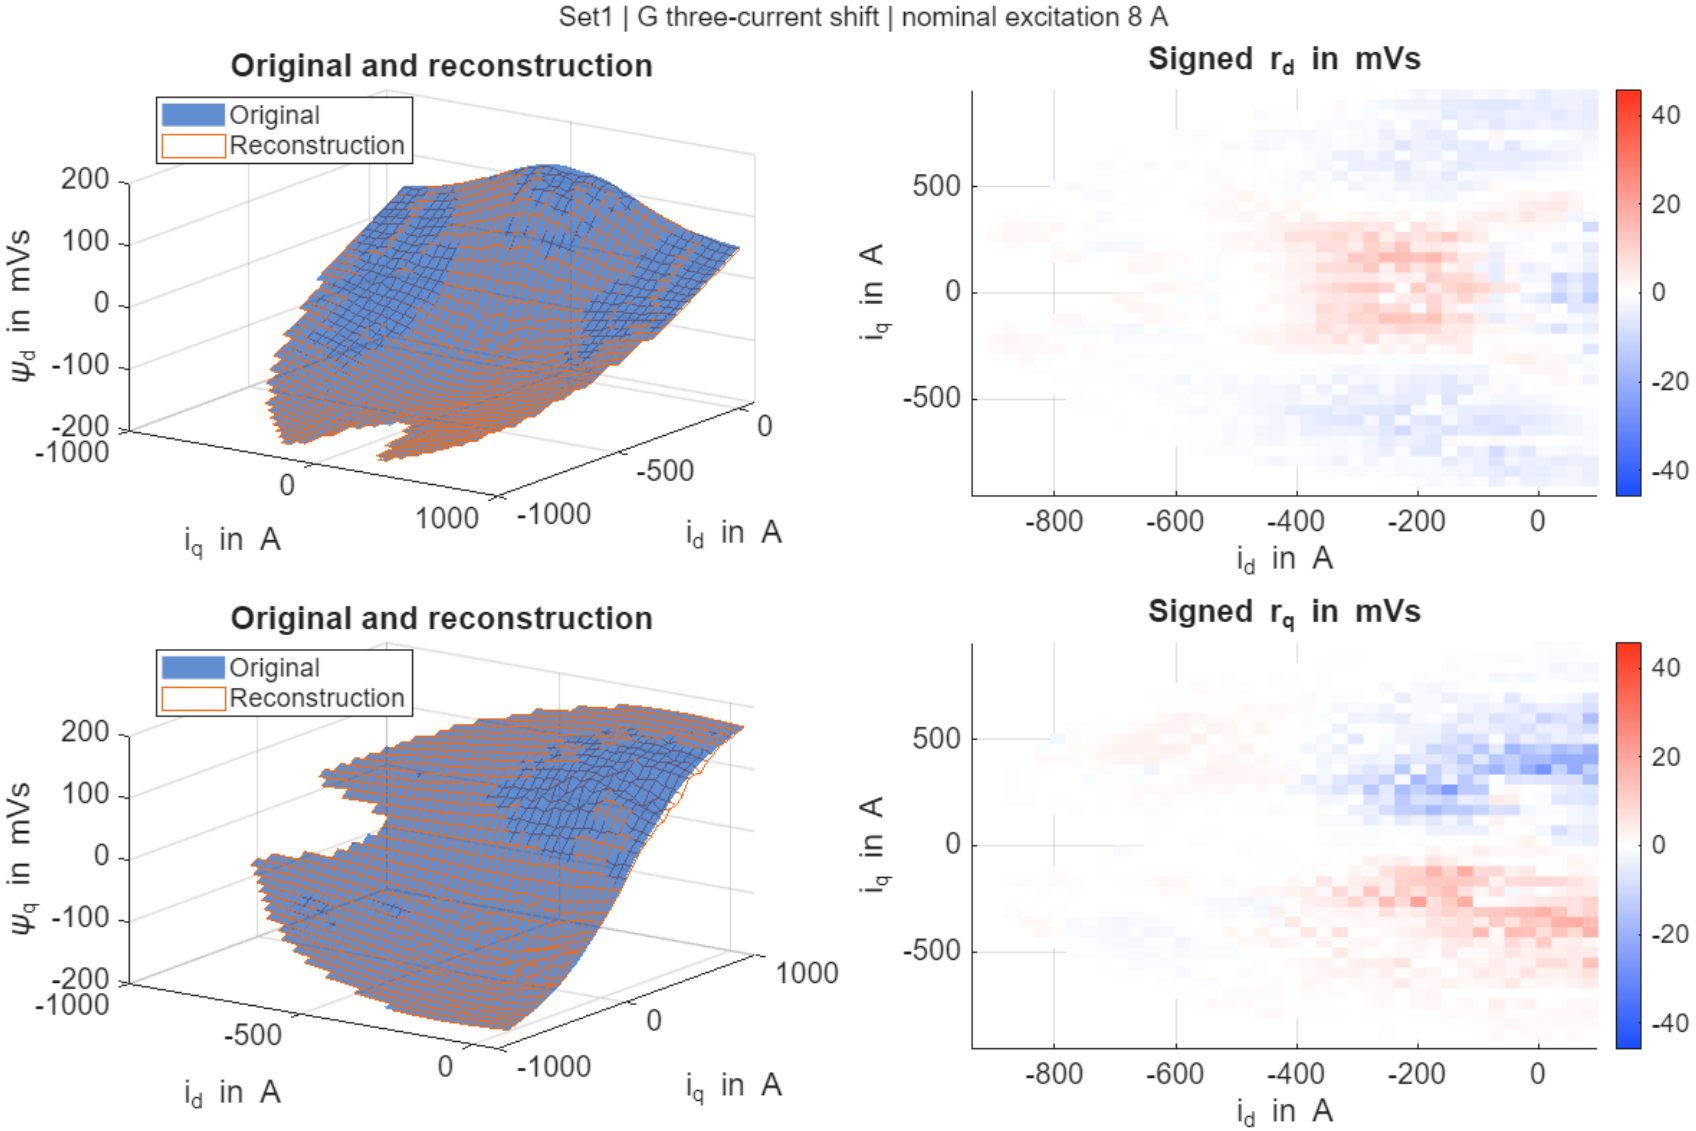

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method H, excitation 8 A

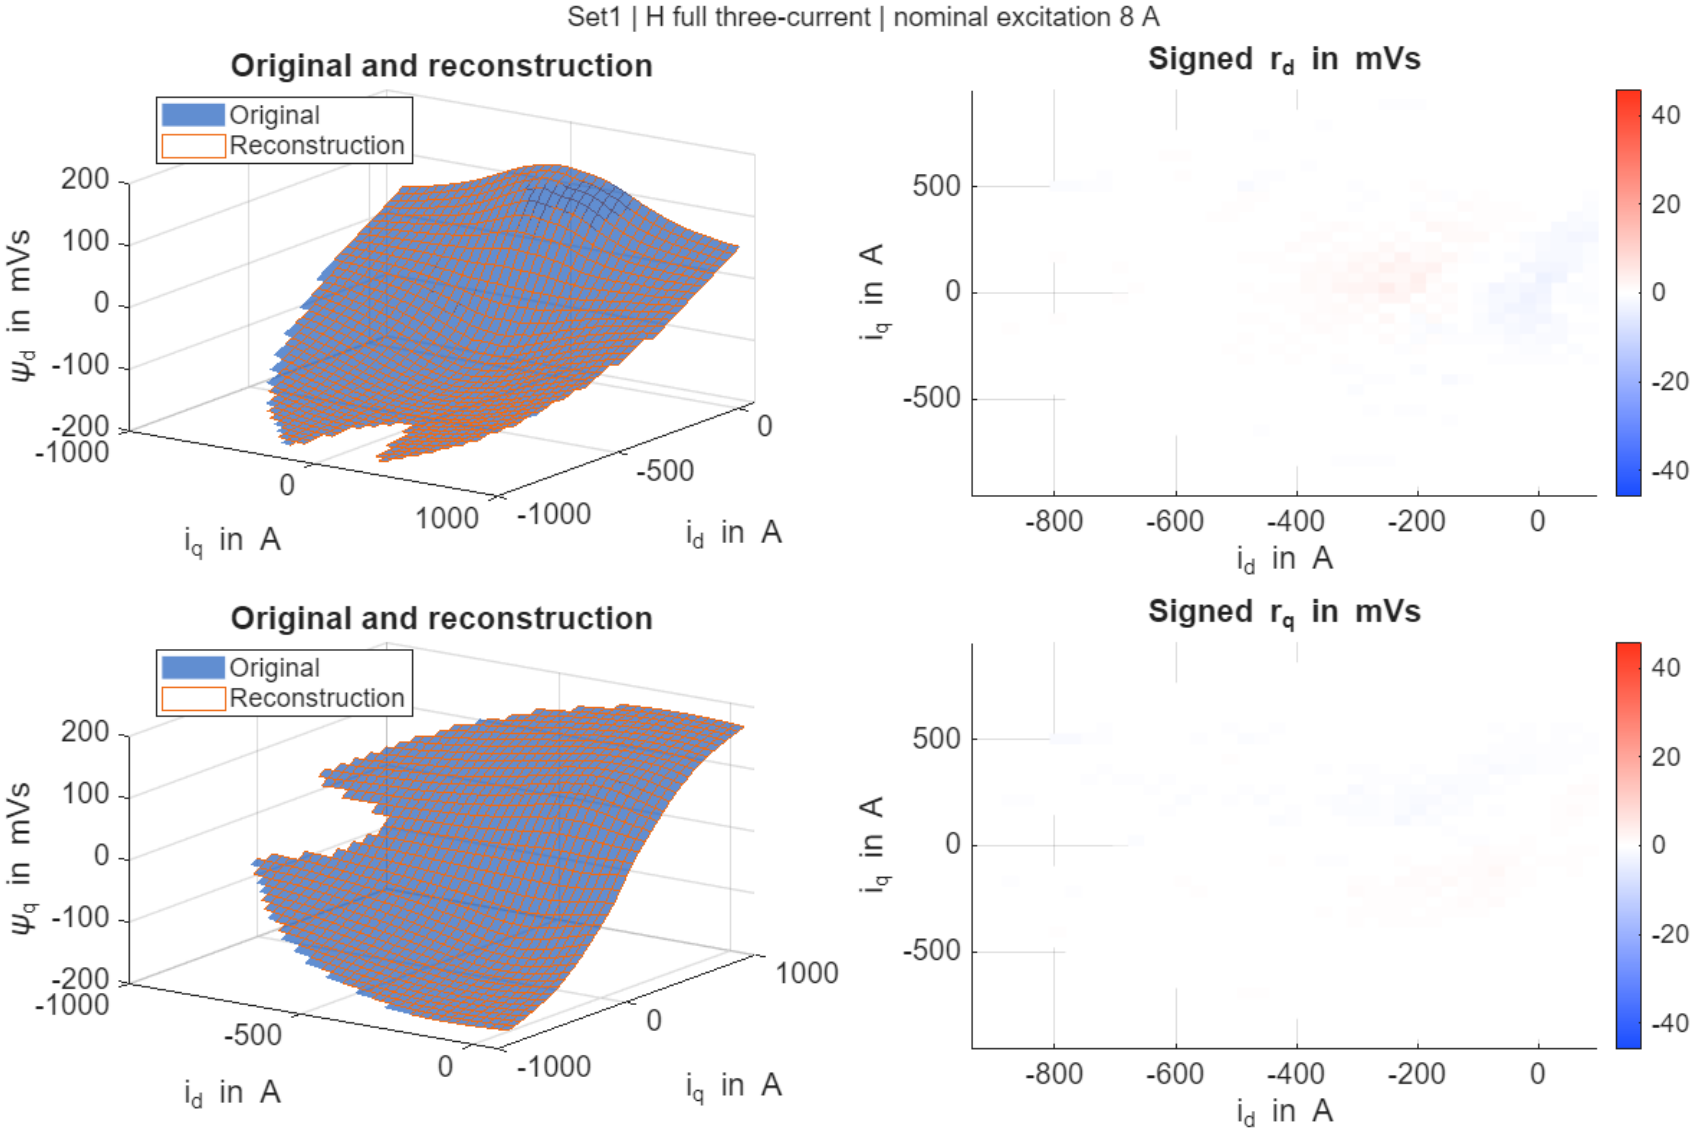

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method A, excitation 11 A

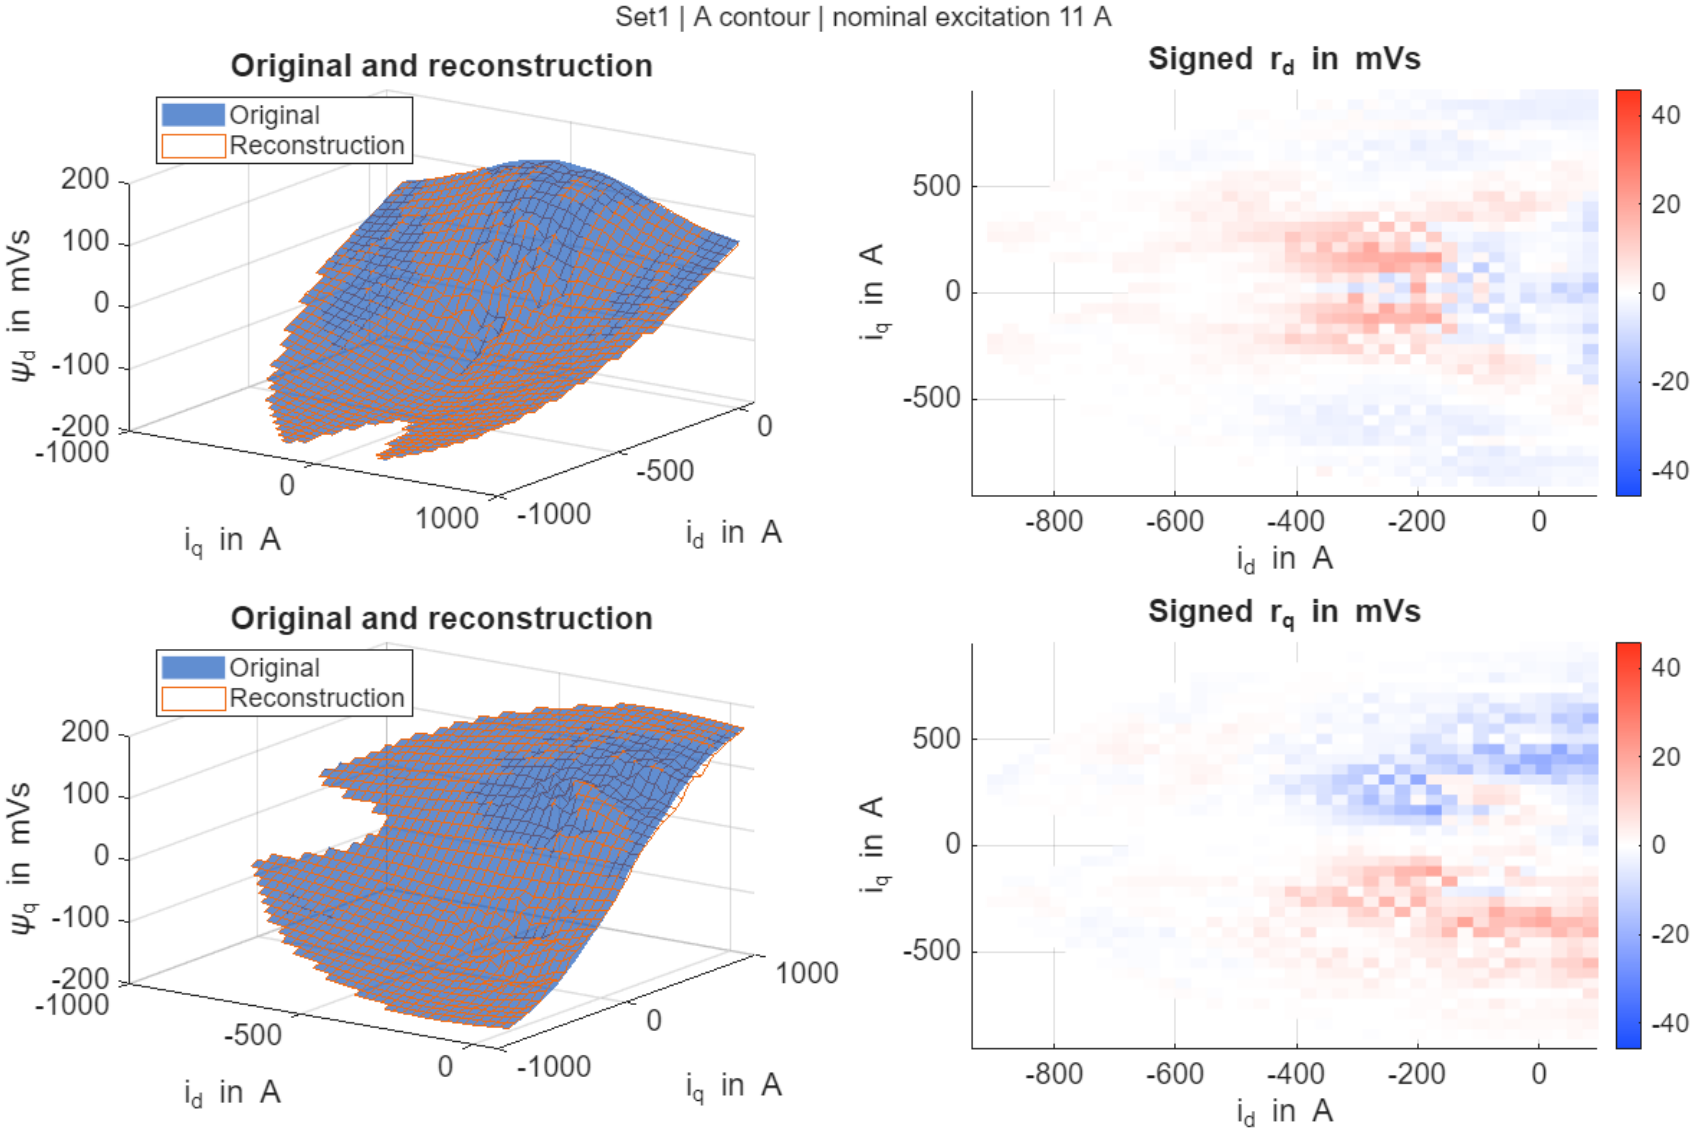

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method B, excitation 11 A

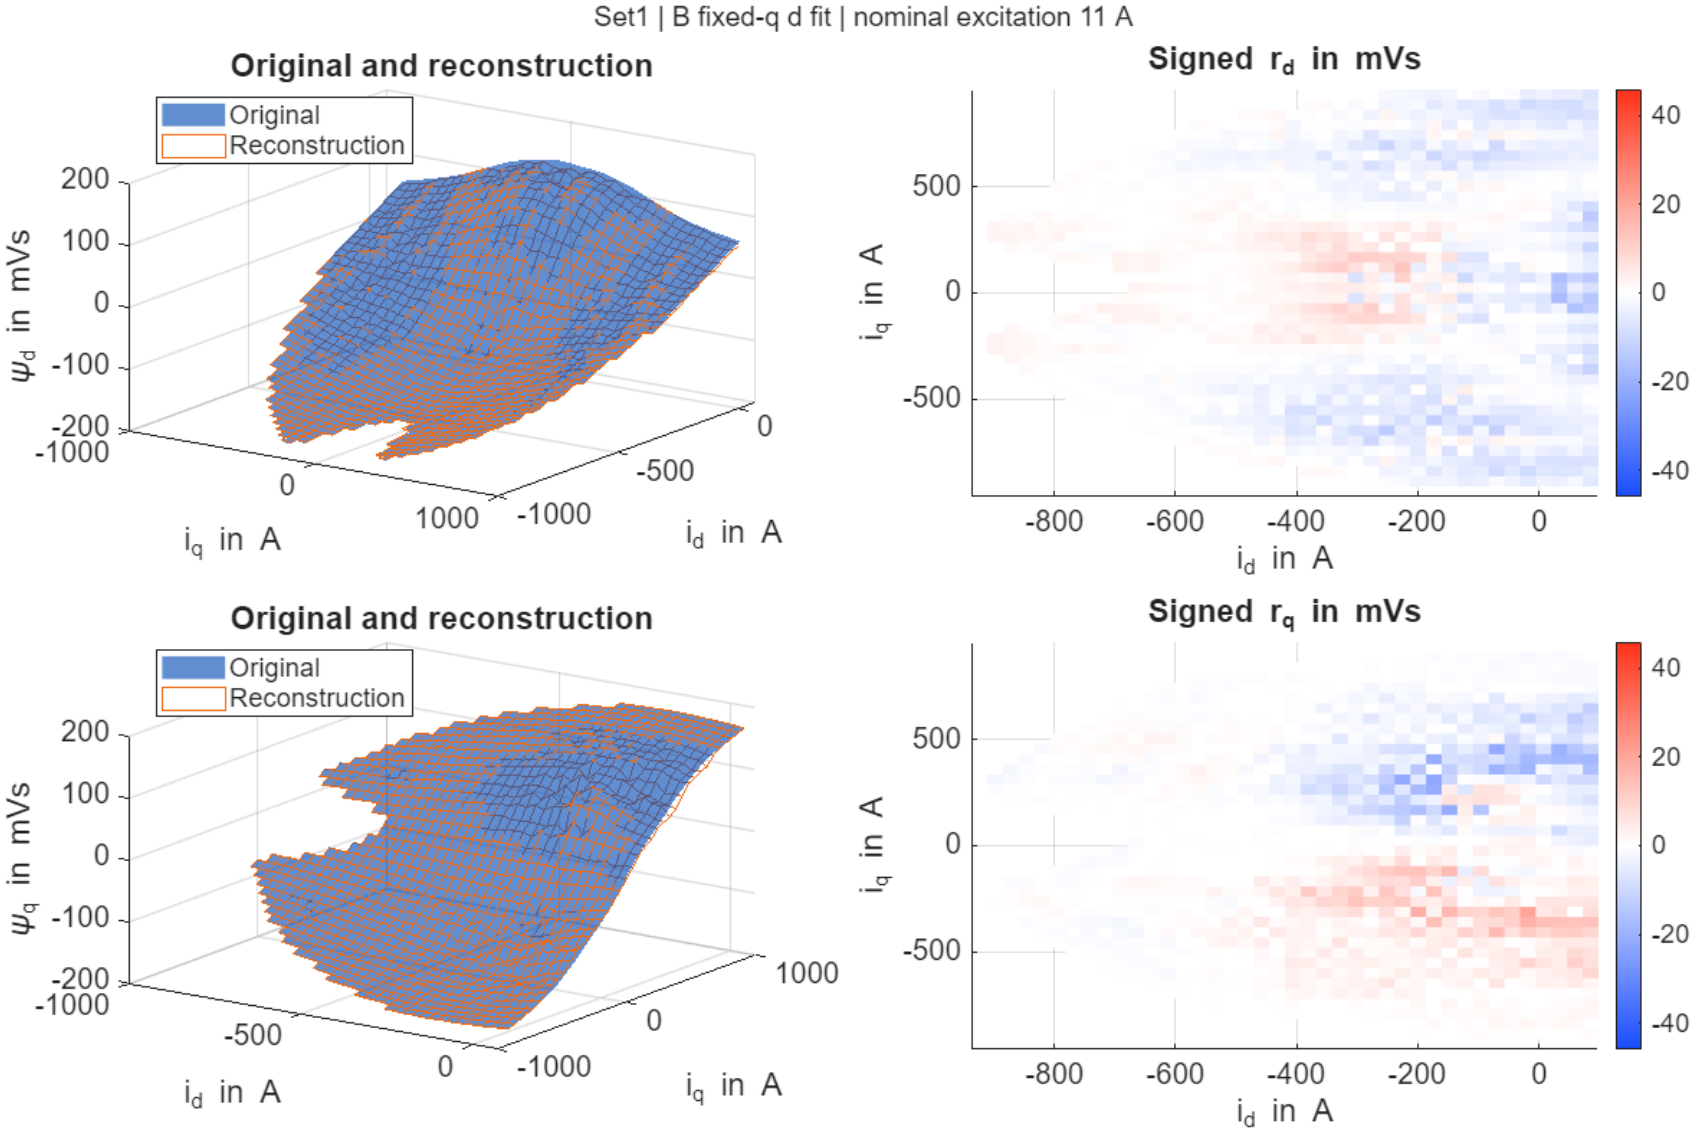

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method C, excitation 11 A

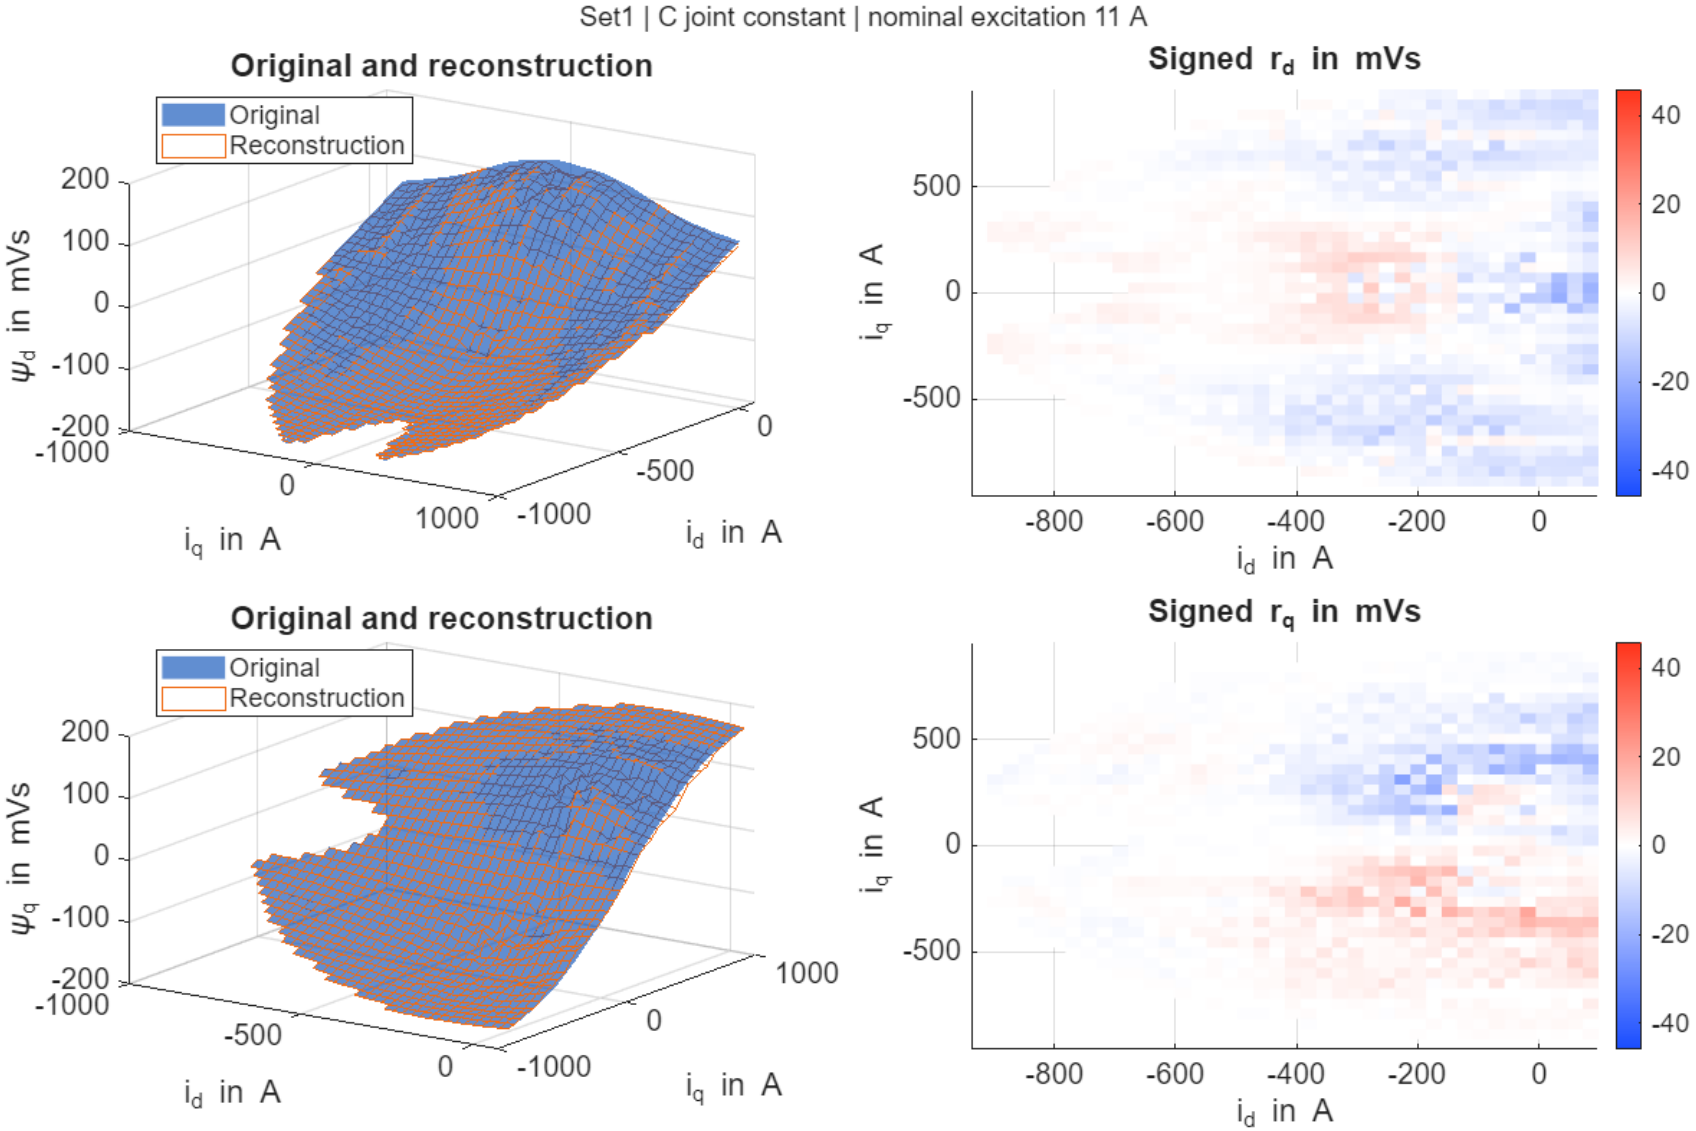

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method D, excitation 11 A

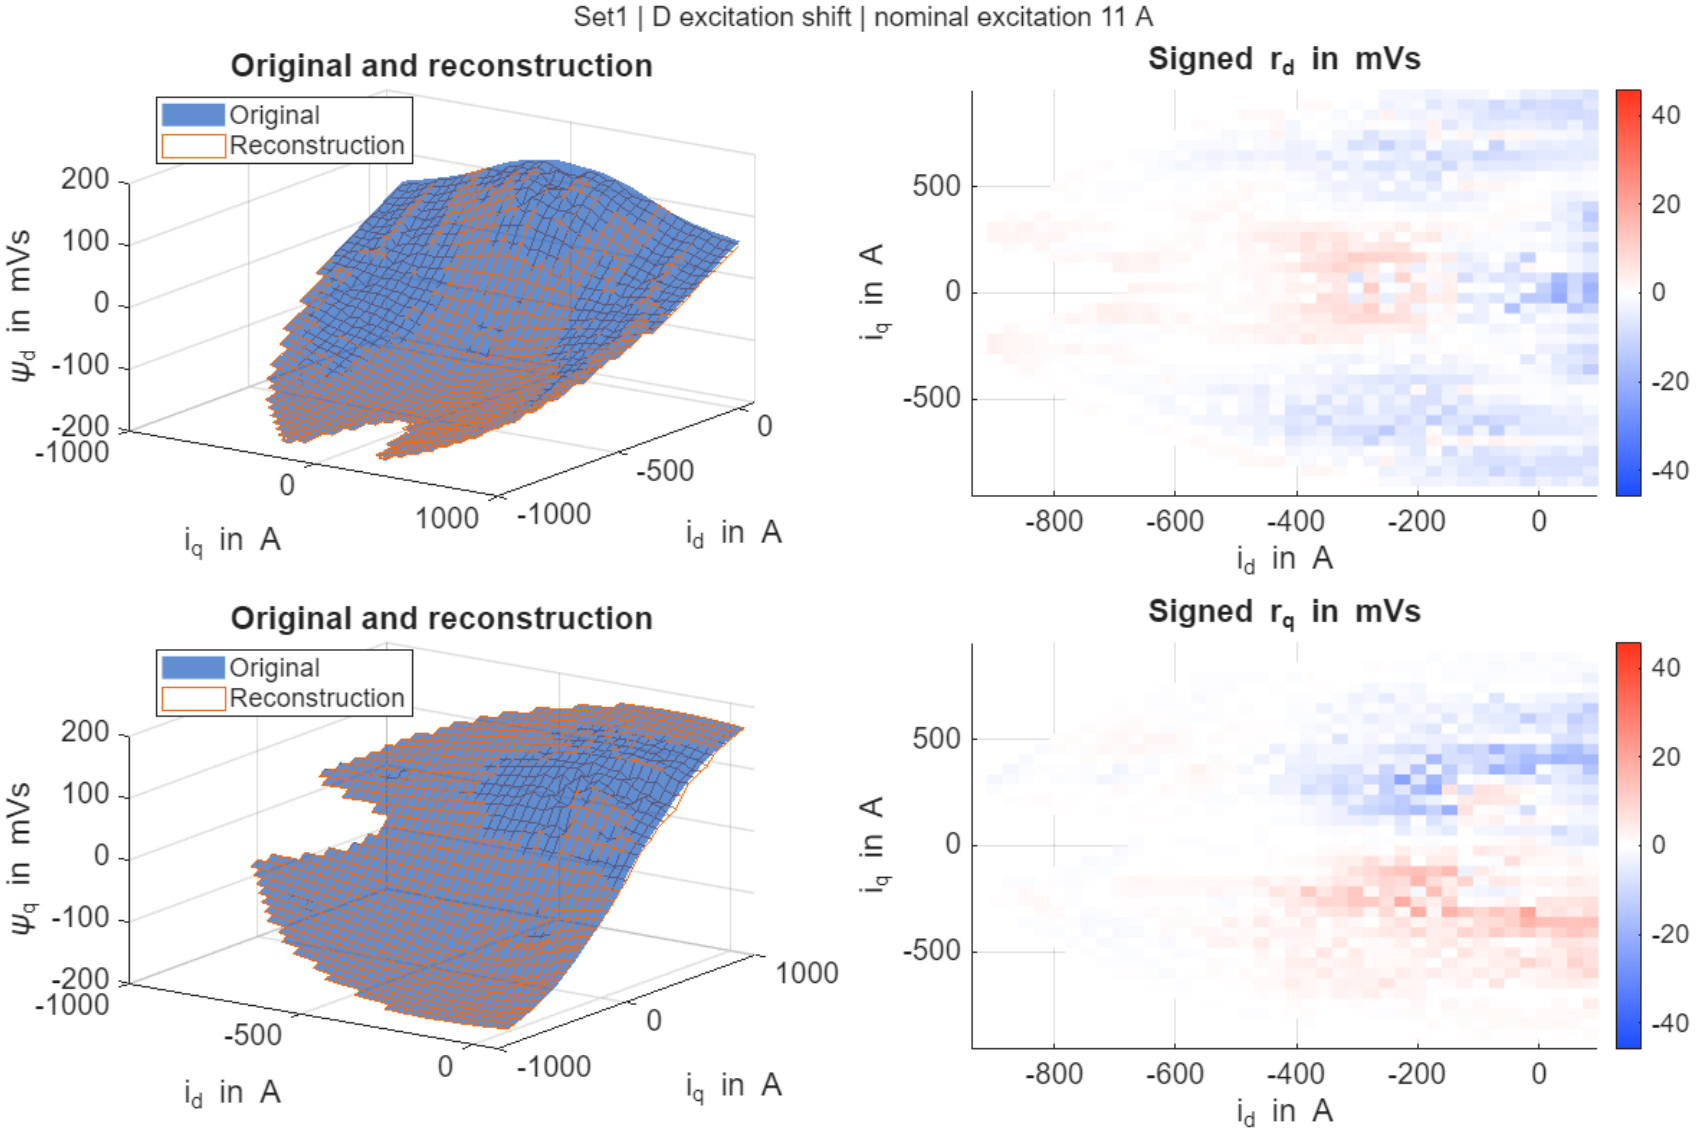

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method E, excitation 11 A

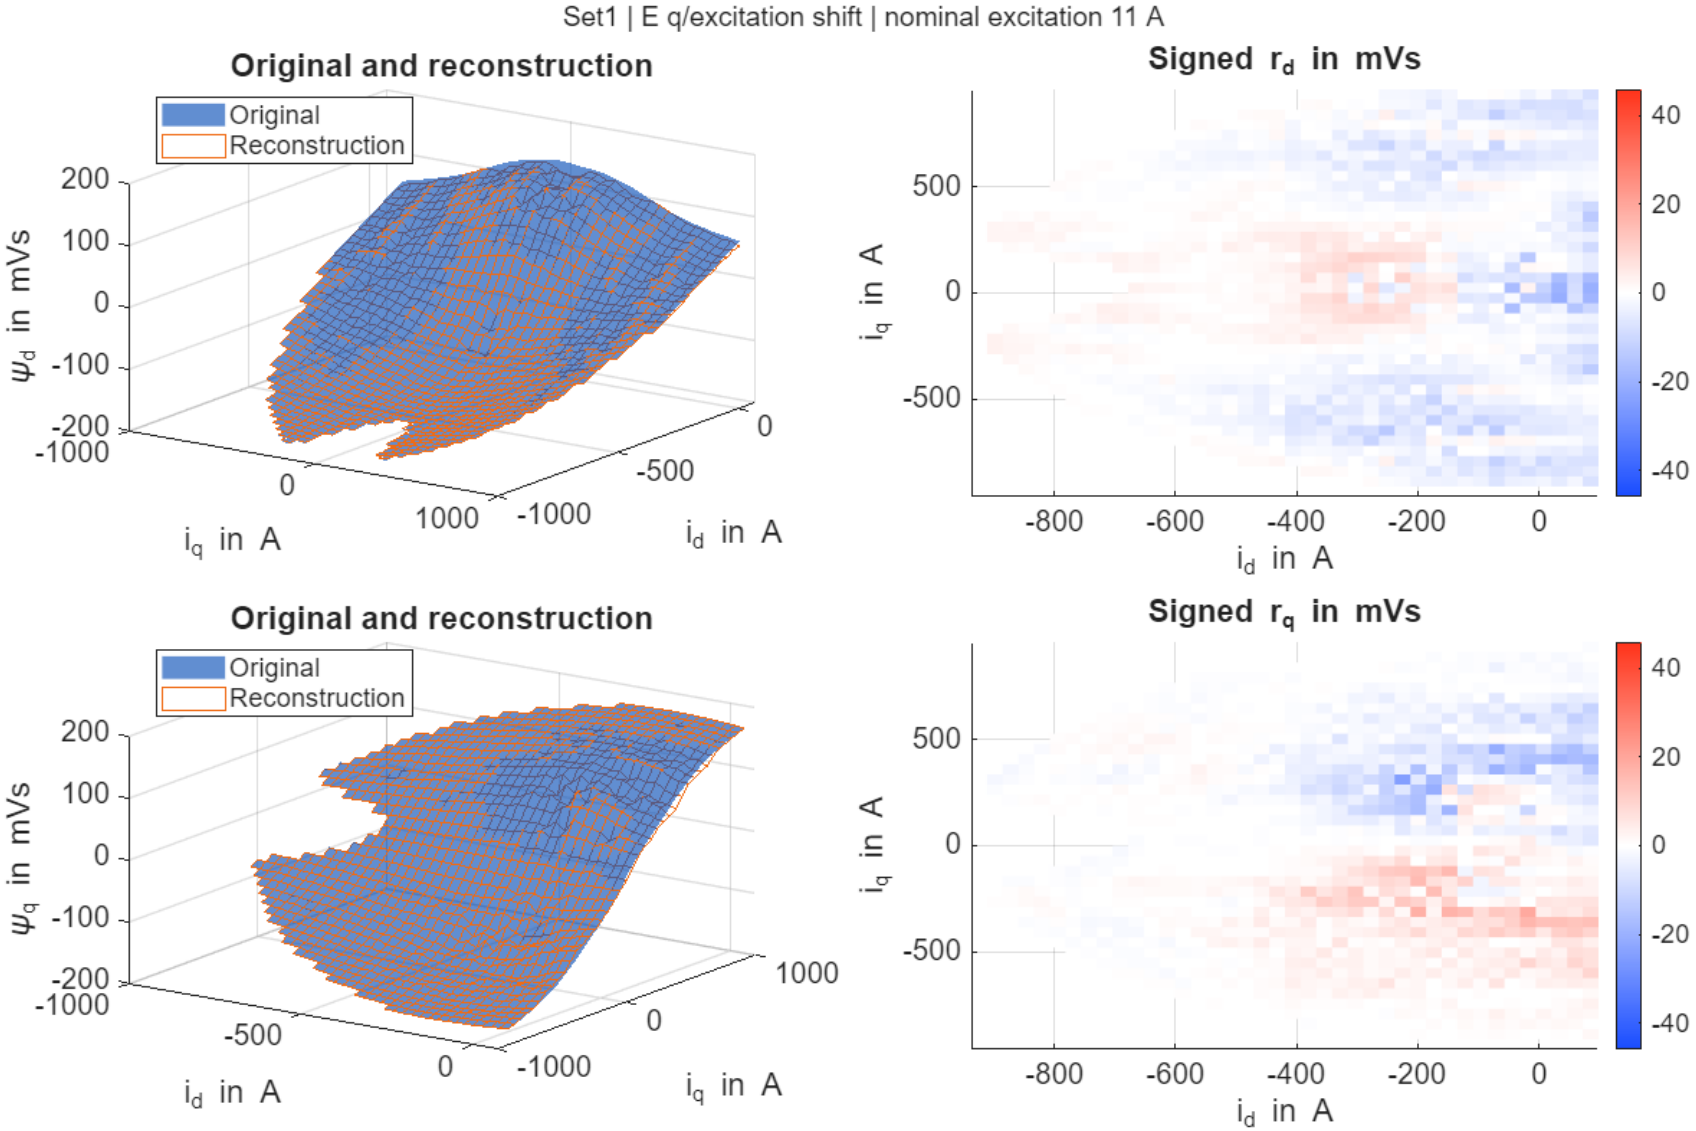

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method F, excitation 11 A

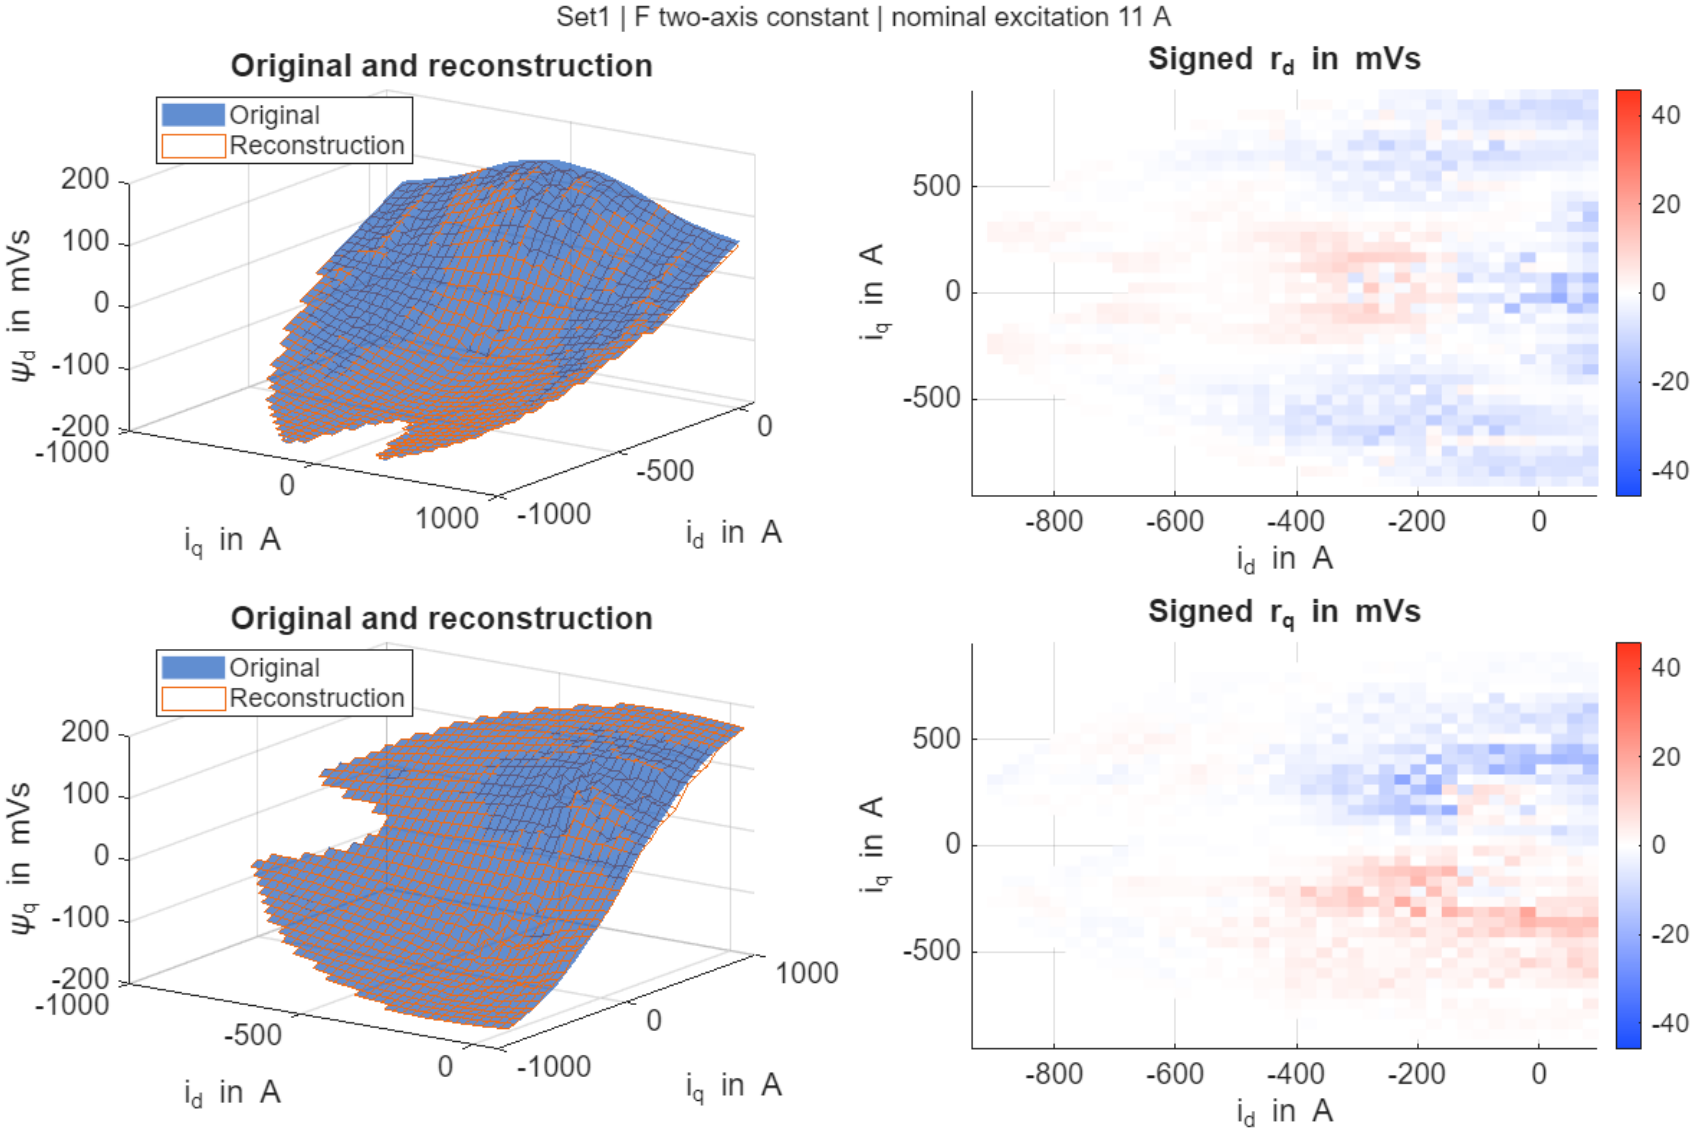

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method G, excitation 11 A

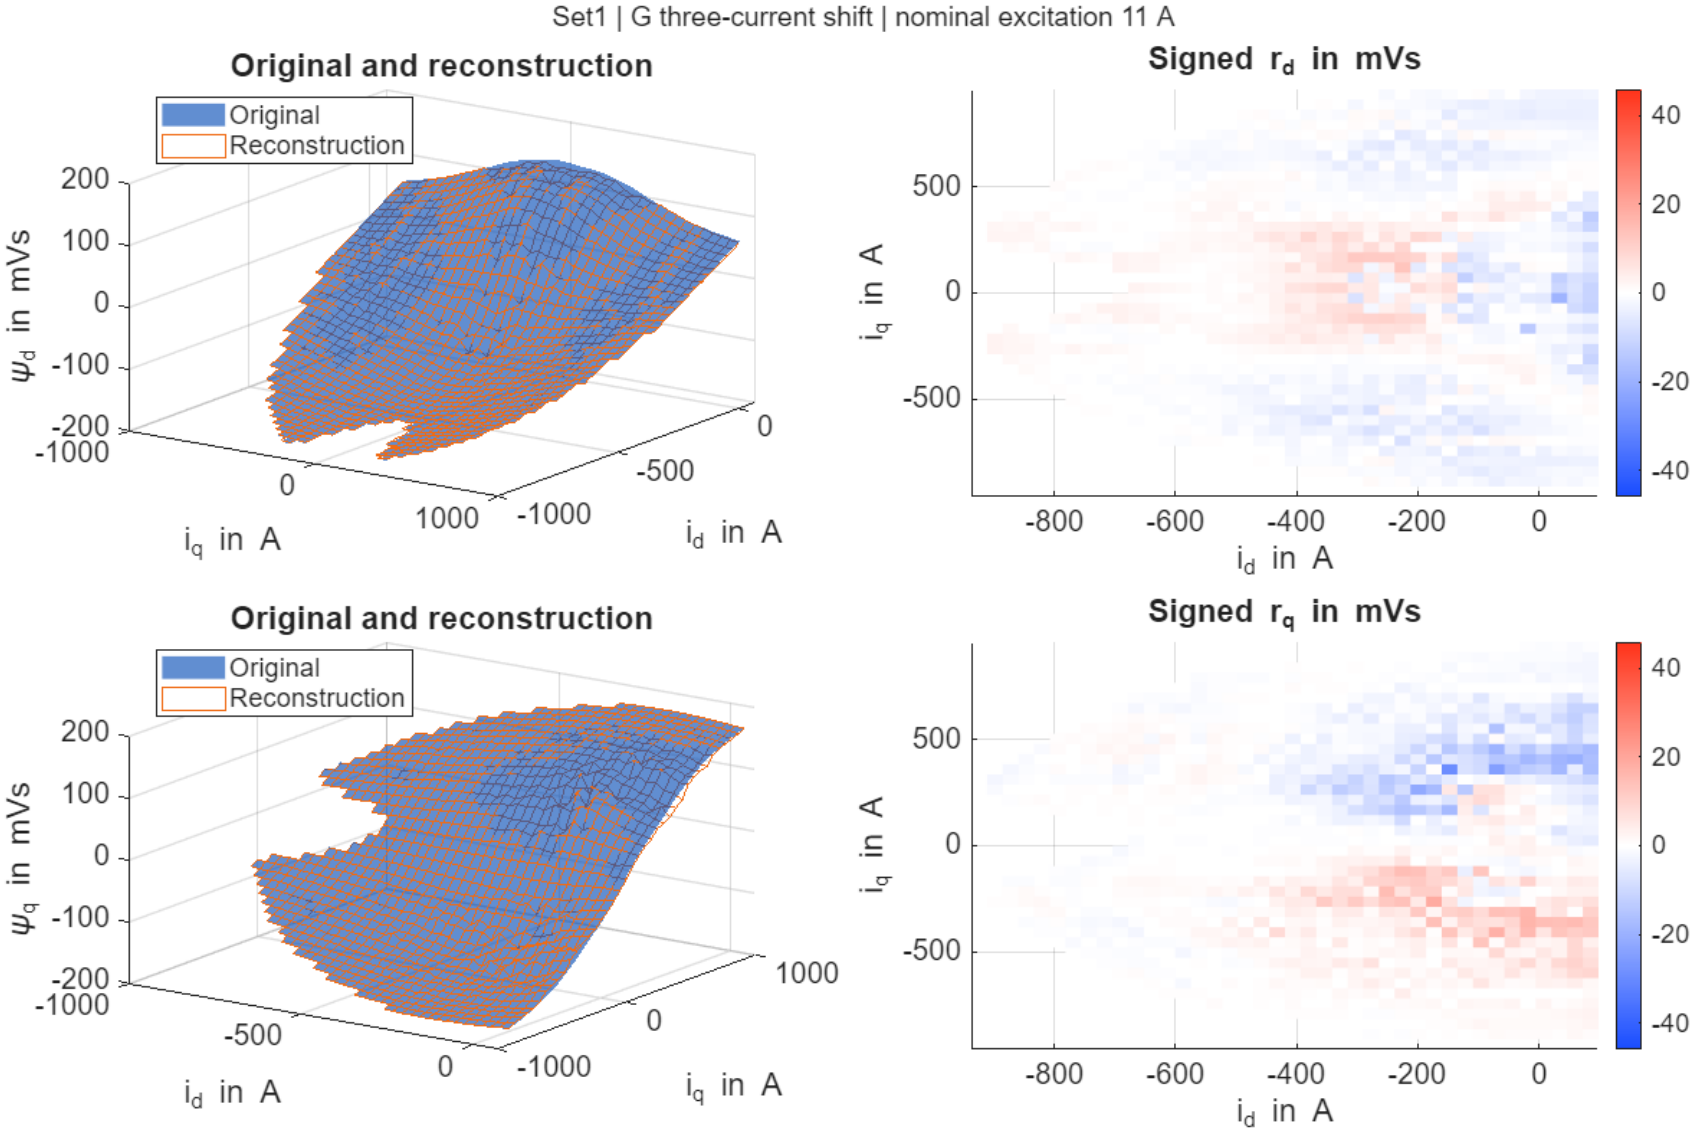

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method H, excitation 11 A

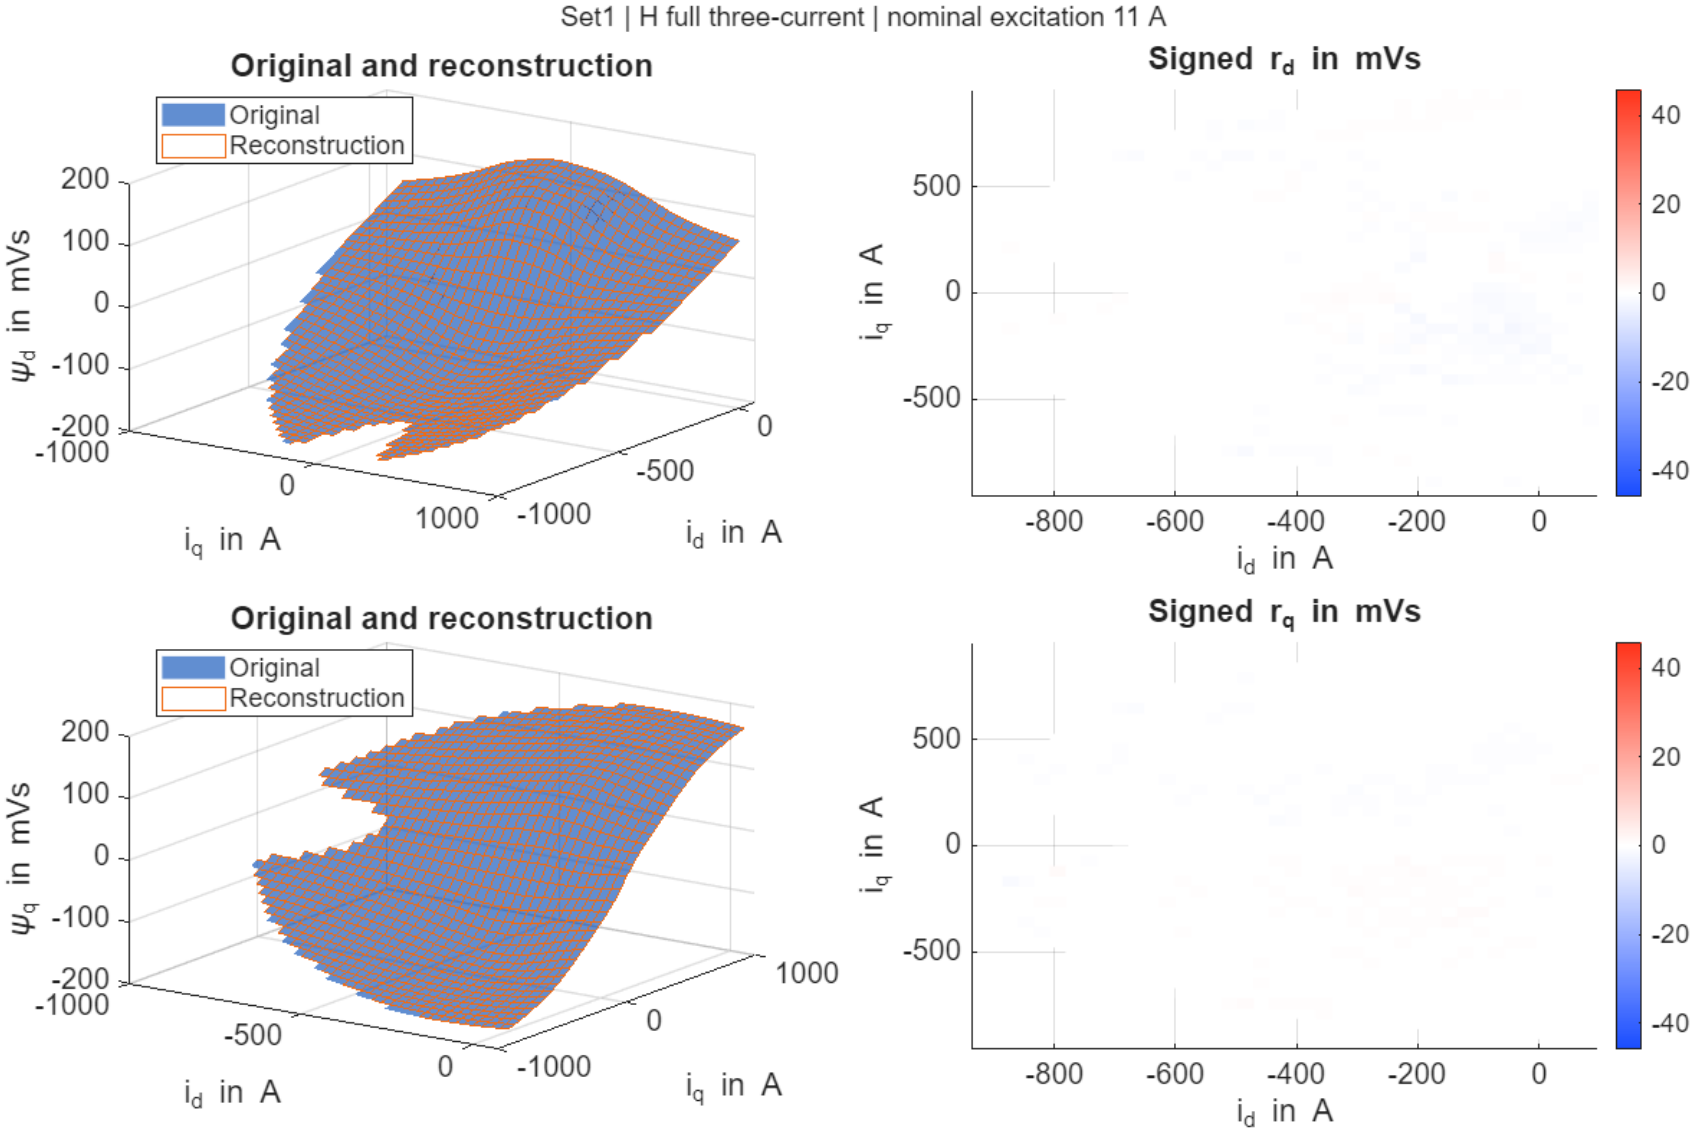

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method A, excitation 14 A

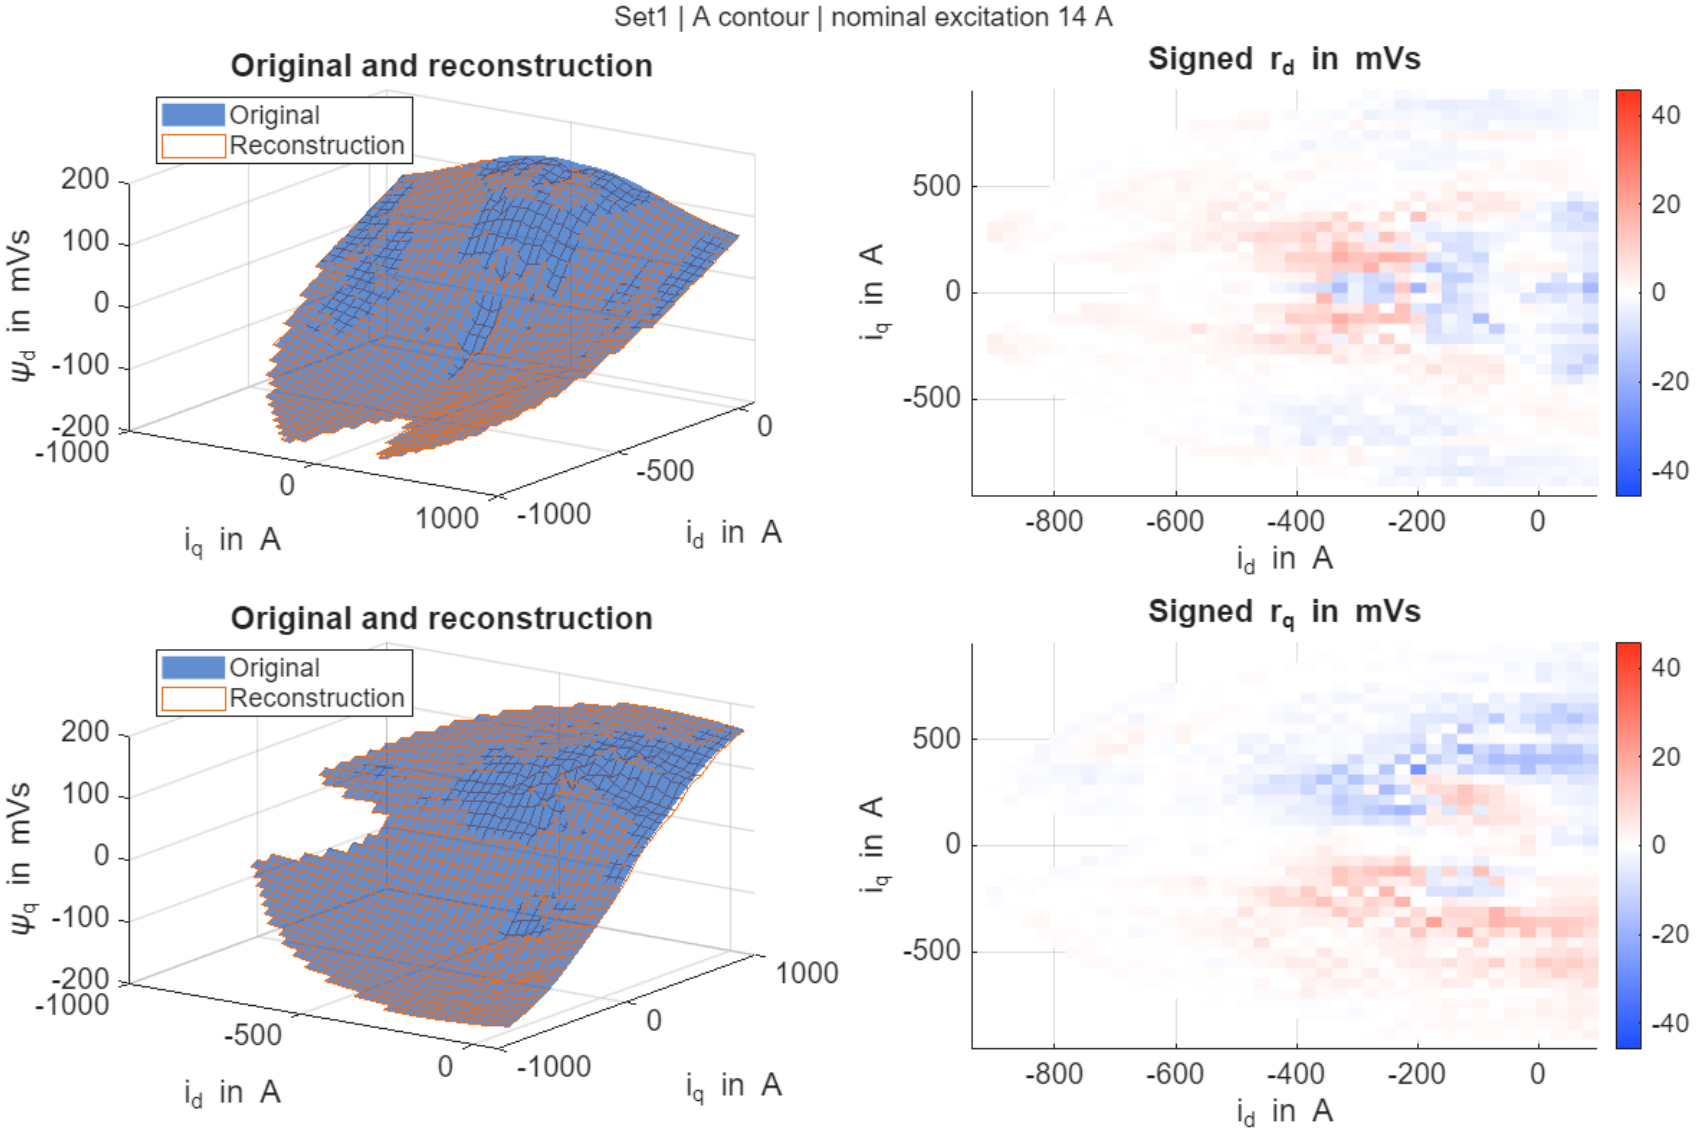

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method B, excitation 14 A

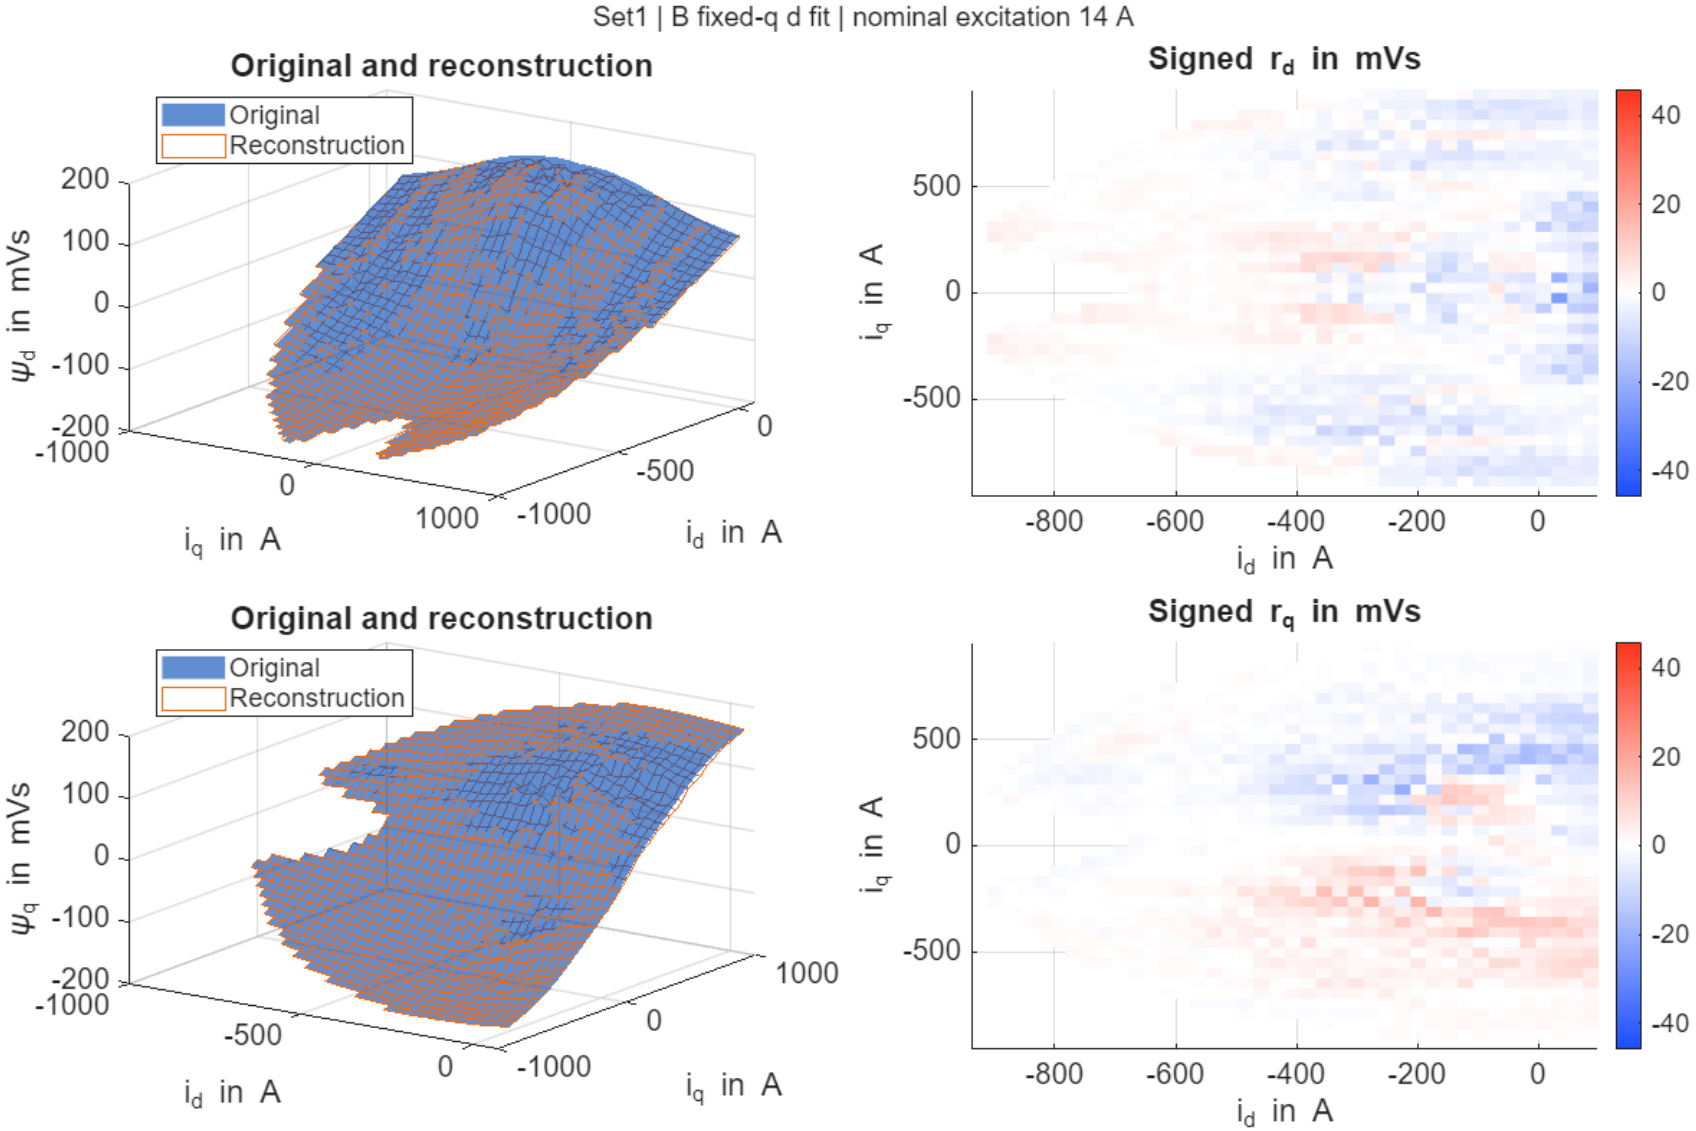

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method C, excitation 14 A

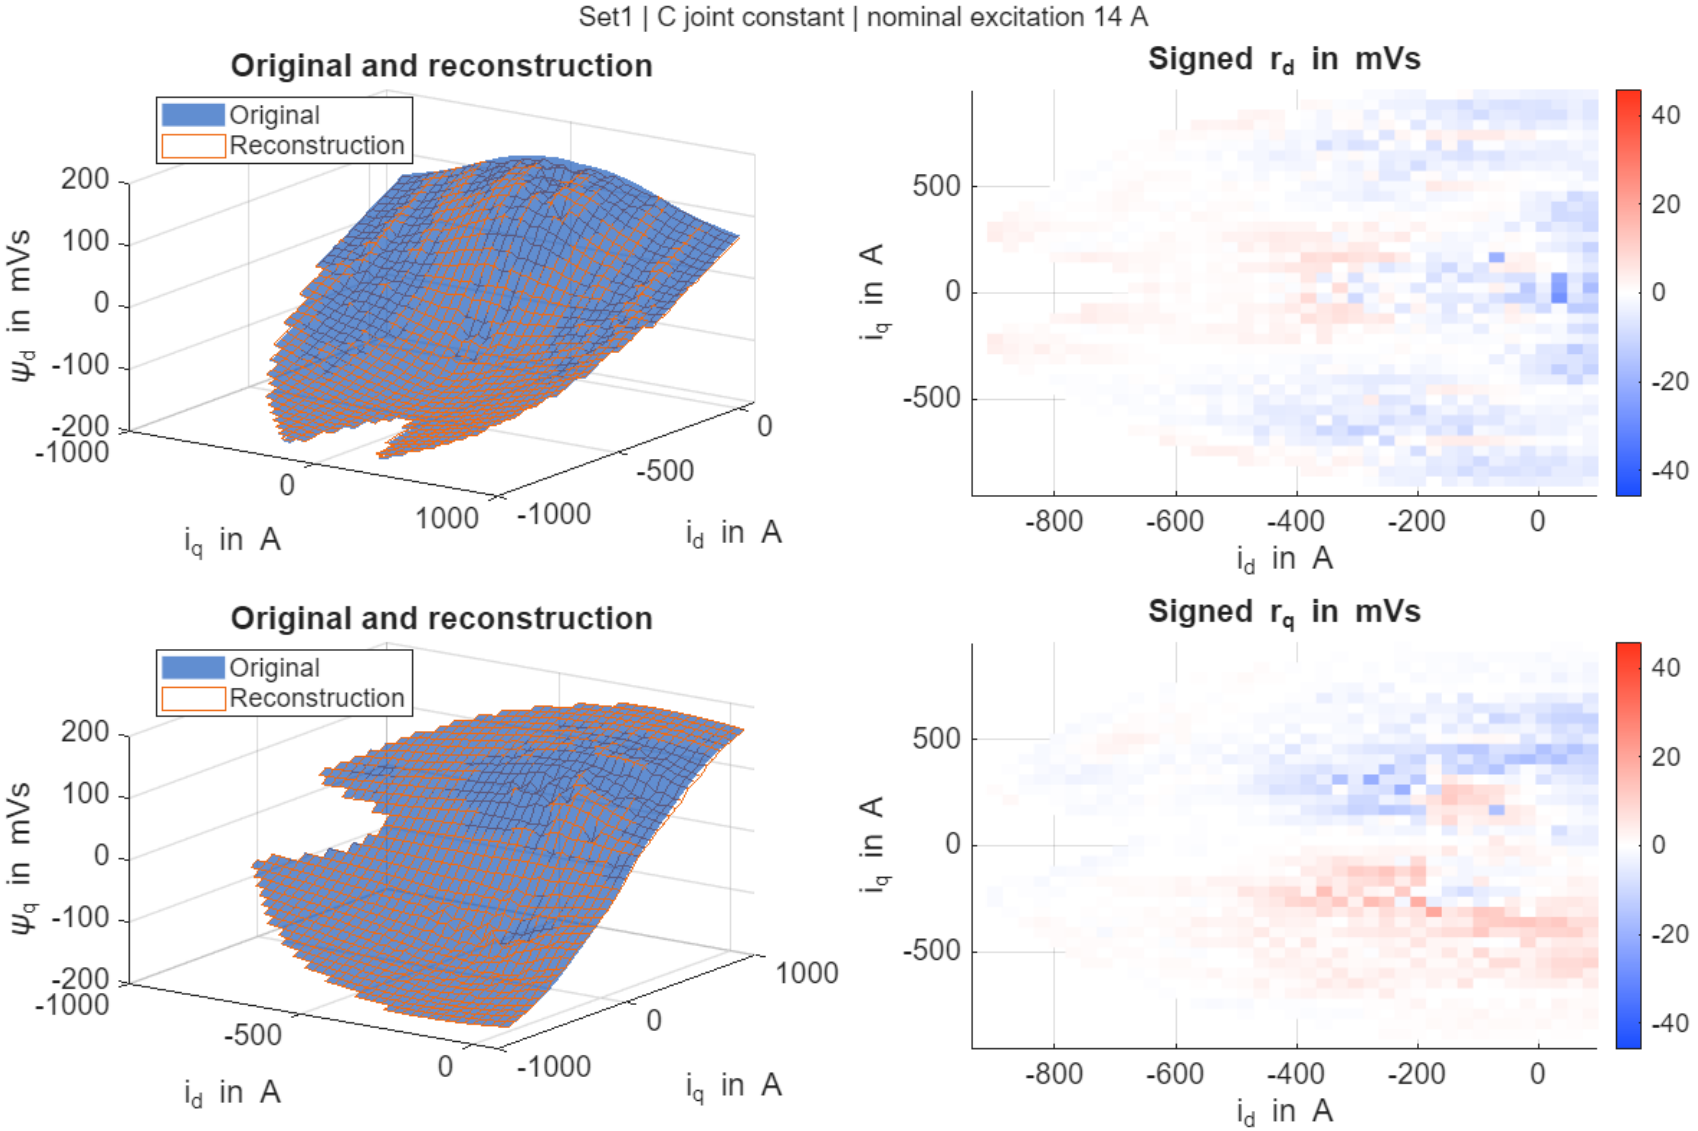

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method D, excitation 14 A

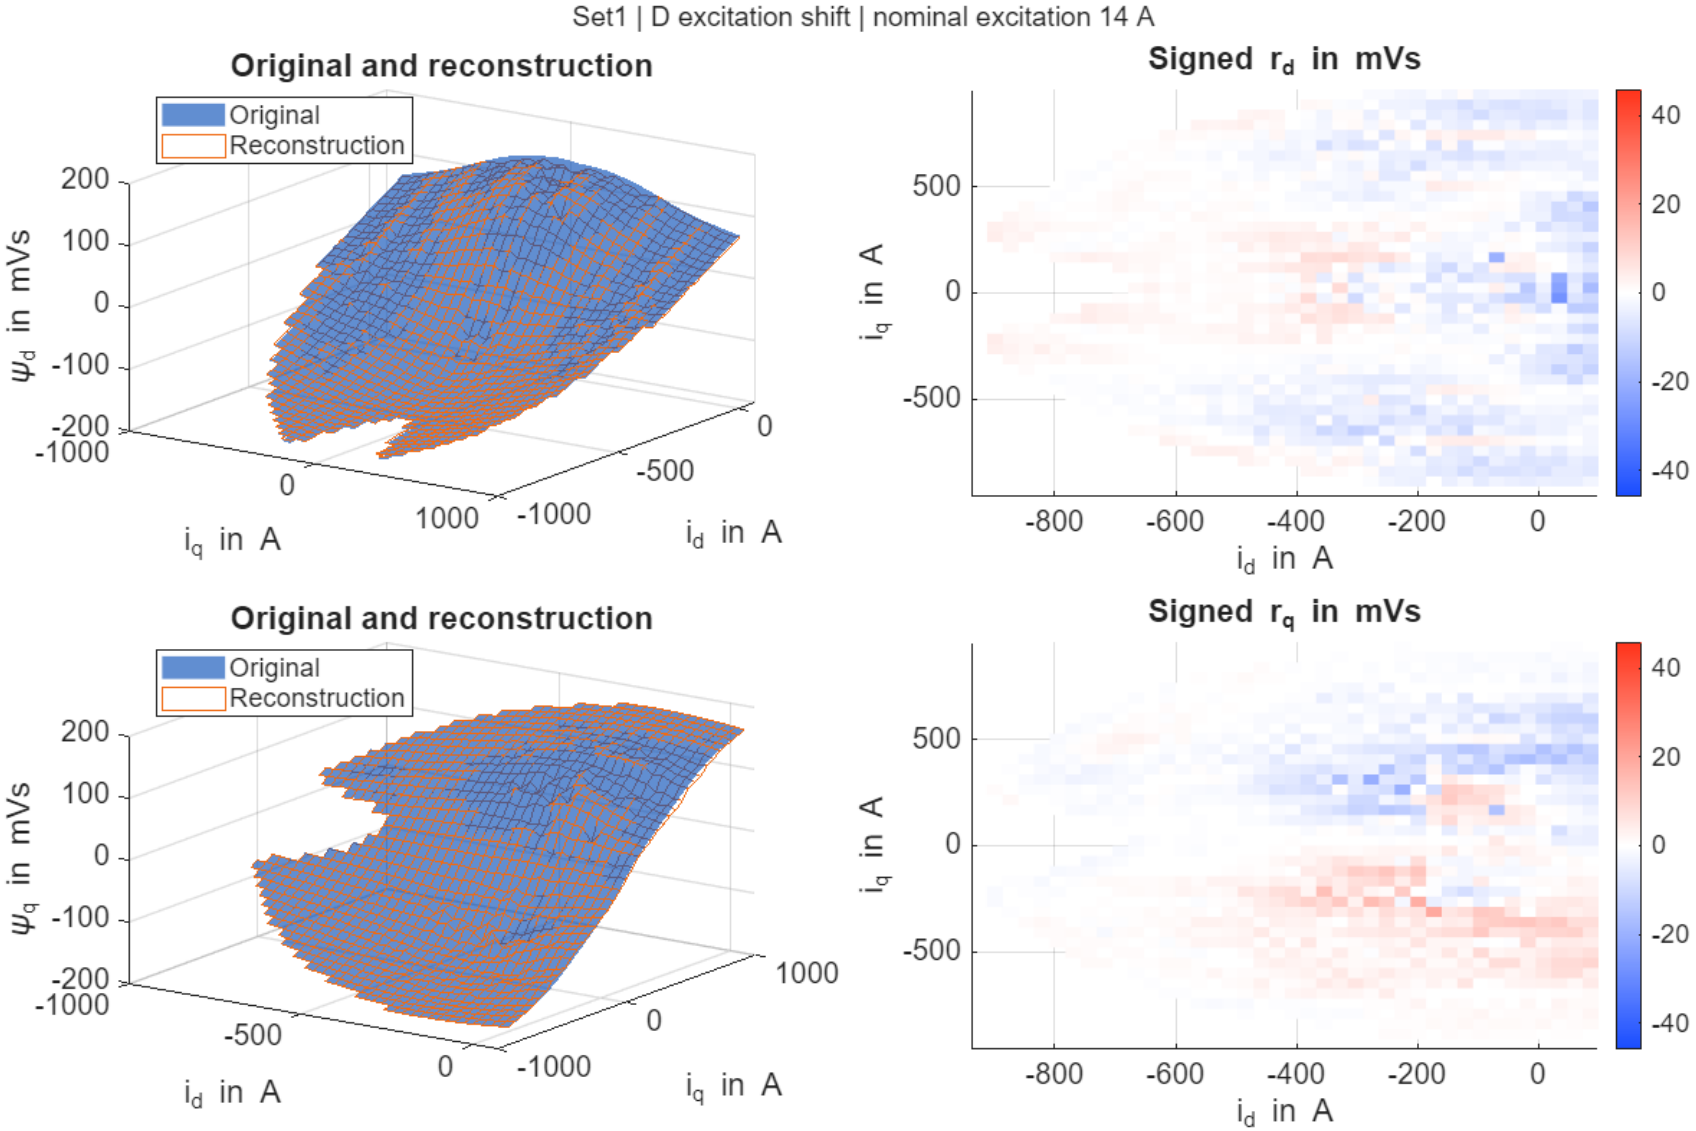

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method E, excitation 14 A

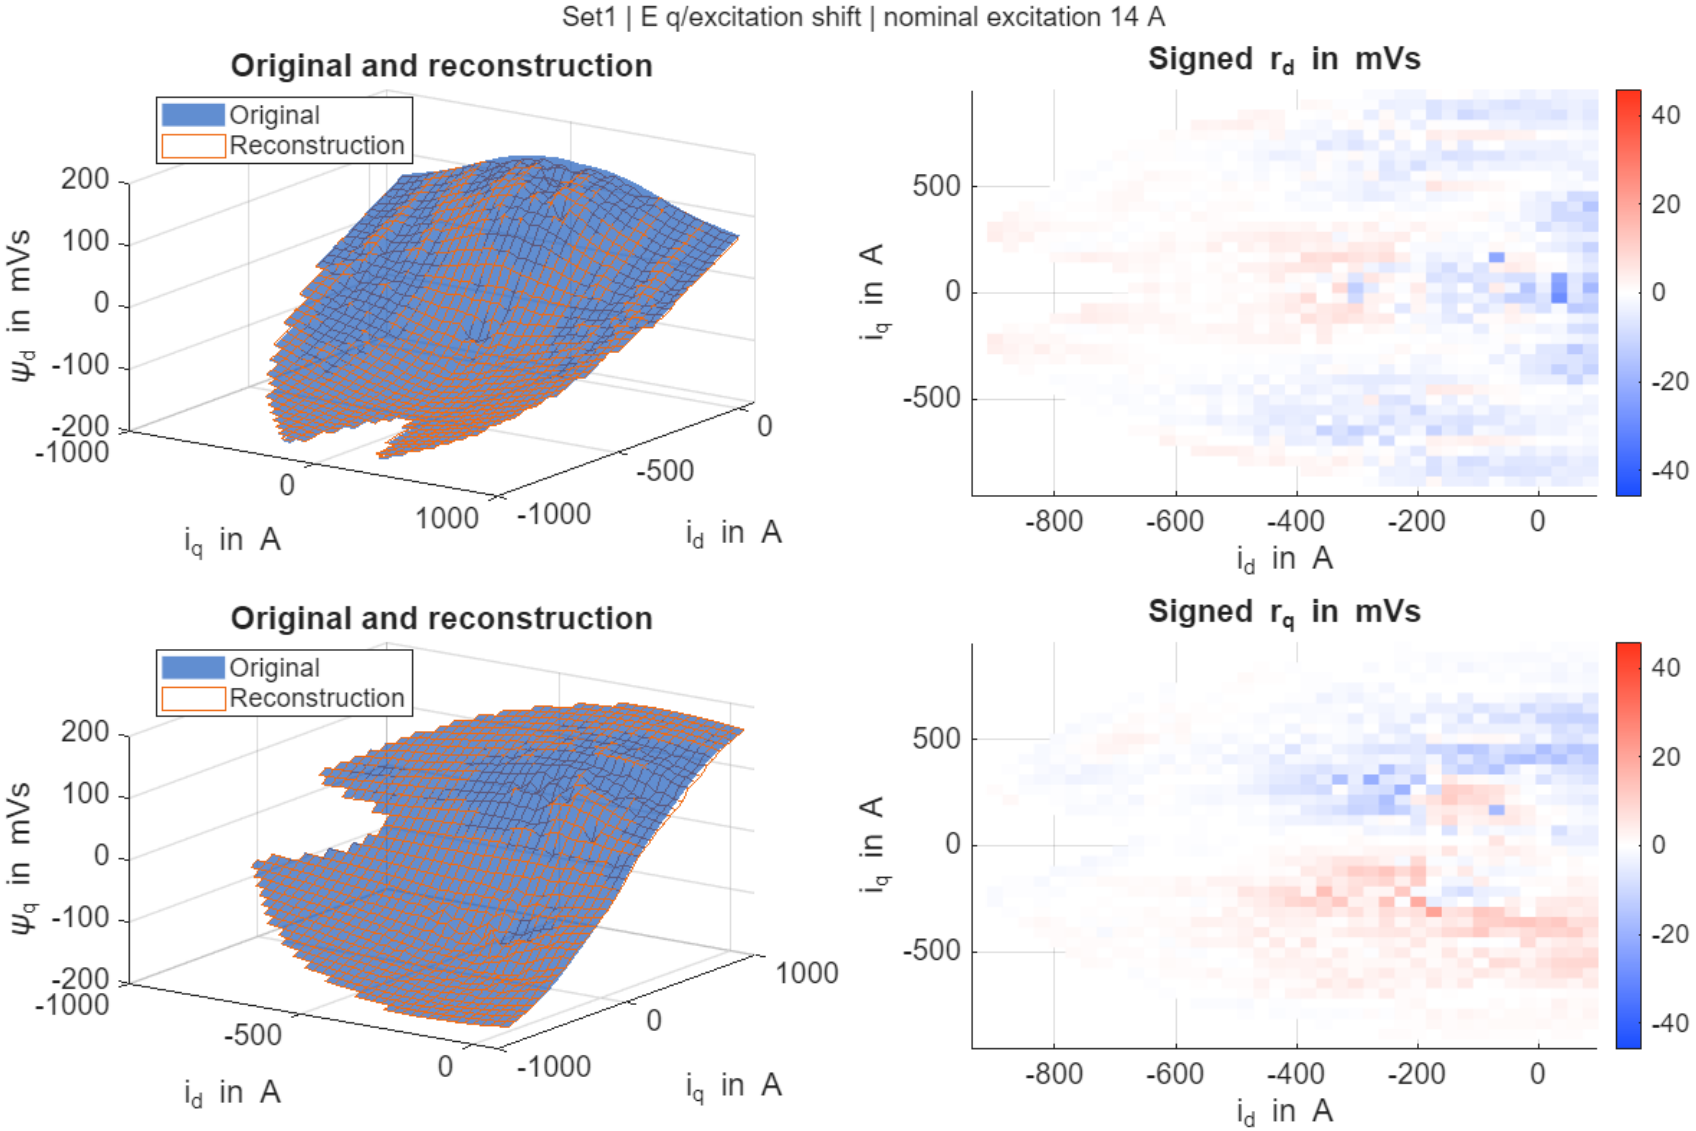

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method F, excitation 14 A

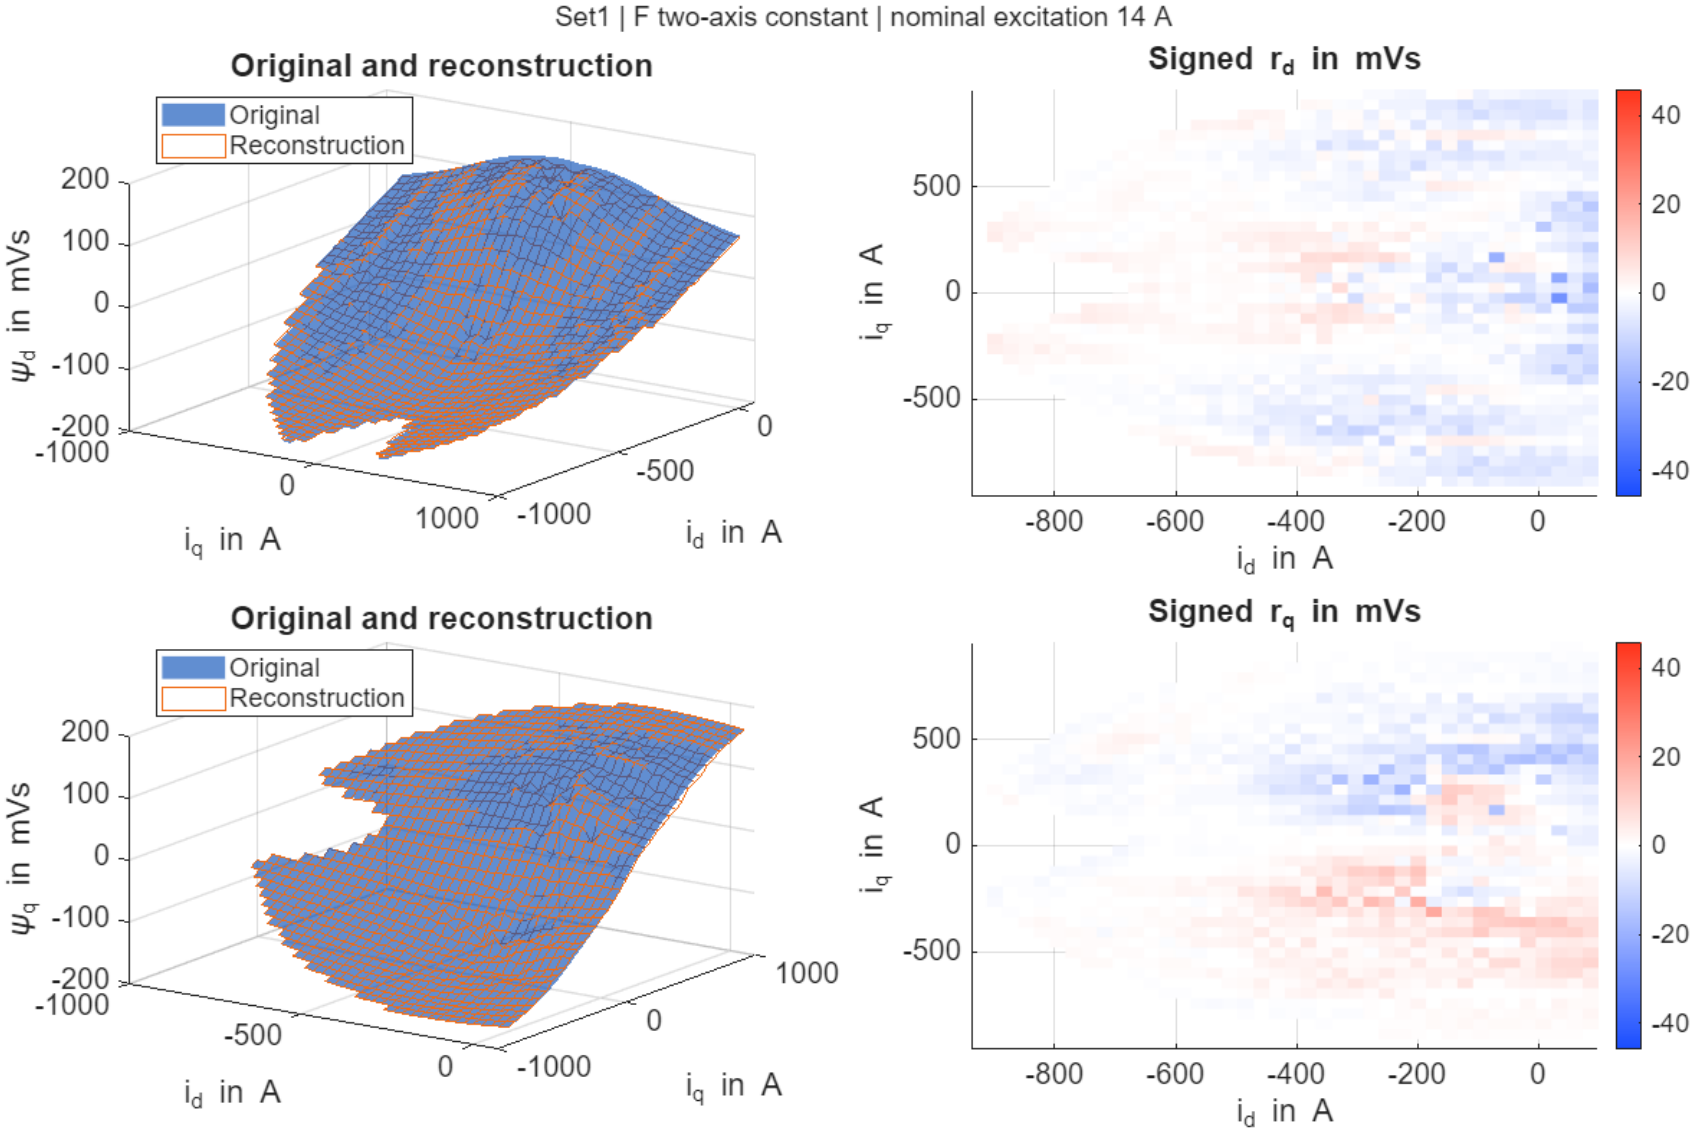

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method G, excitation 14 A

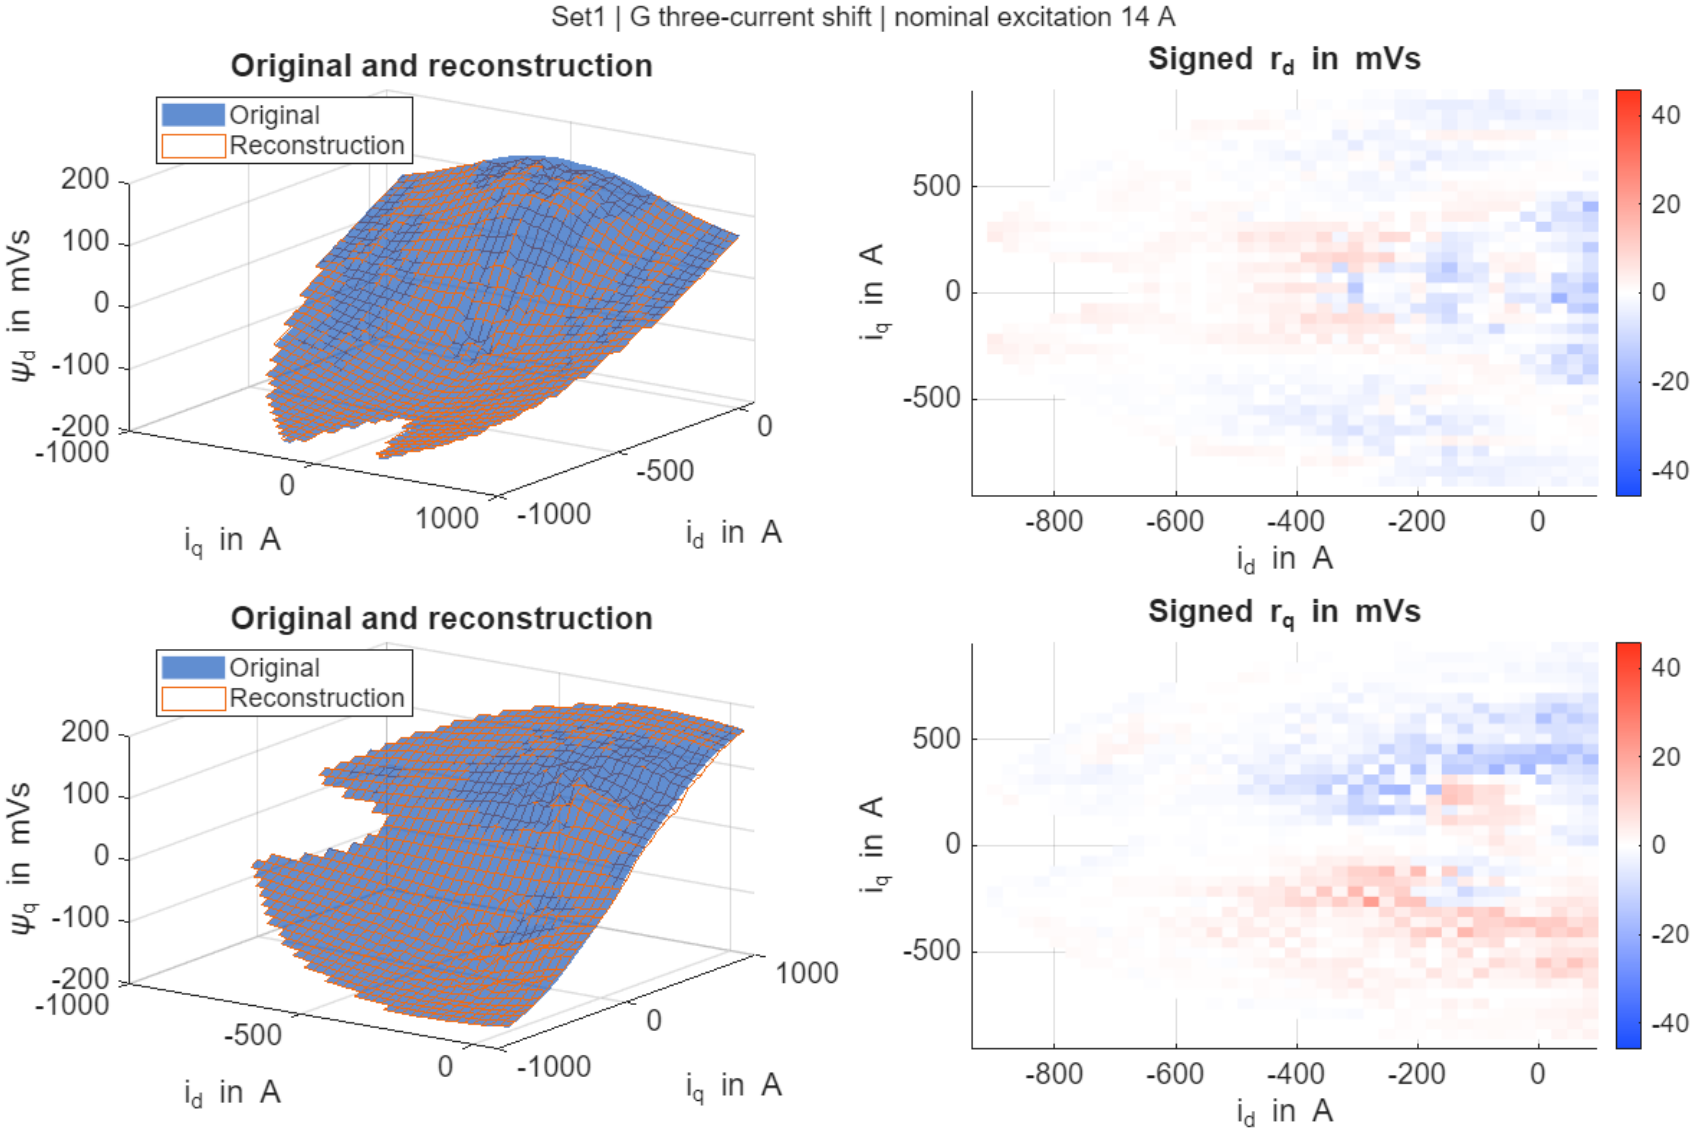

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method H, excitation 14 A

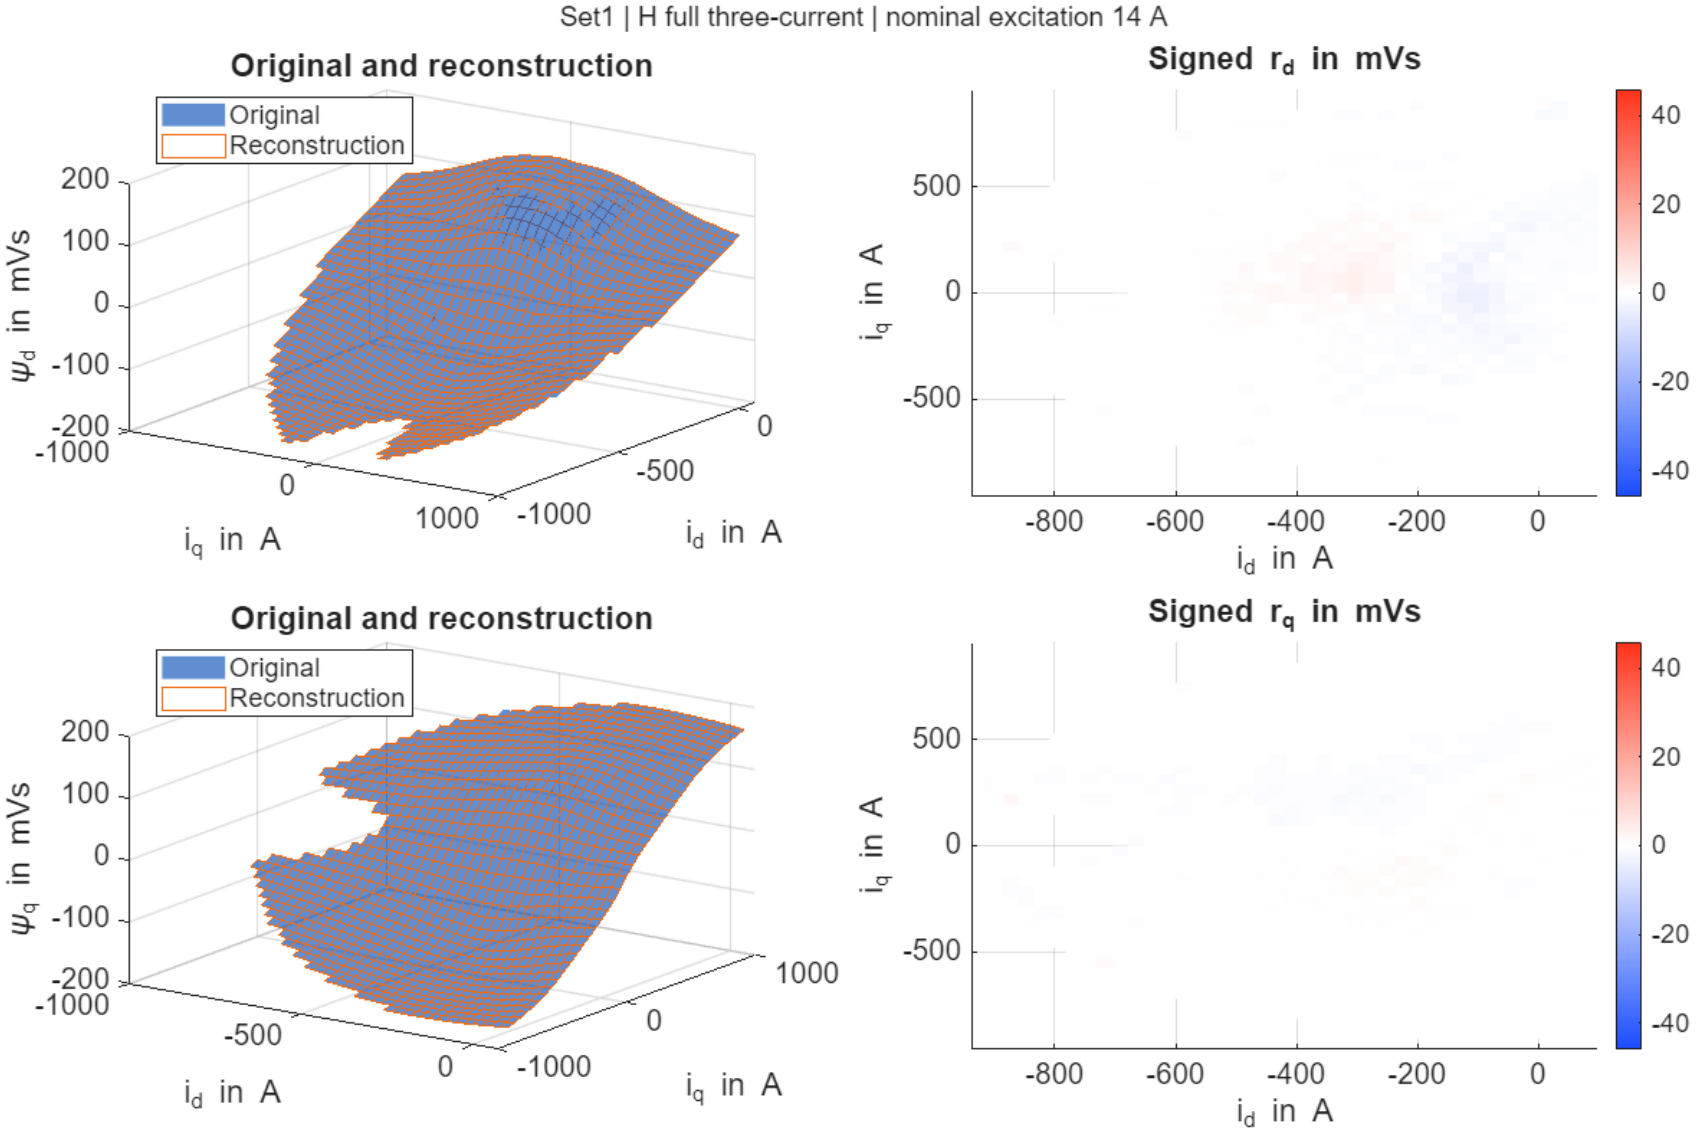

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method A, excitation 17 A

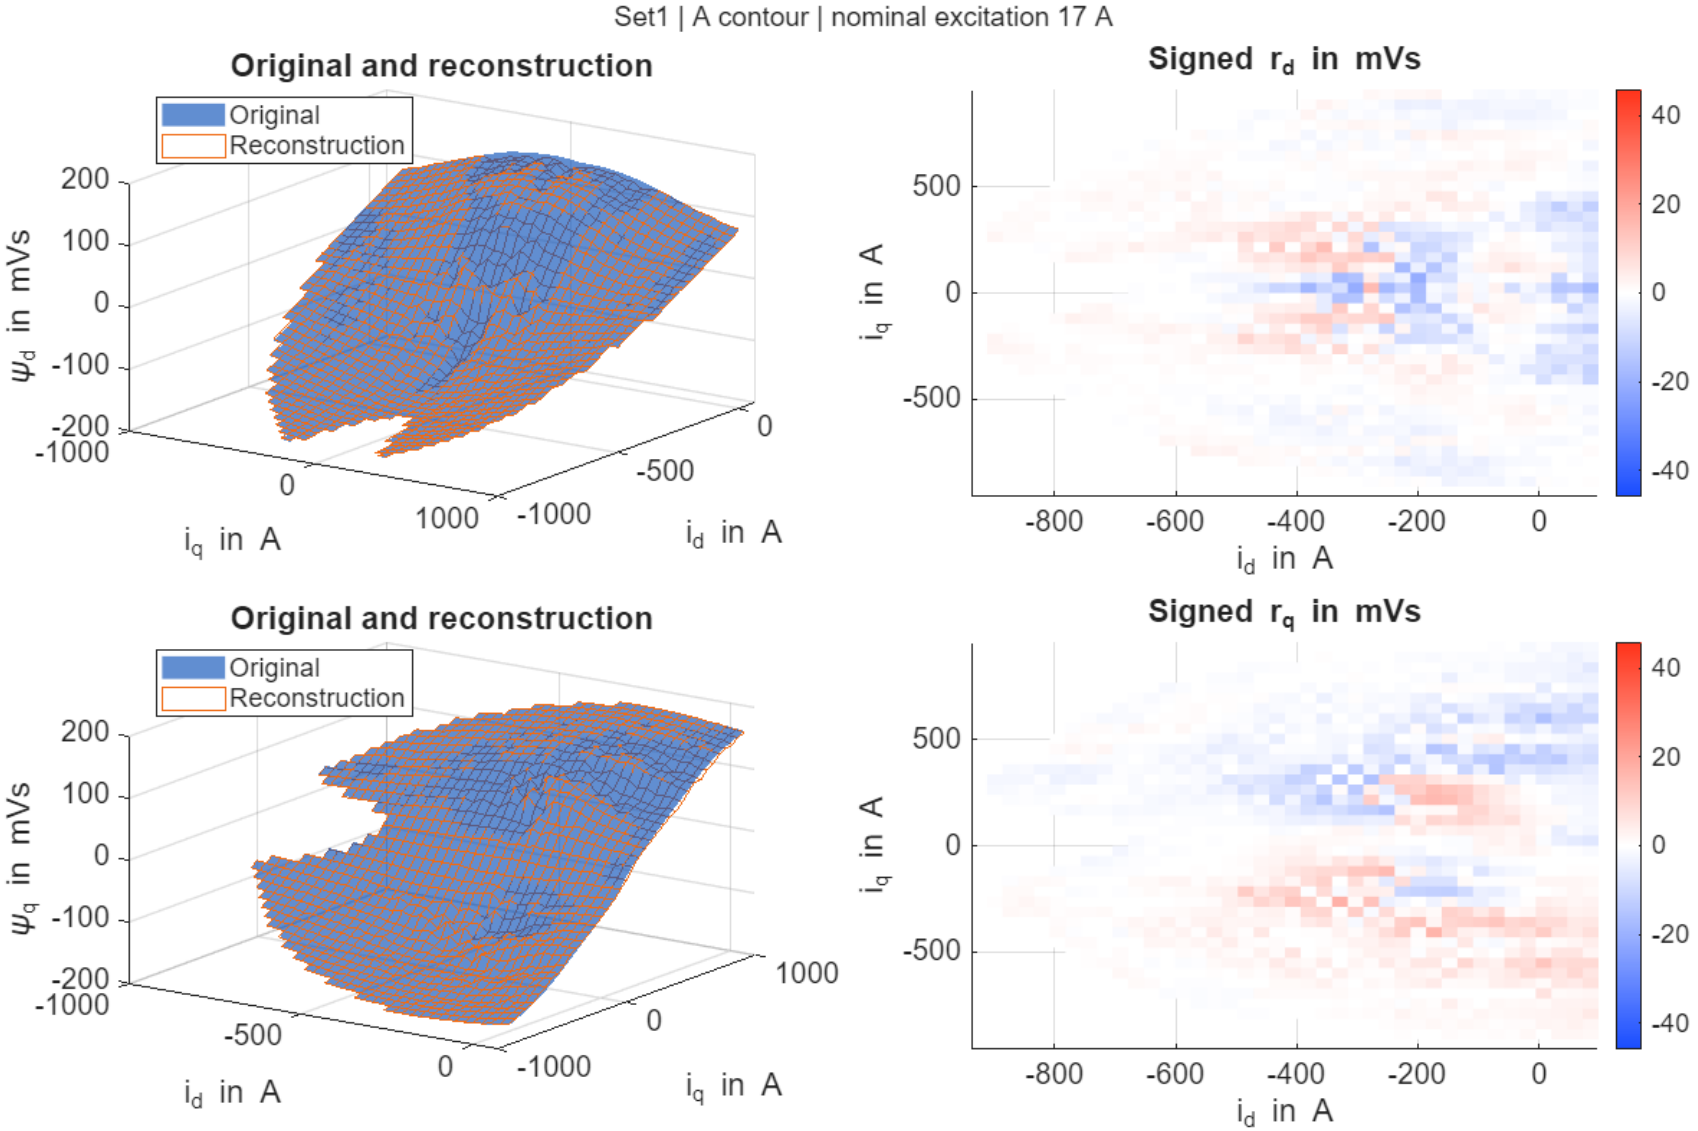

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method B, excitation 17 A

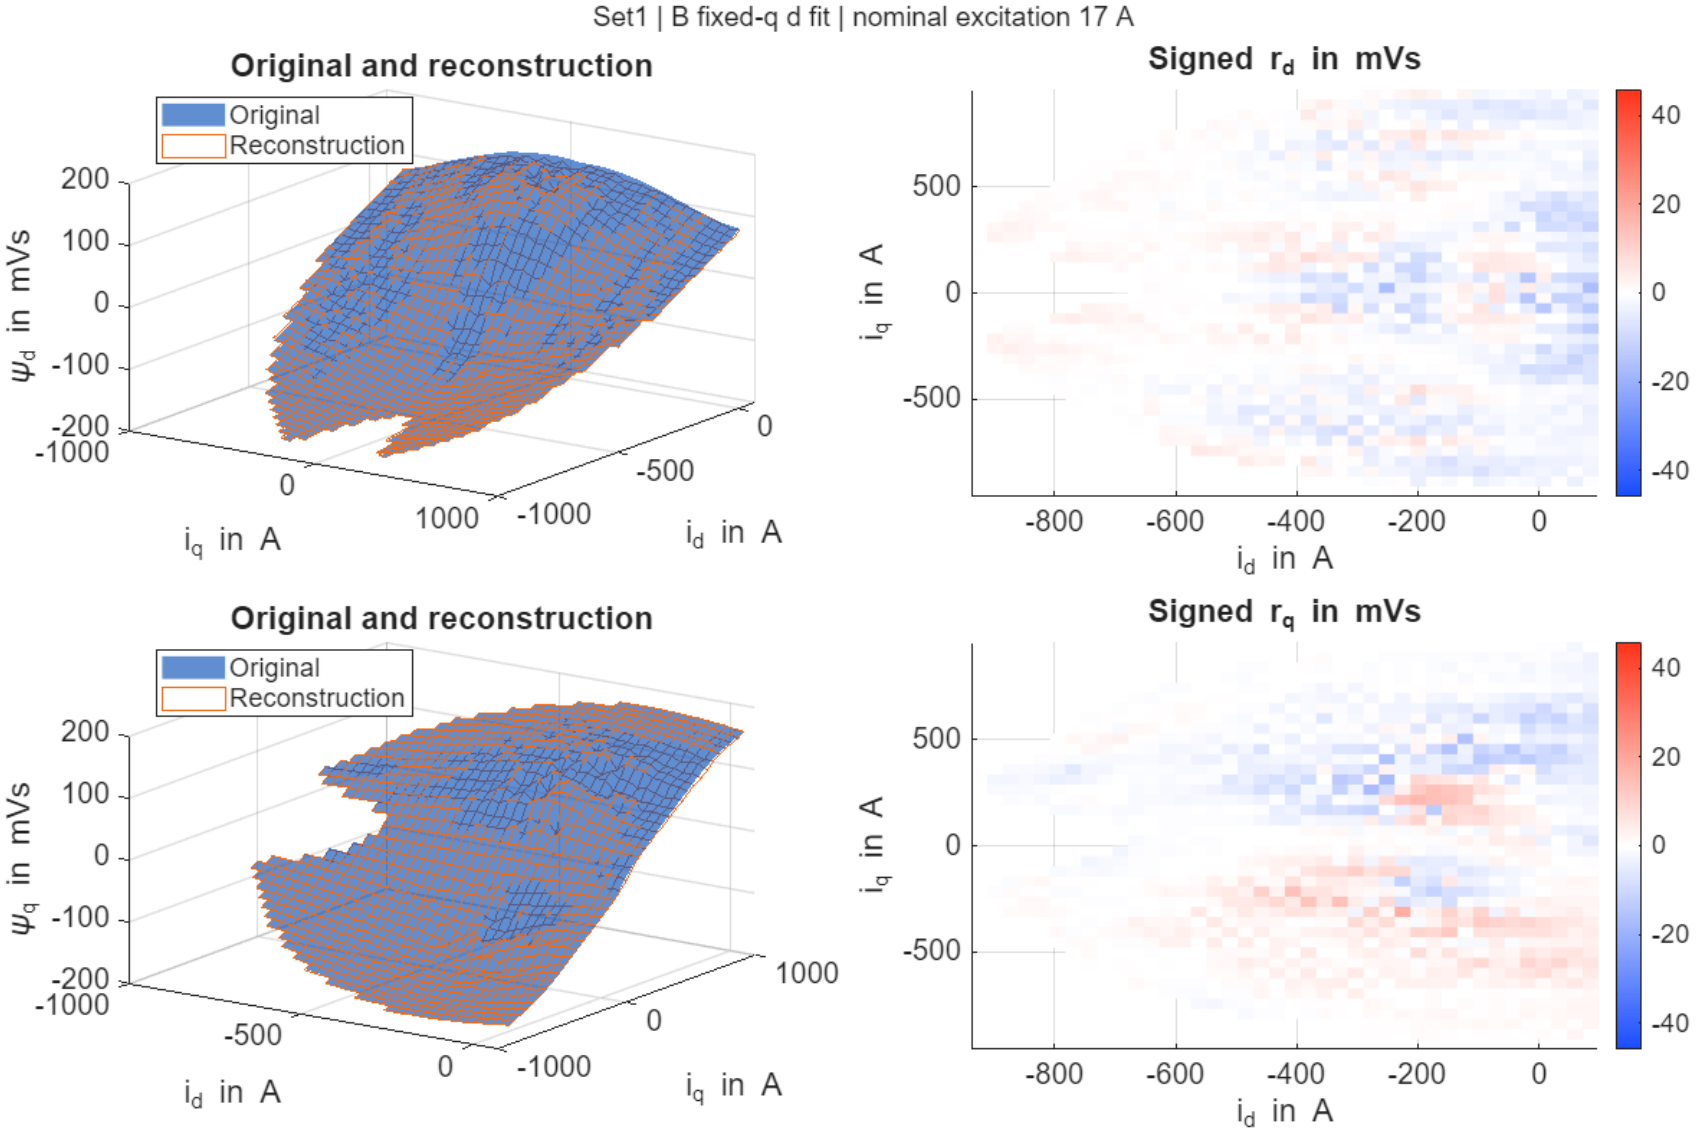

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method C, excitation 17 A

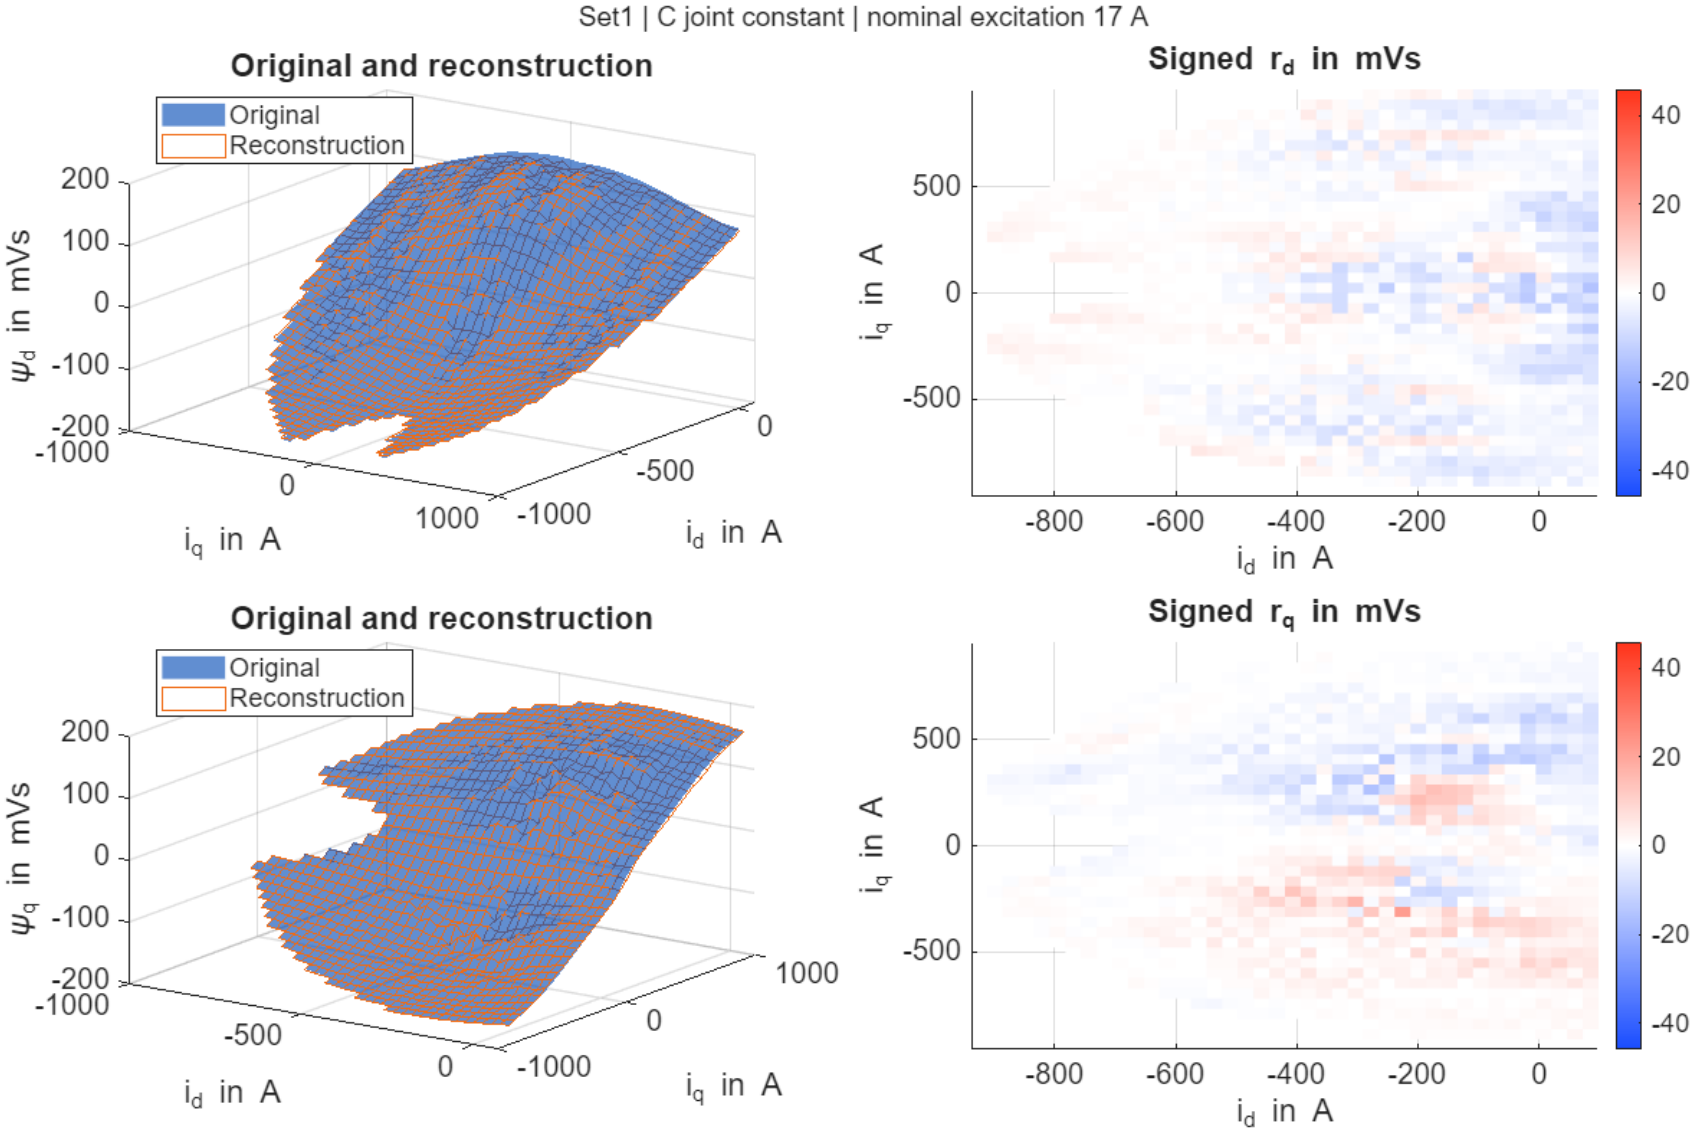

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method D, excitation 17 A

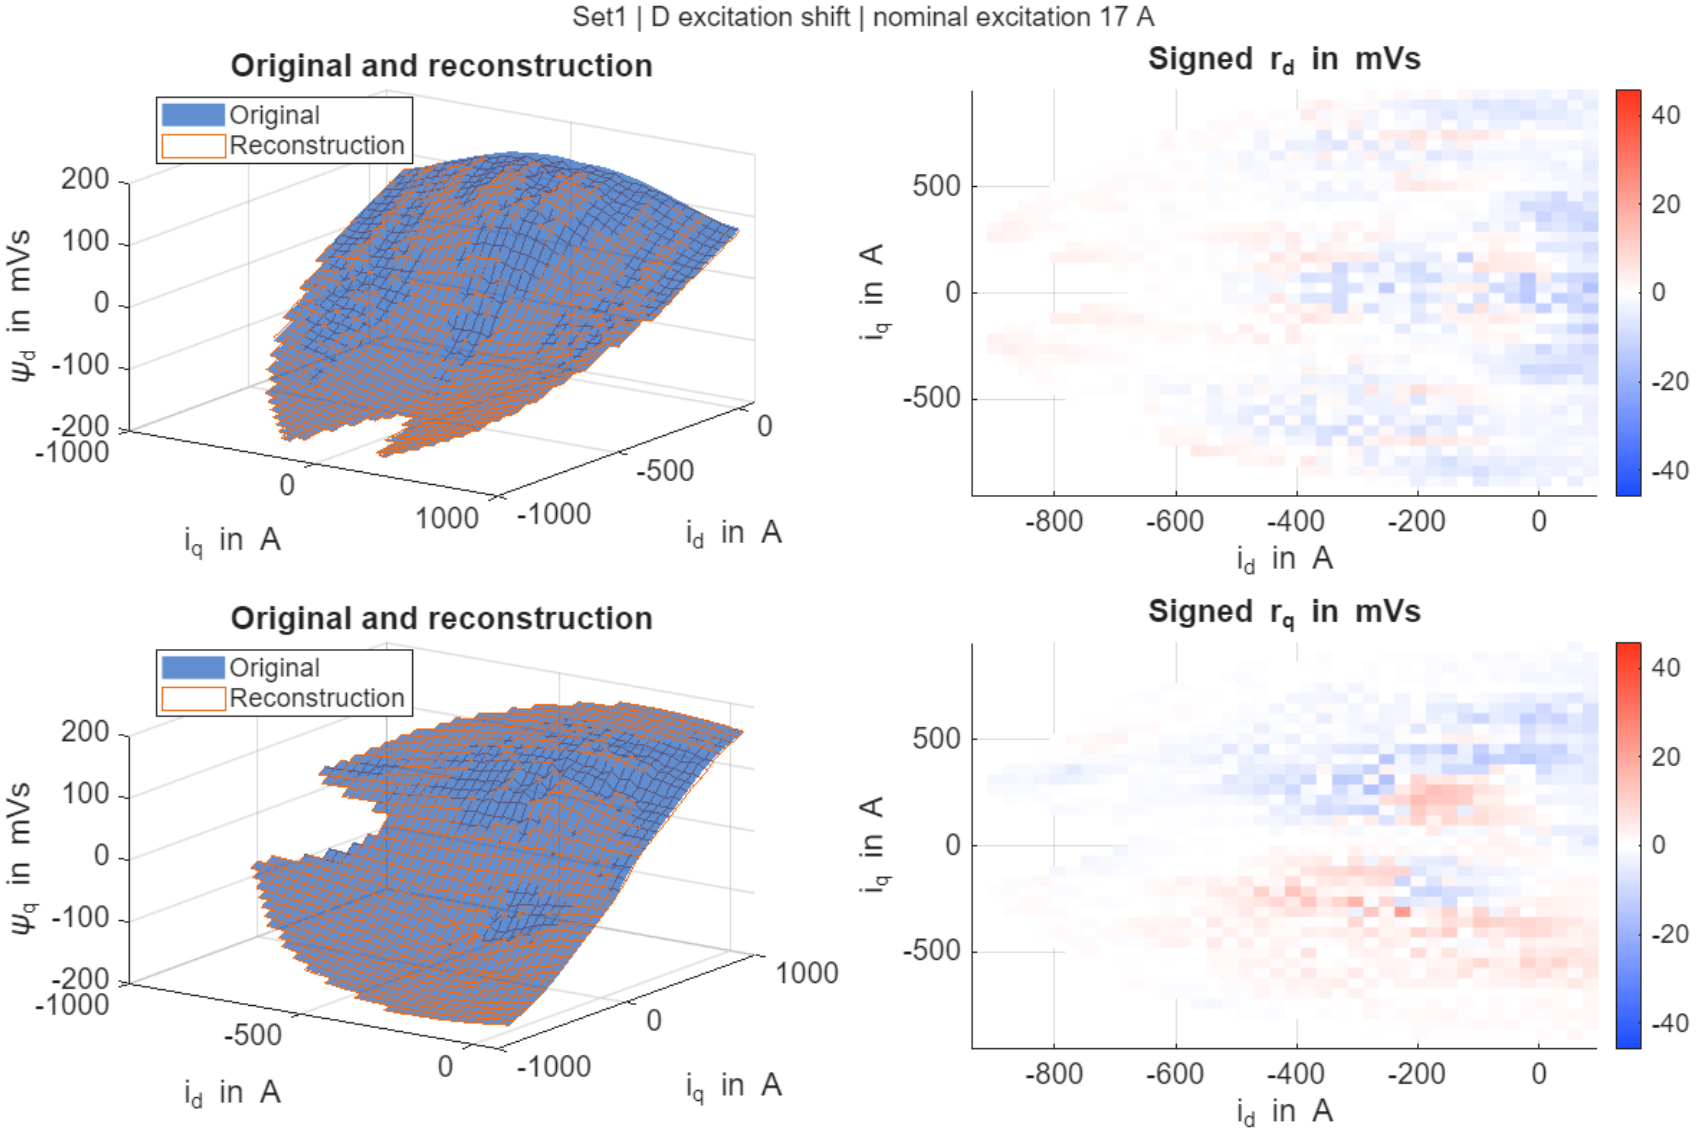

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method E, excitation 17 A

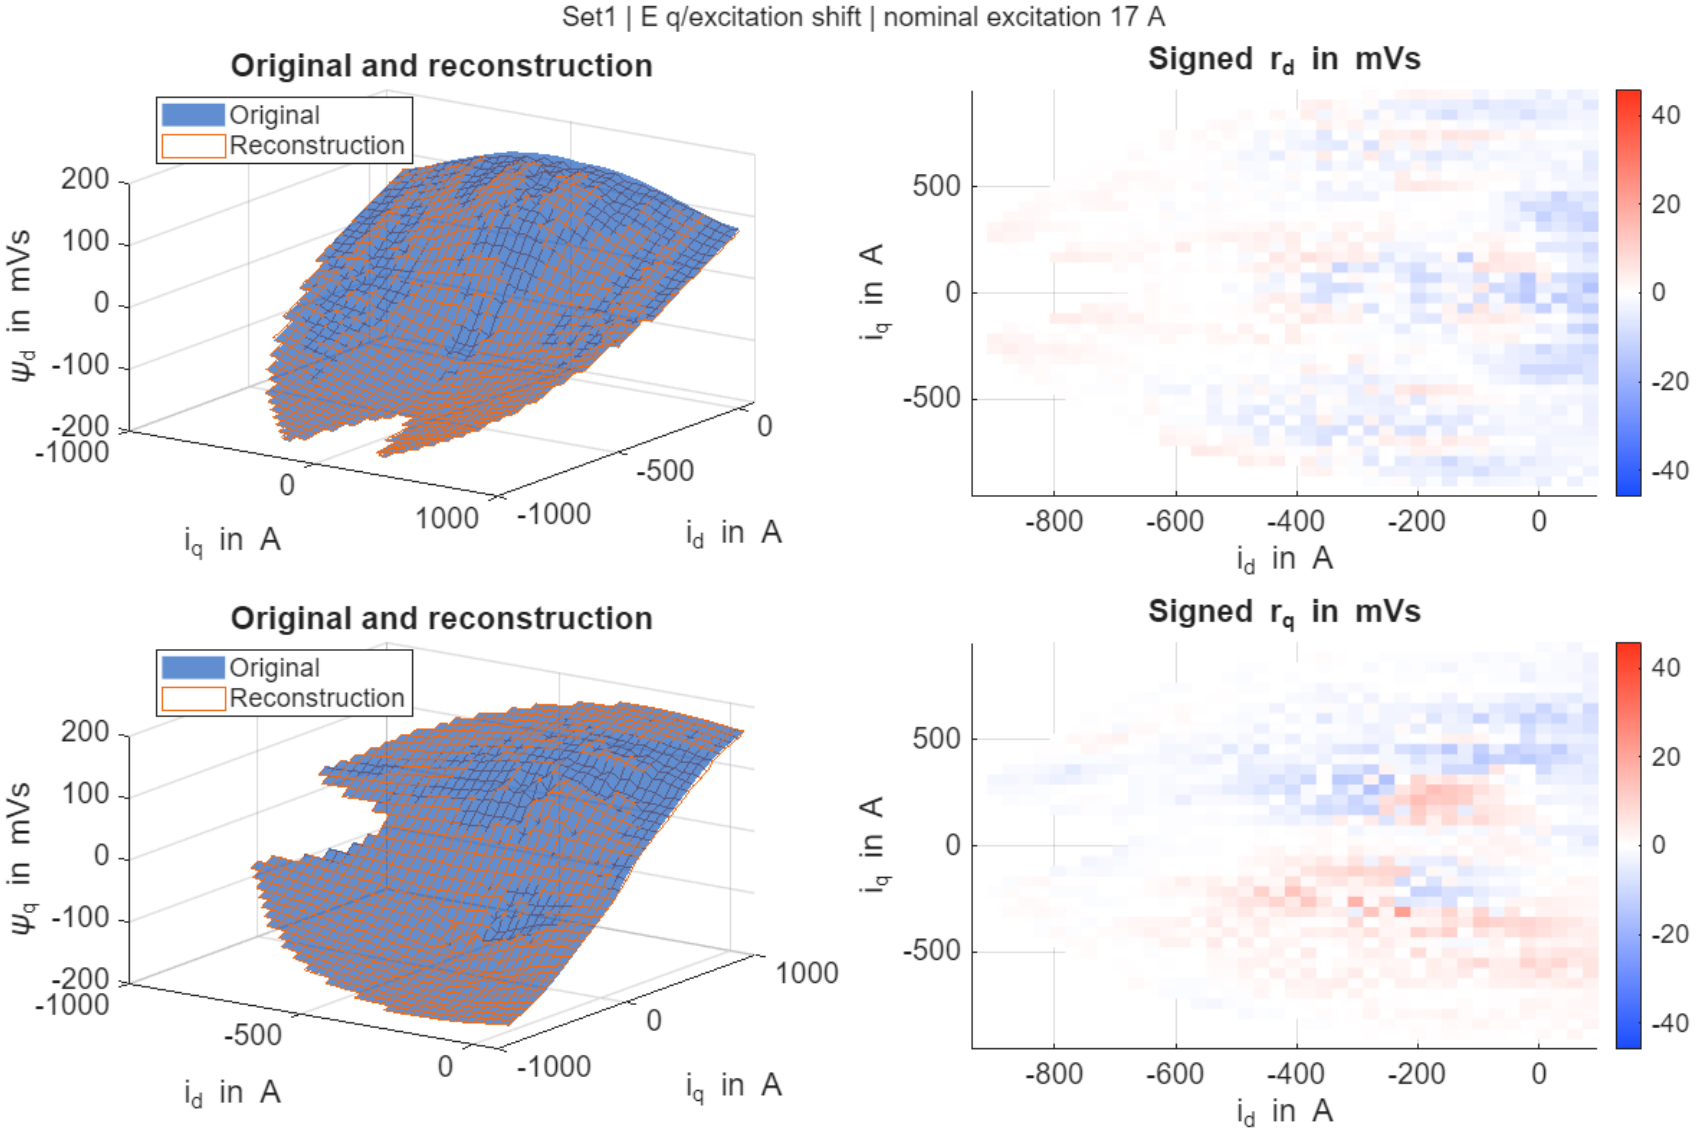

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method F, excitation 17 A

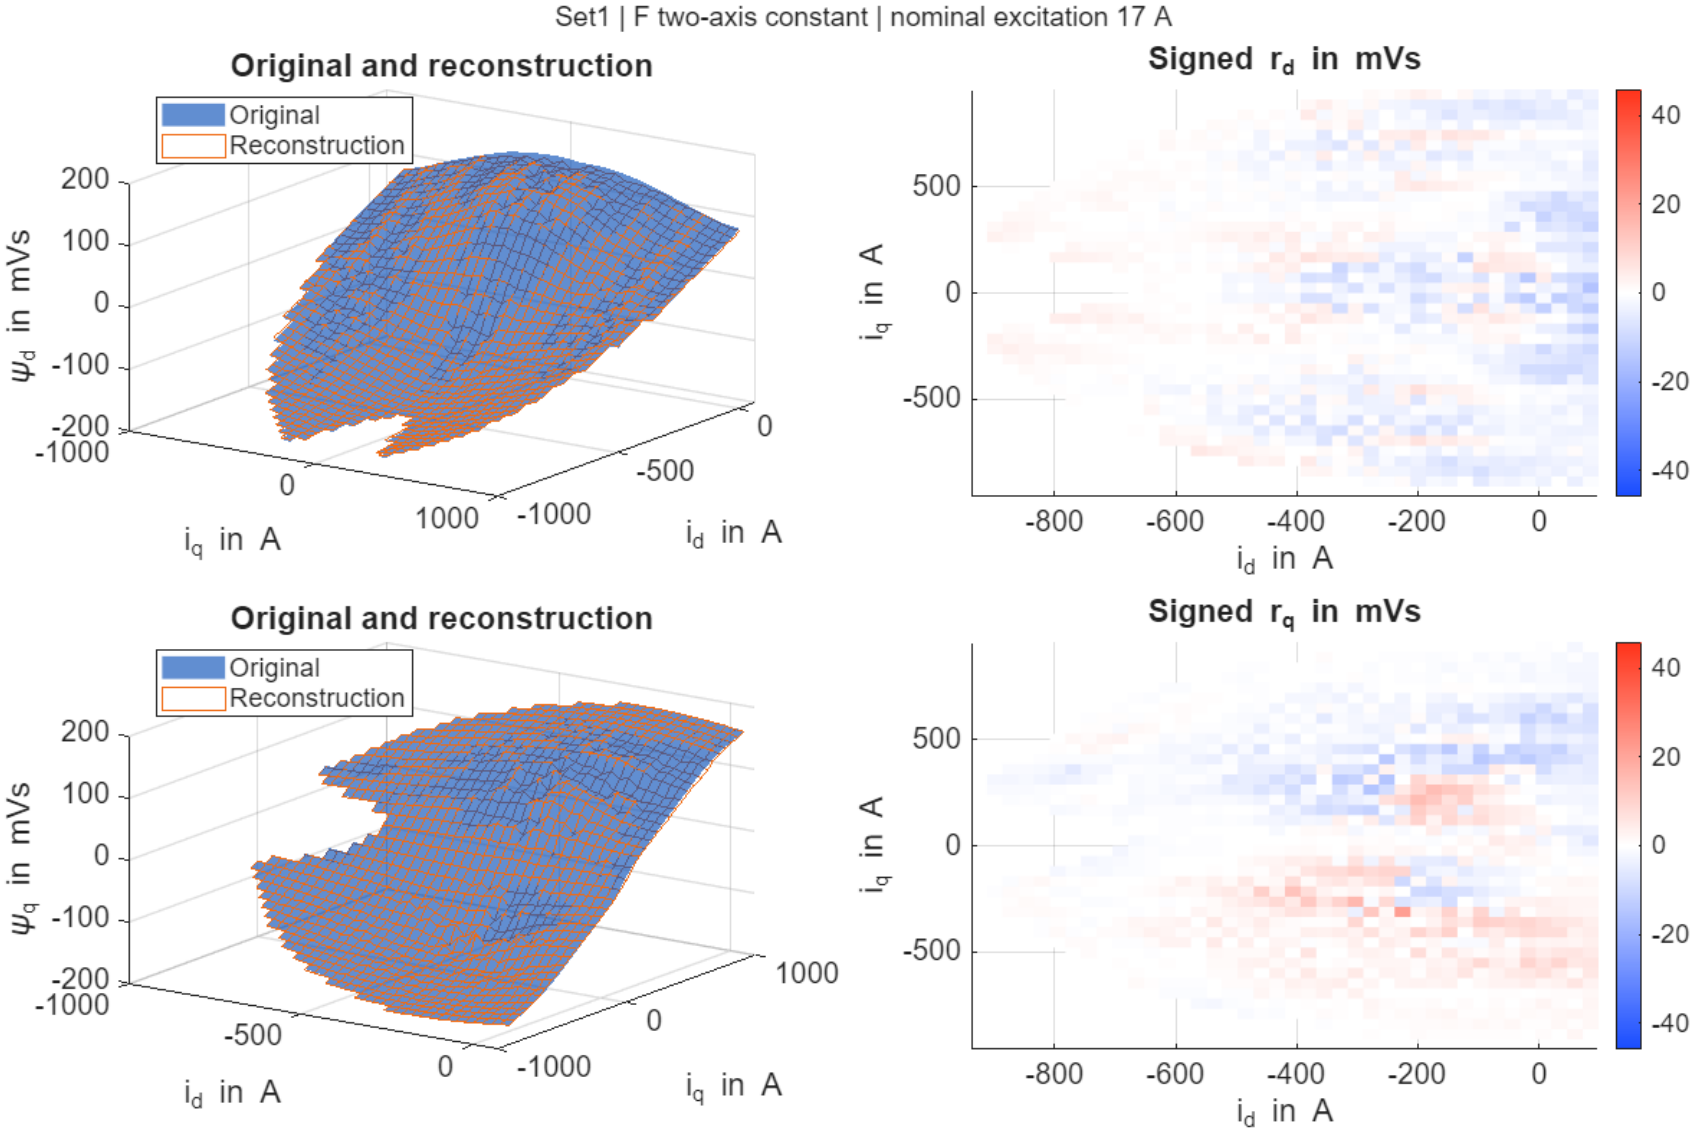

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method G, excitation 17 A

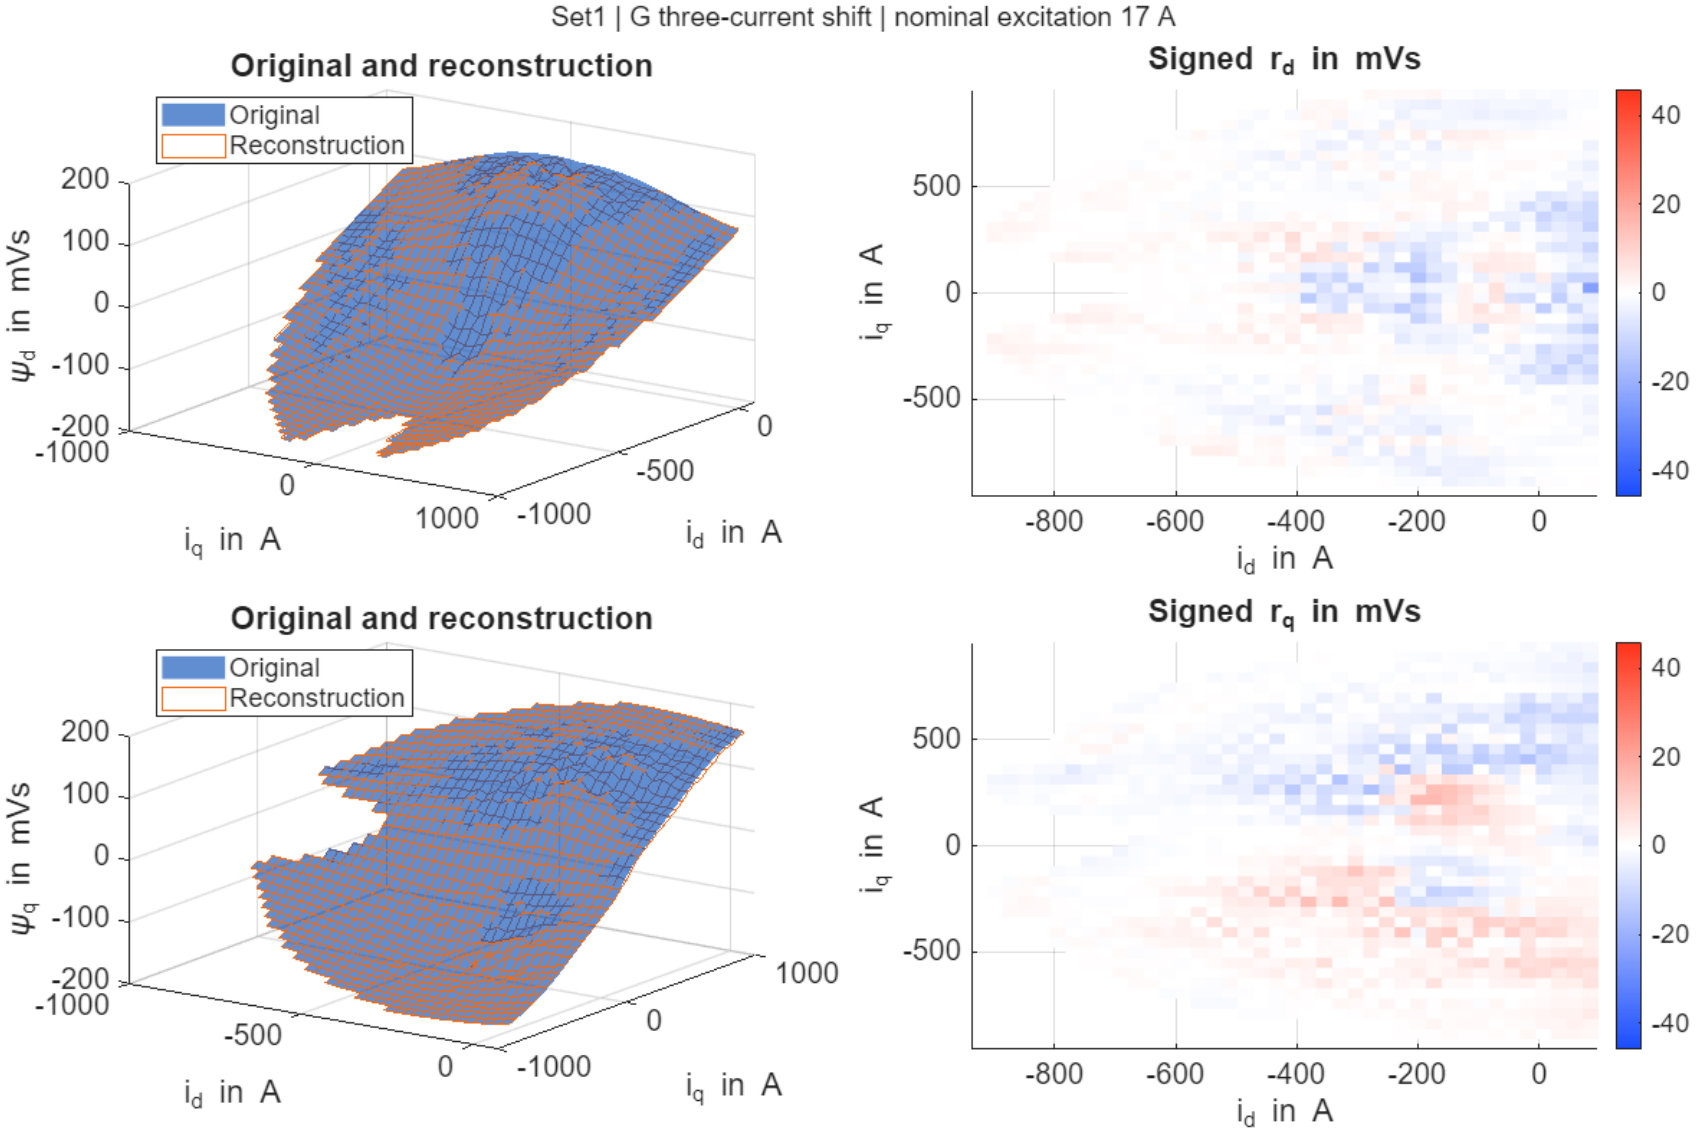

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method H, excitation 17 A

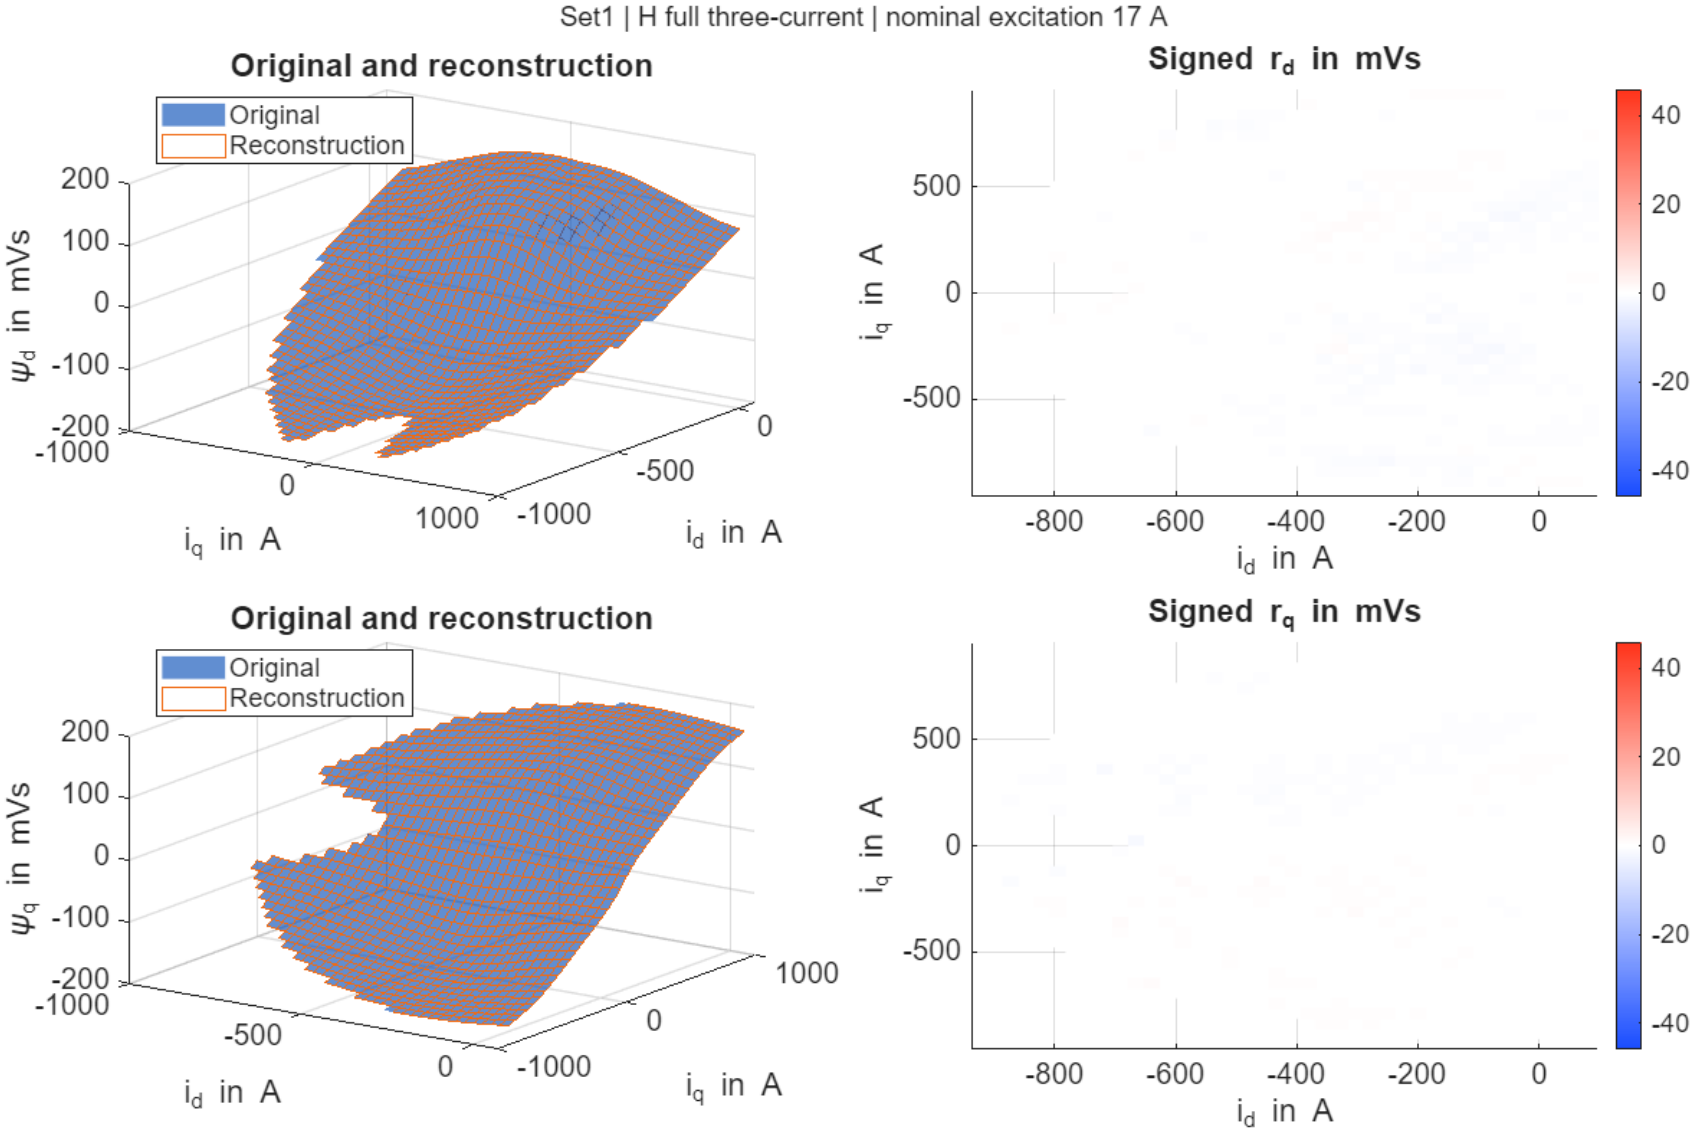

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method A, excitation 20 A

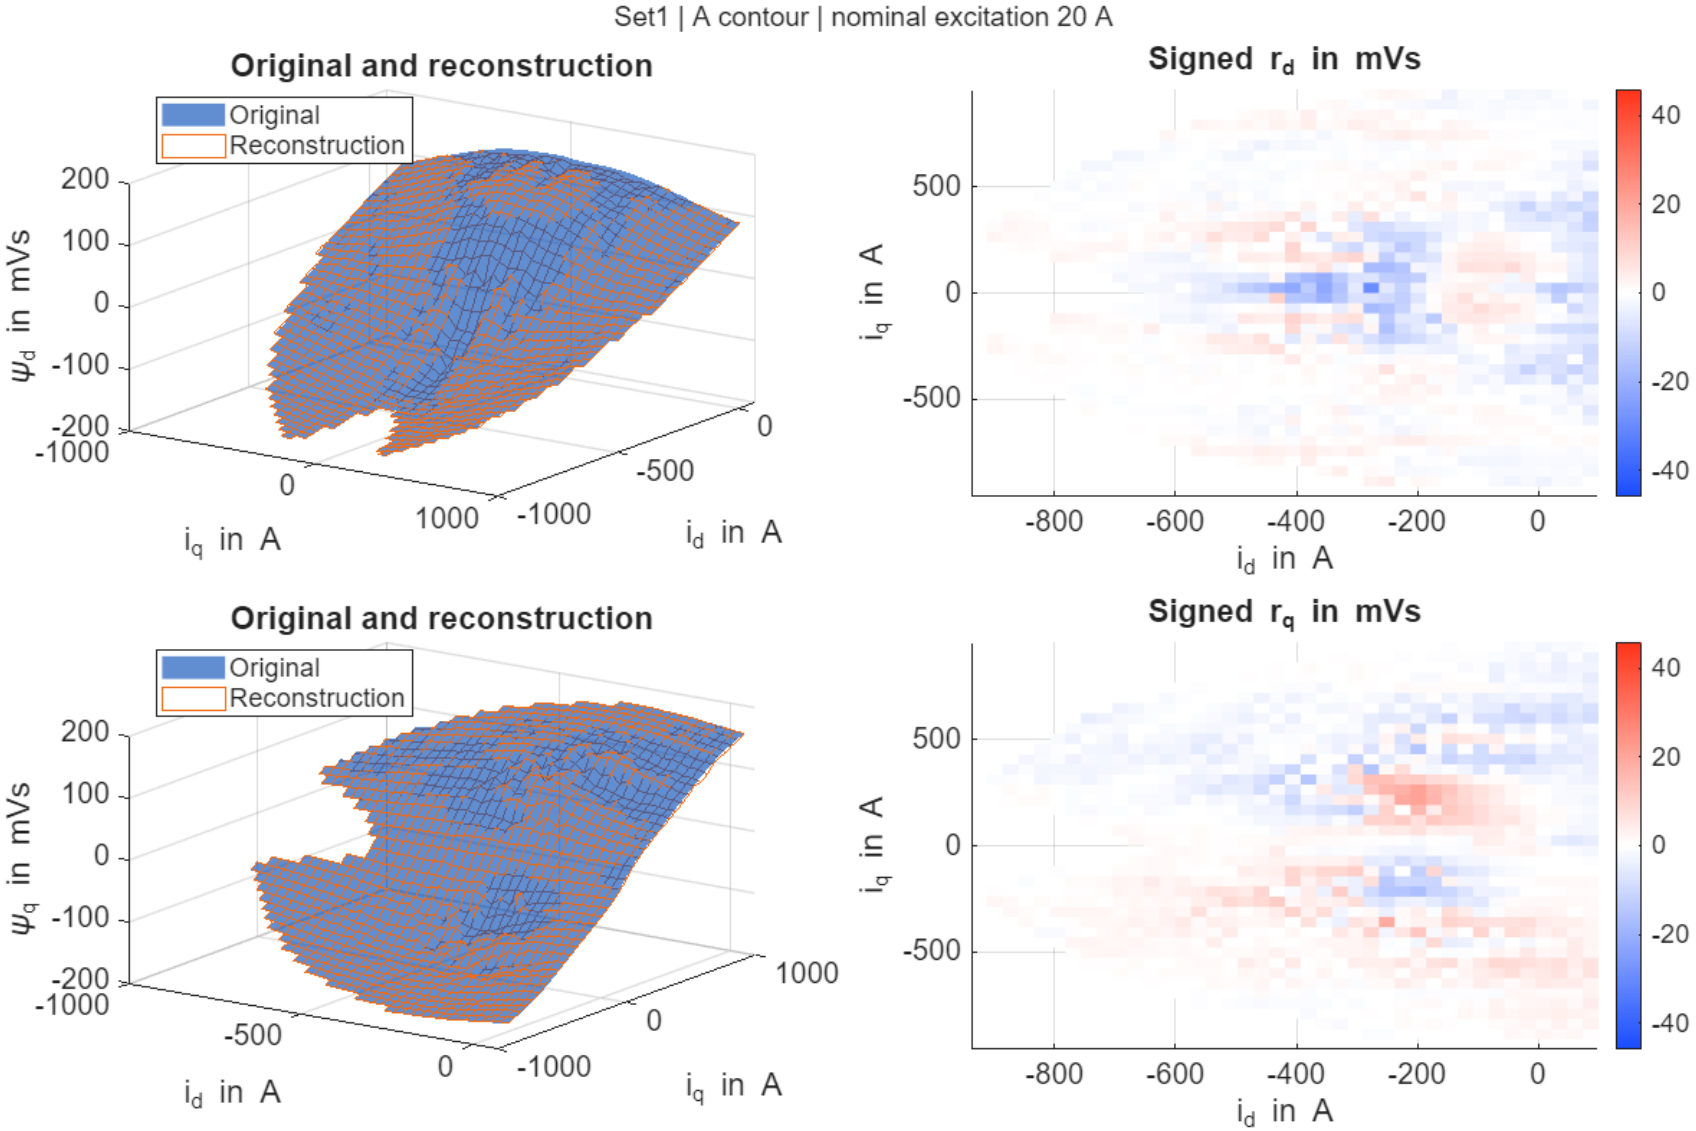

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method B, excitation 20 A

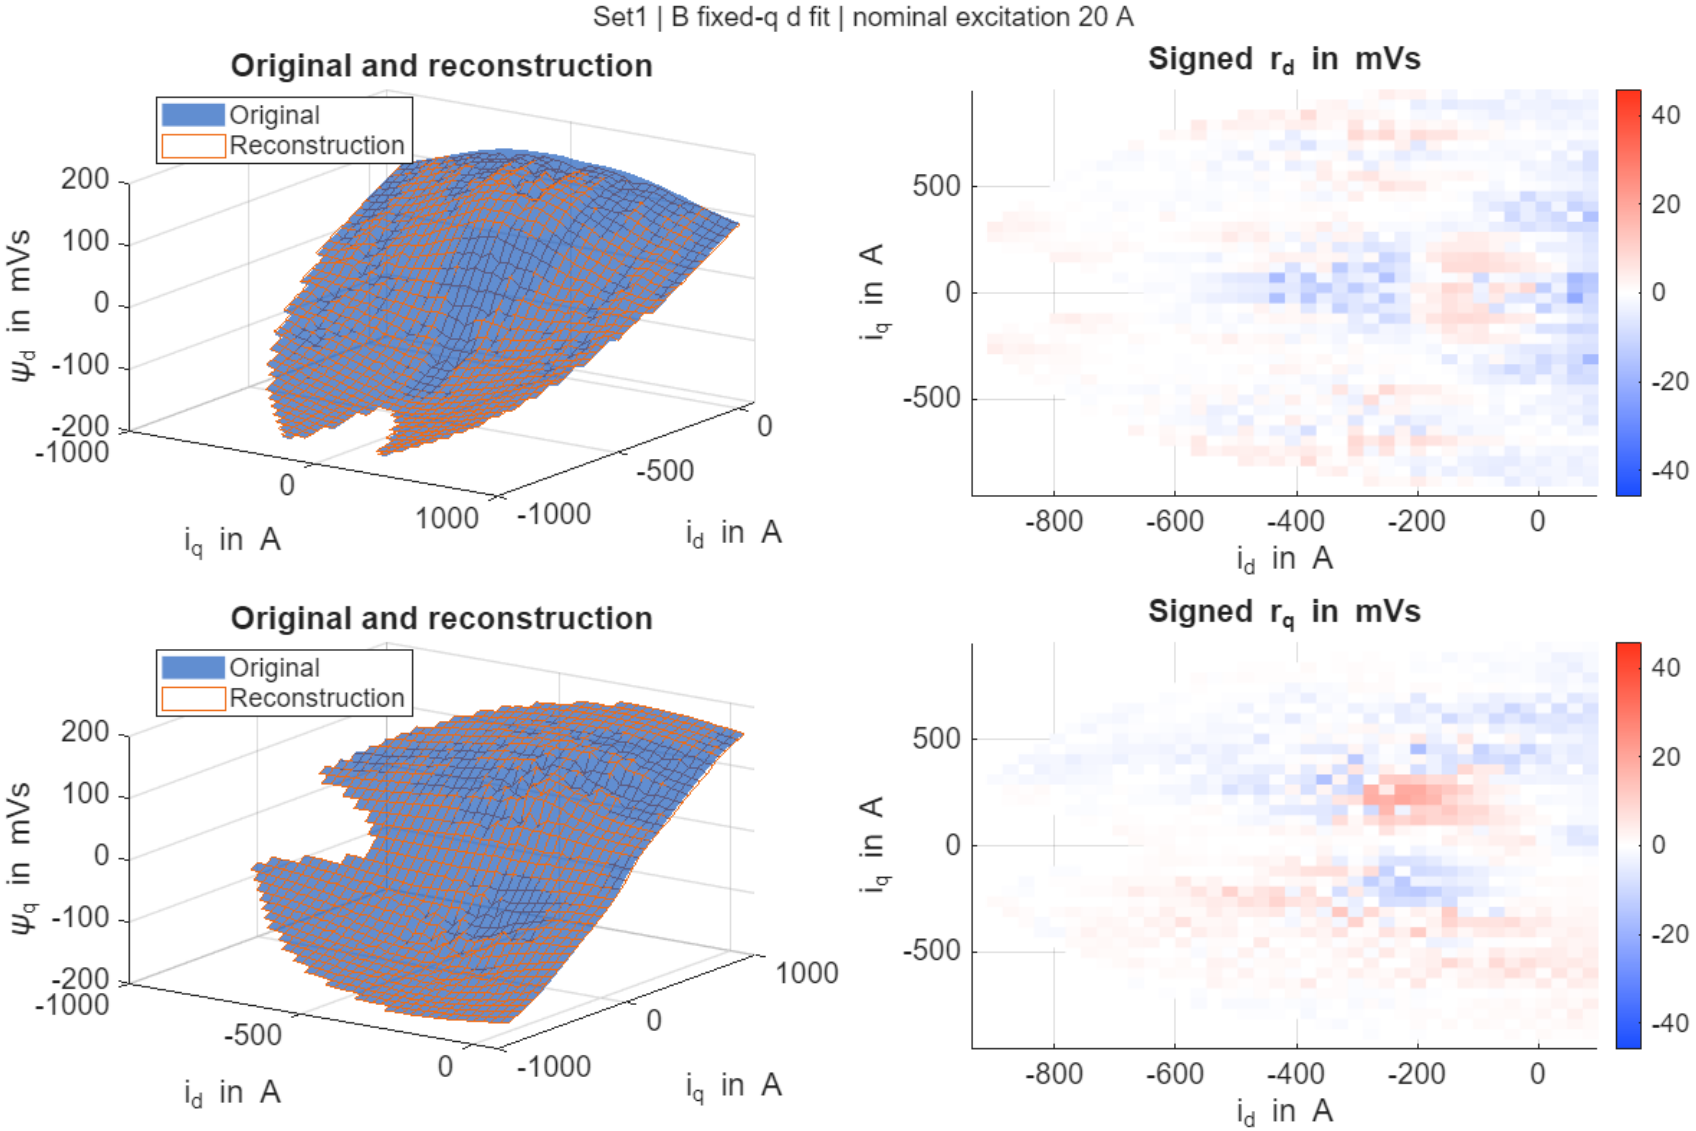

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method C, excitation 20 A

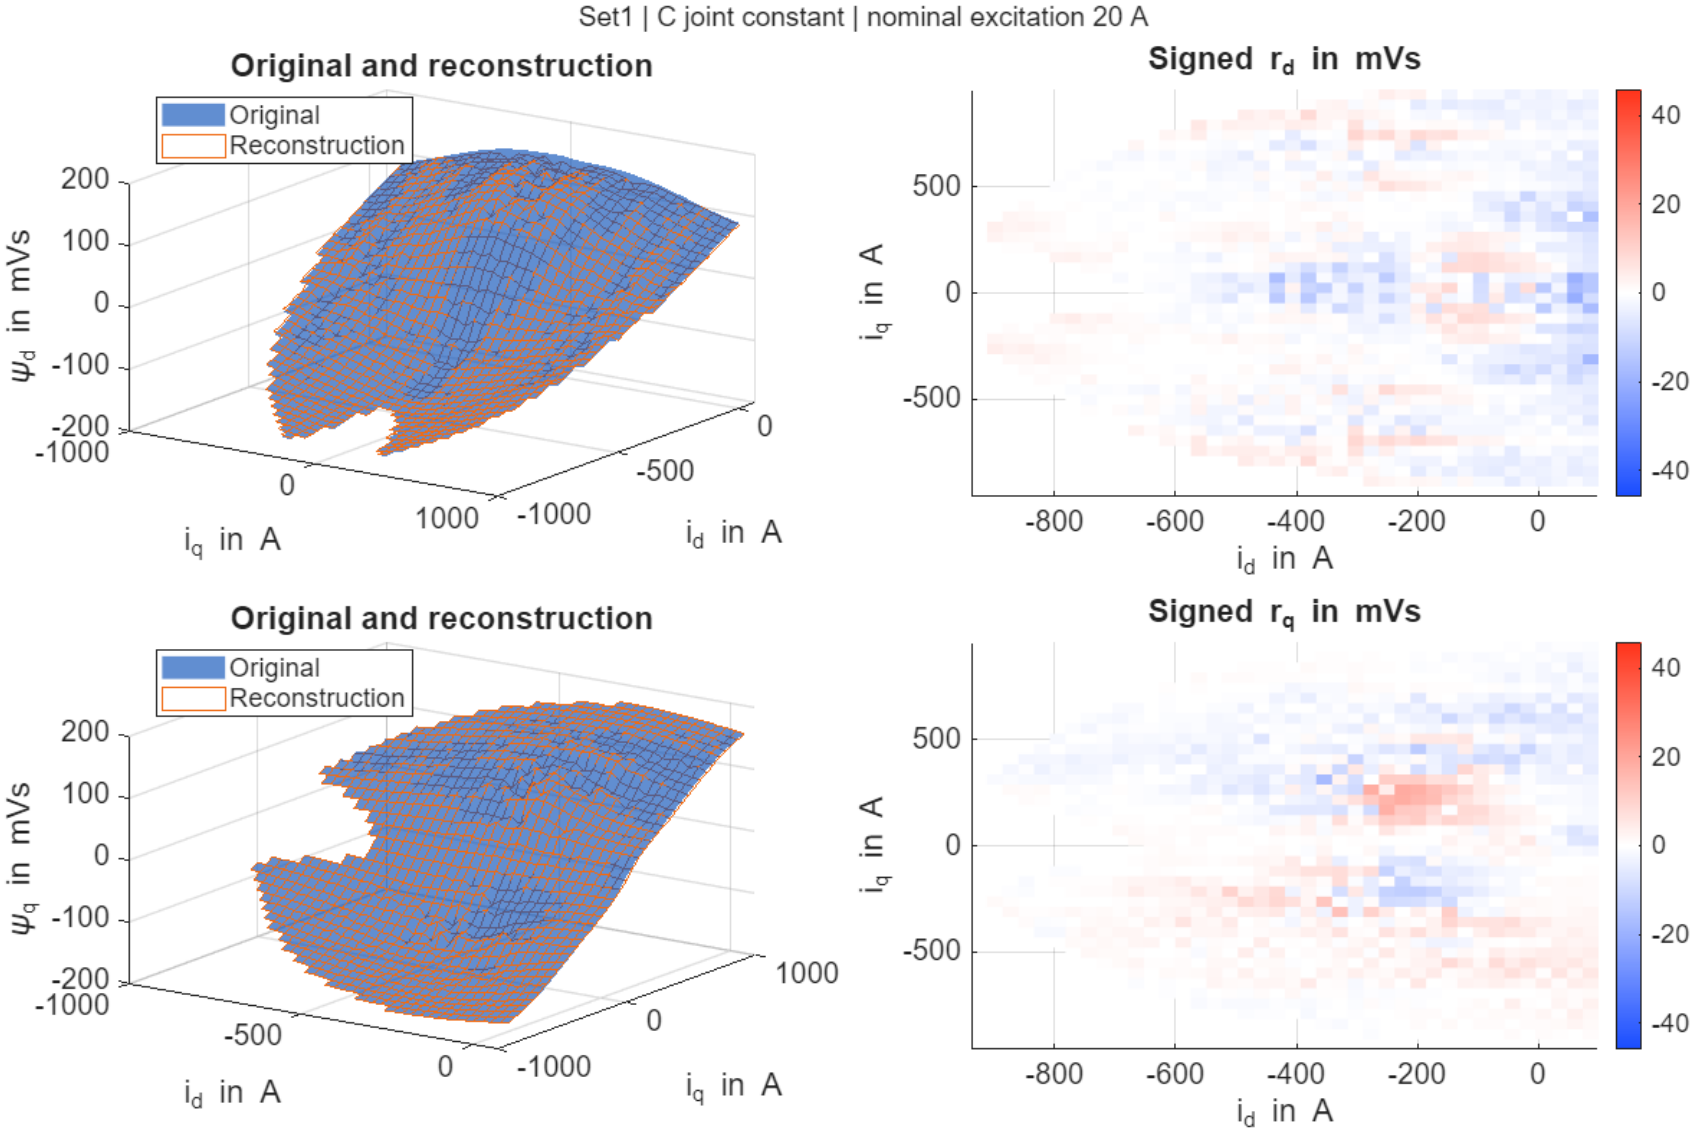

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method D, excitation 20 A

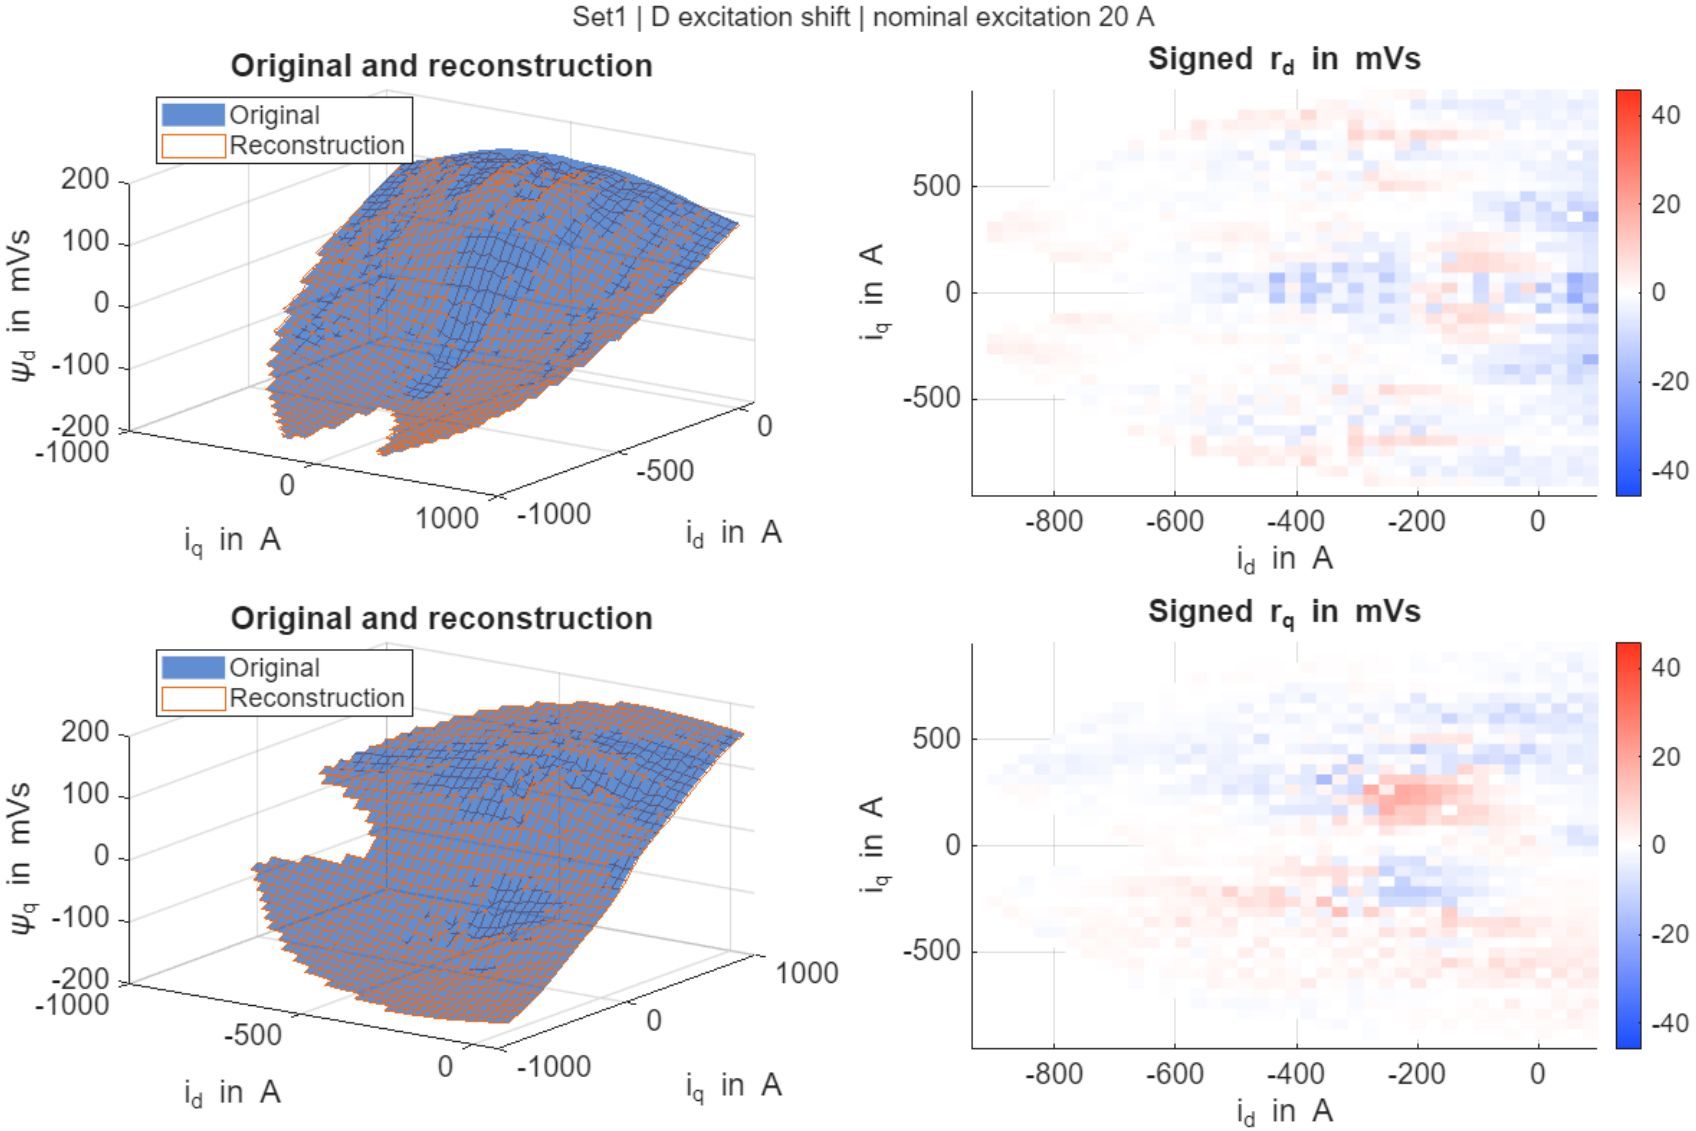

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method E, excitation 20 A

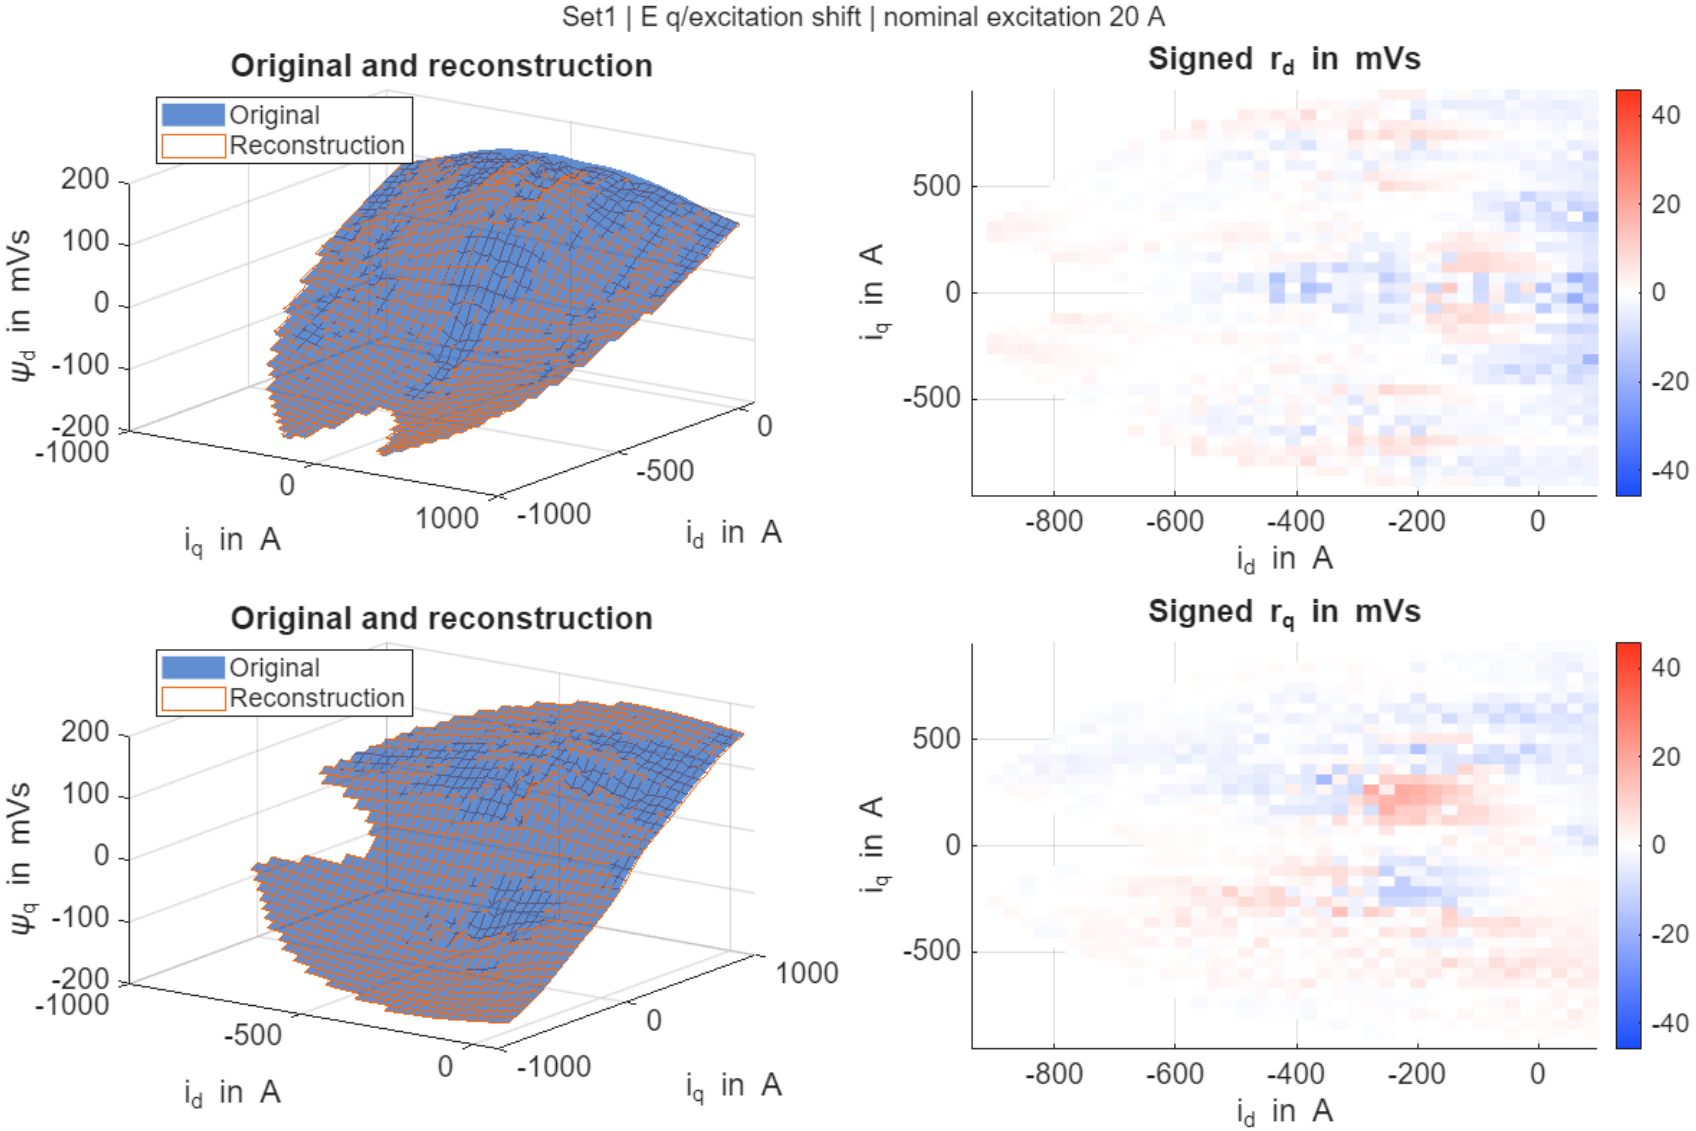

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method F, excitation 20 A

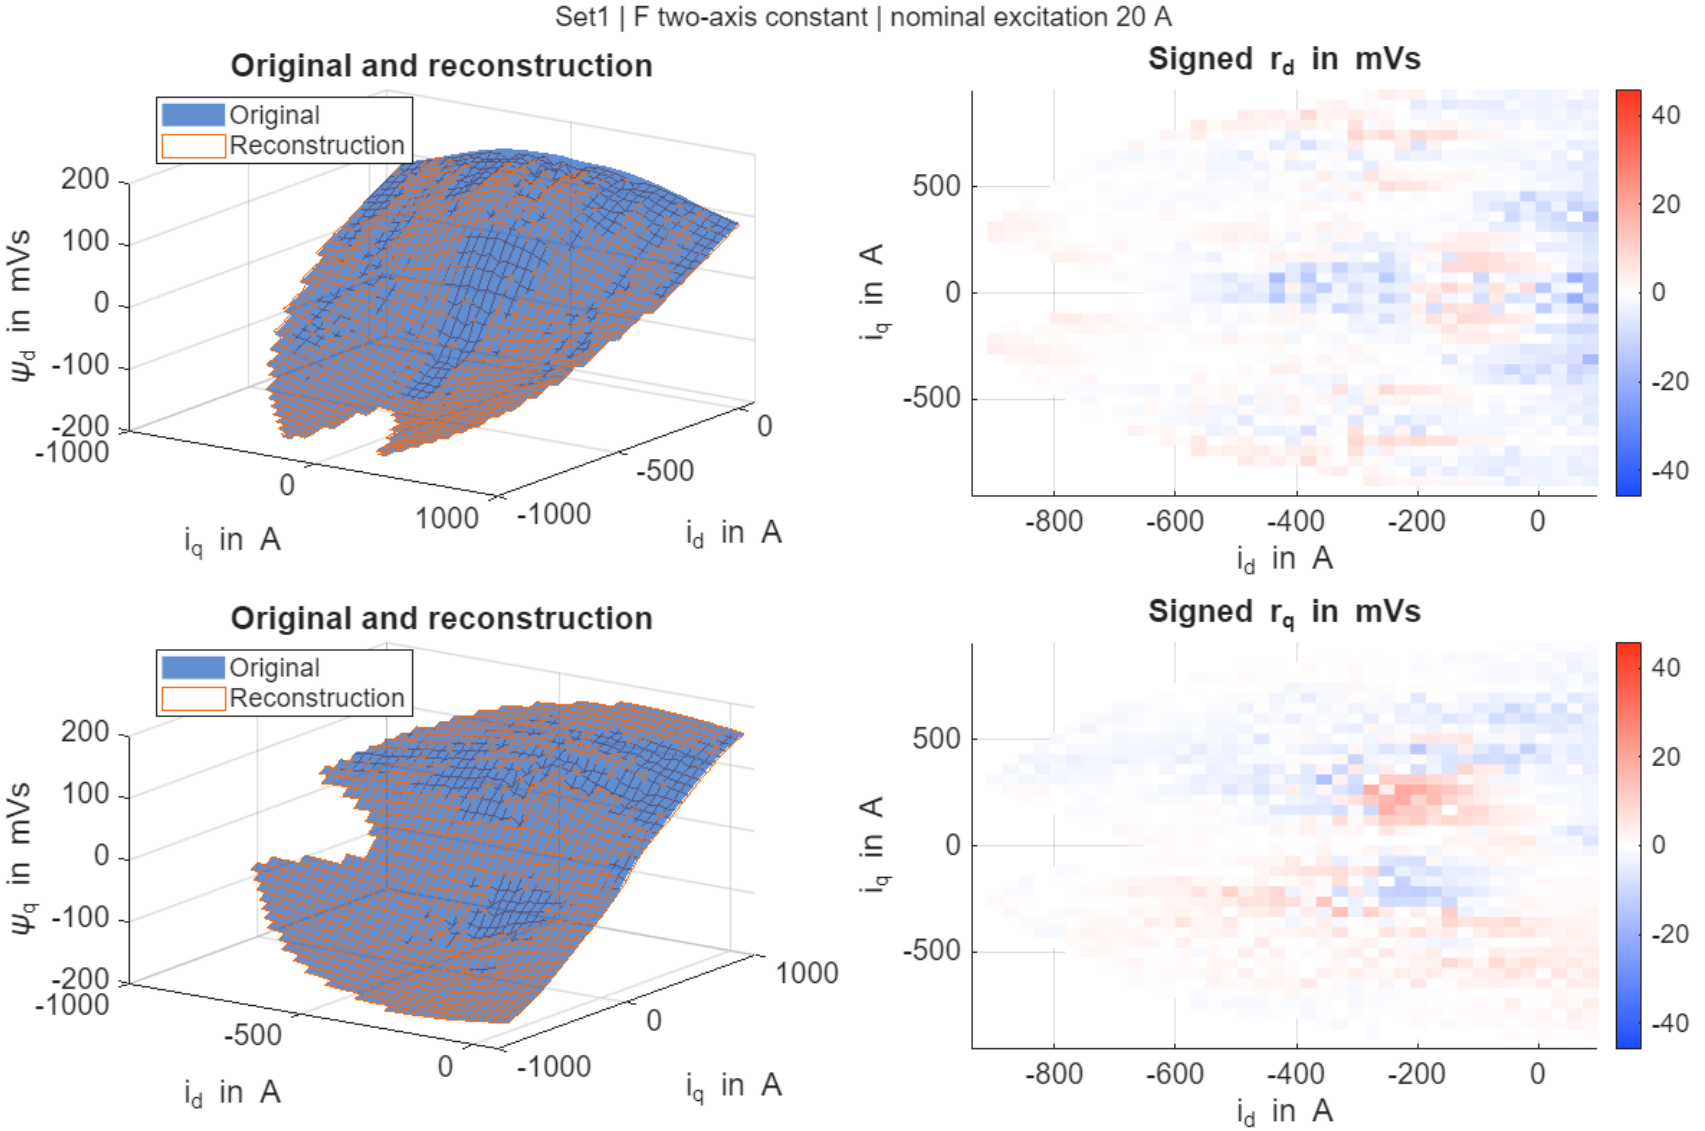

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method G, excitation 20 A

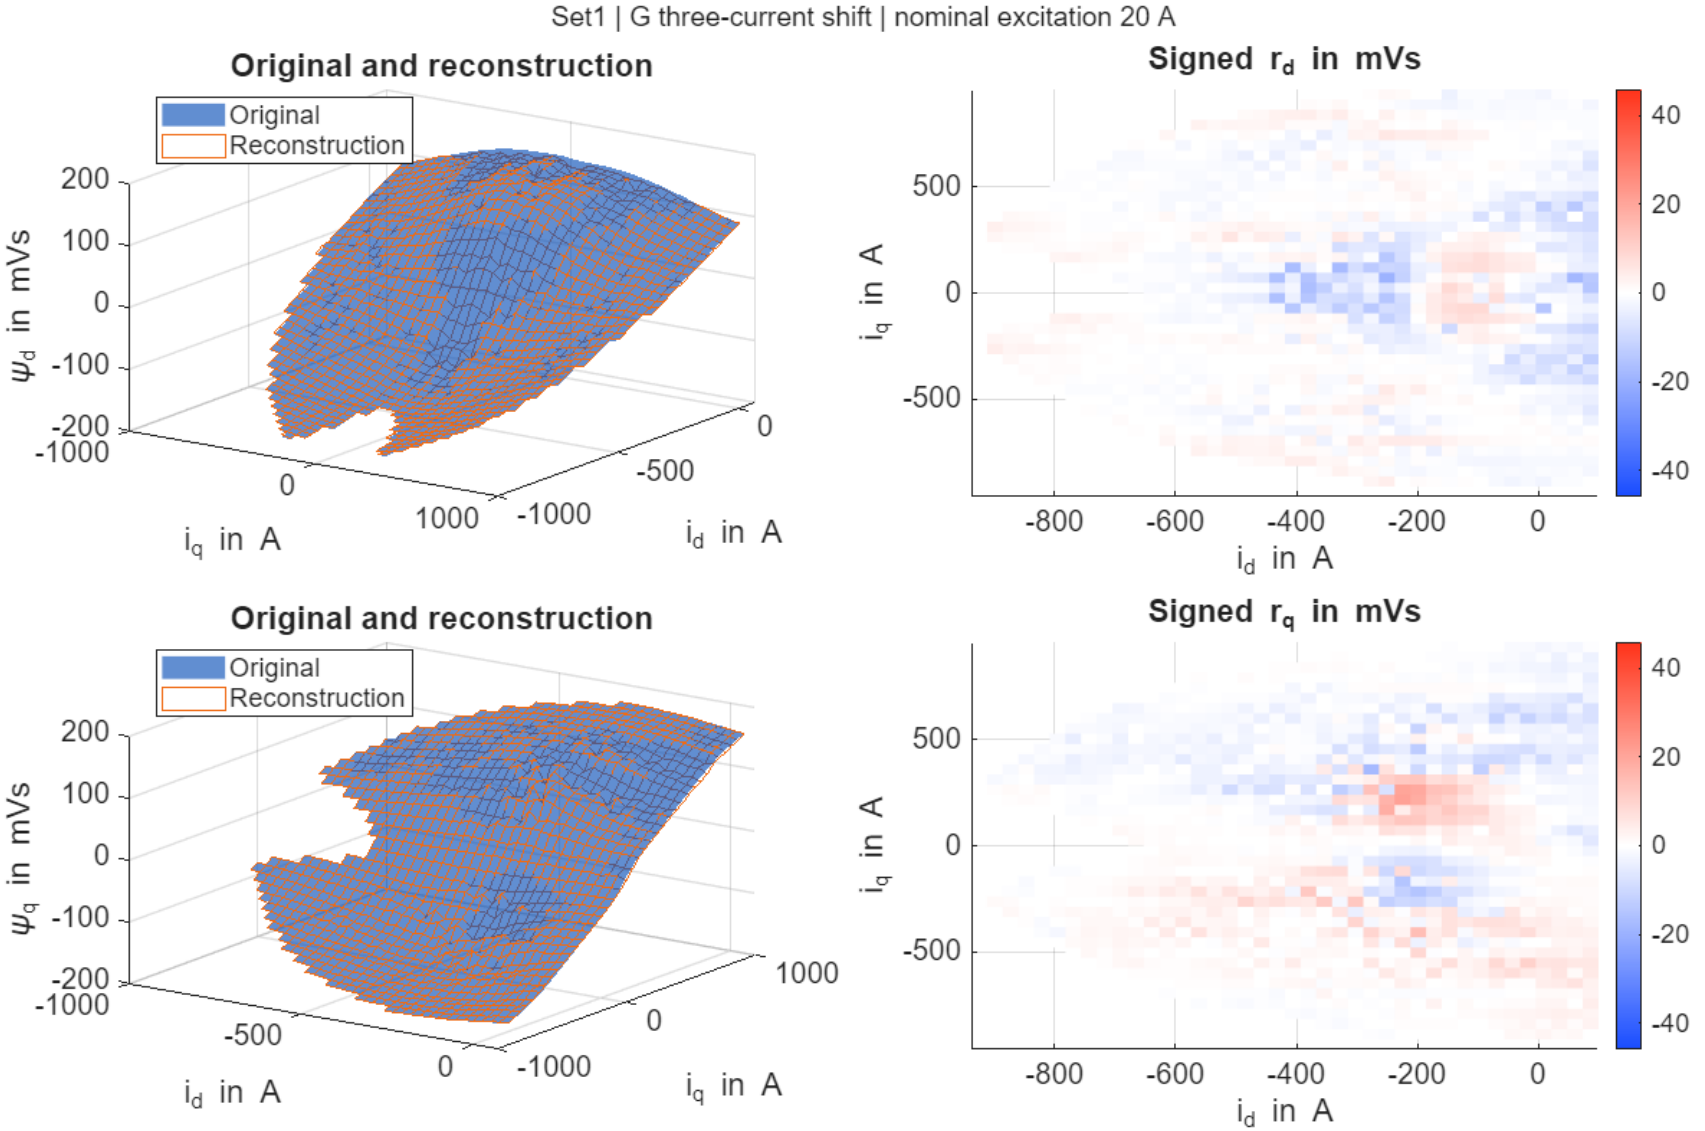

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method H, excitation 20 A

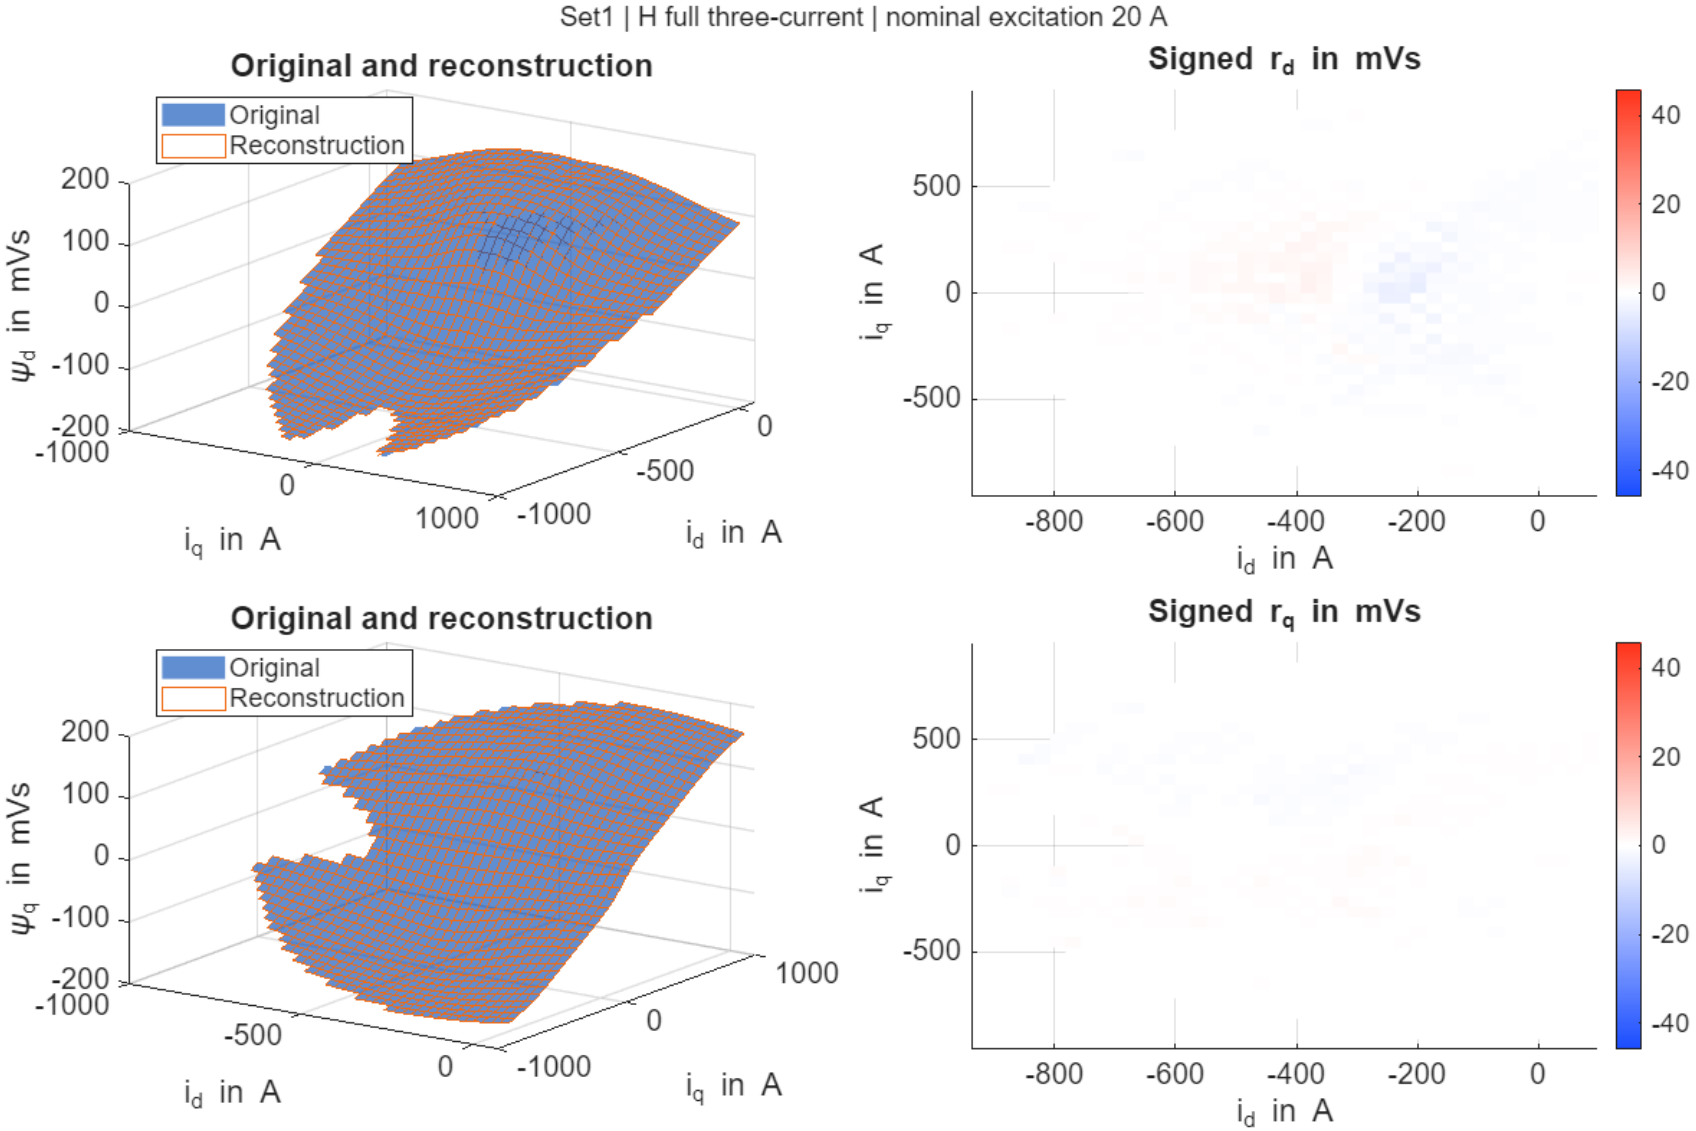

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method A, excitation 23 A

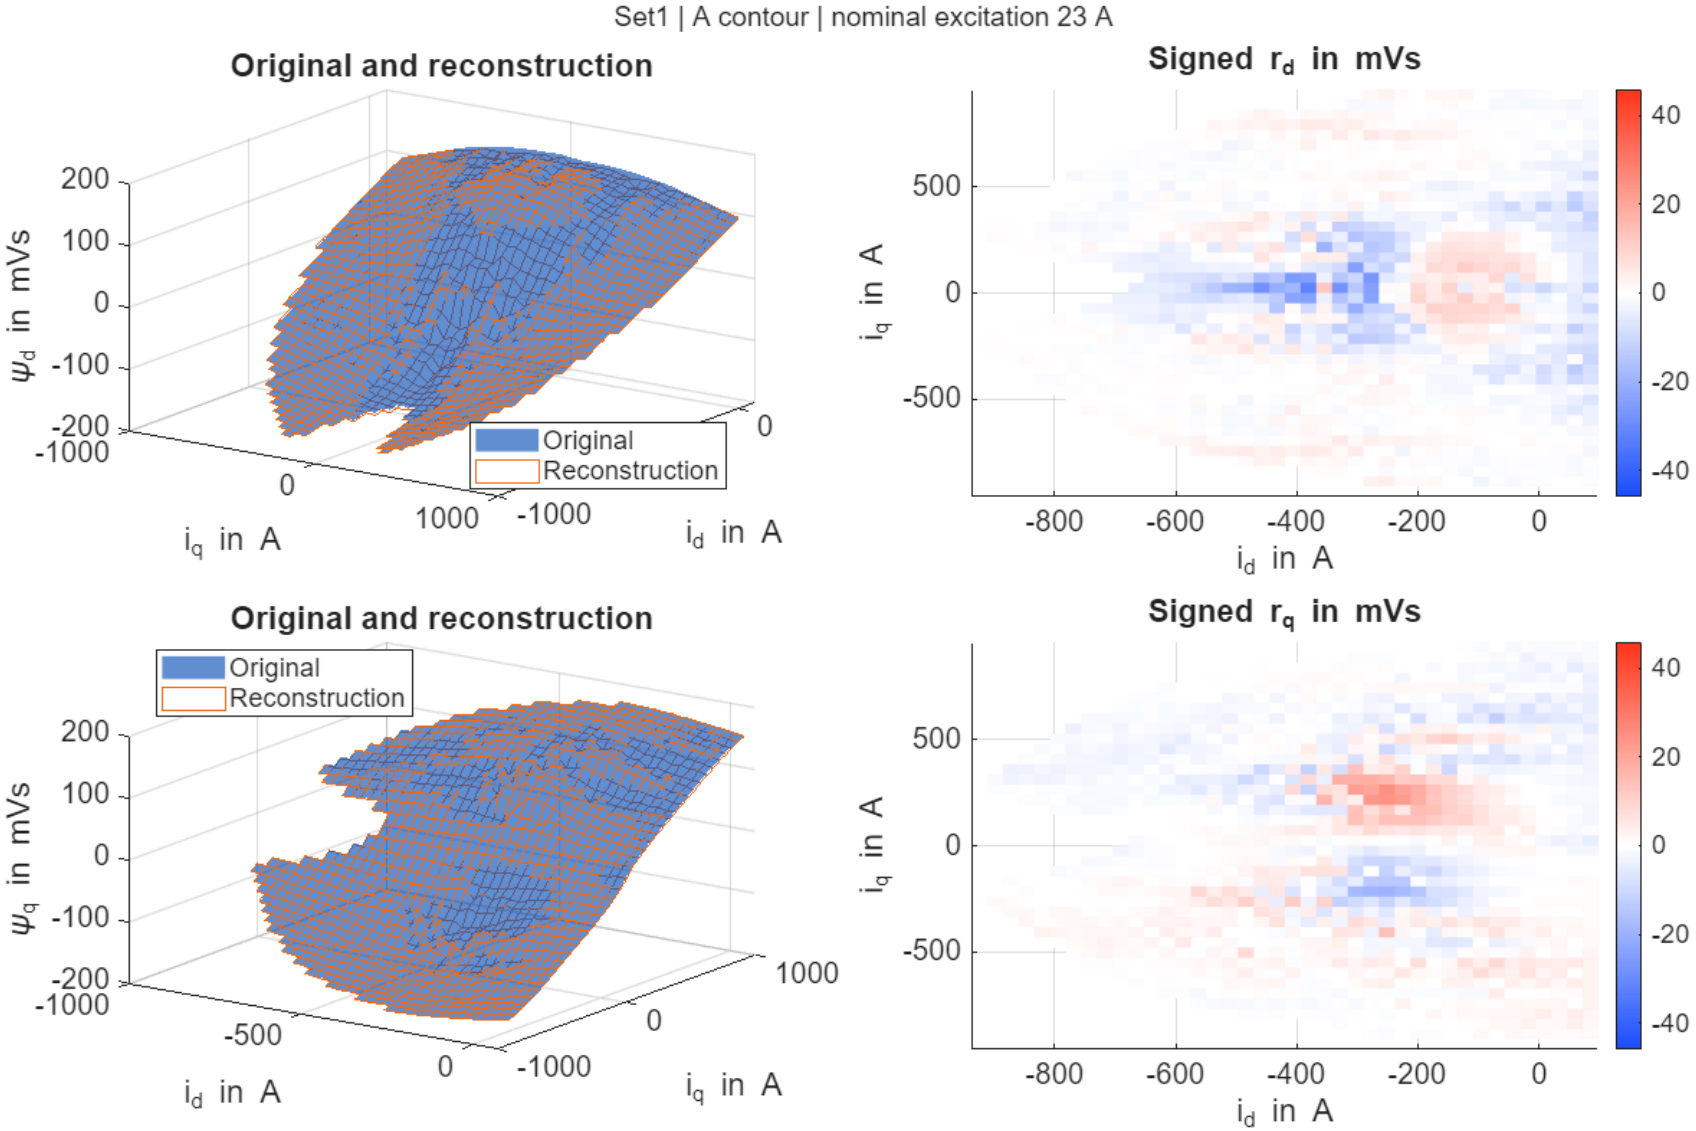

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method B, excitation 23 A

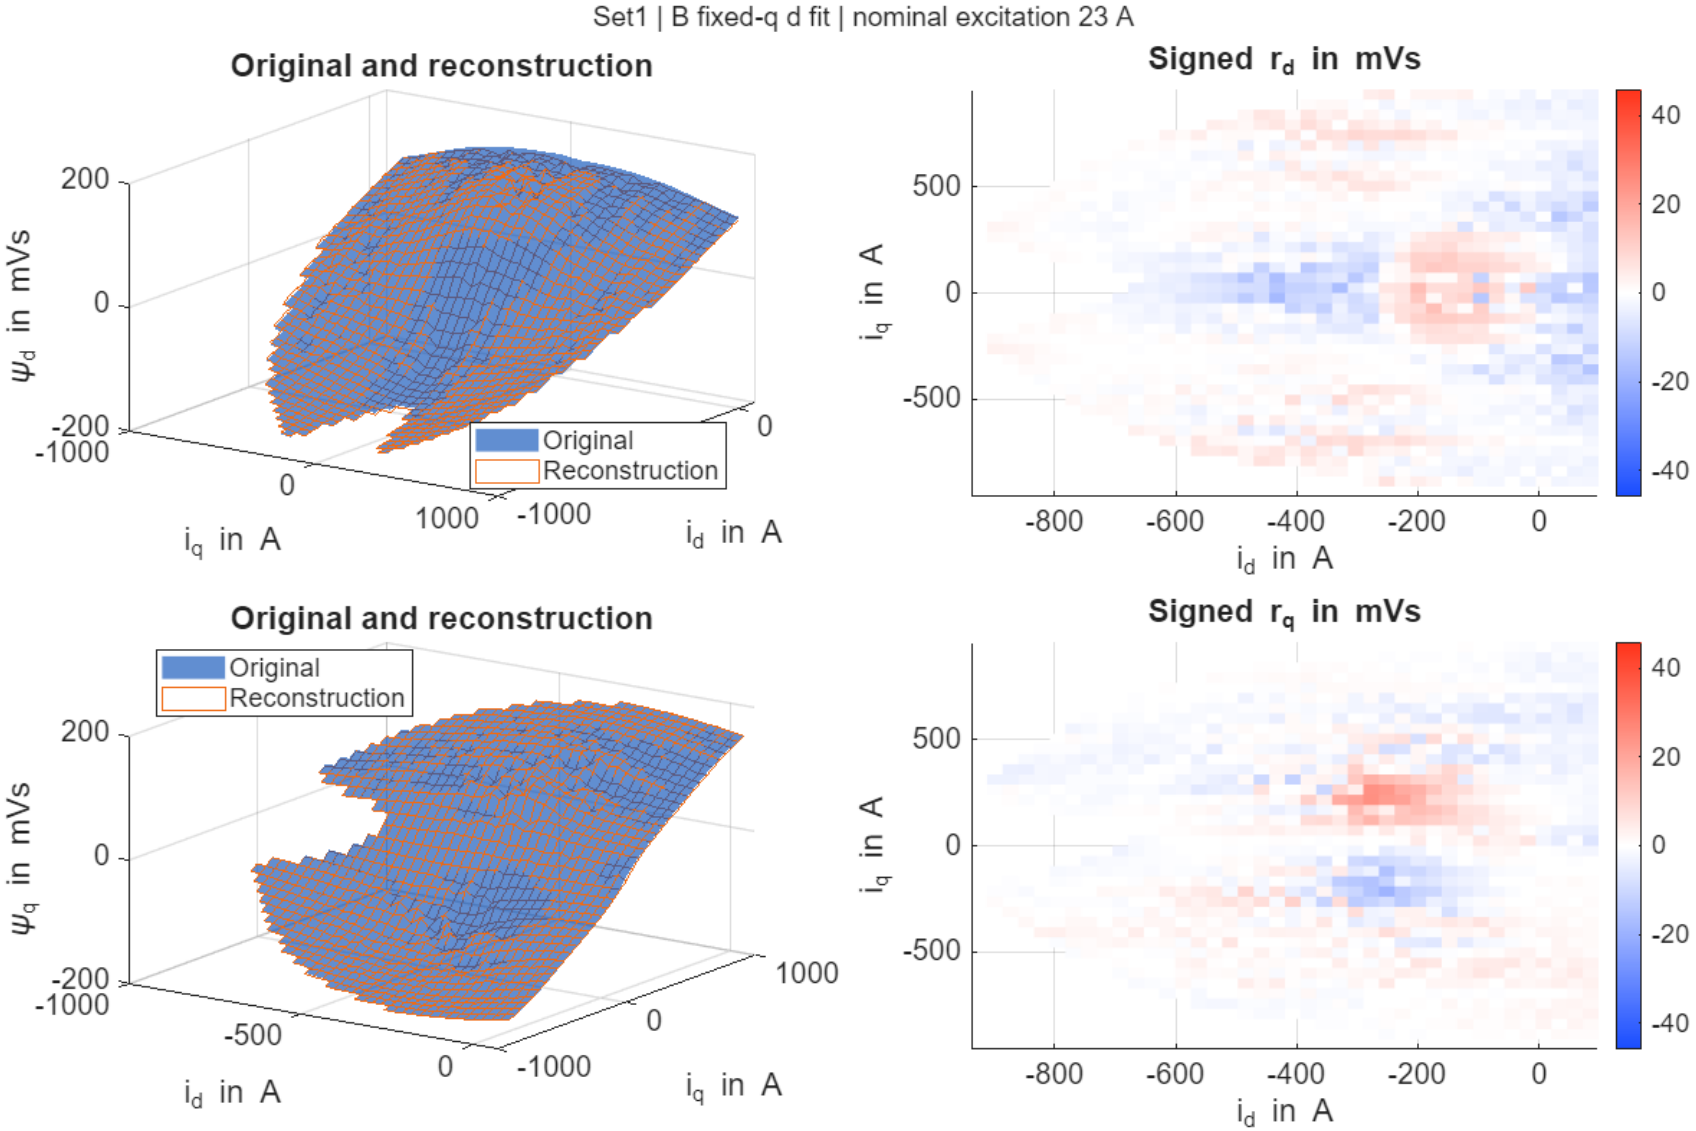

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method C, excitation 23 A

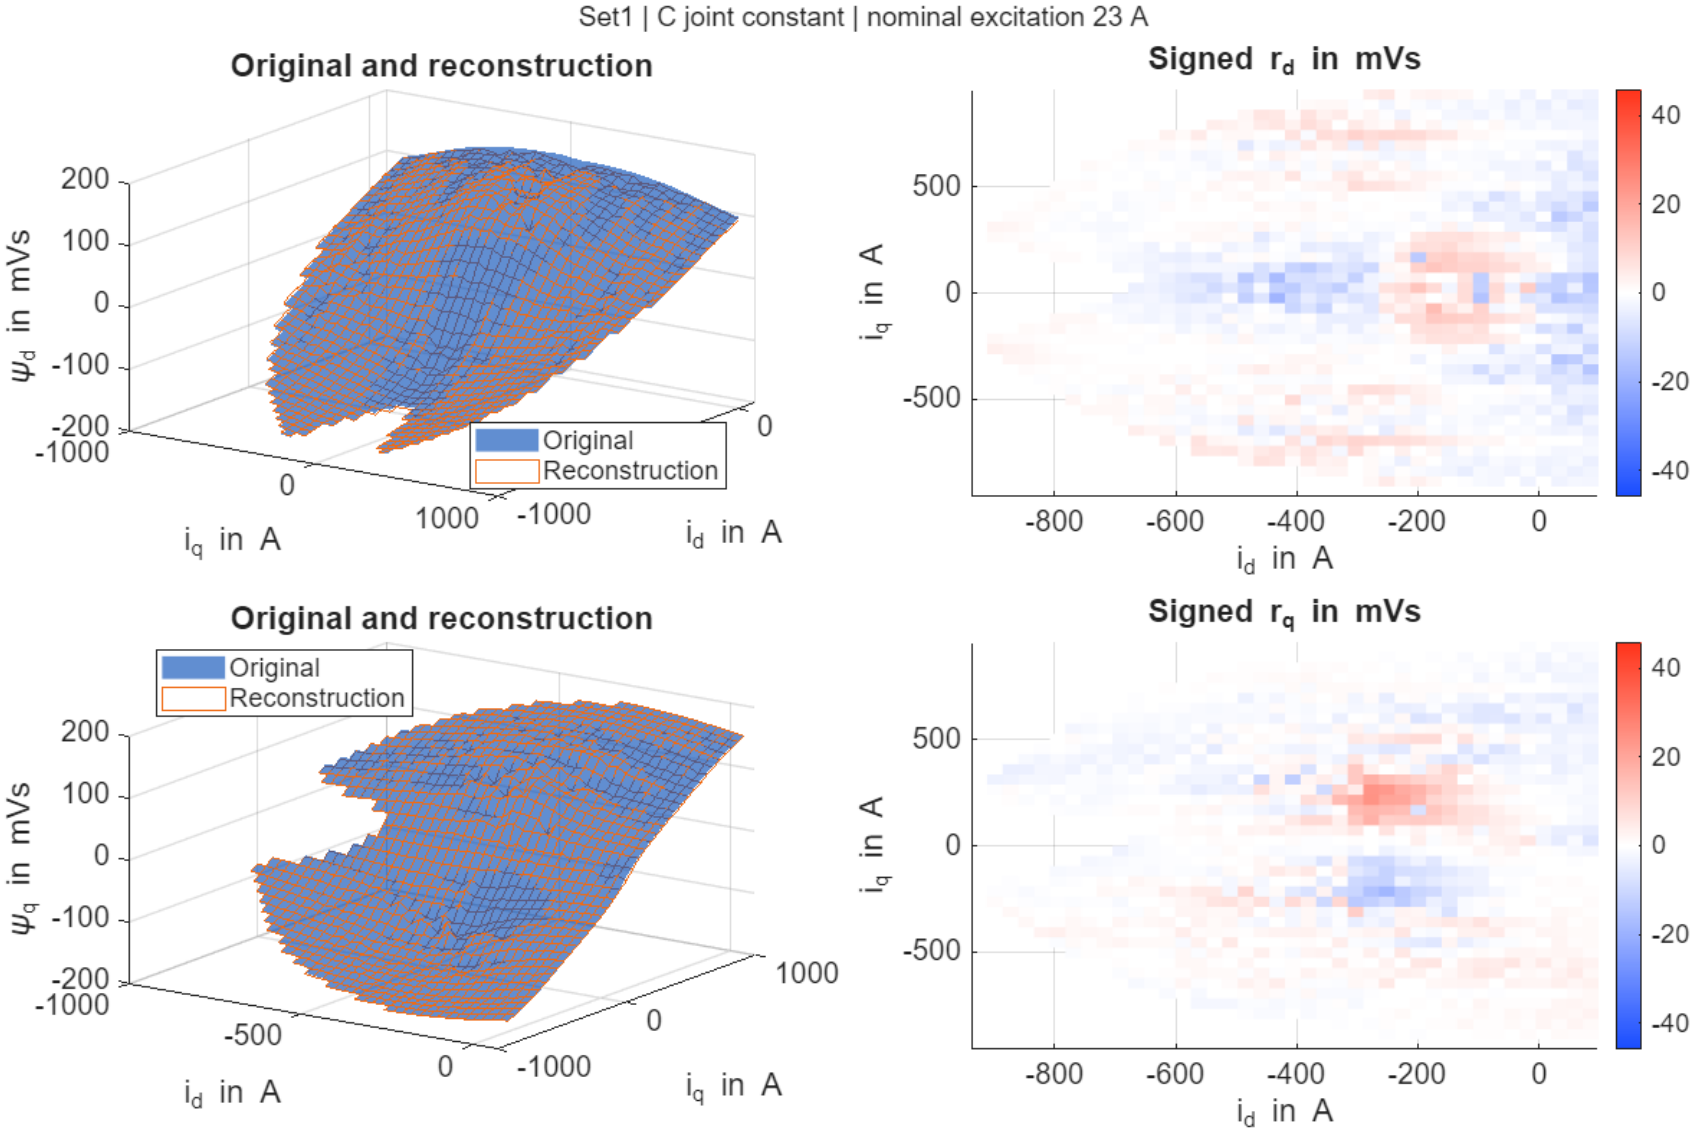

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method D, excitation 23 A

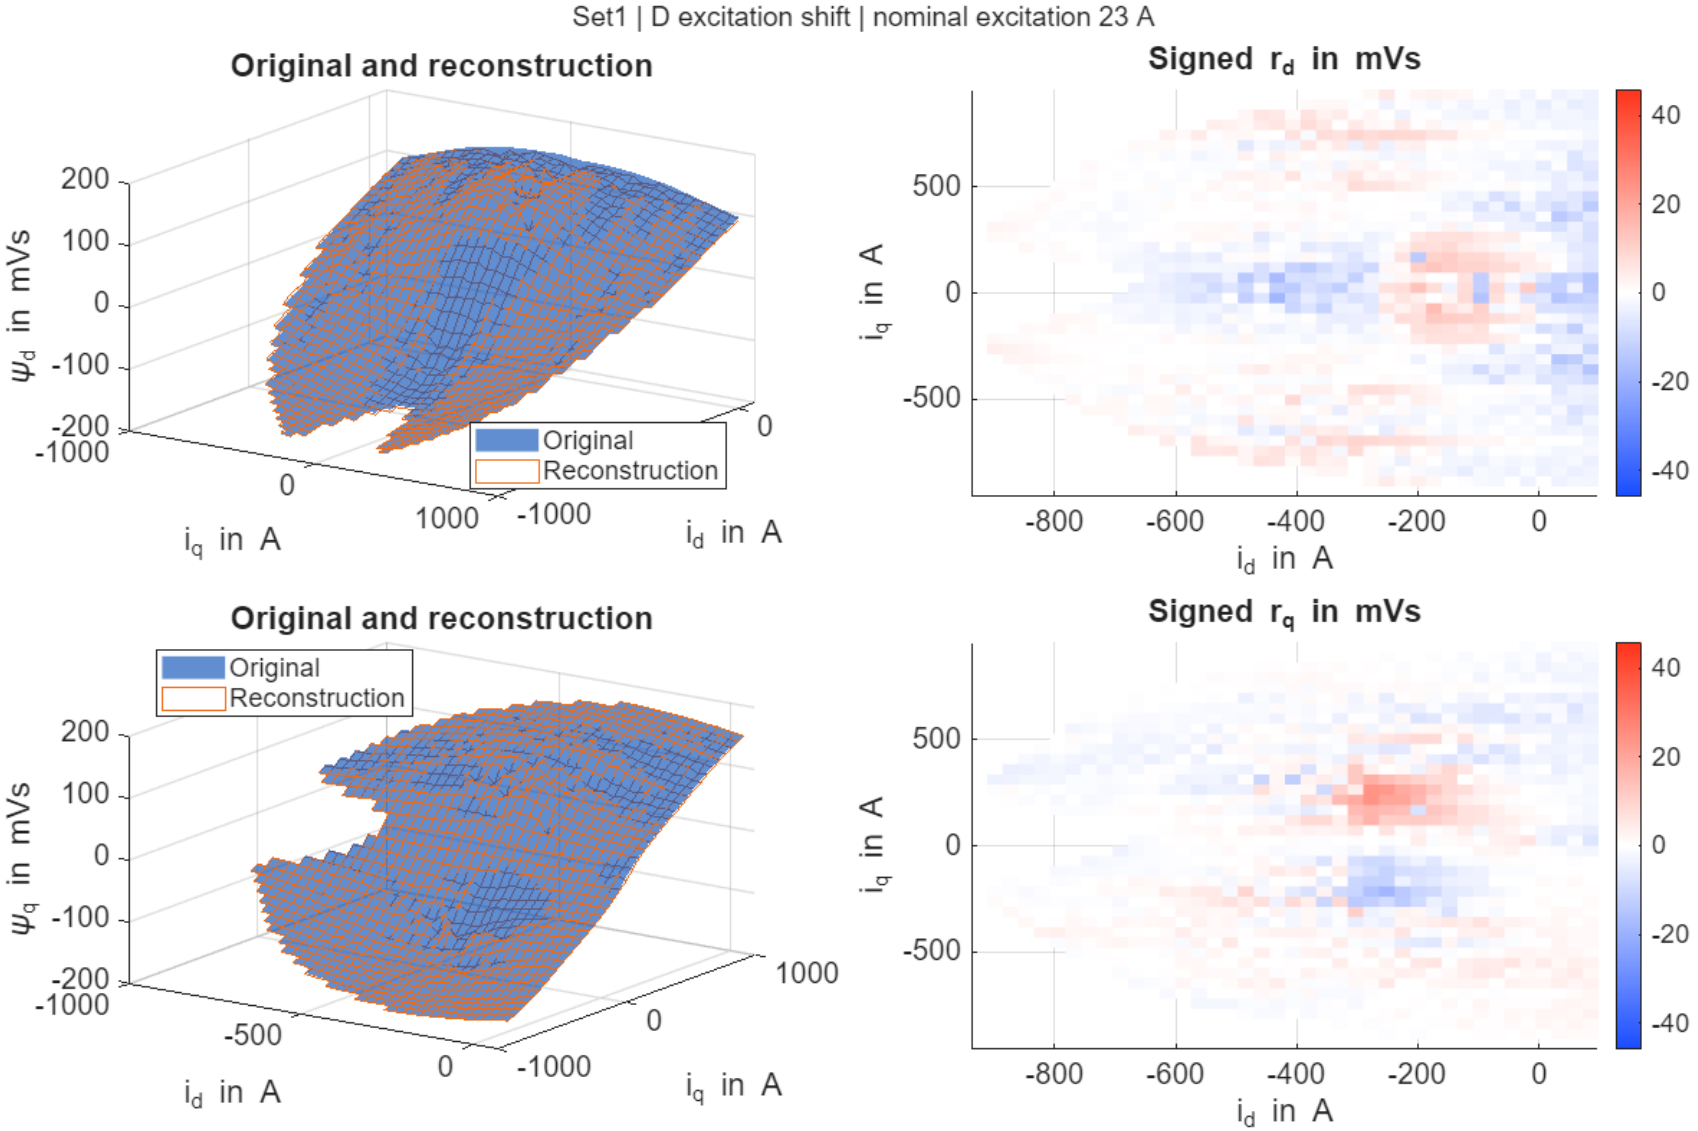

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method E, excitation 23 A

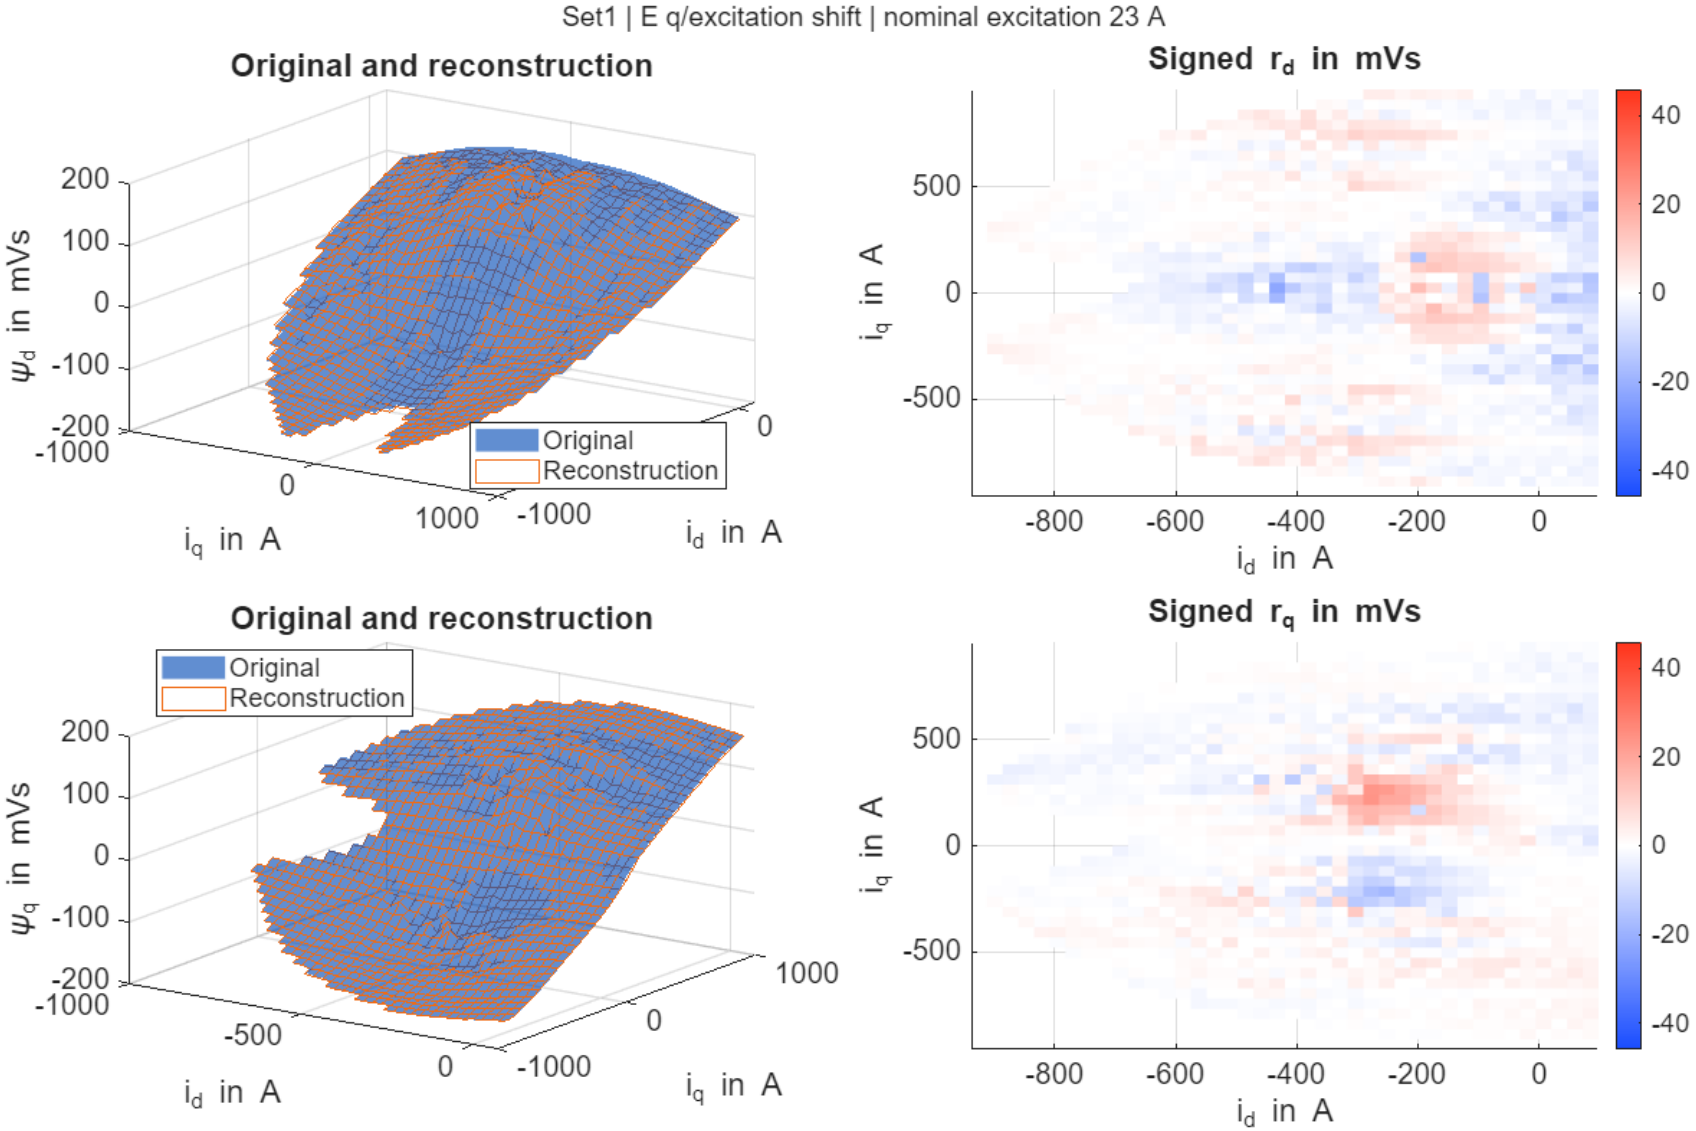

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method F, excitation 23 A

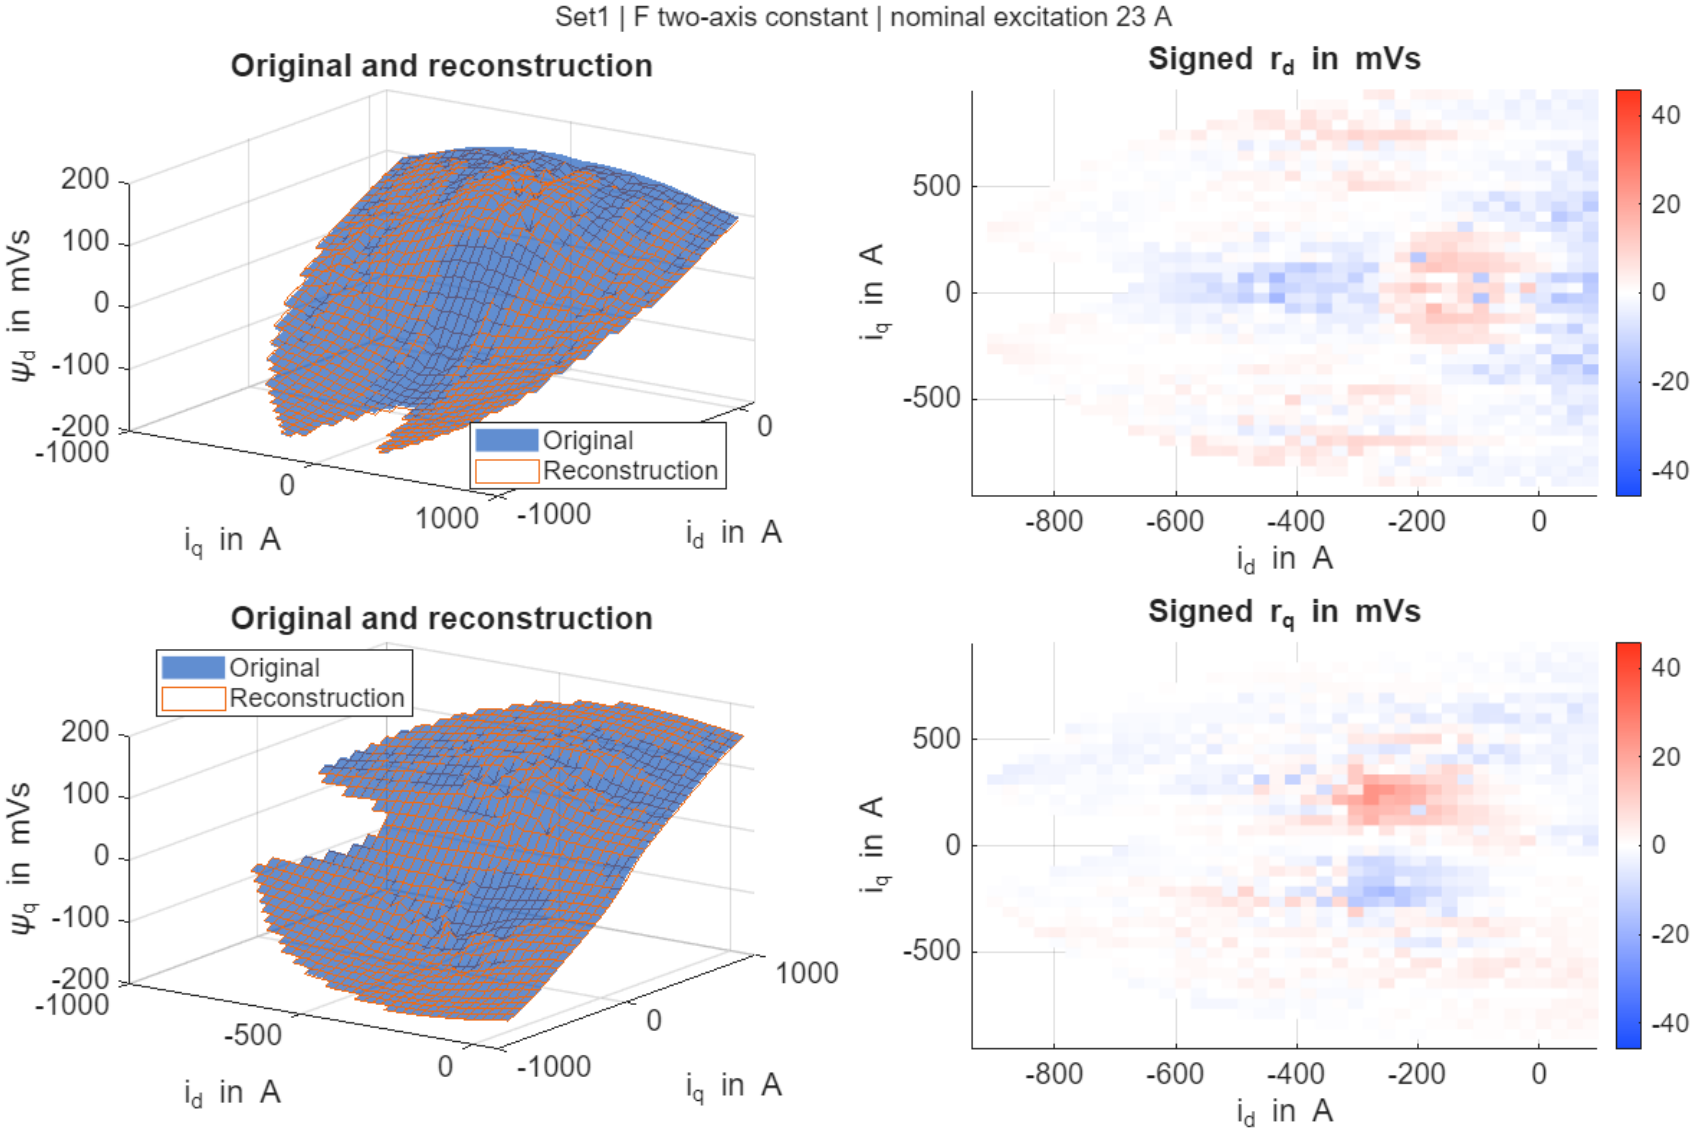

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method G, excitation 23 A

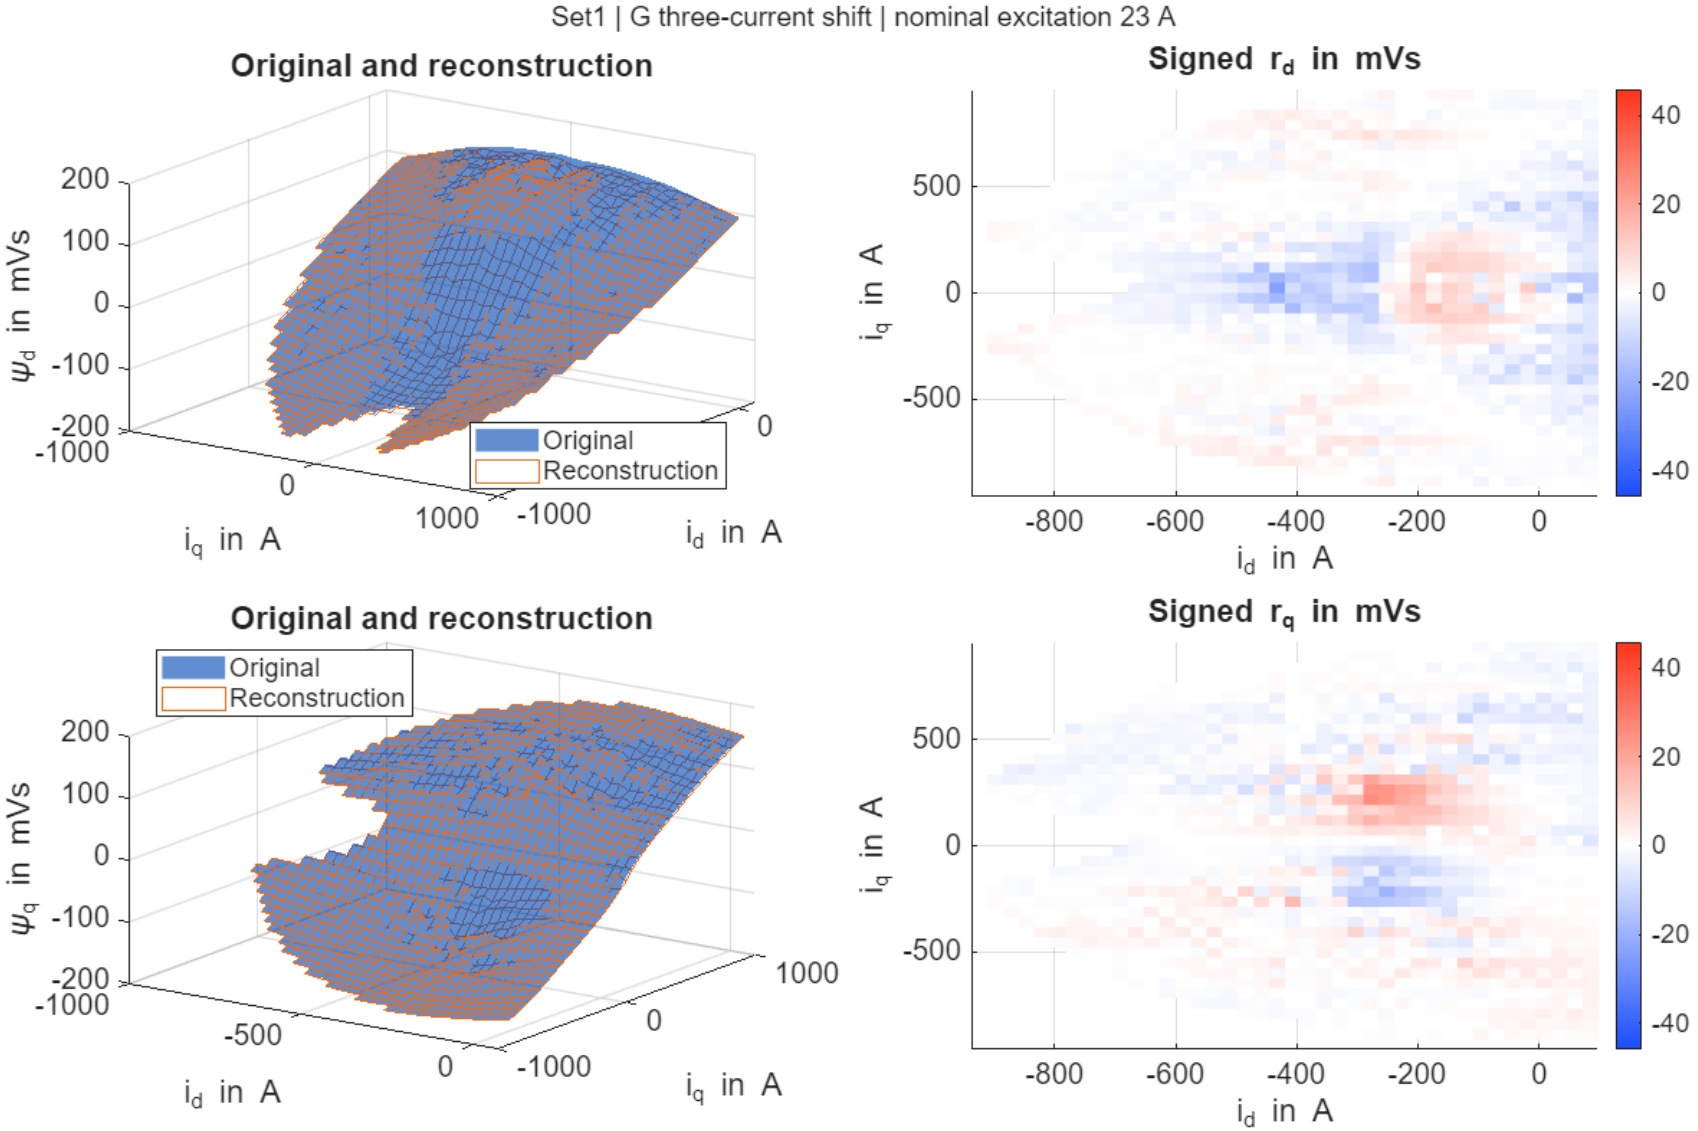

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method H, excitation 23 A

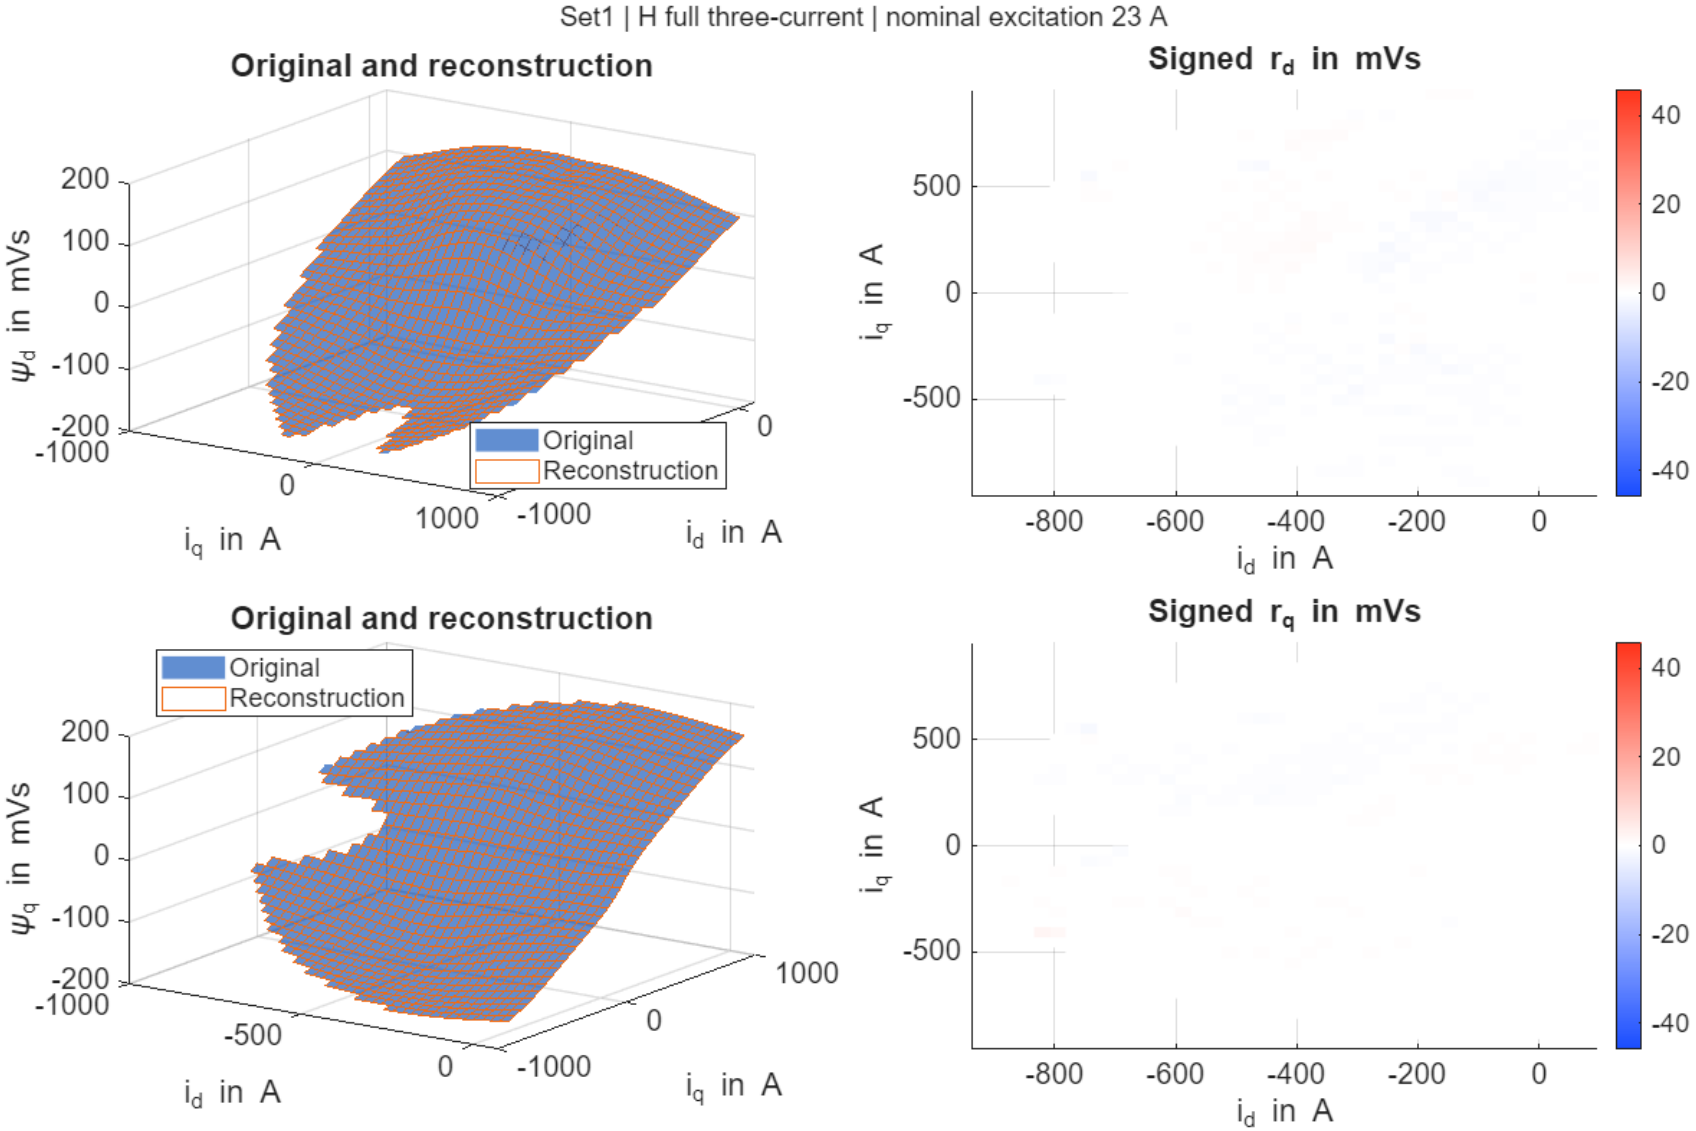

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method A, excitation 26 A

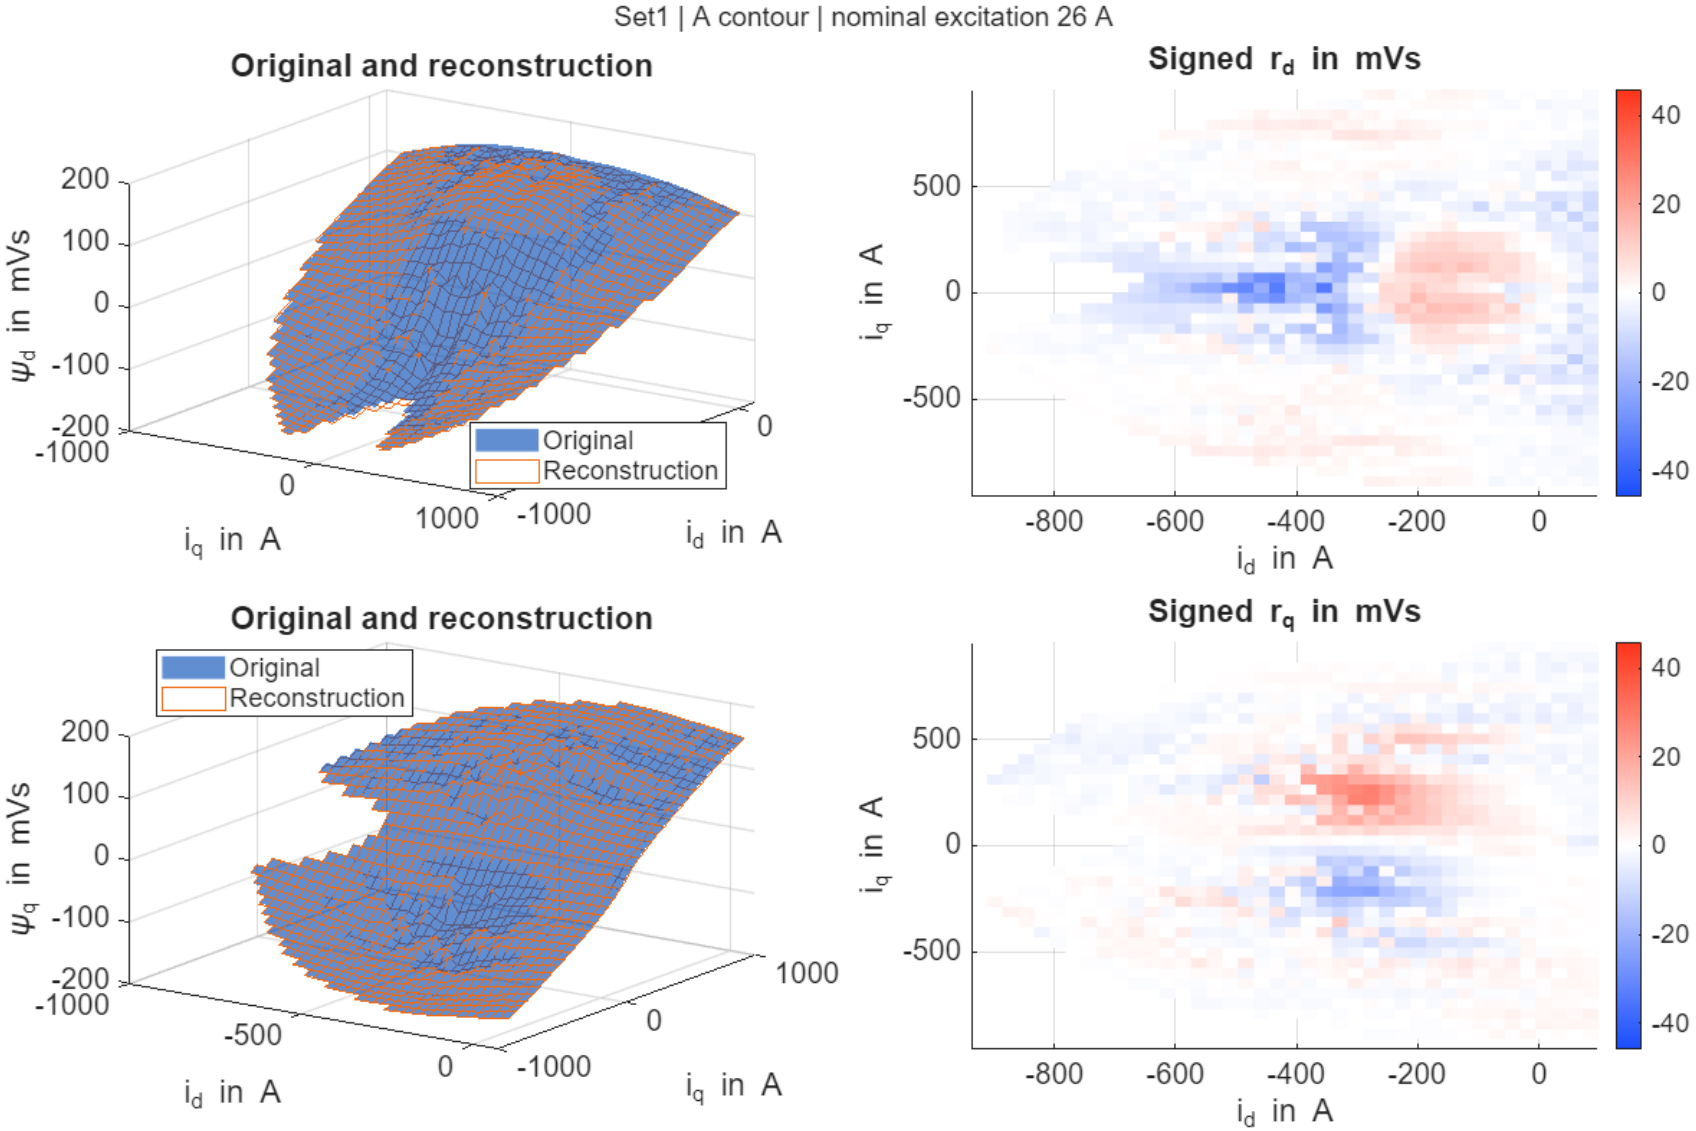

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method B, excitation 26 A

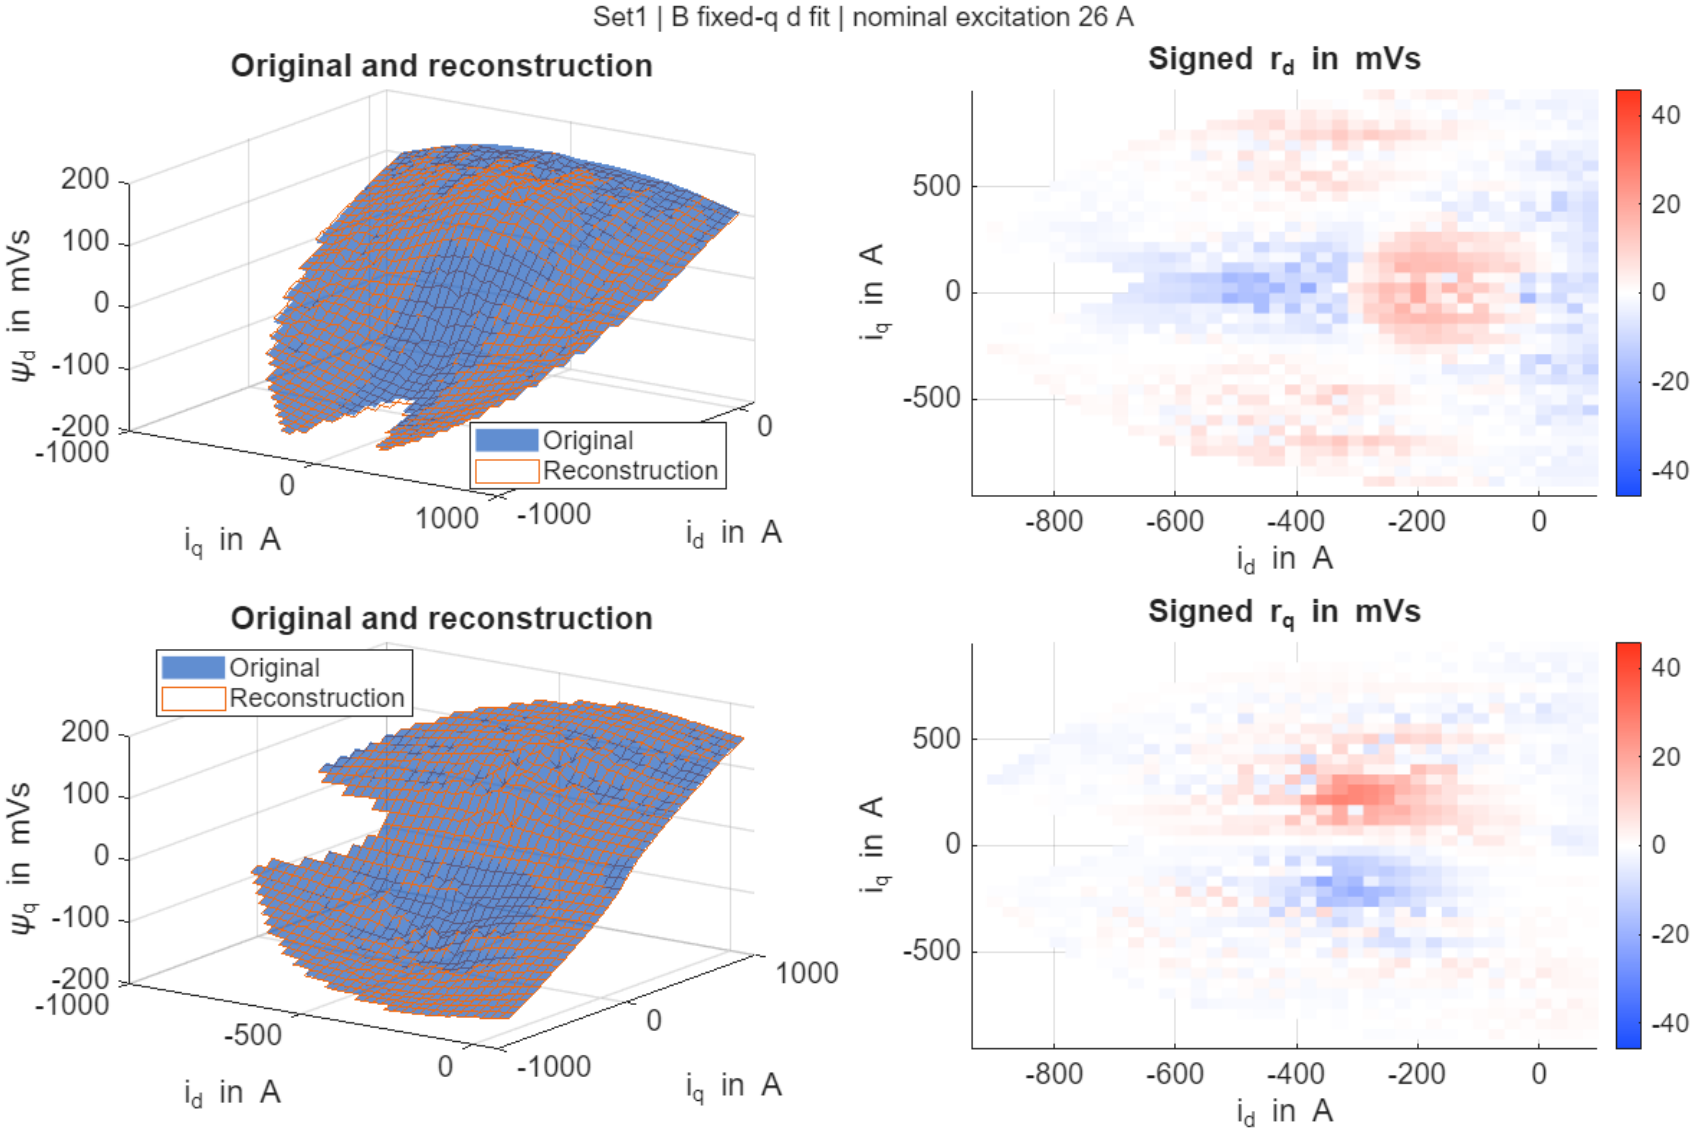

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method C, excitation 26 A

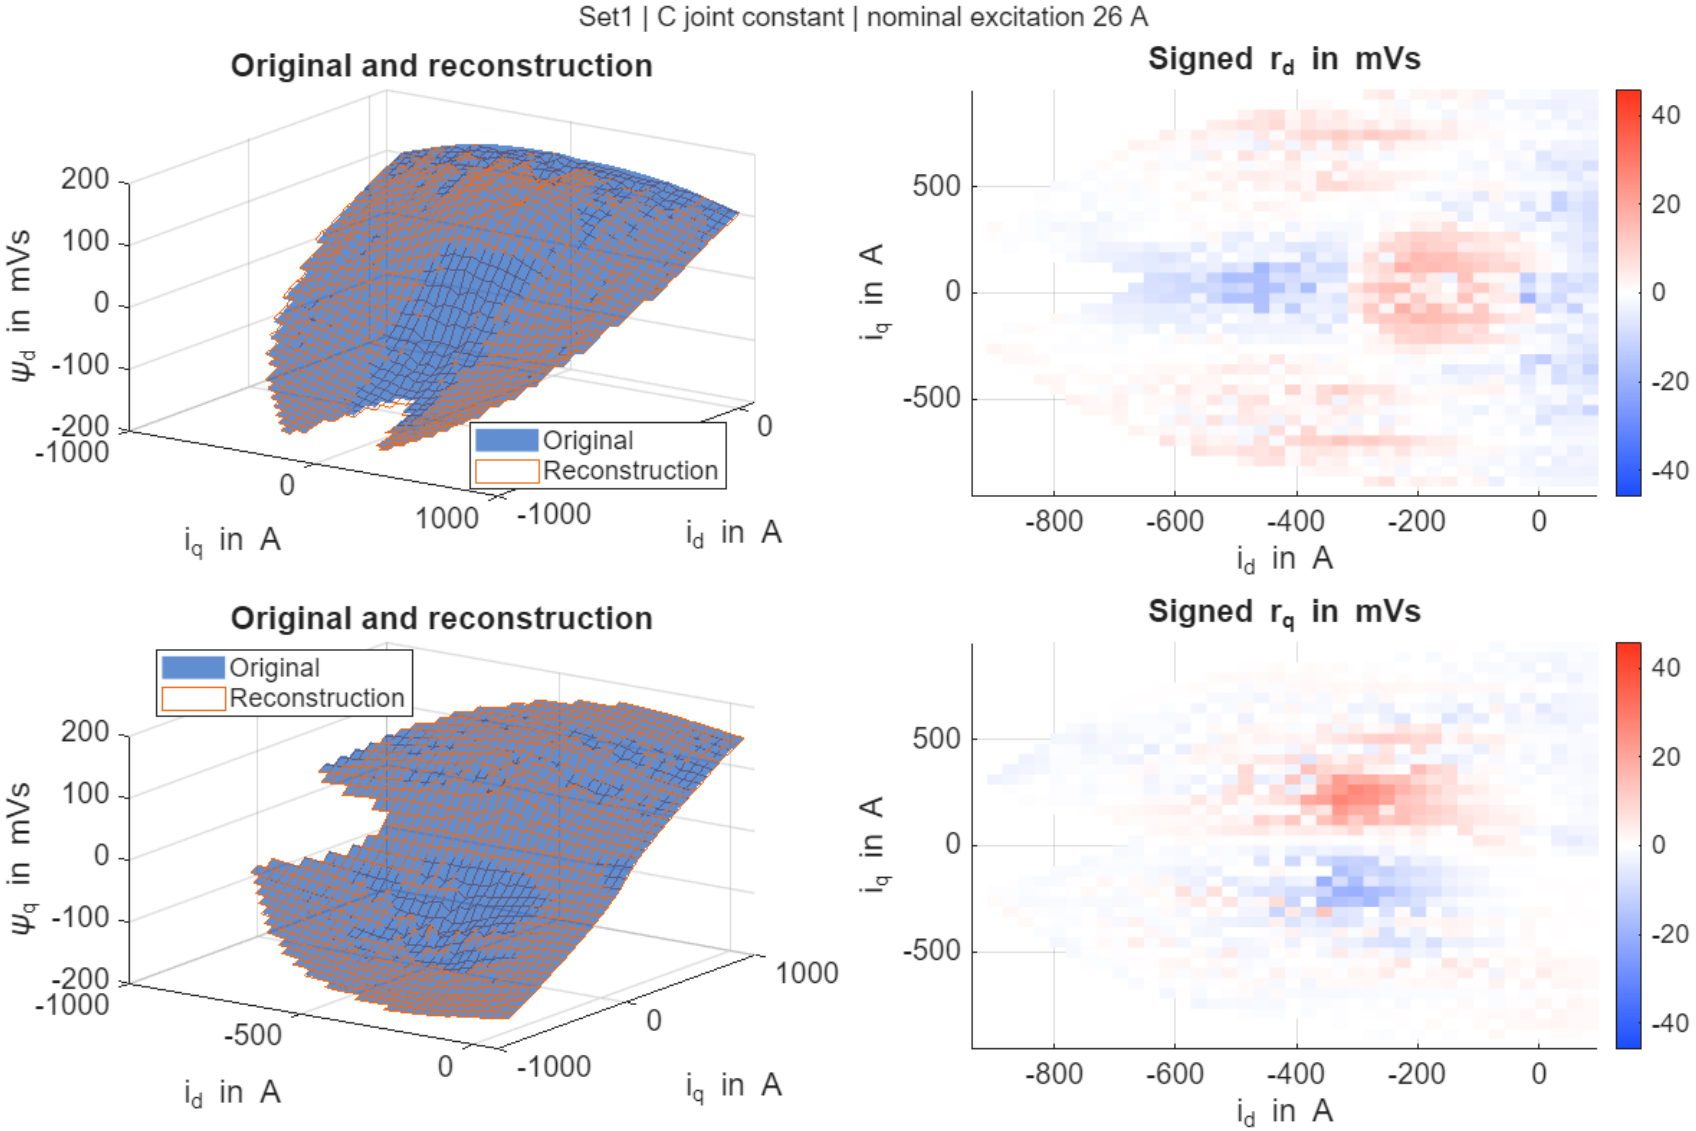

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method D, excitation 26 A

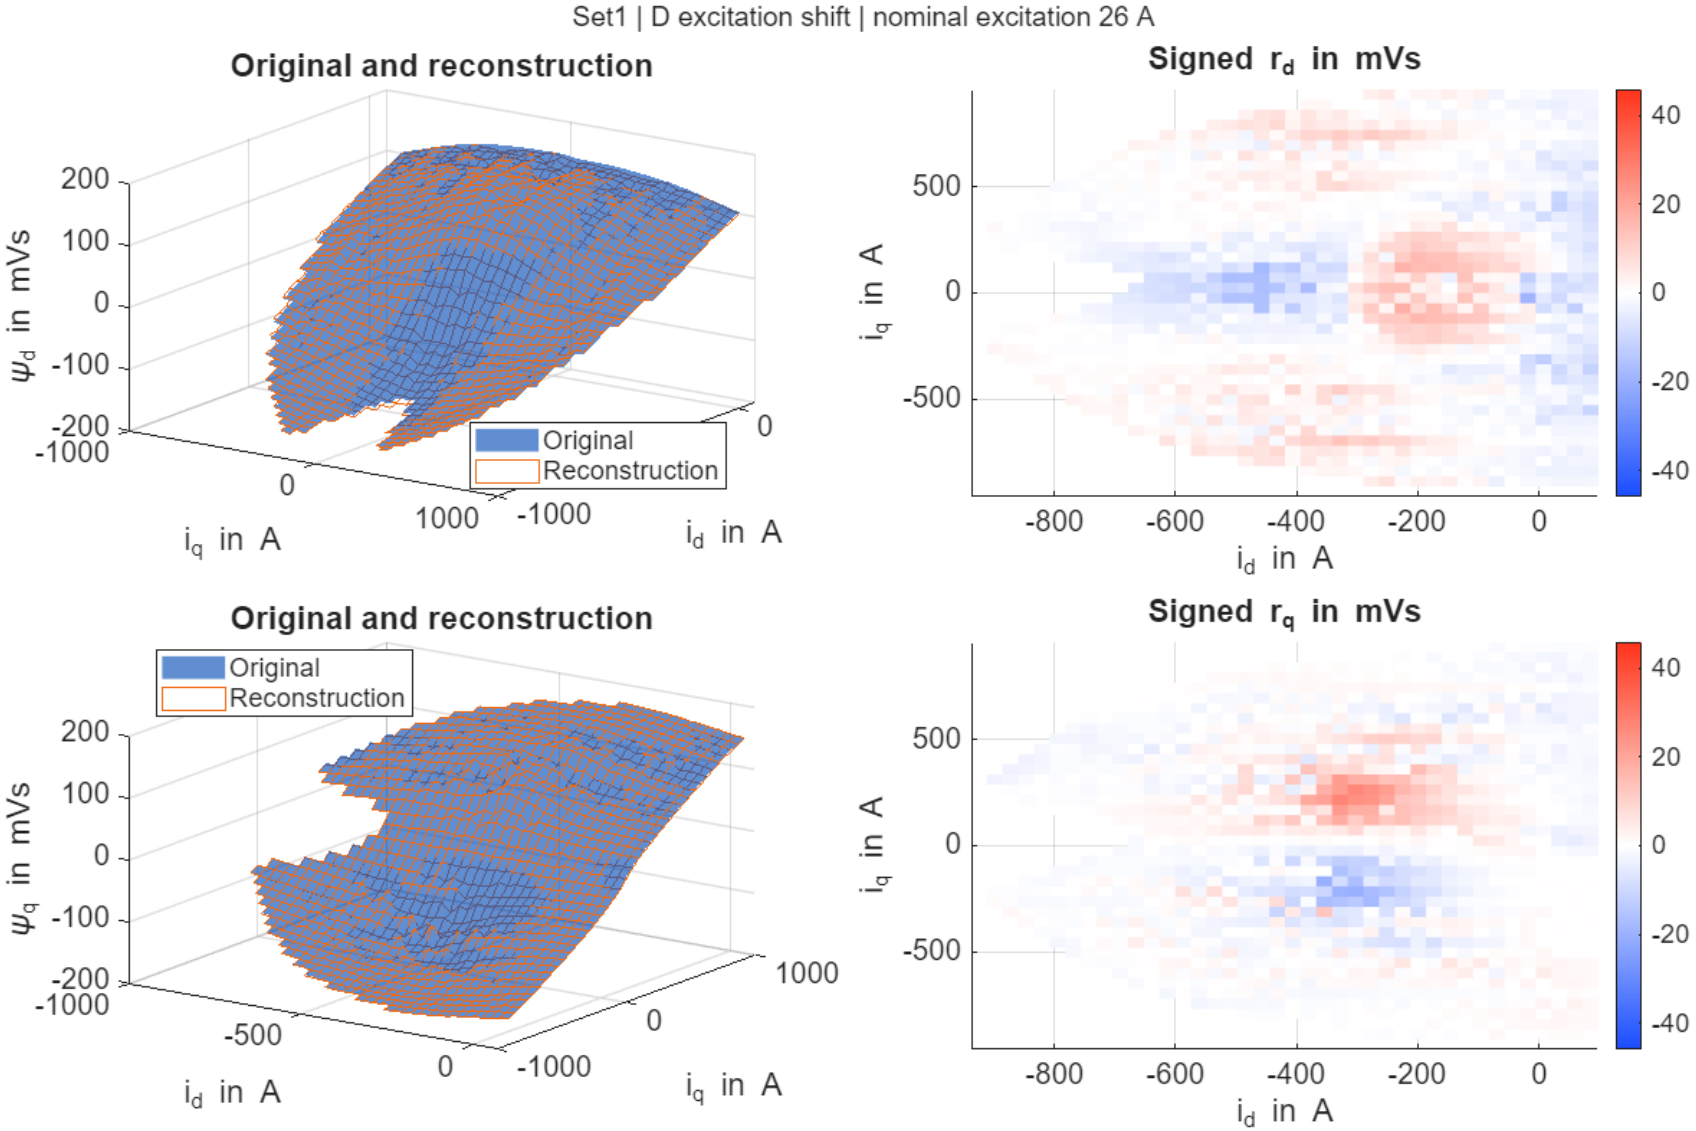

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method E, excitation 26 A

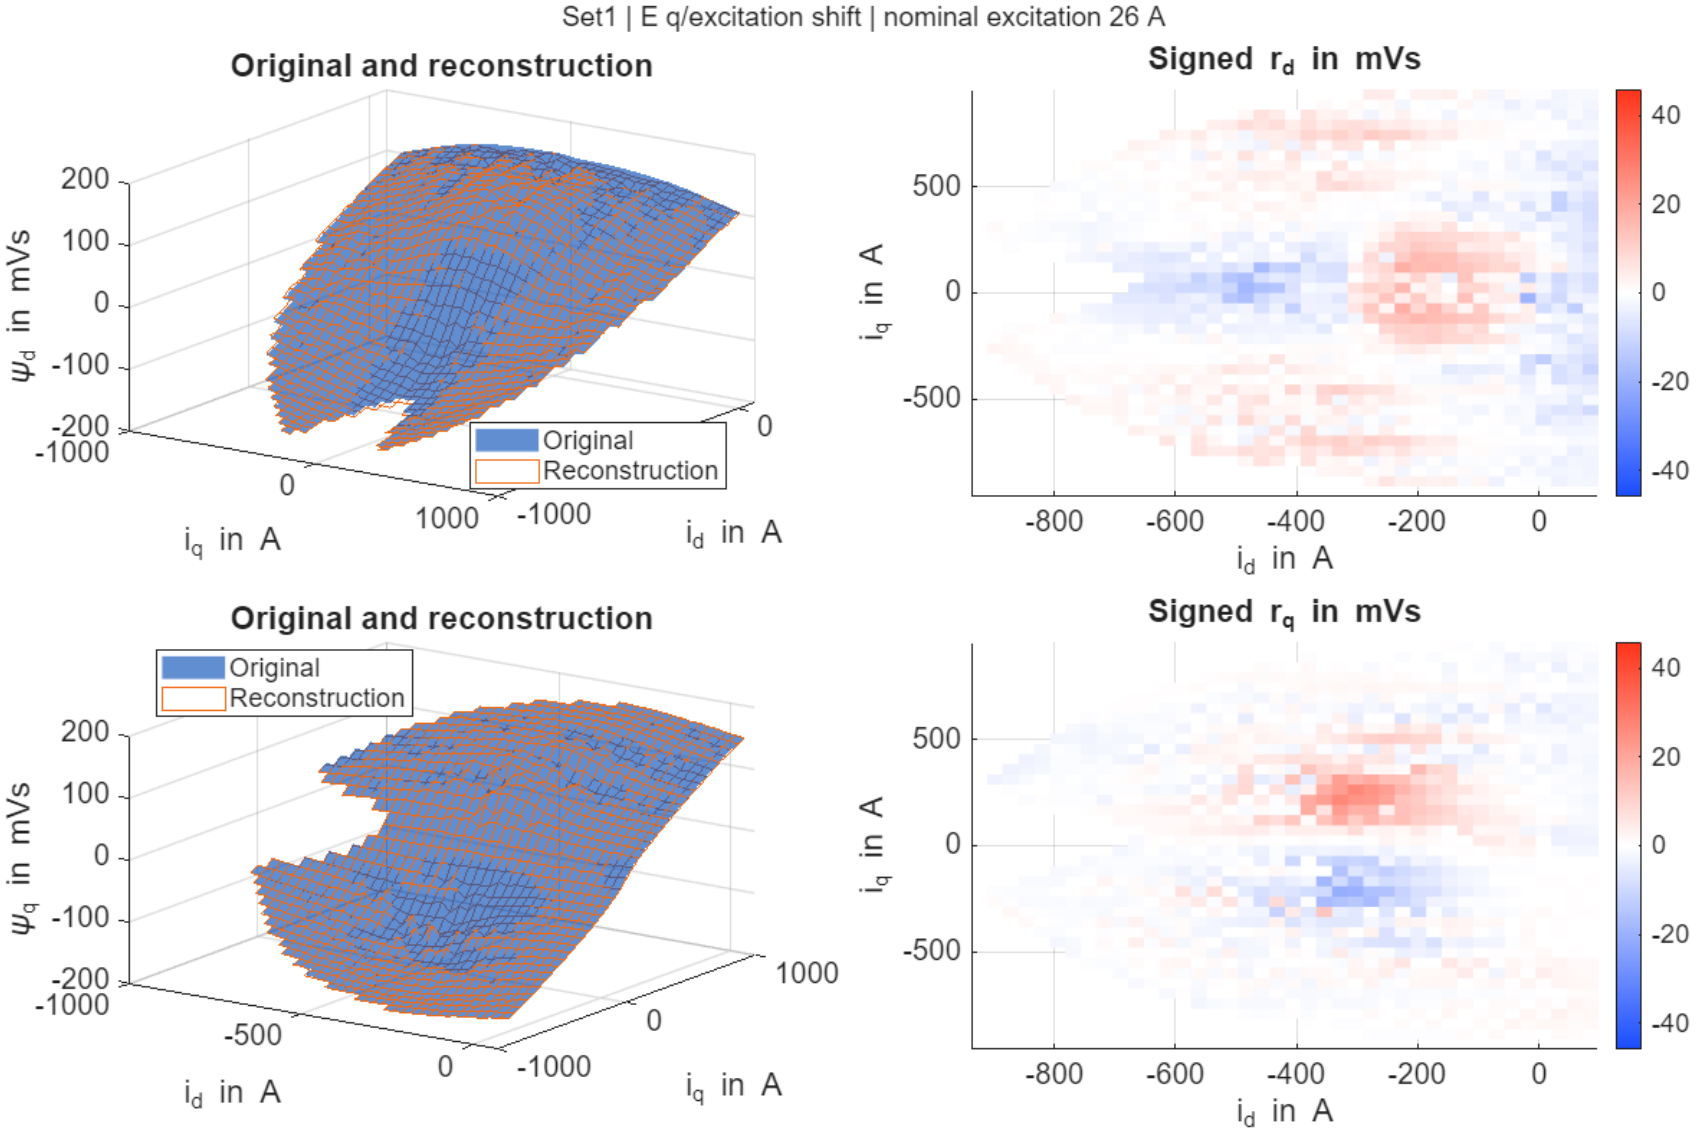

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method F, excitation 26 A

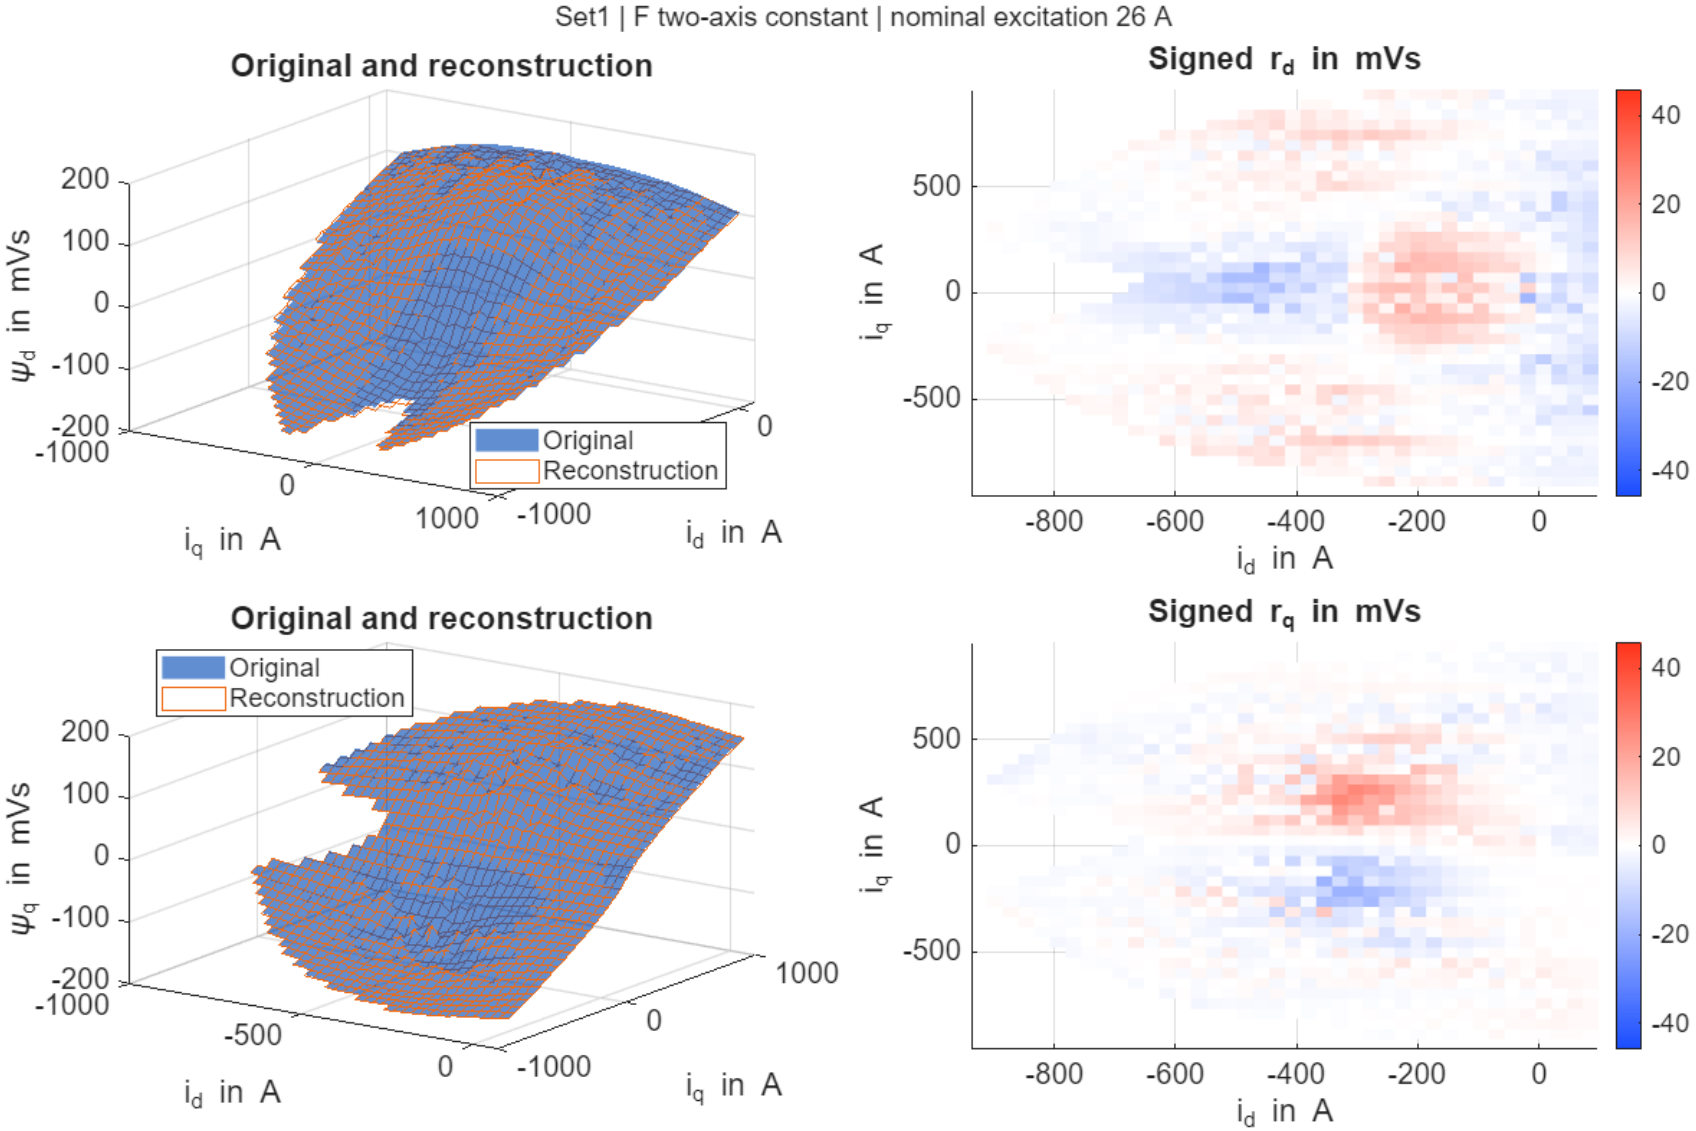

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method G, excitation 26 A

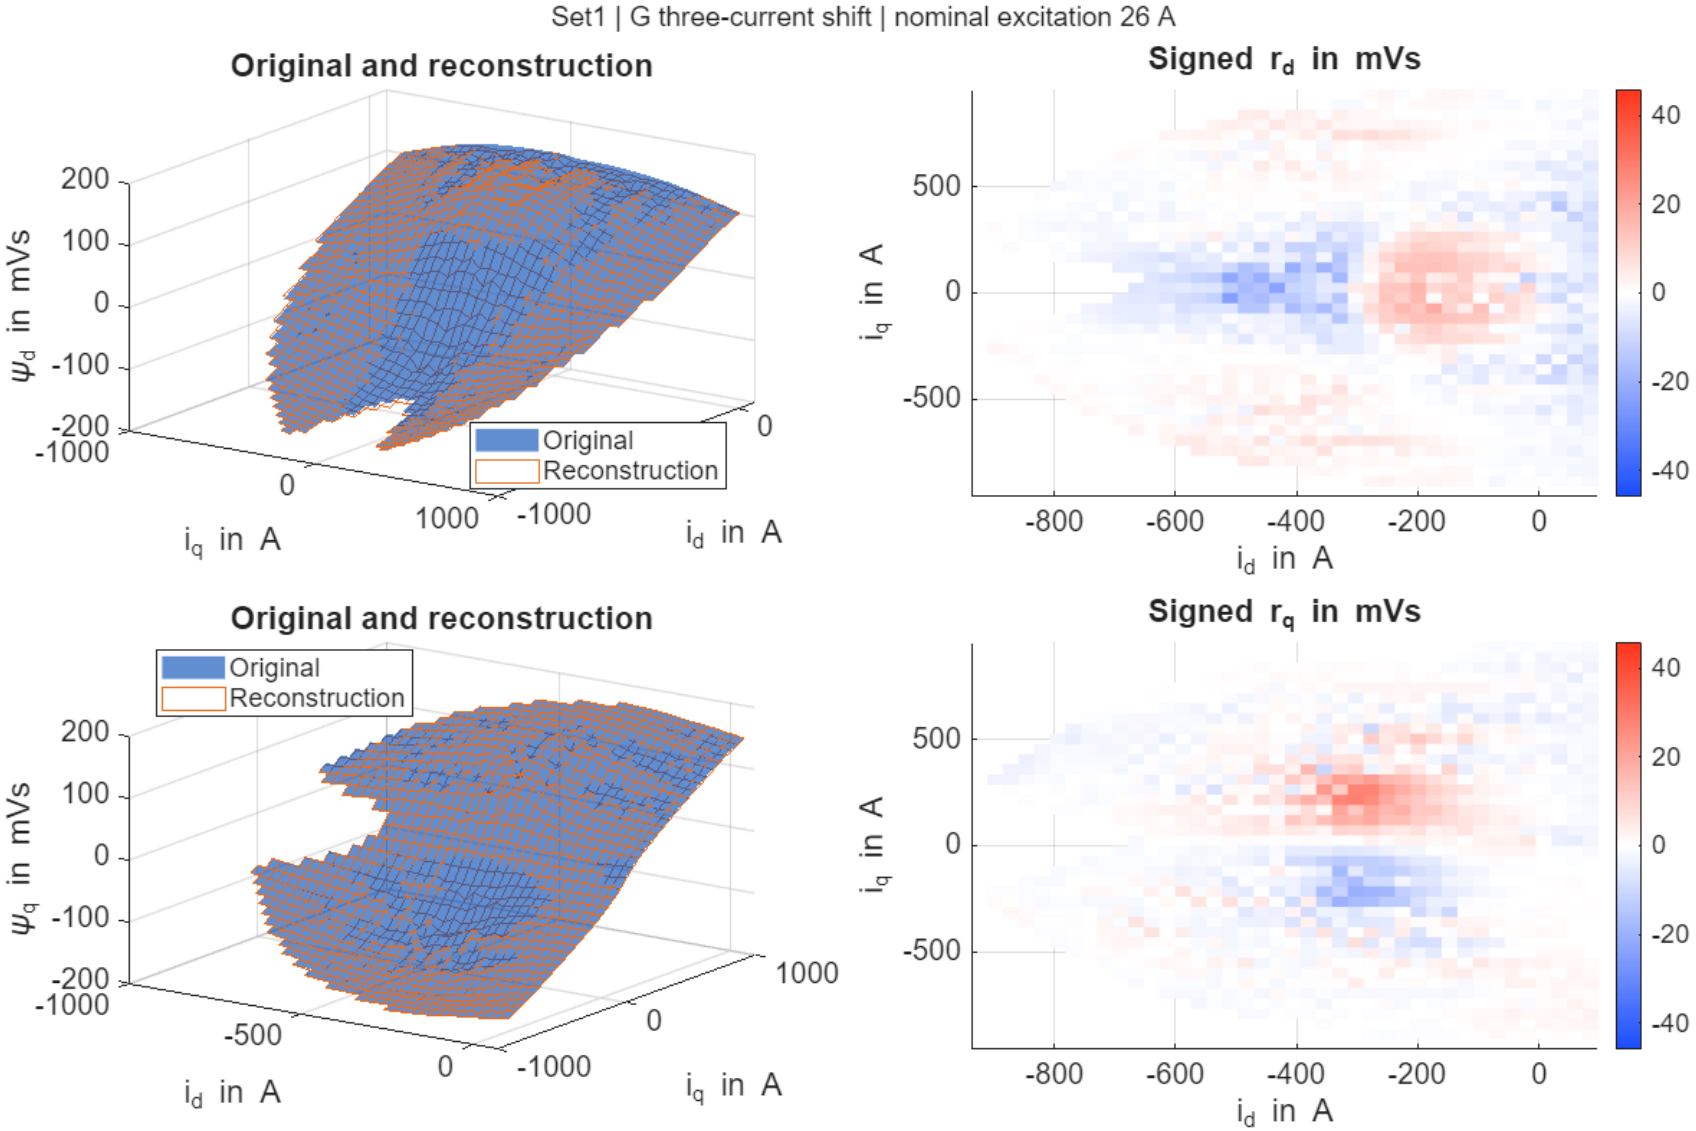

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method H, excitation 26 A

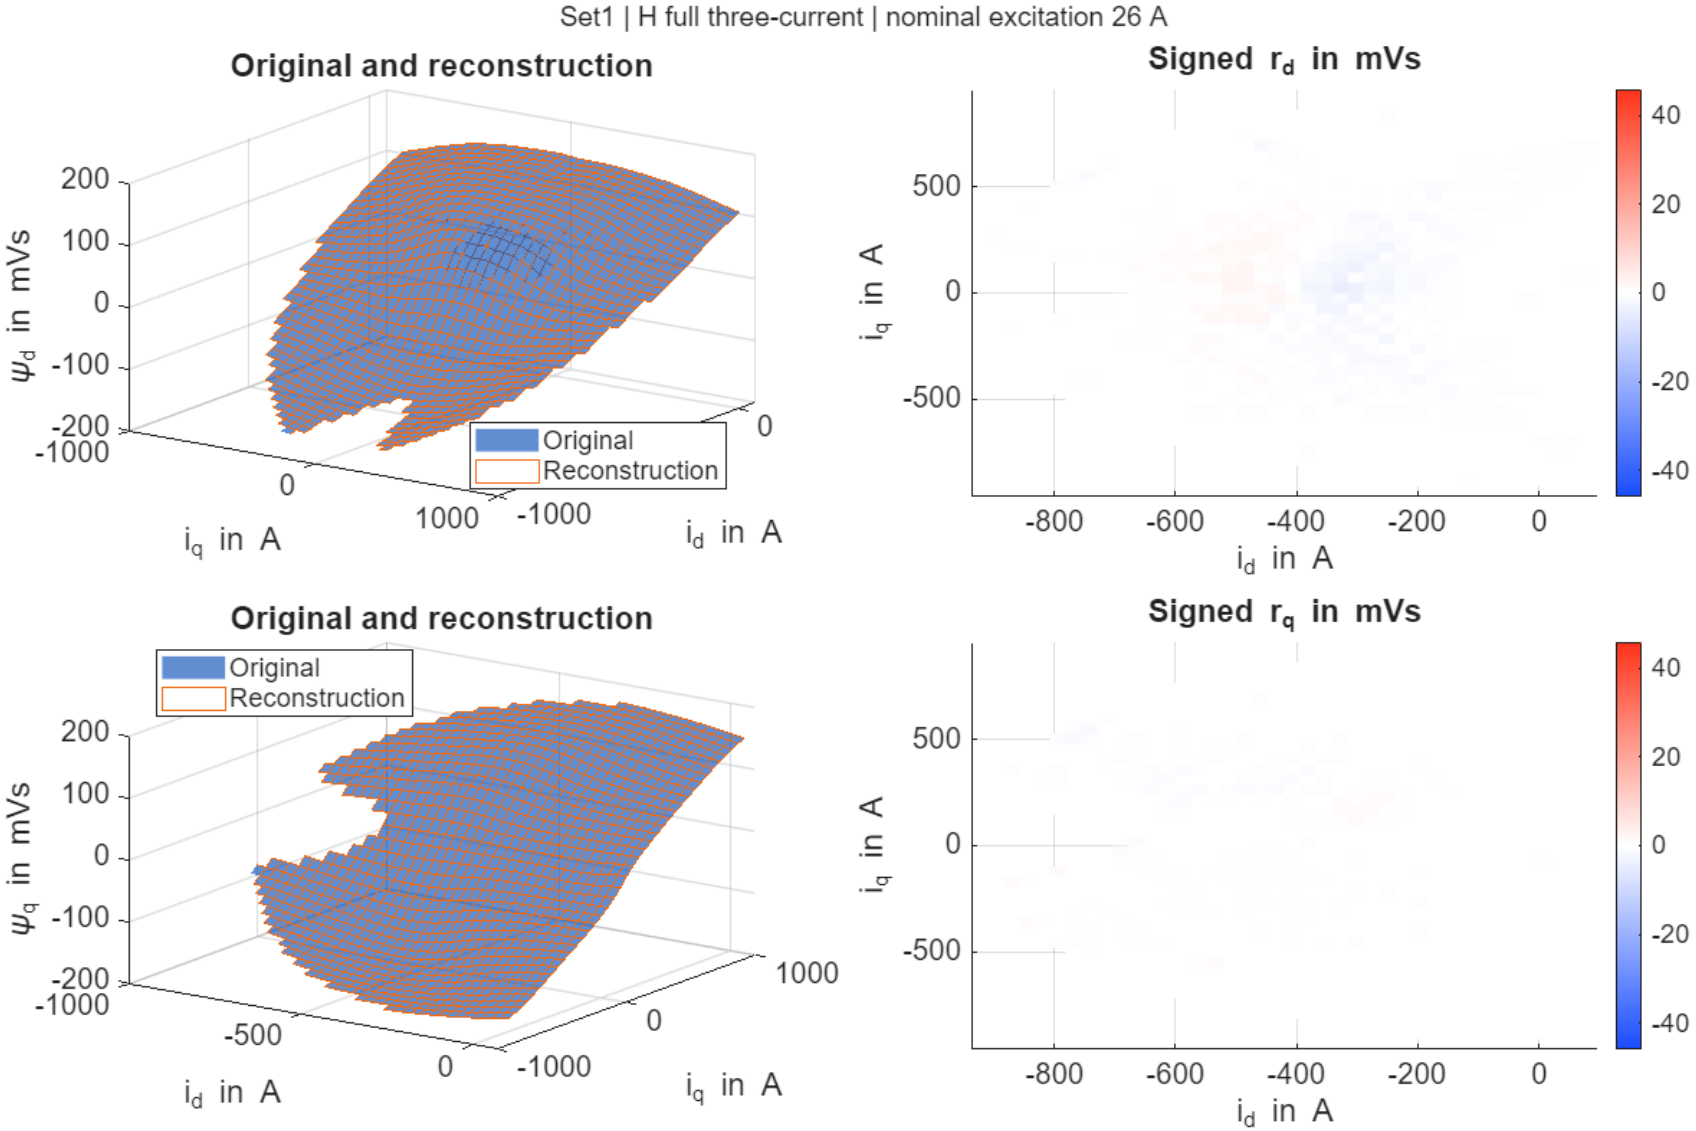

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method A, excitation 29 A

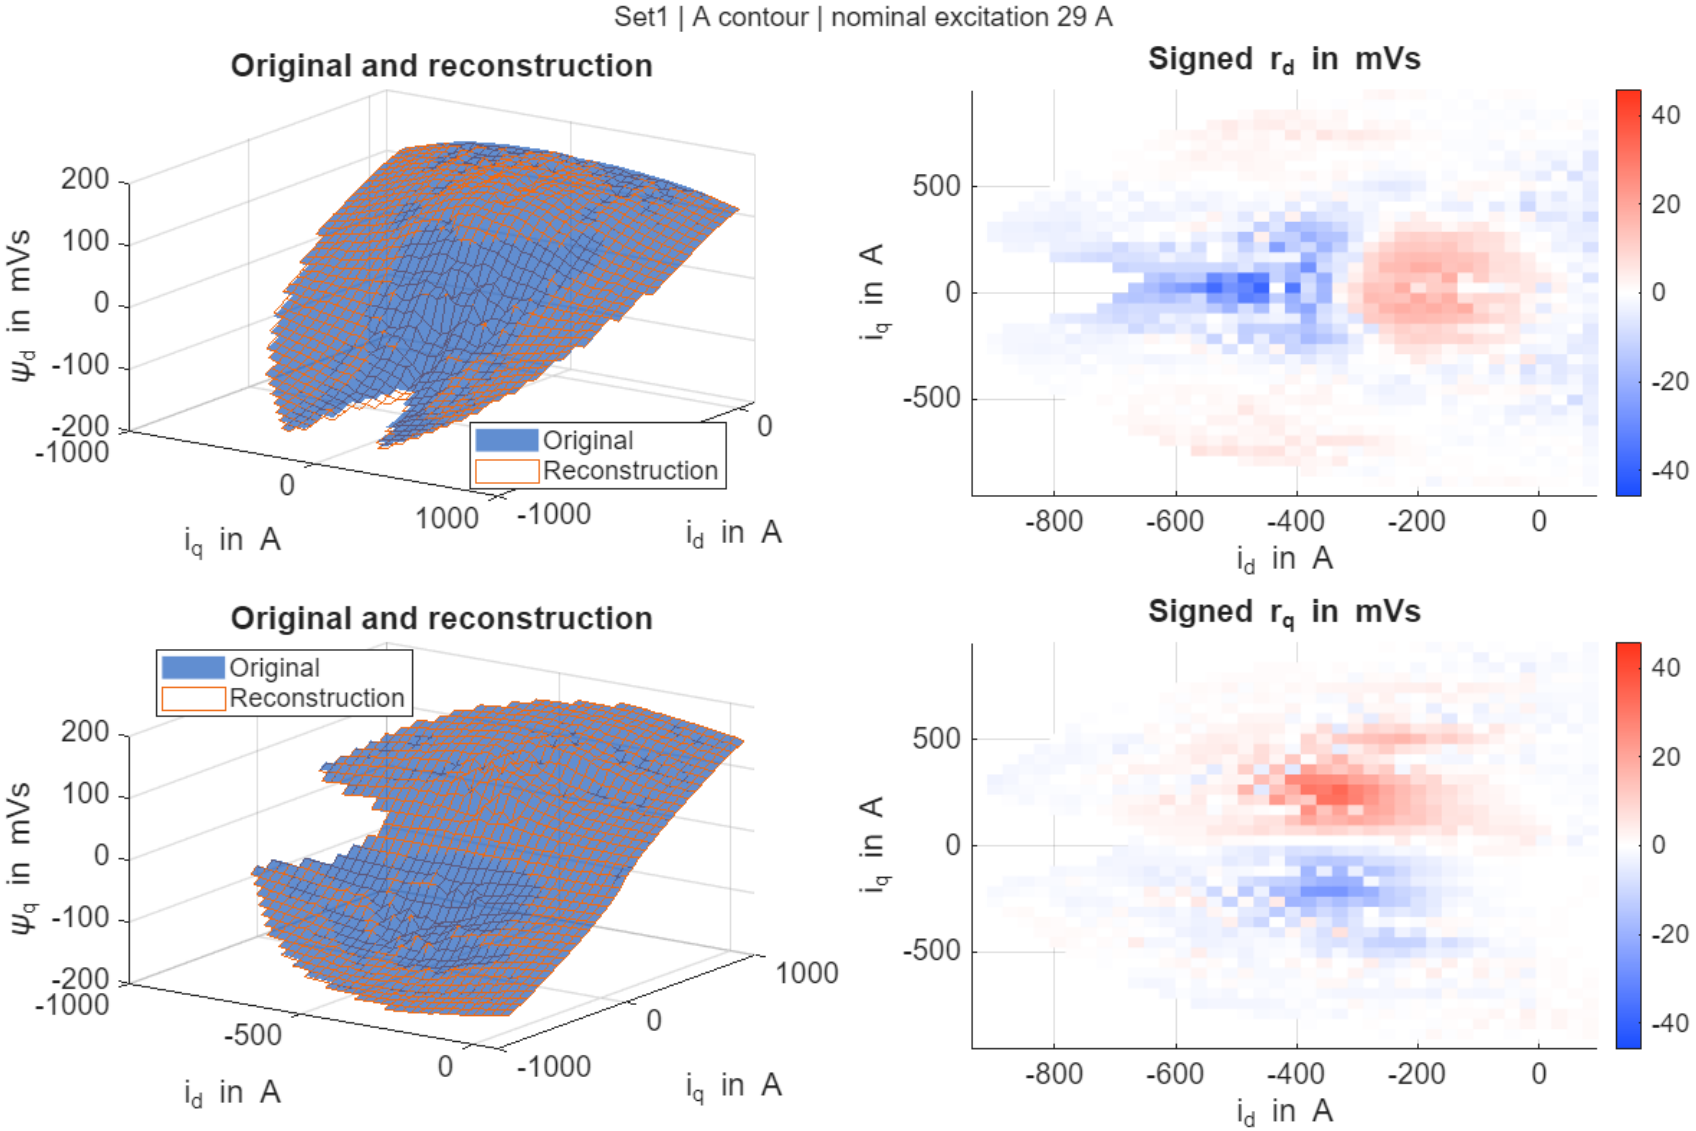

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method B, excitation 29 A

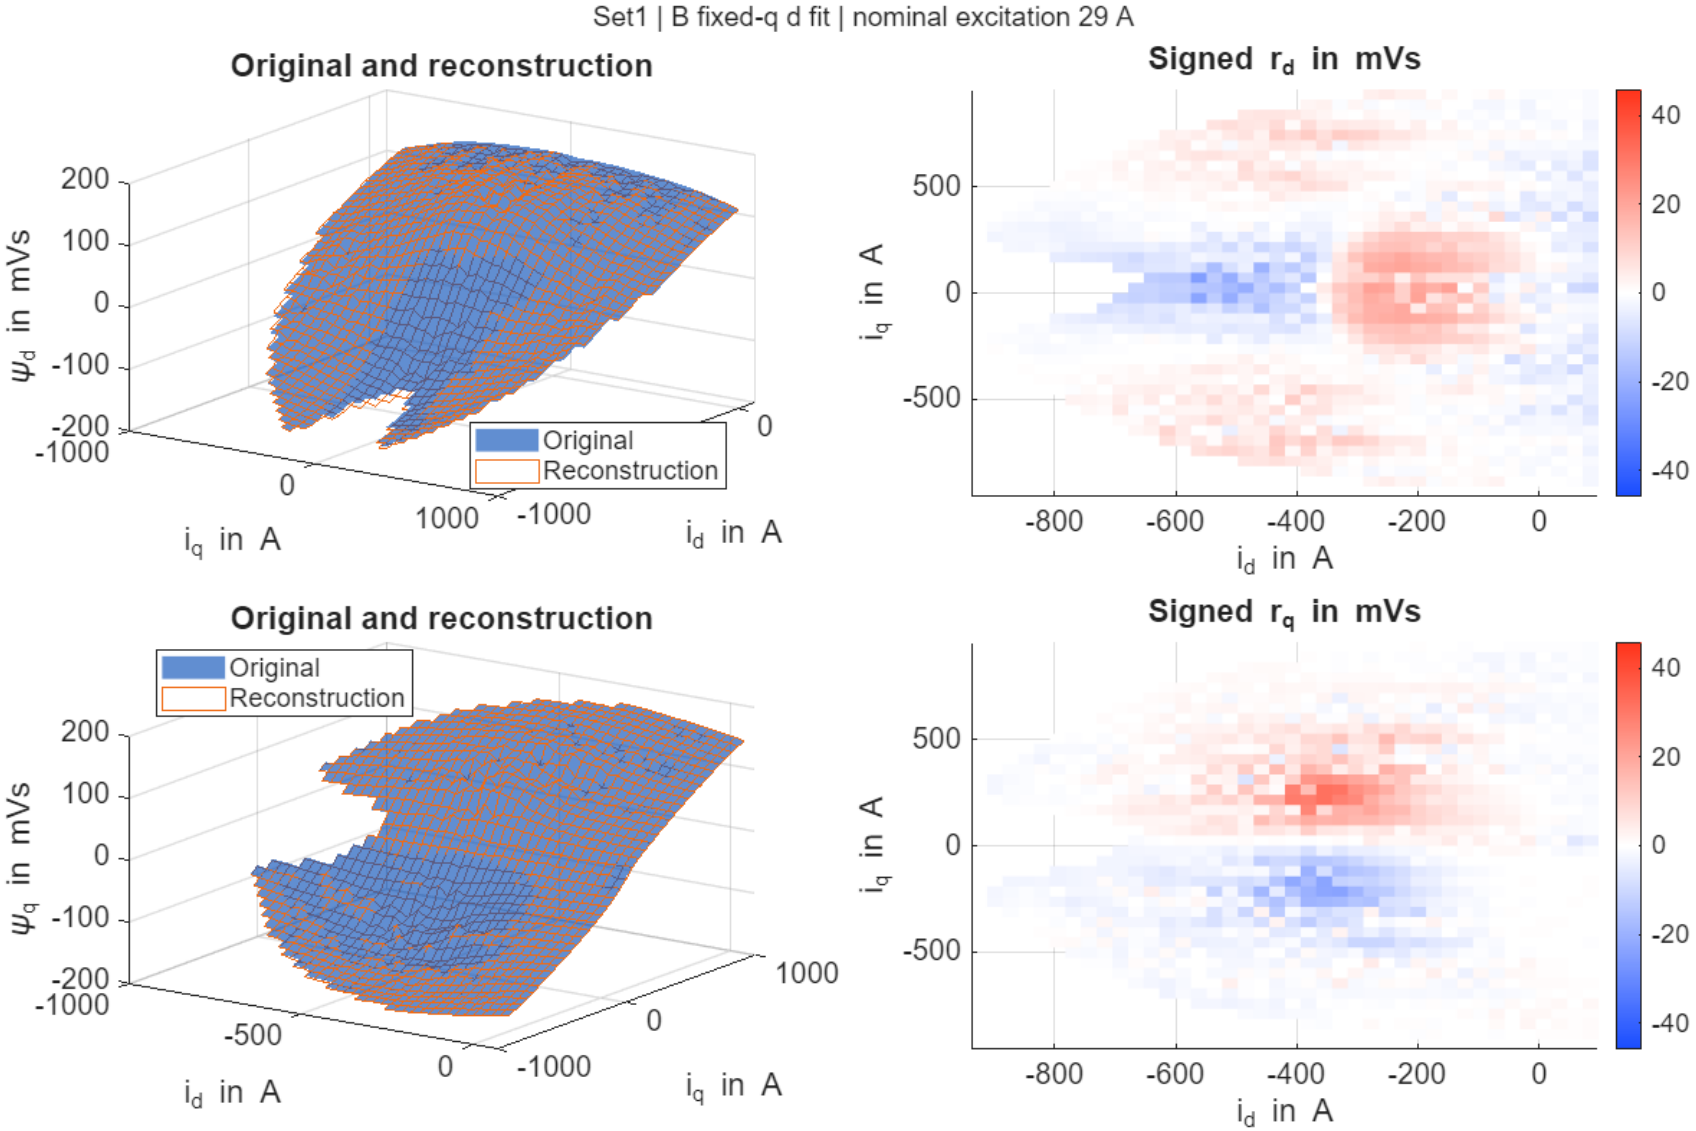

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method C, excitation 29 A

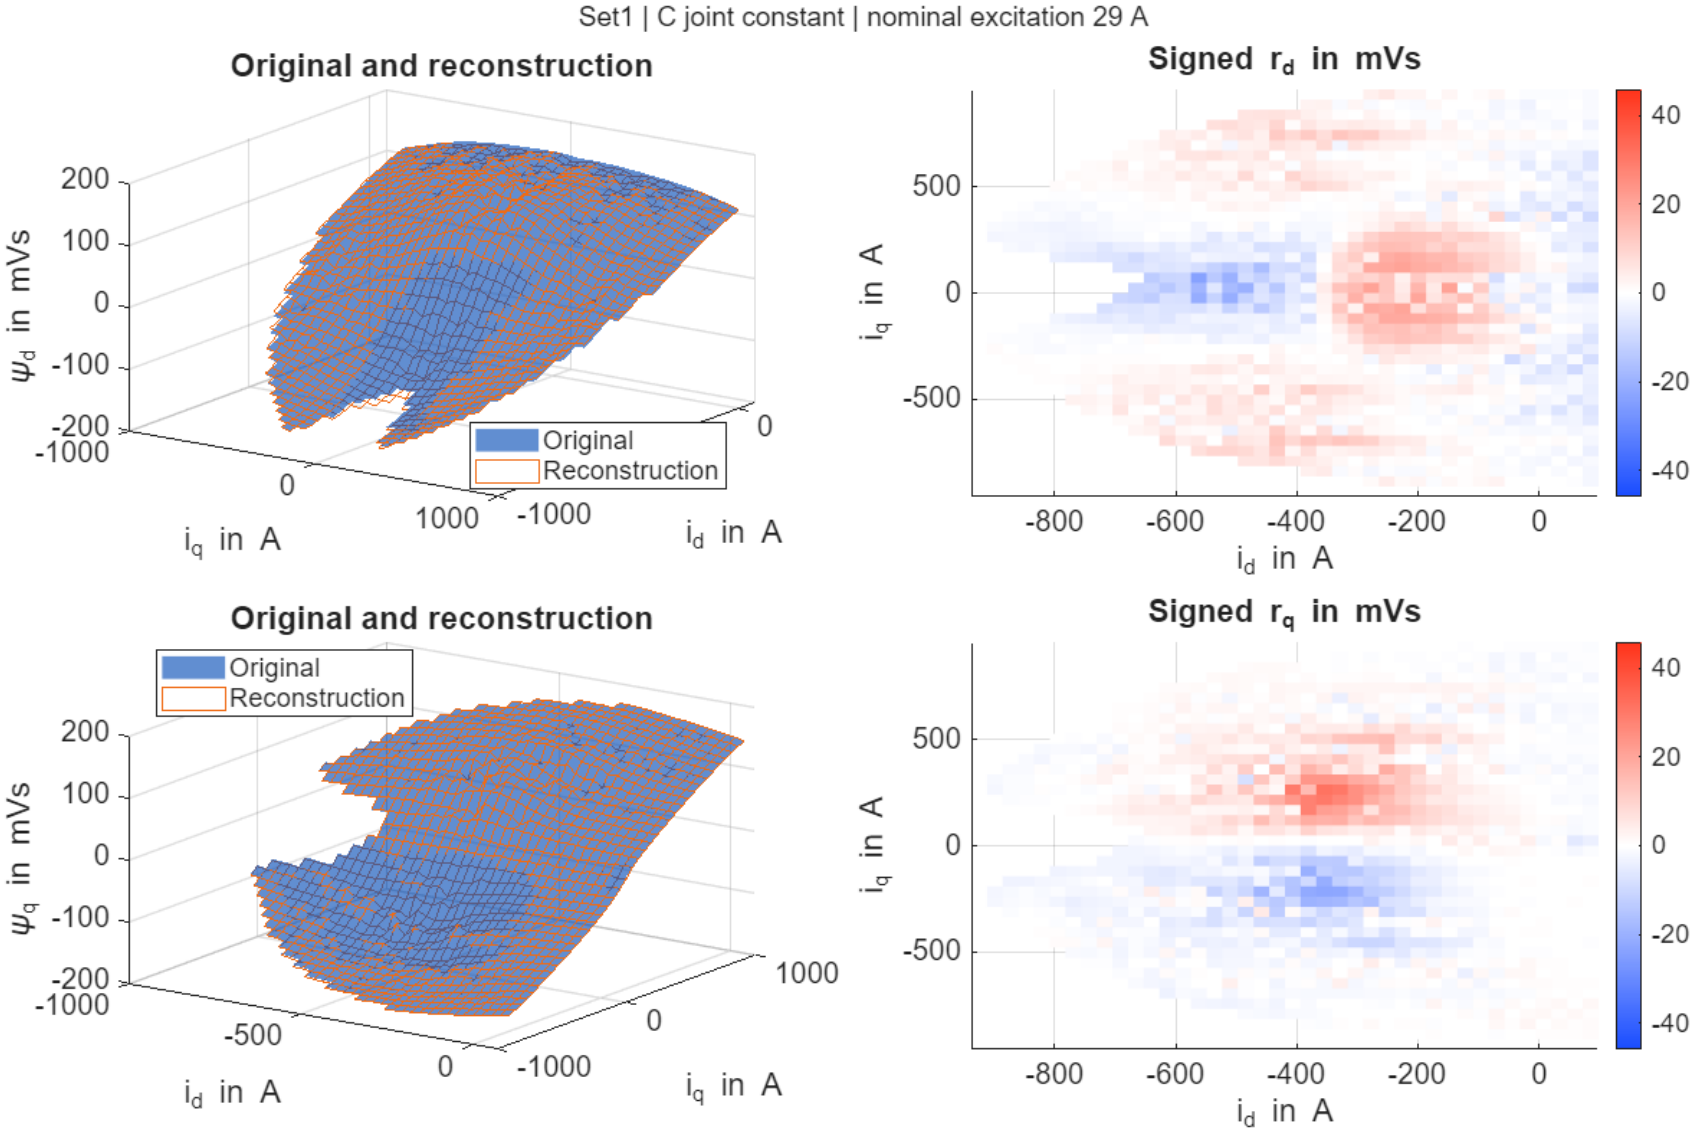

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method D, excitation 29 A

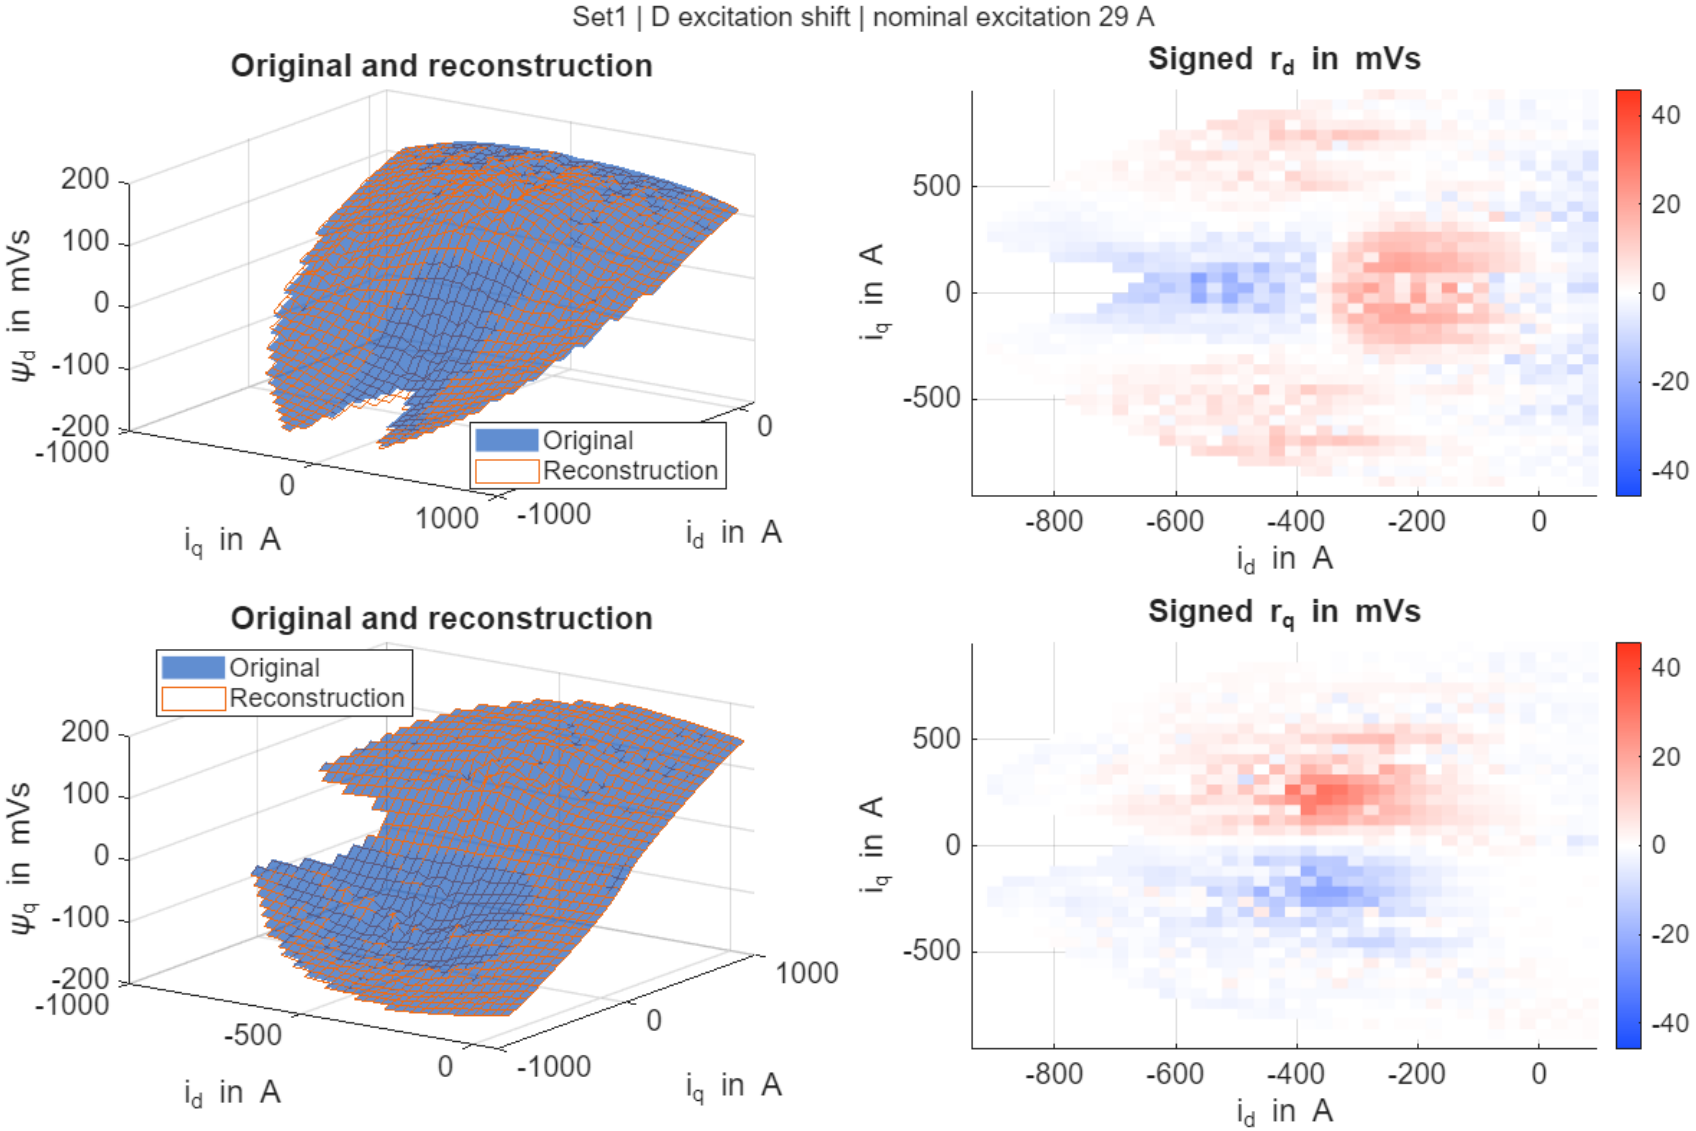

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method E, excitation 29 A

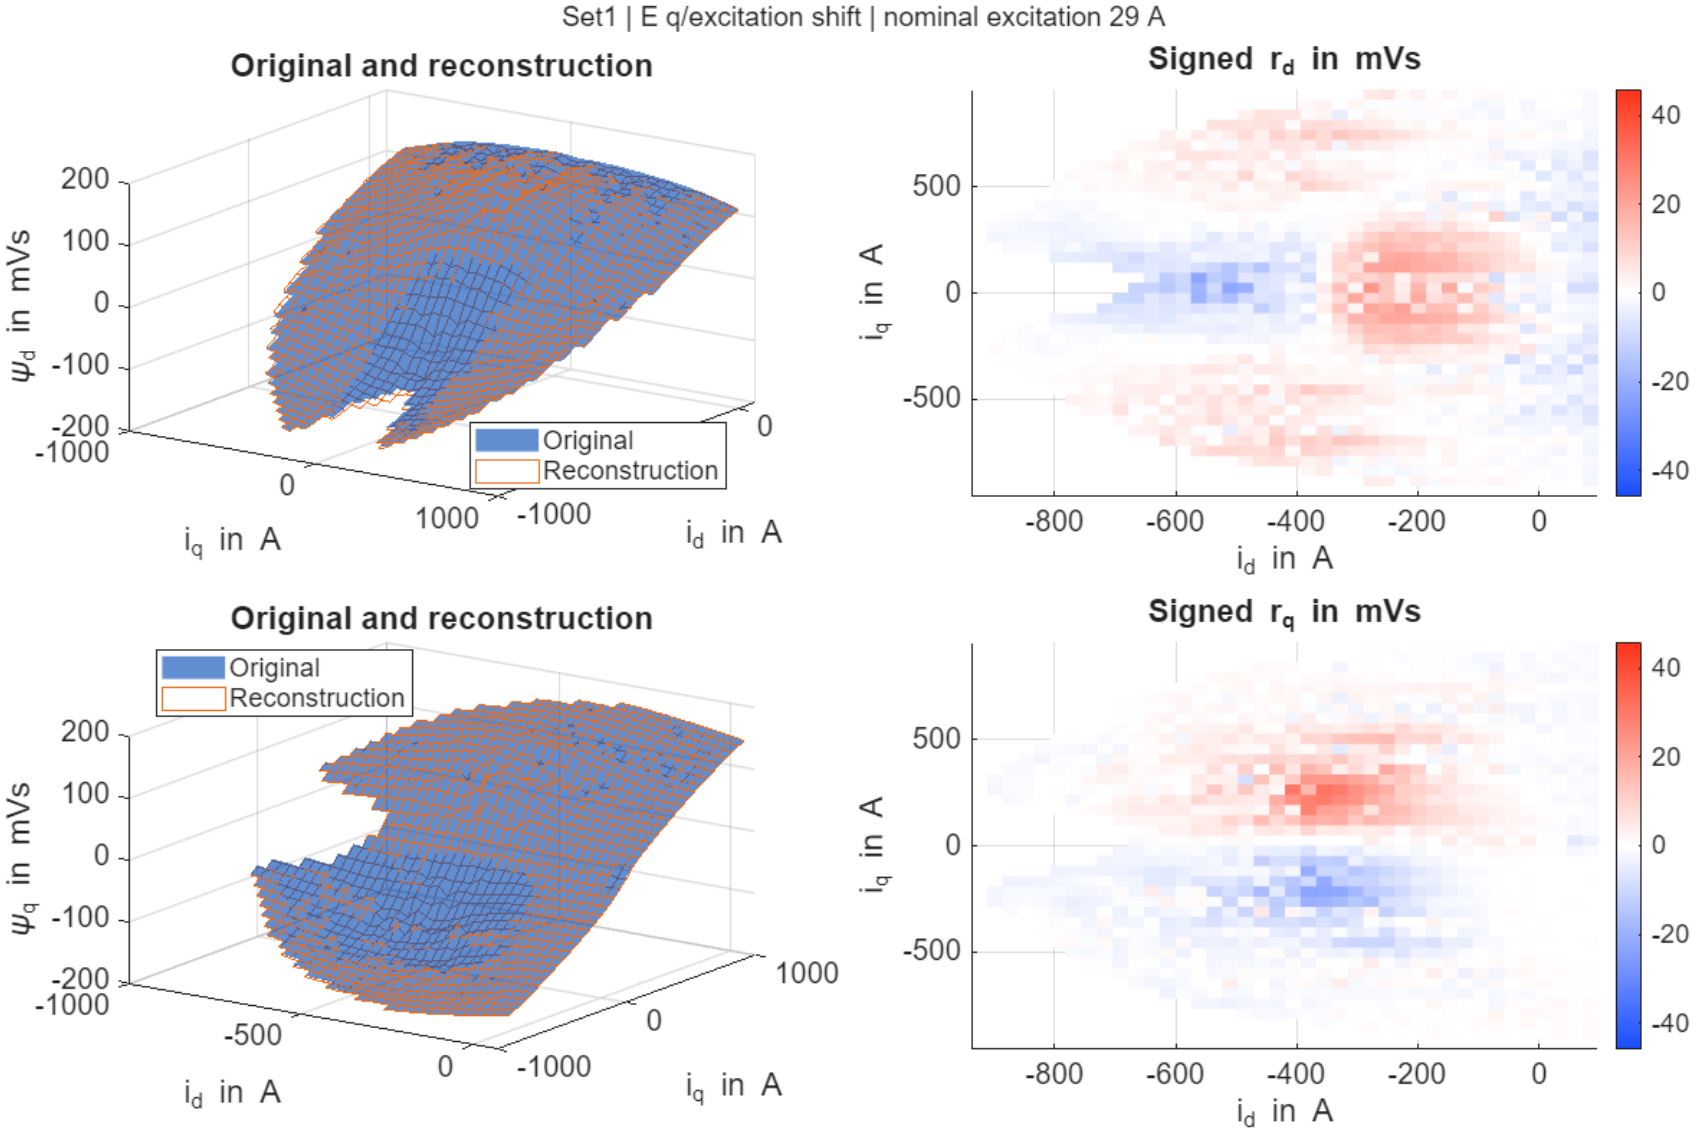

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method F, excitation 29 A

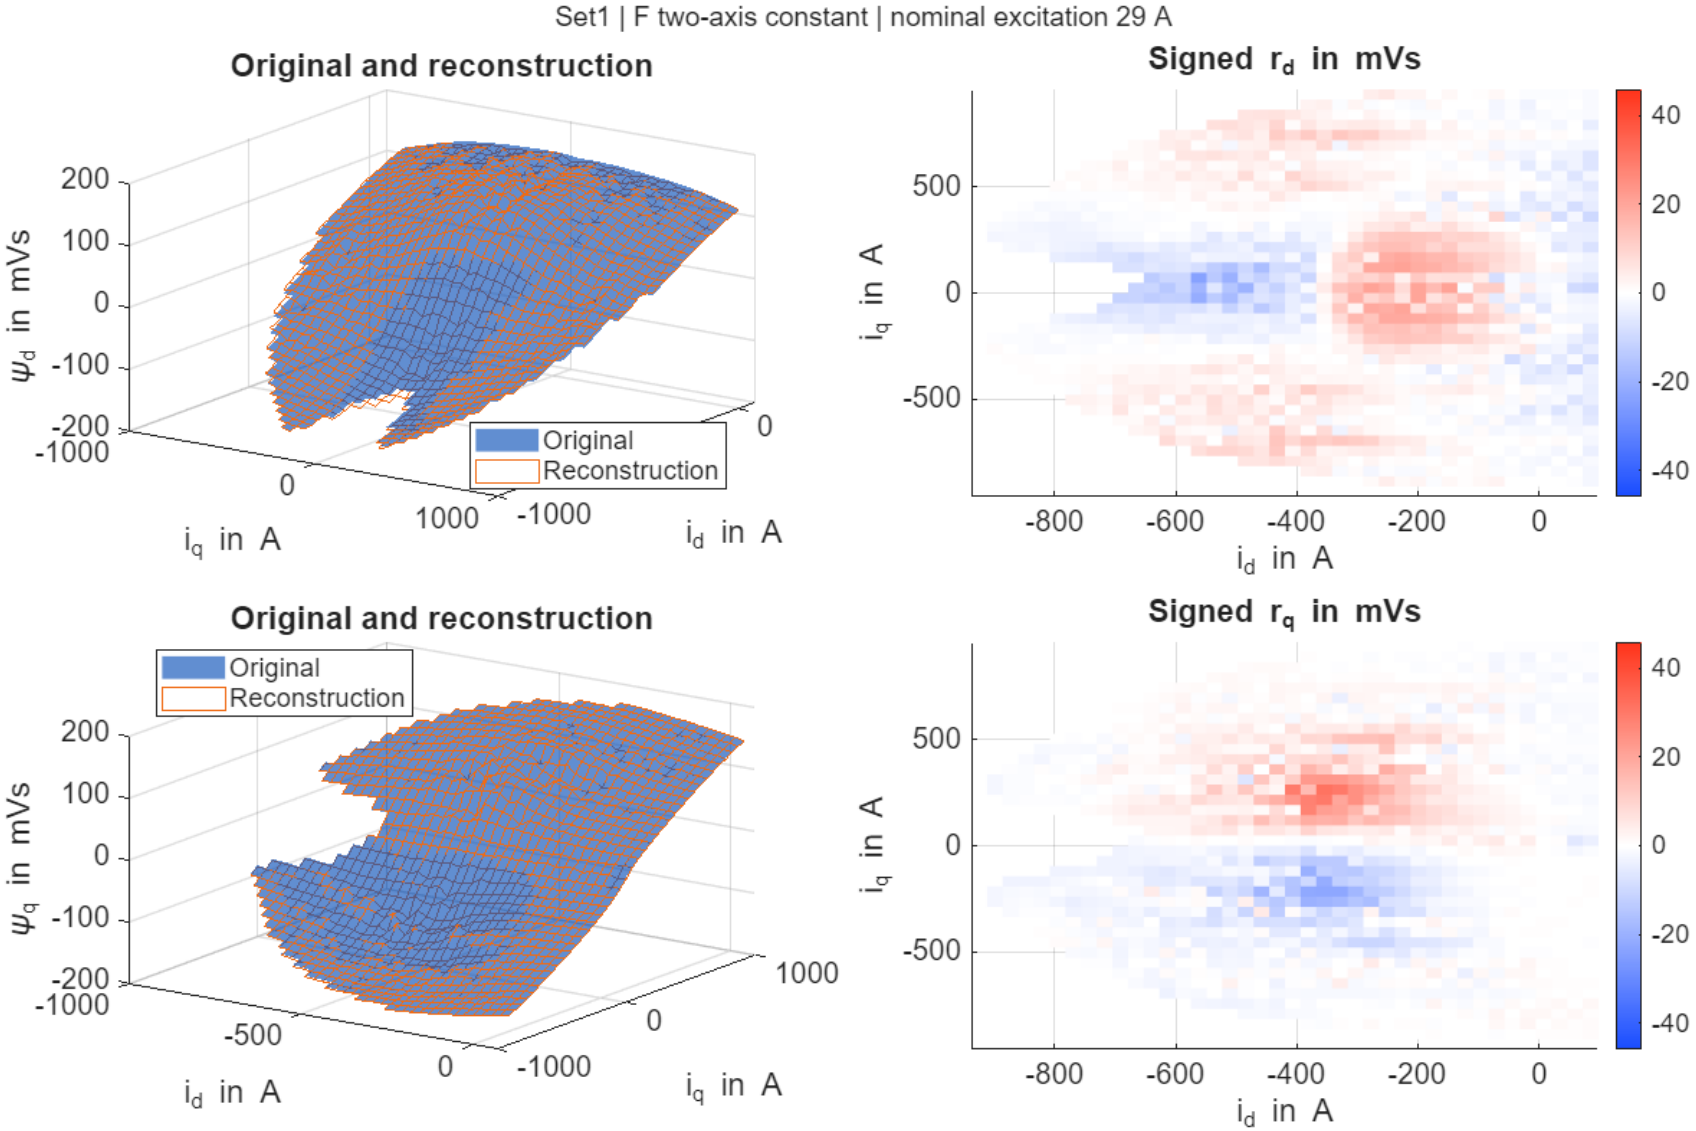

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method G, excitation 29 A

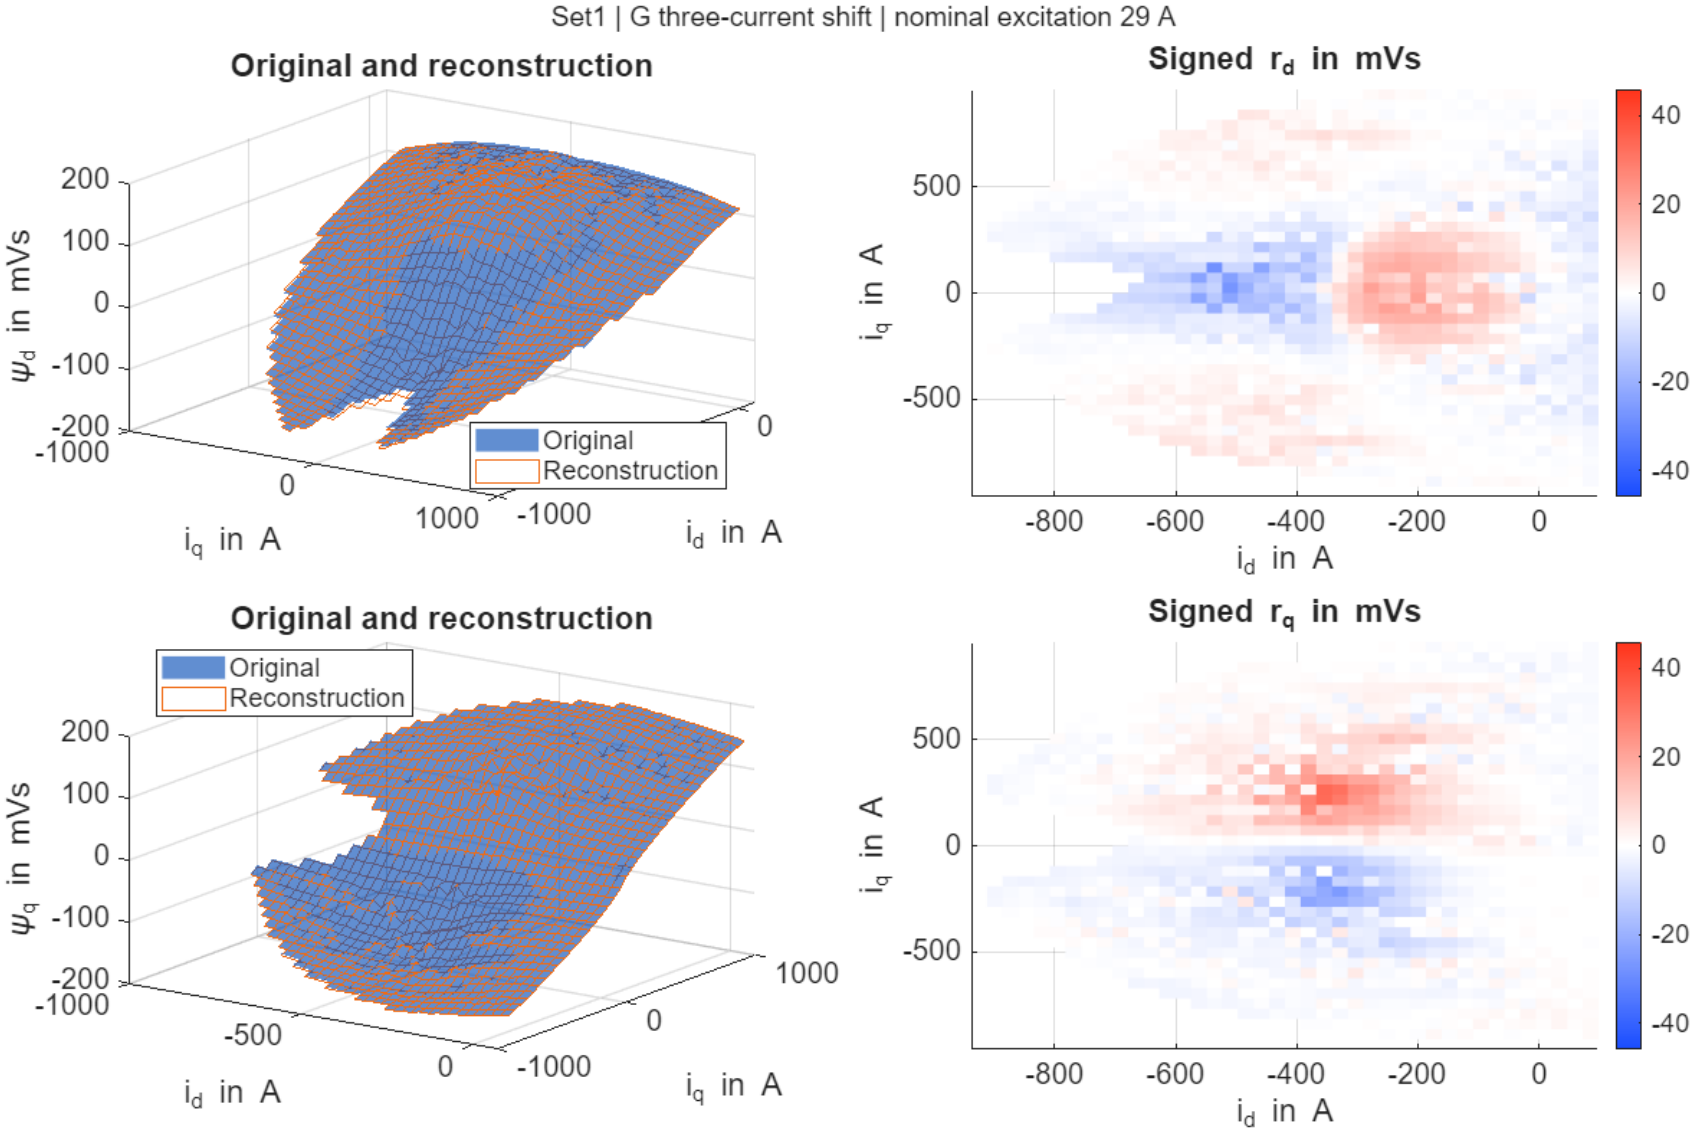

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method H, excitation 29 A

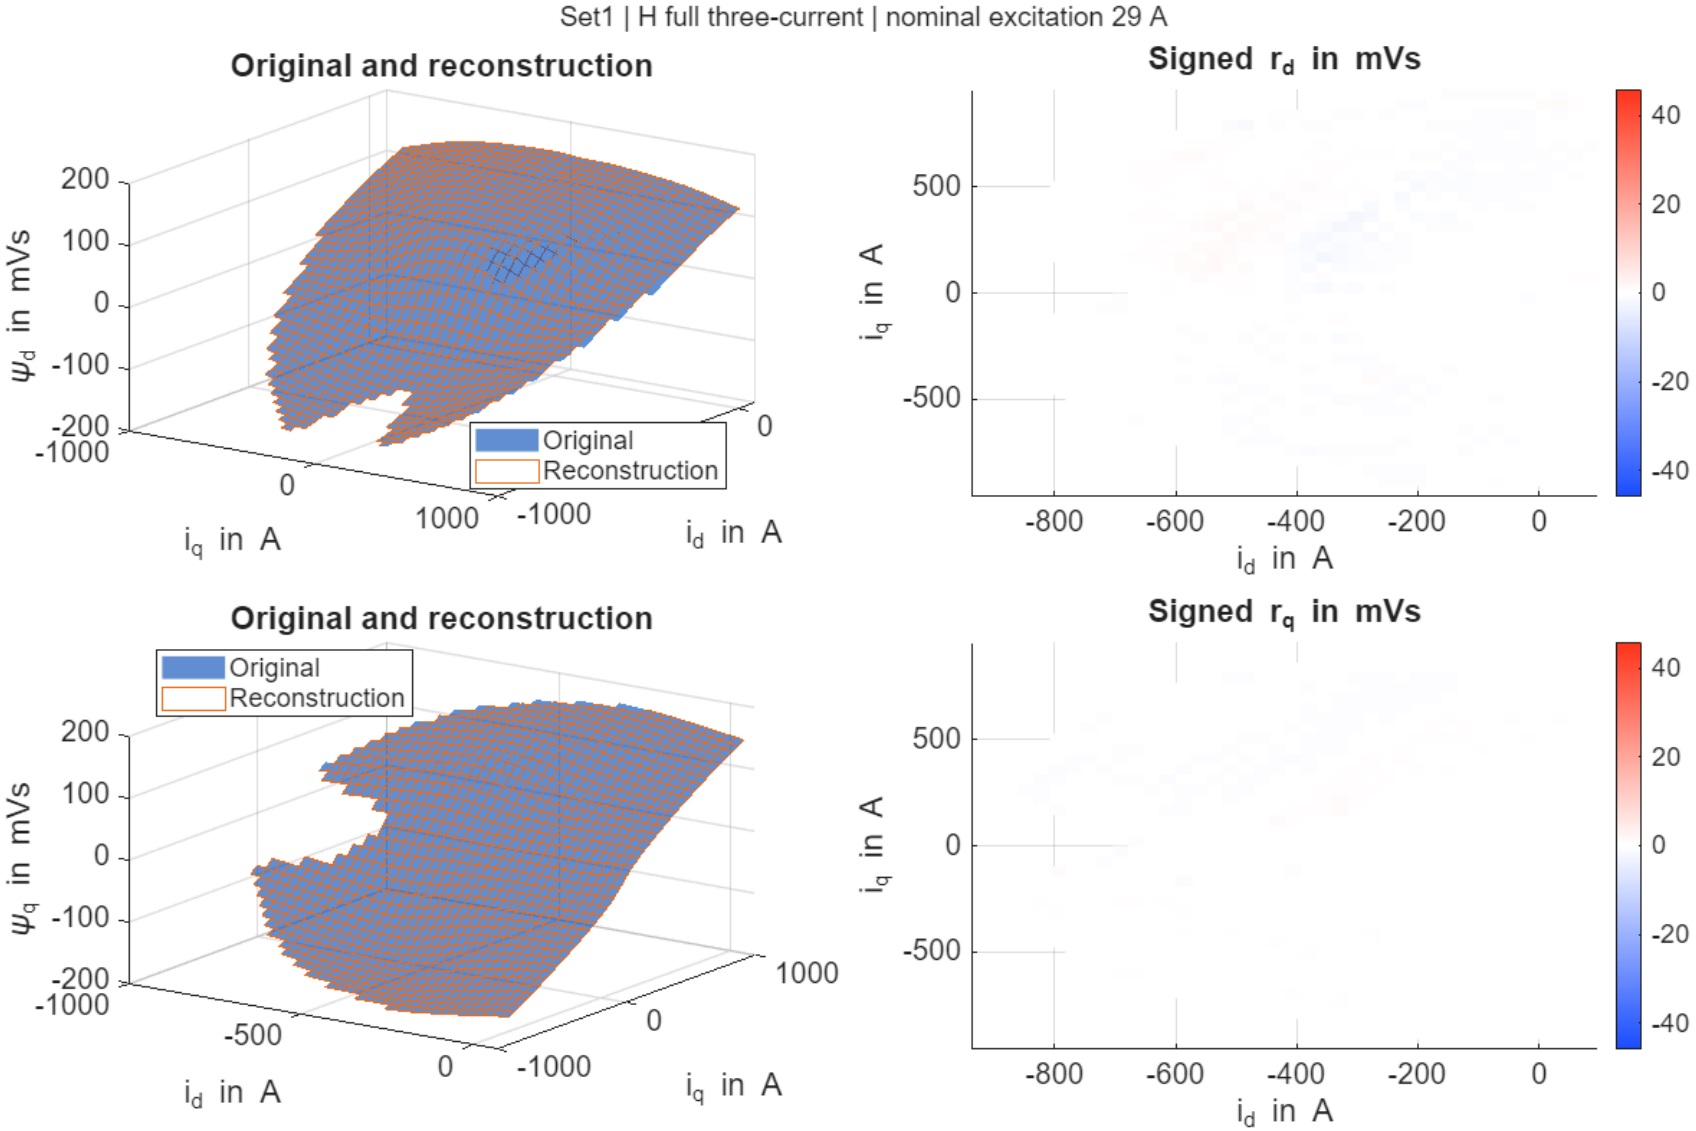

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method A, excitation 32 A

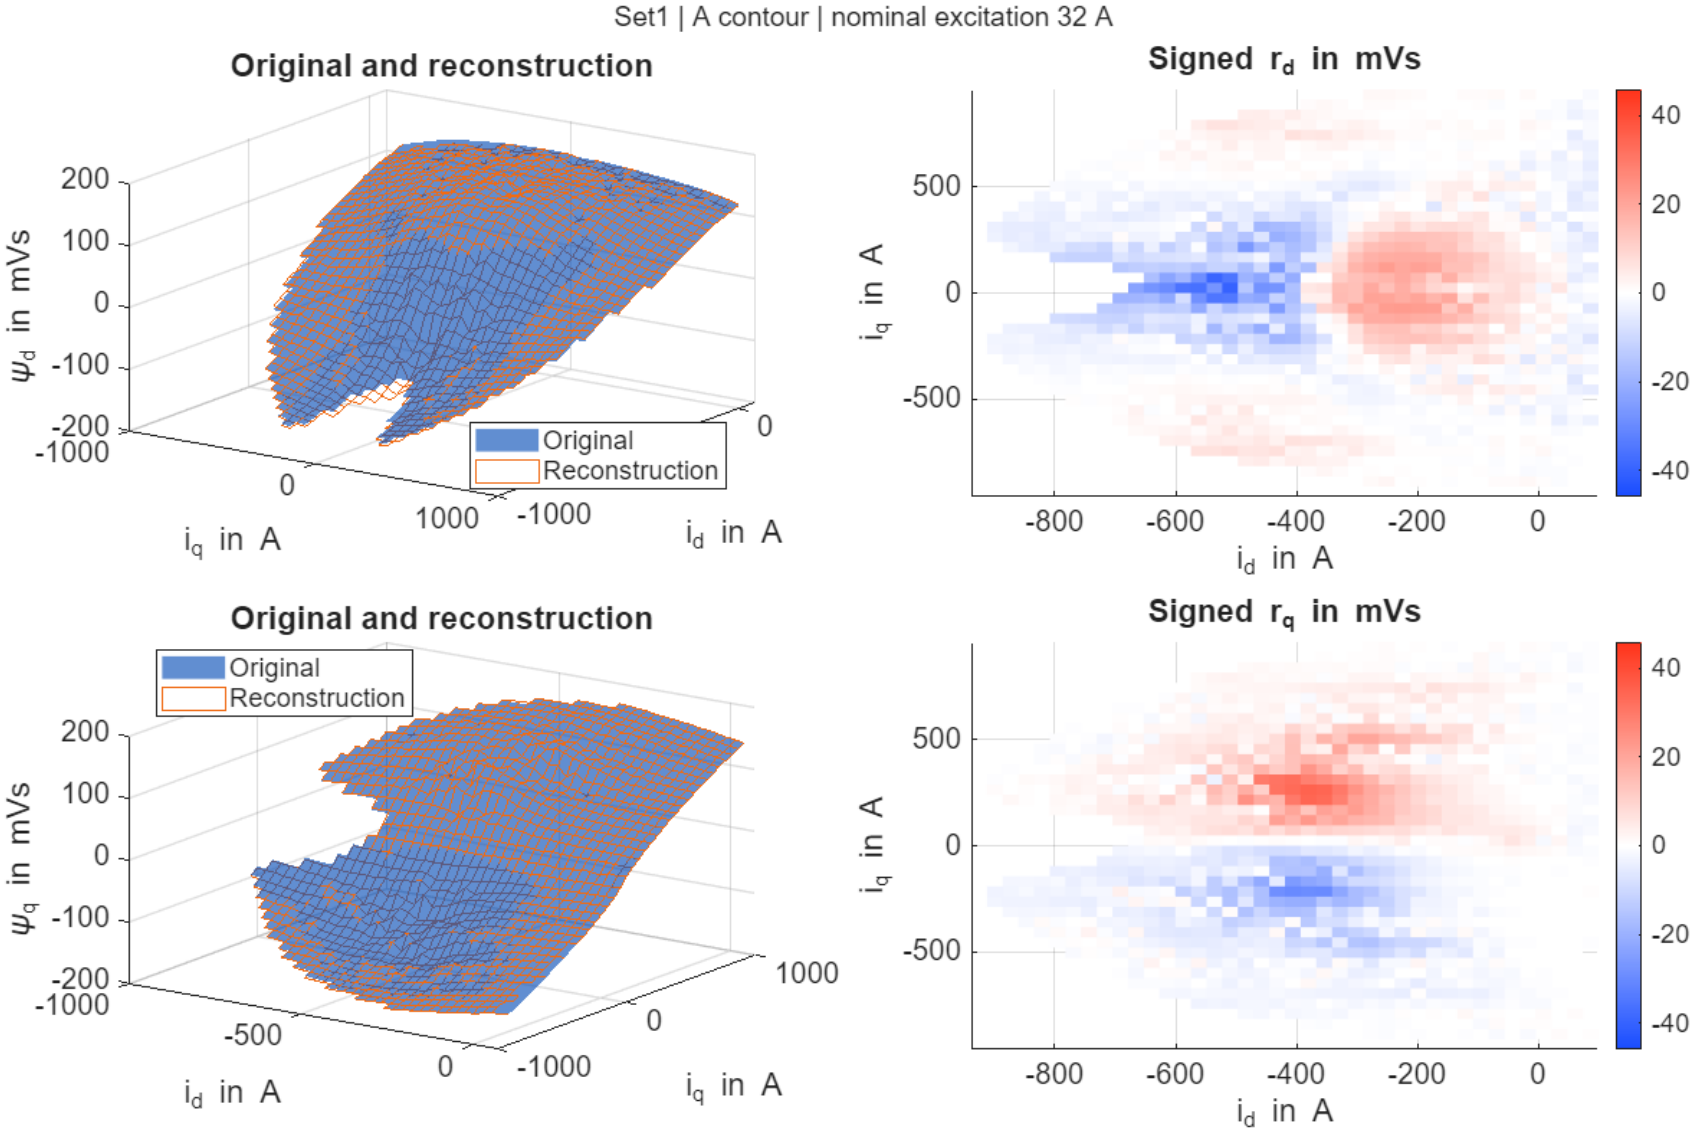

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method B, excitation 32 A

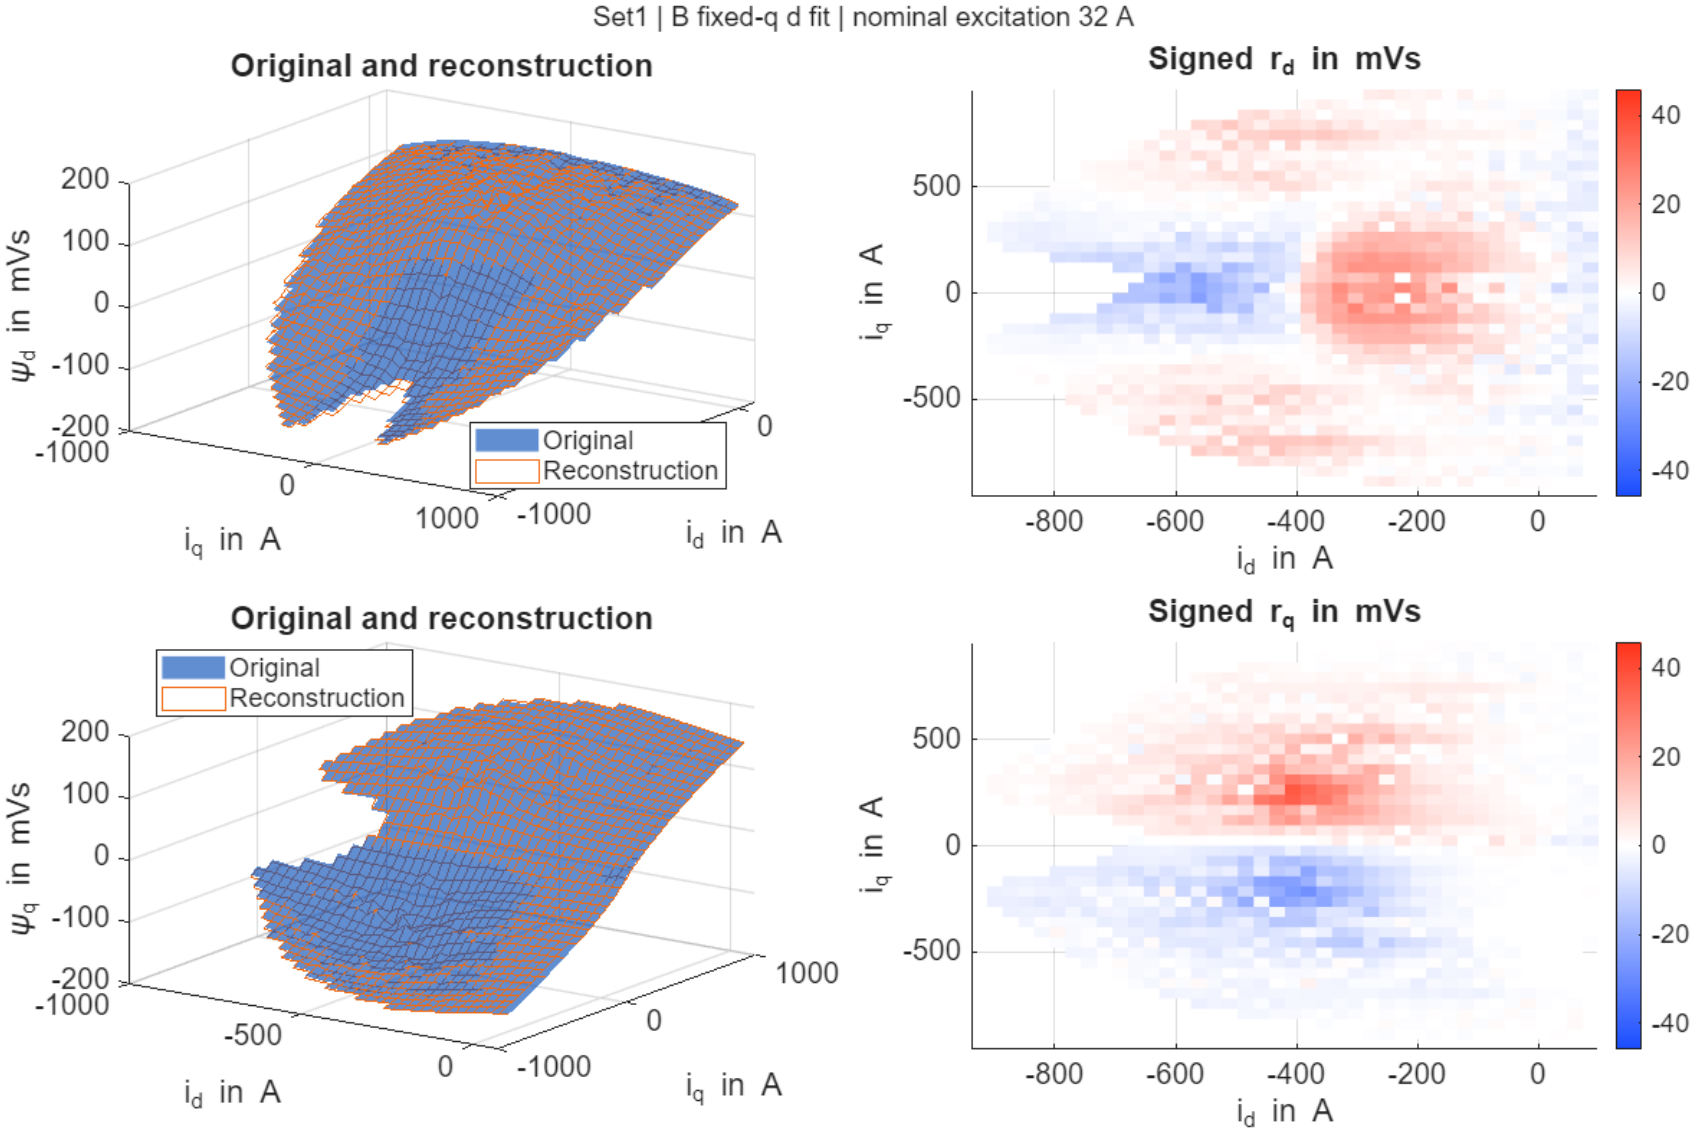

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method C, excitation 32 A

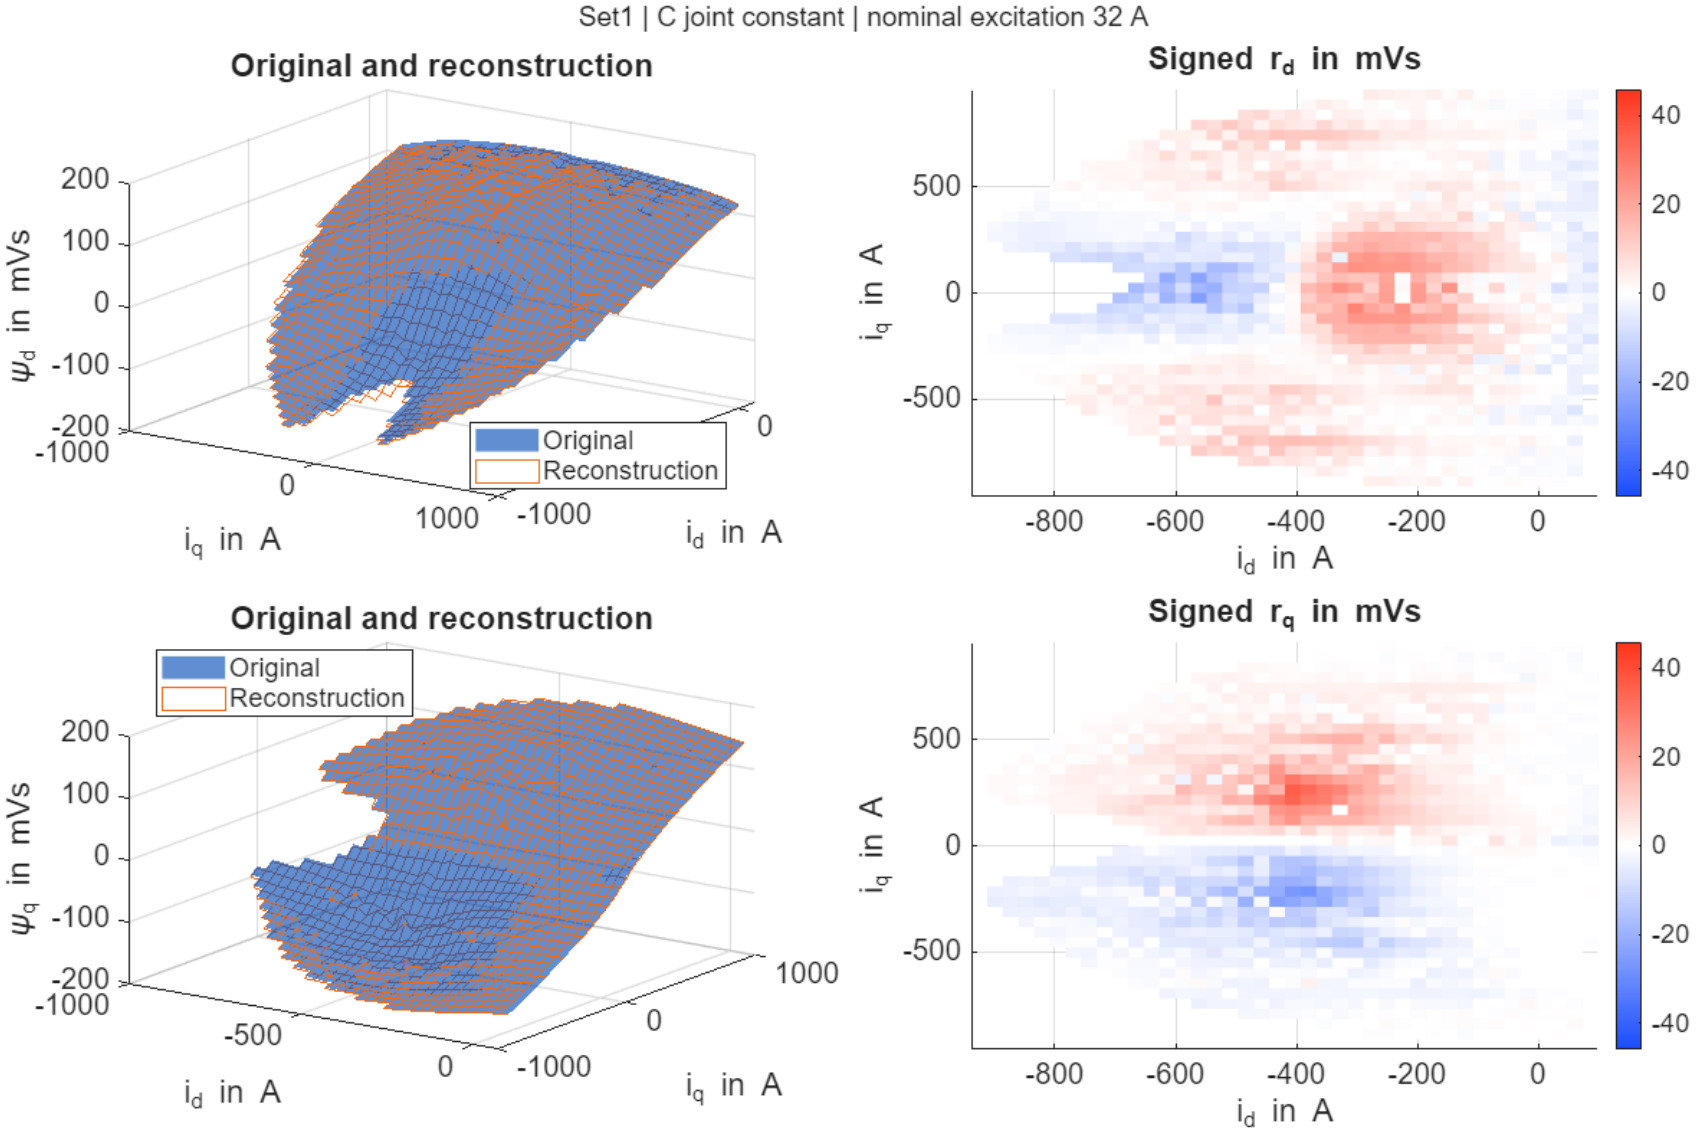

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method D, excitation 32 A

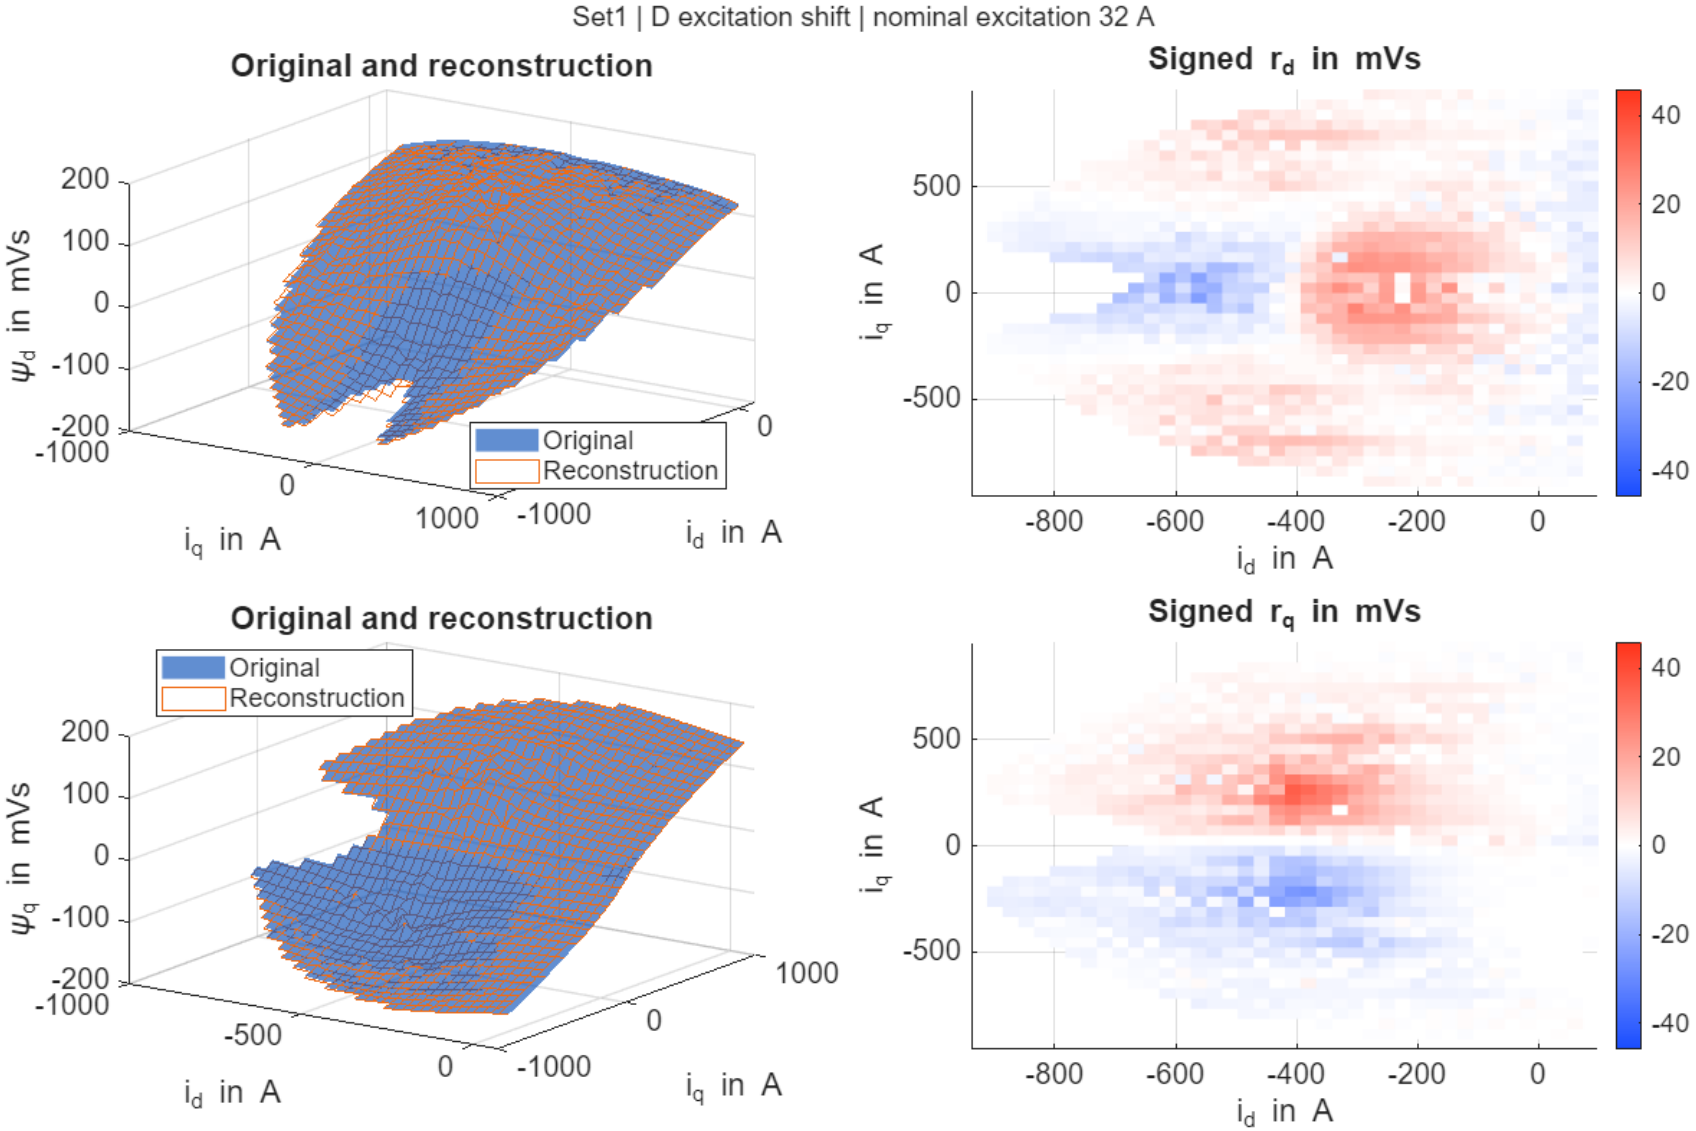

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method E, excitation 32 A

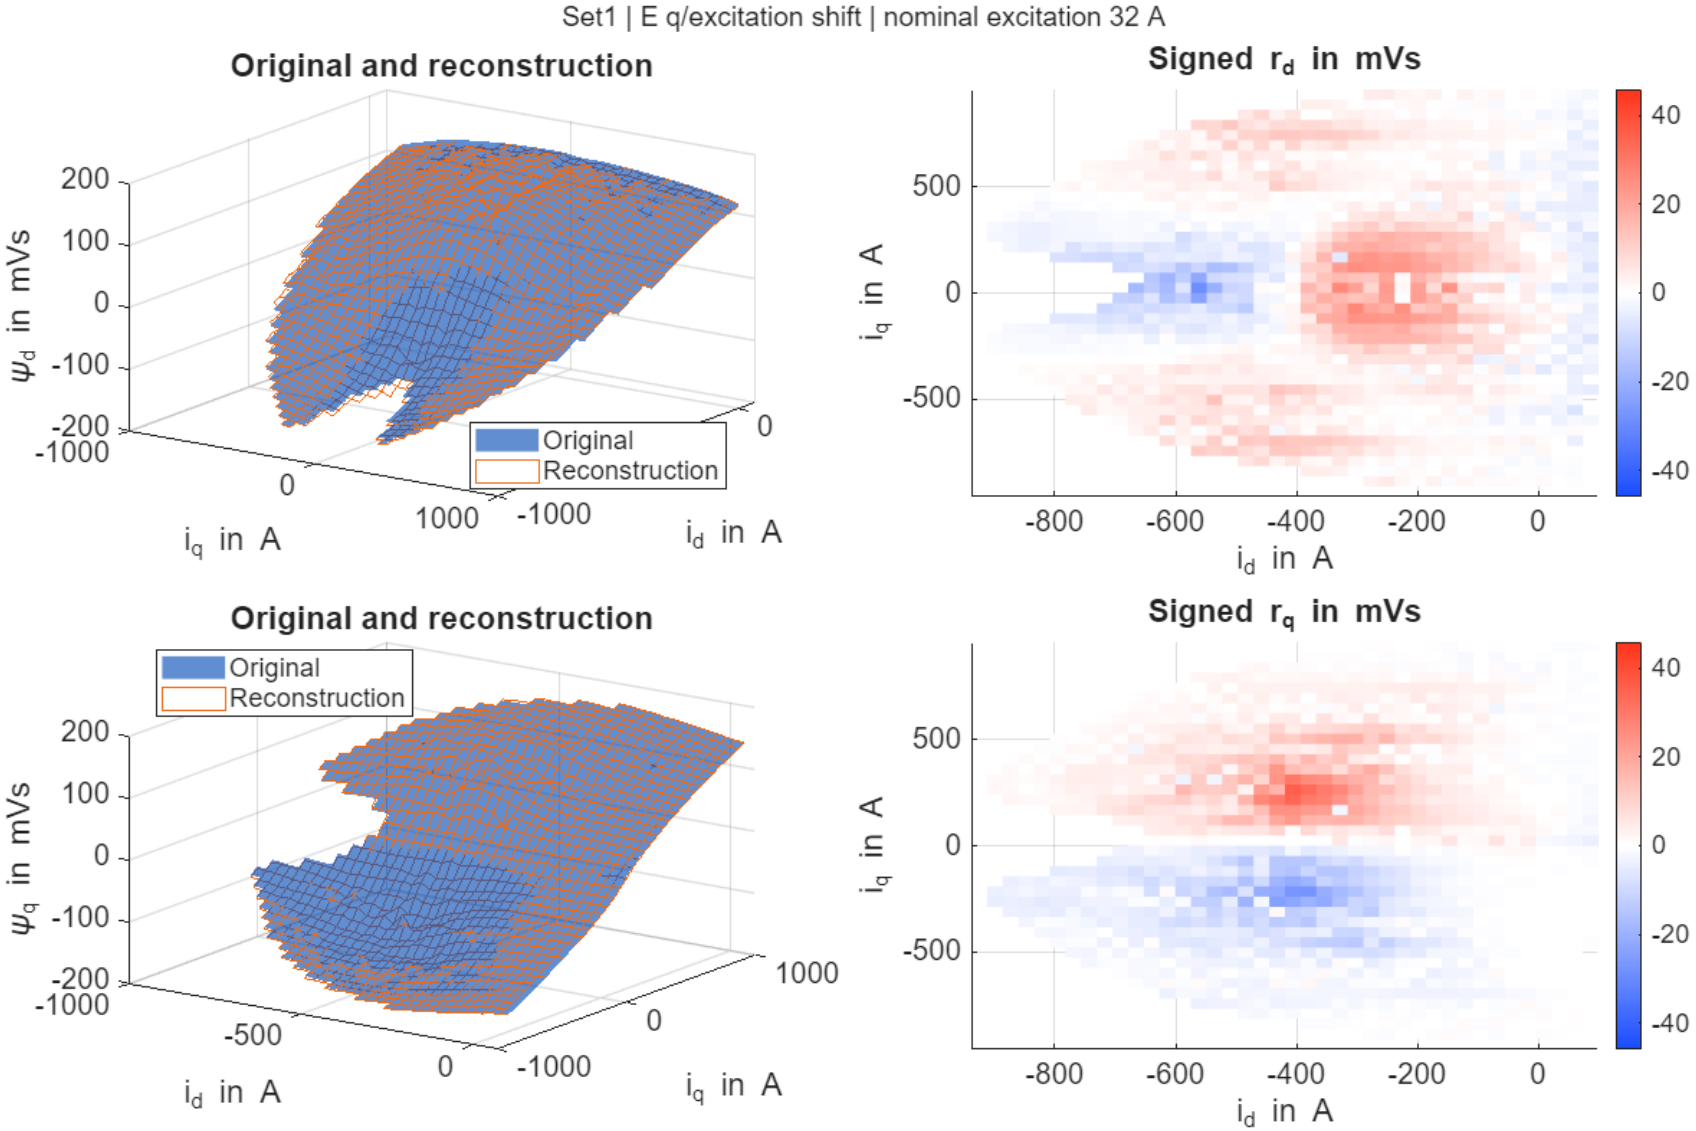

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method F, excitation 32 A

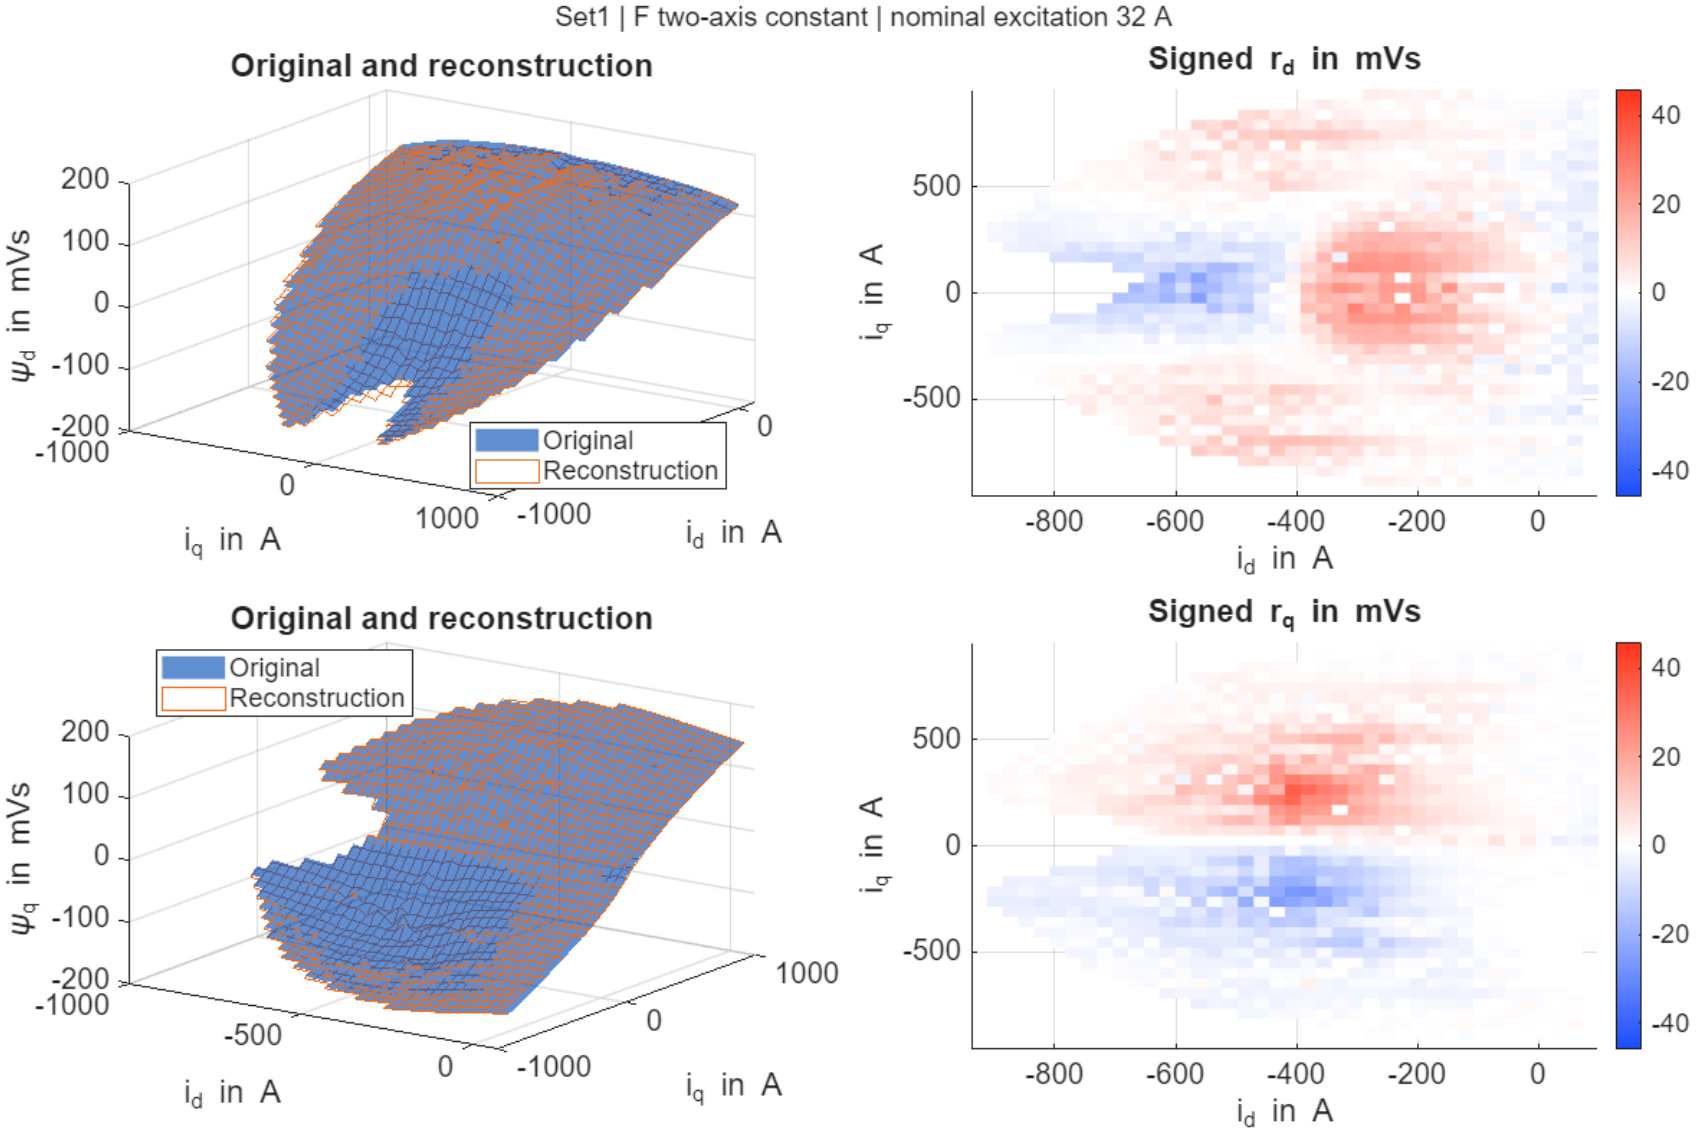

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method G, excitation 32 A

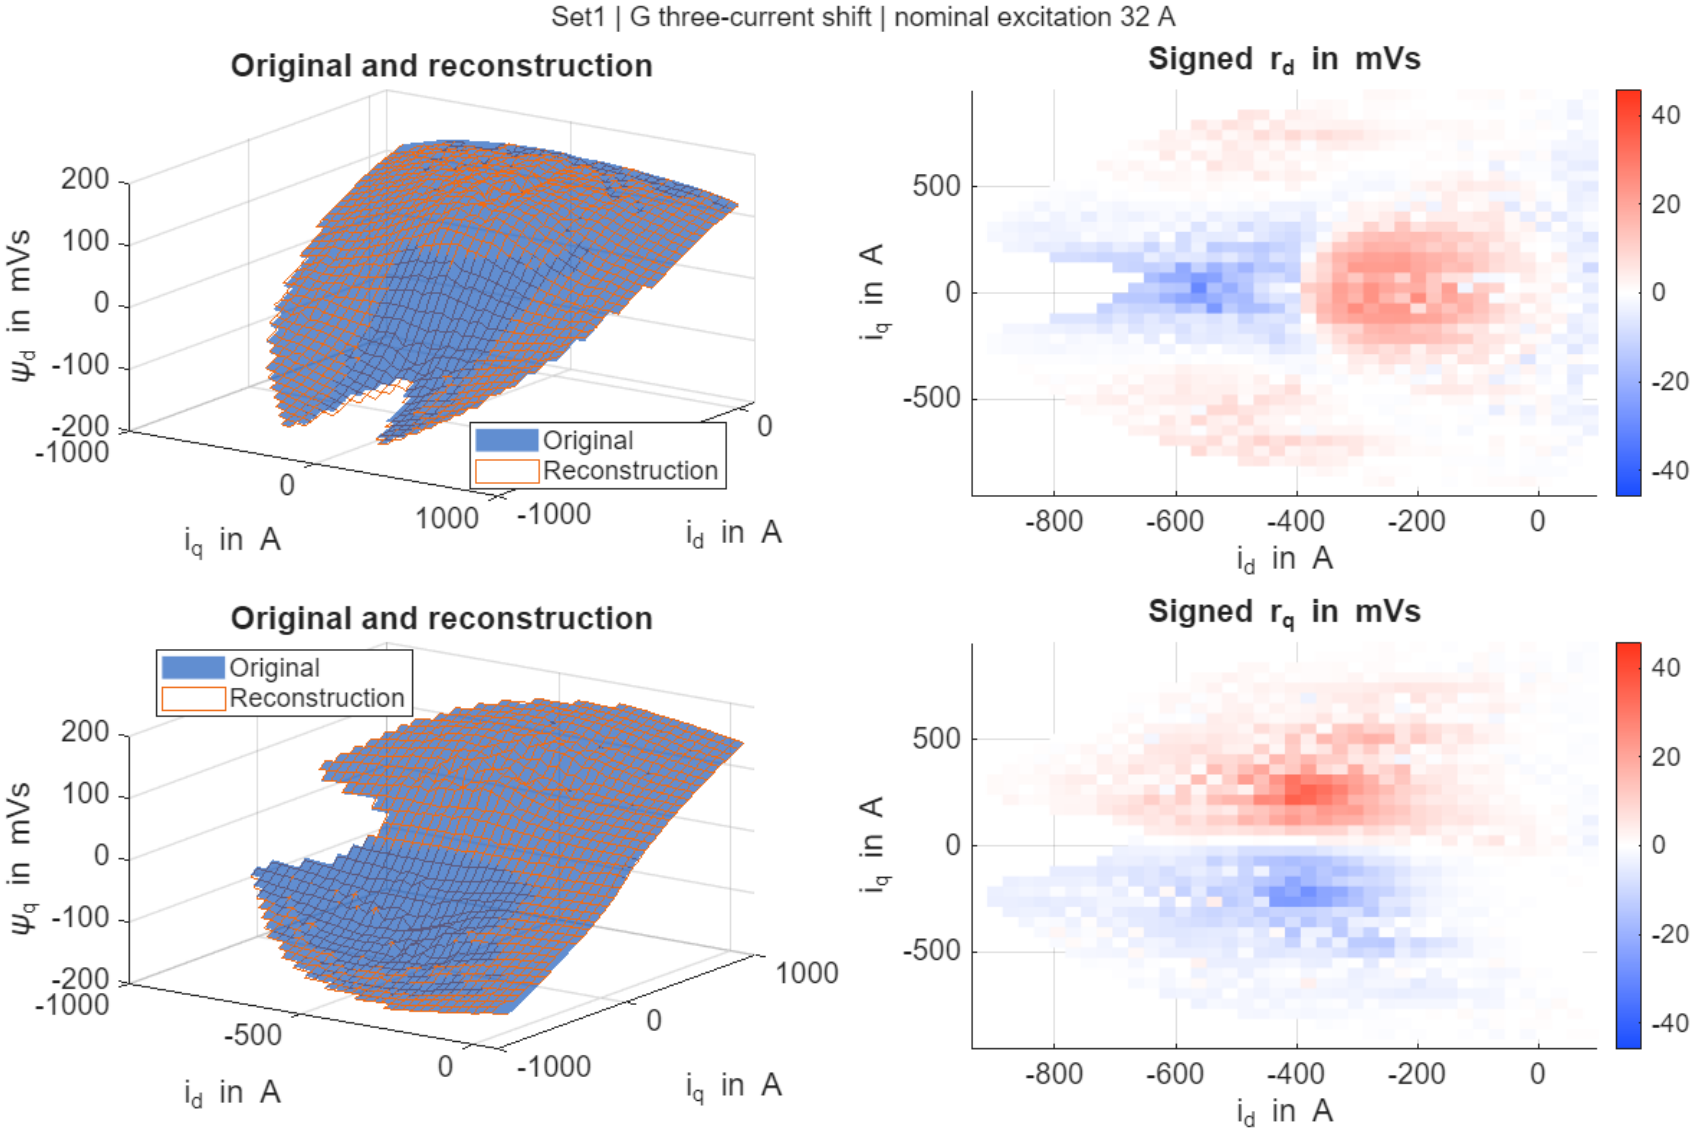

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method H, excitation 32 A

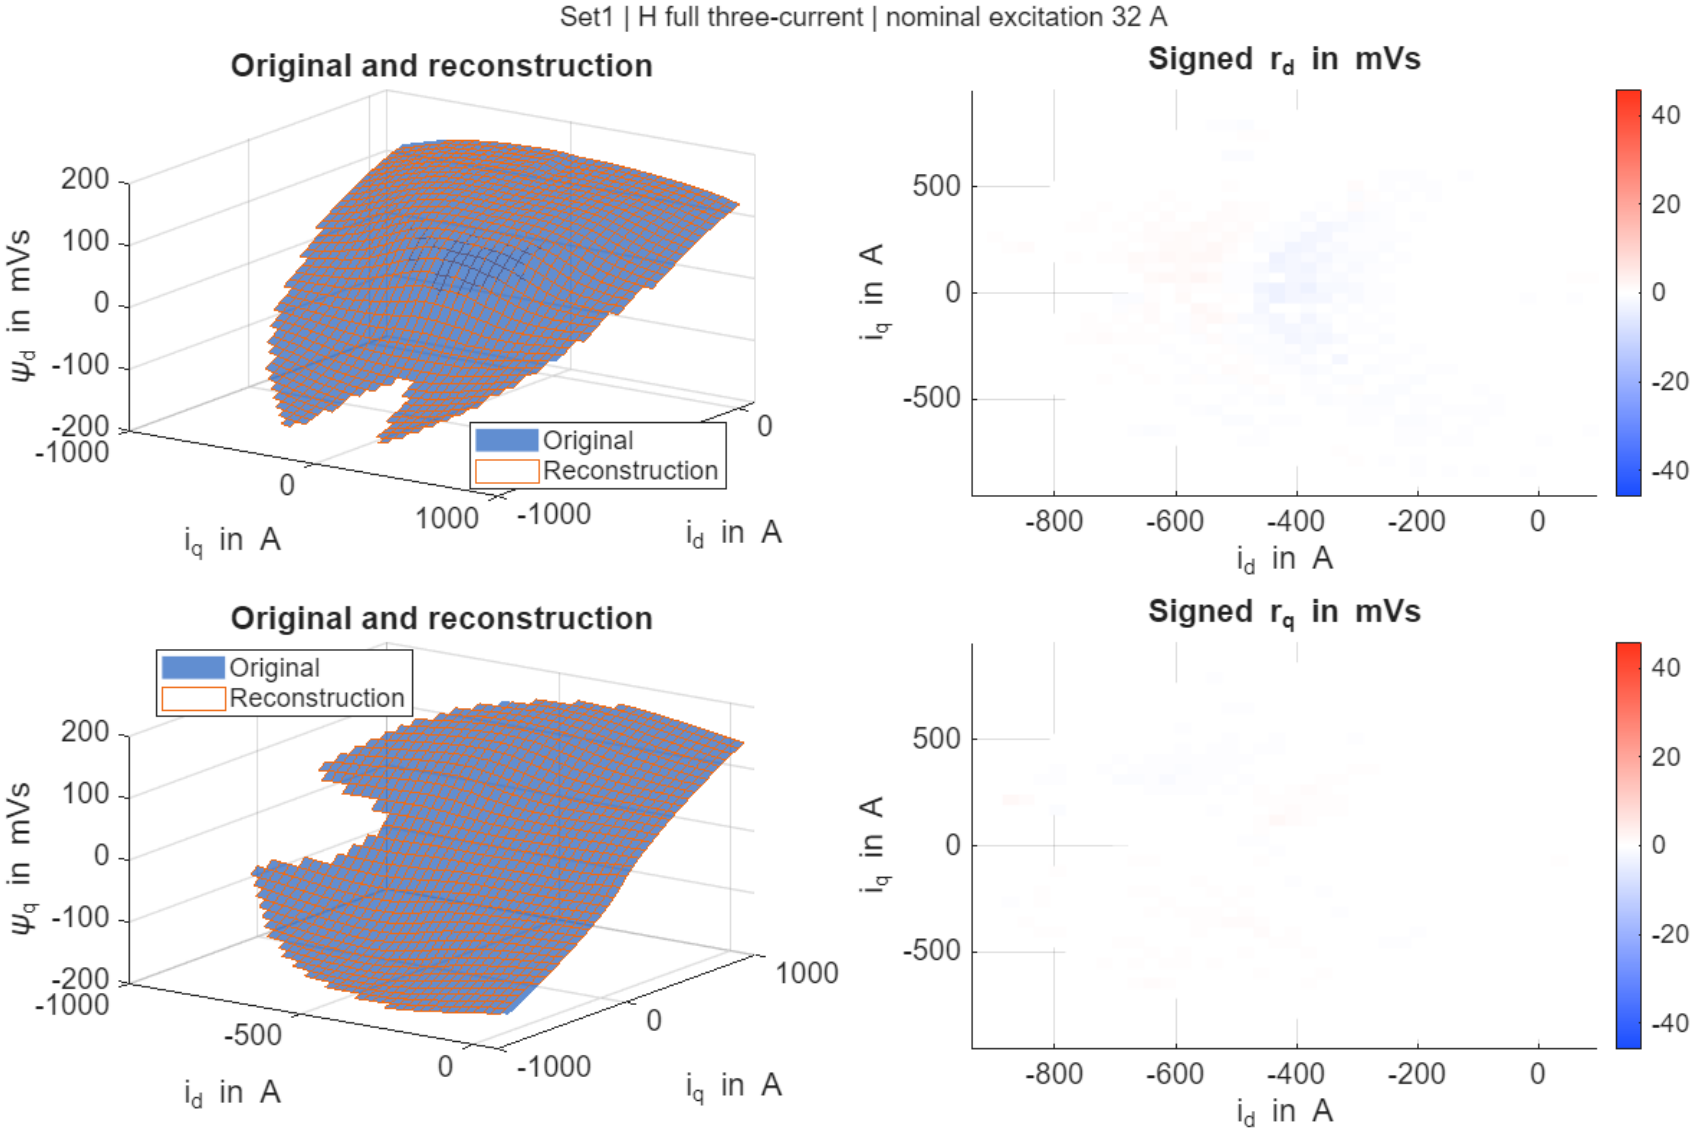

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method A, excitation 36 A

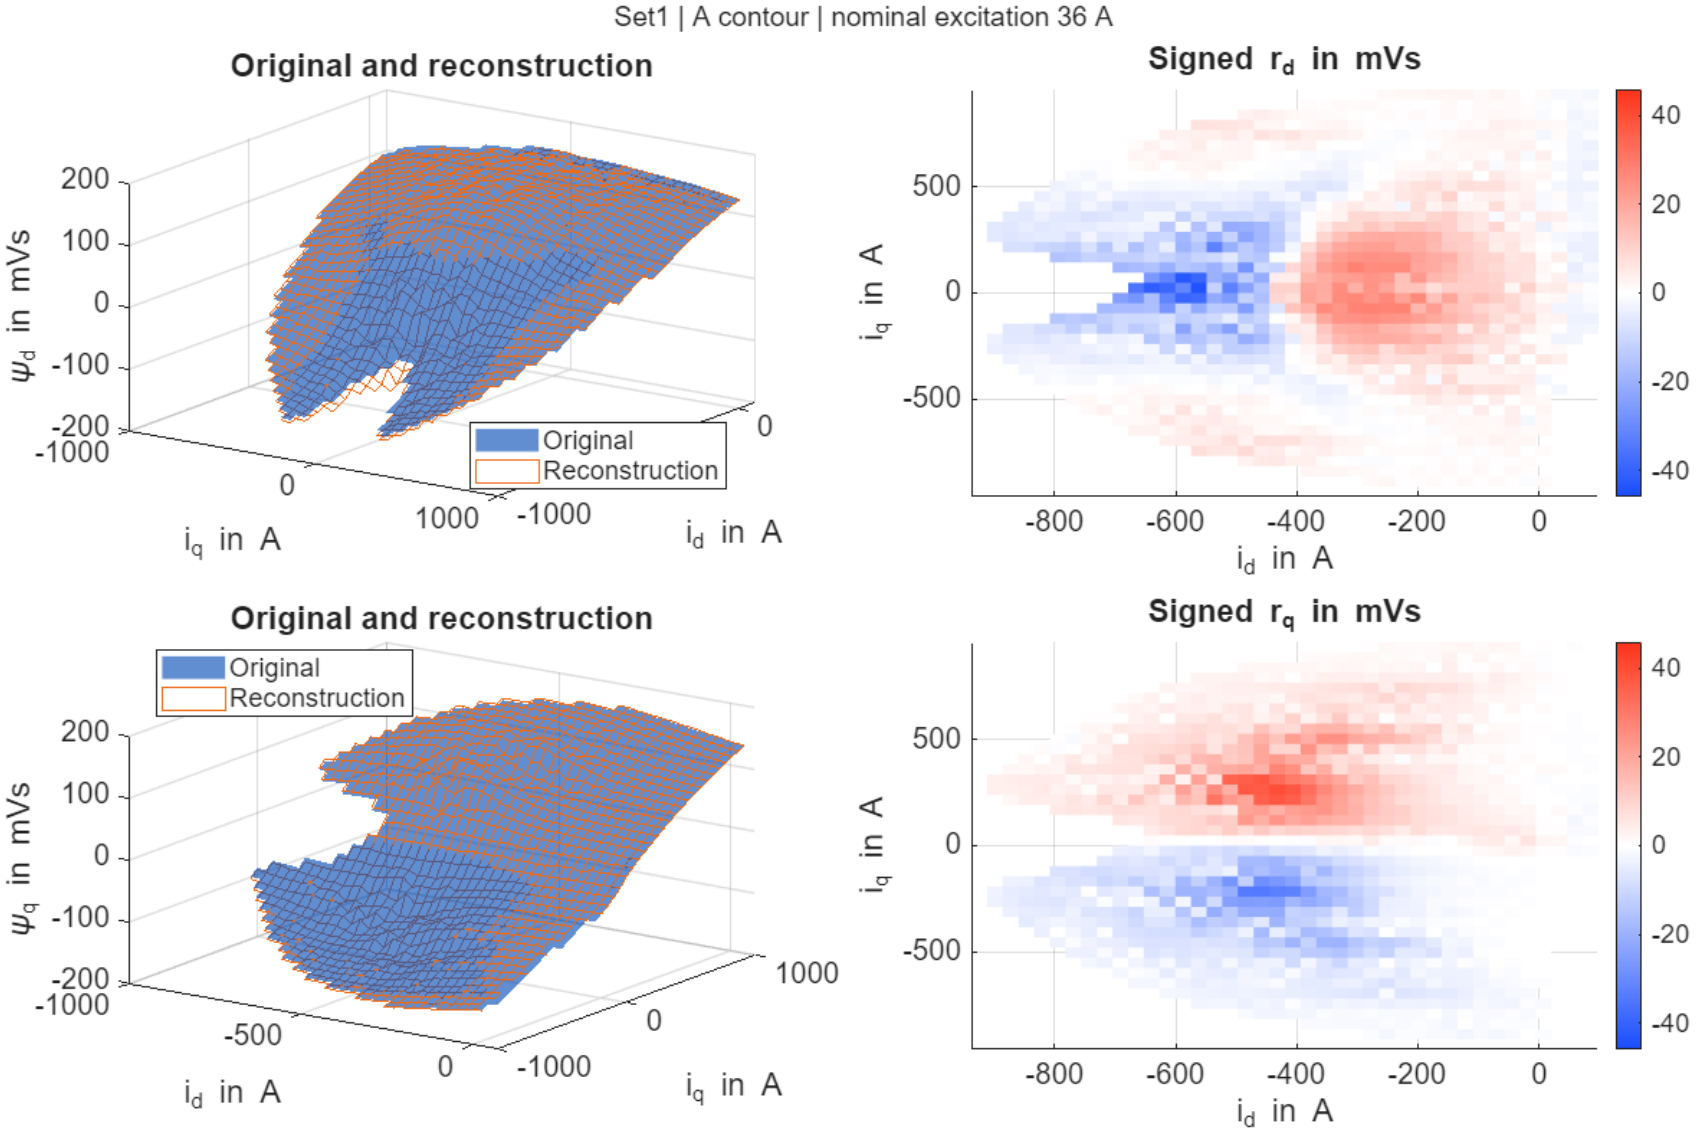

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method B, excitation 36 A

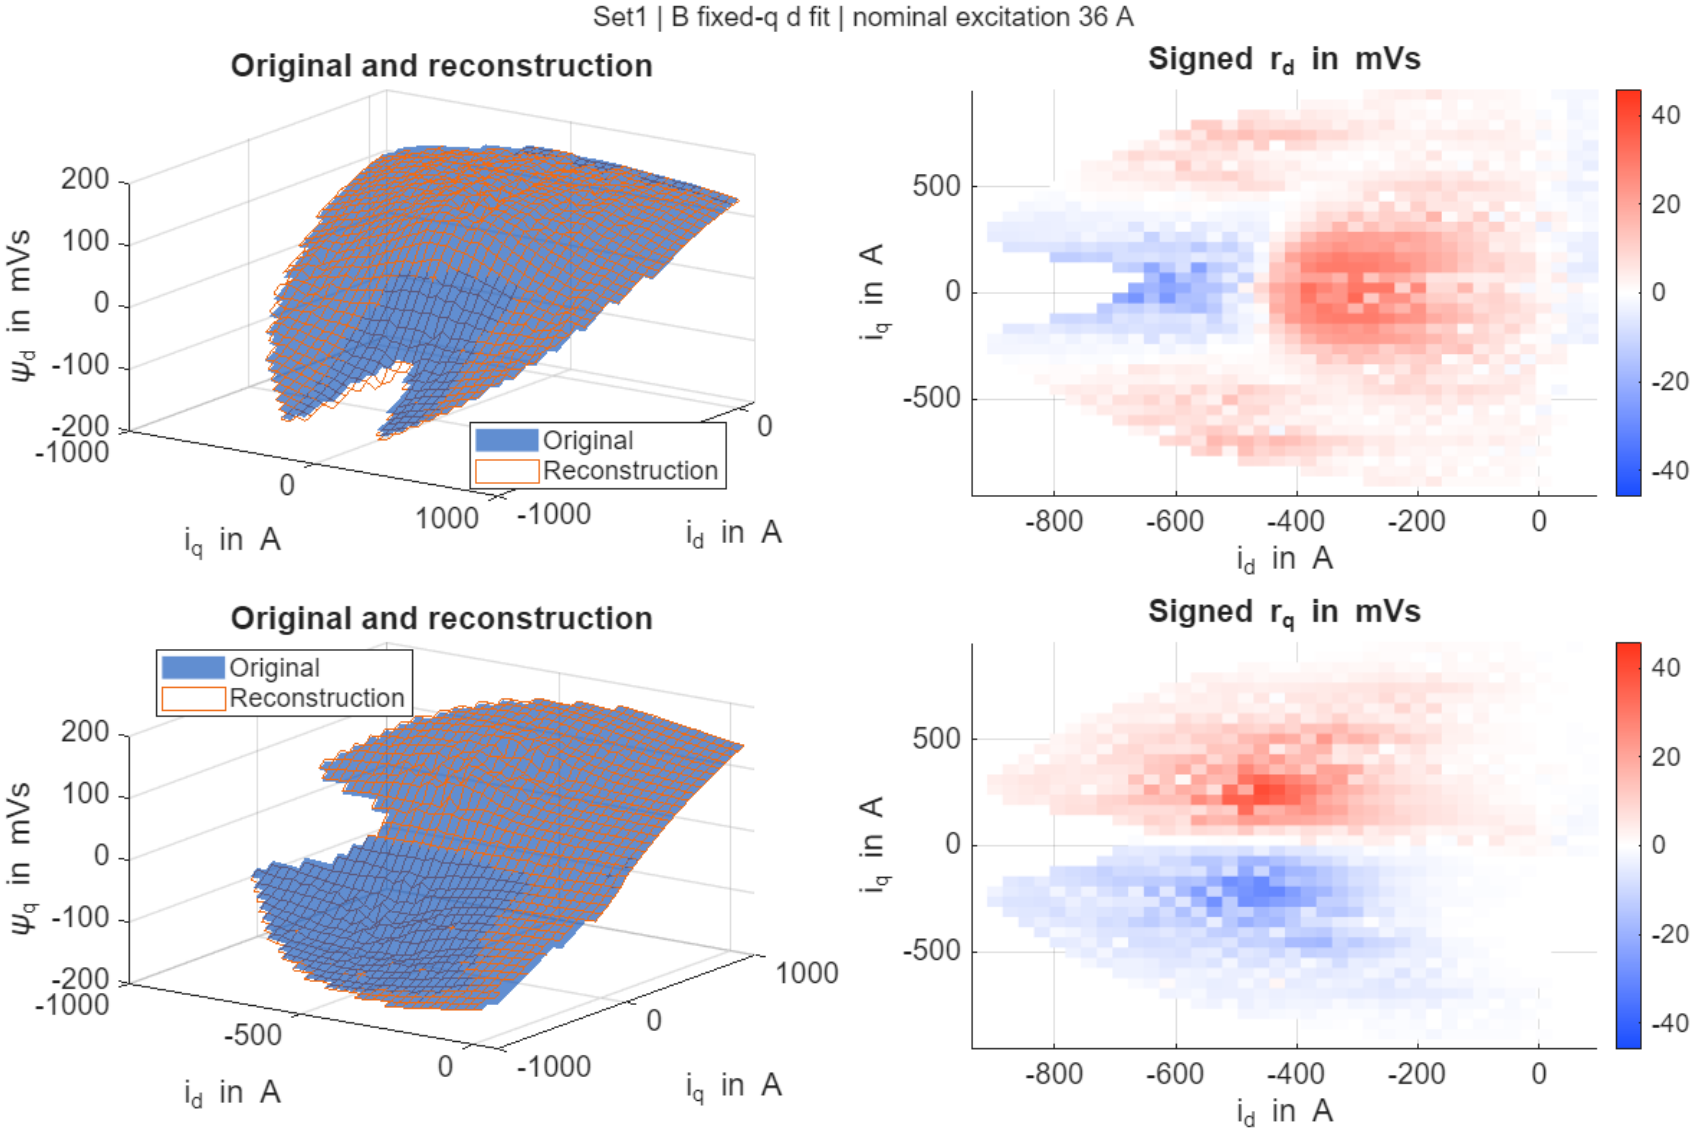

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method C, excitation 36 A

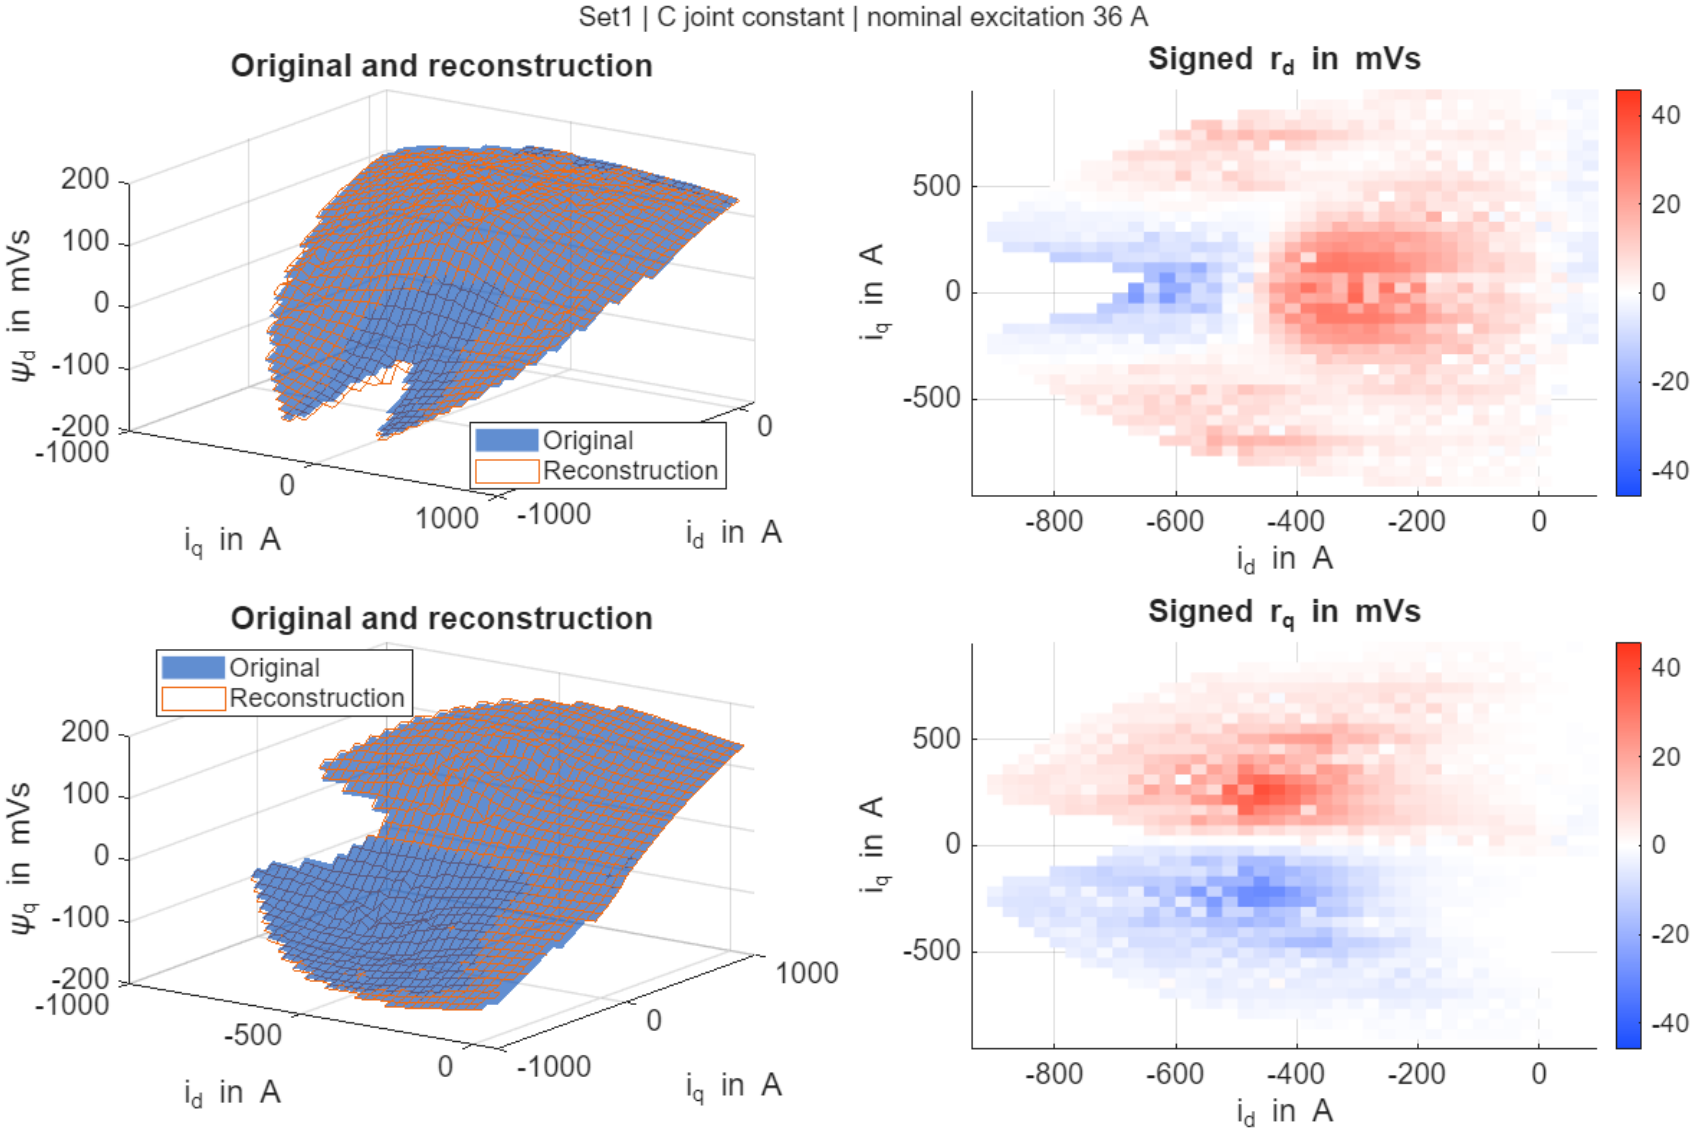

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method D, excitation 36 A

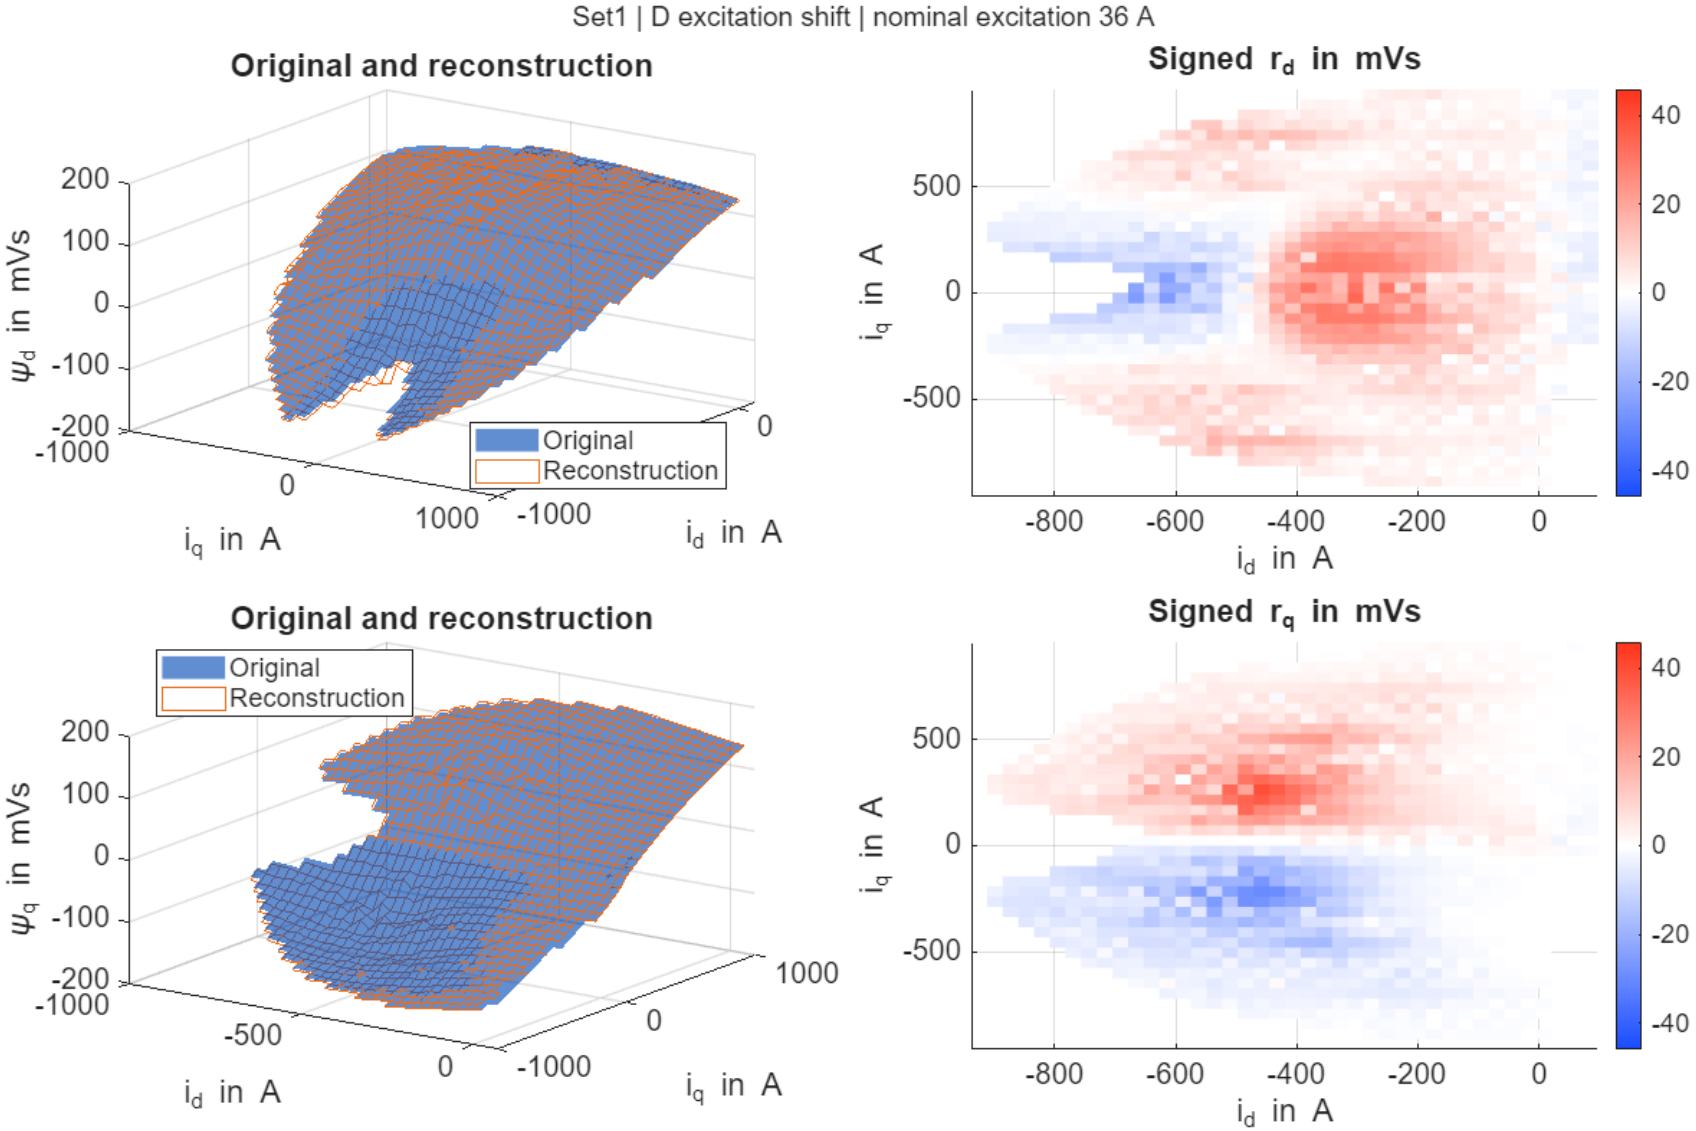

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method E, excitation 36 A

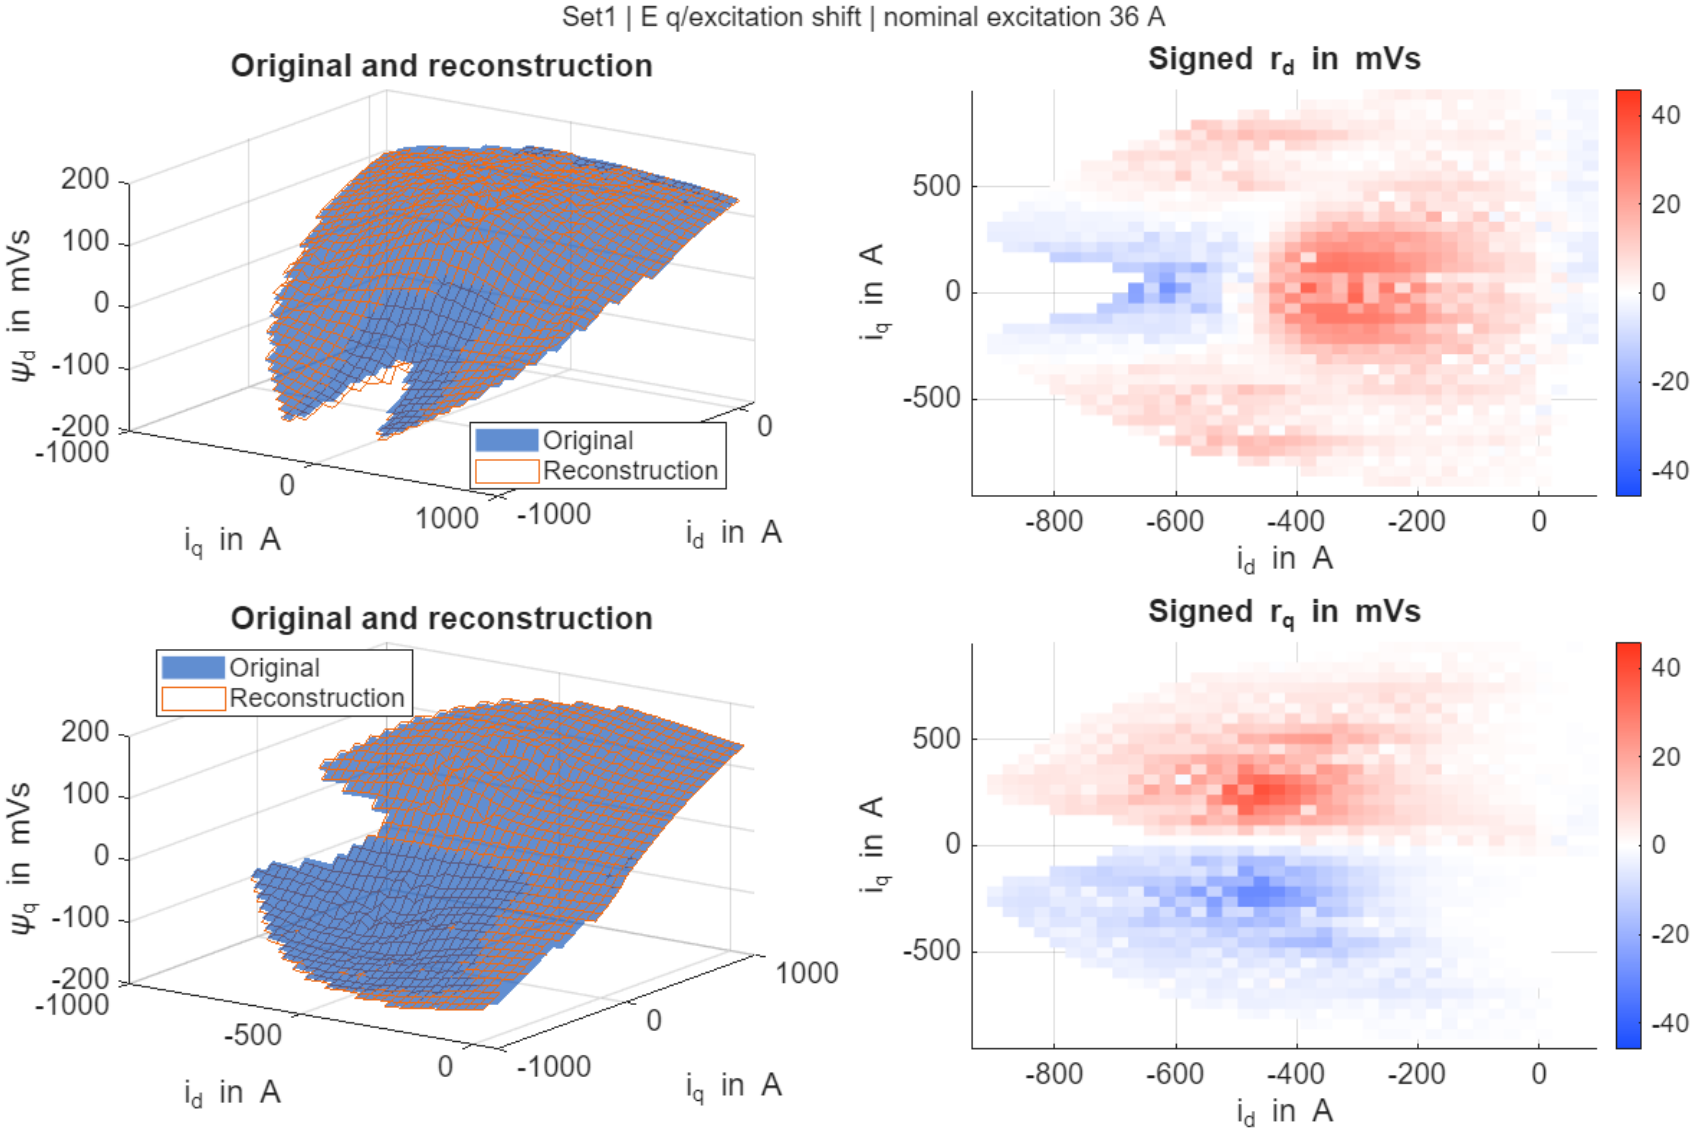

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method F, excitation 36 A

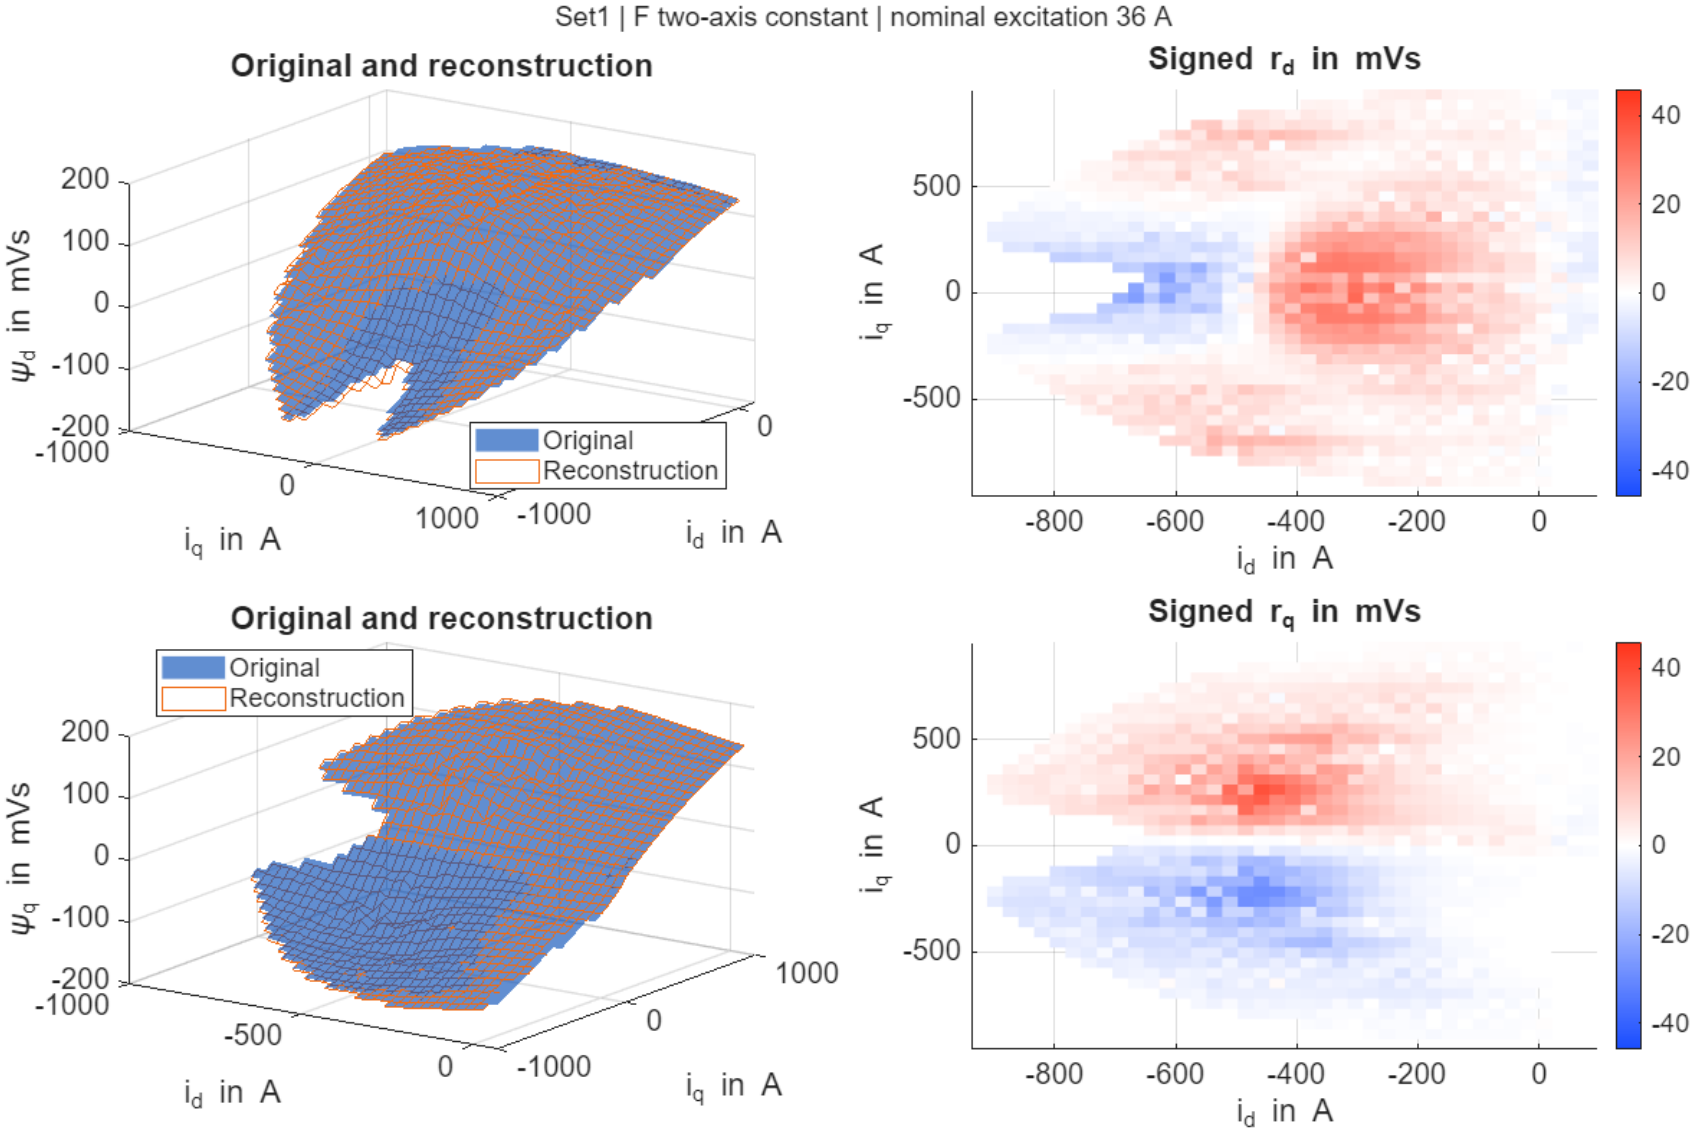

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method G, excitation 36 A

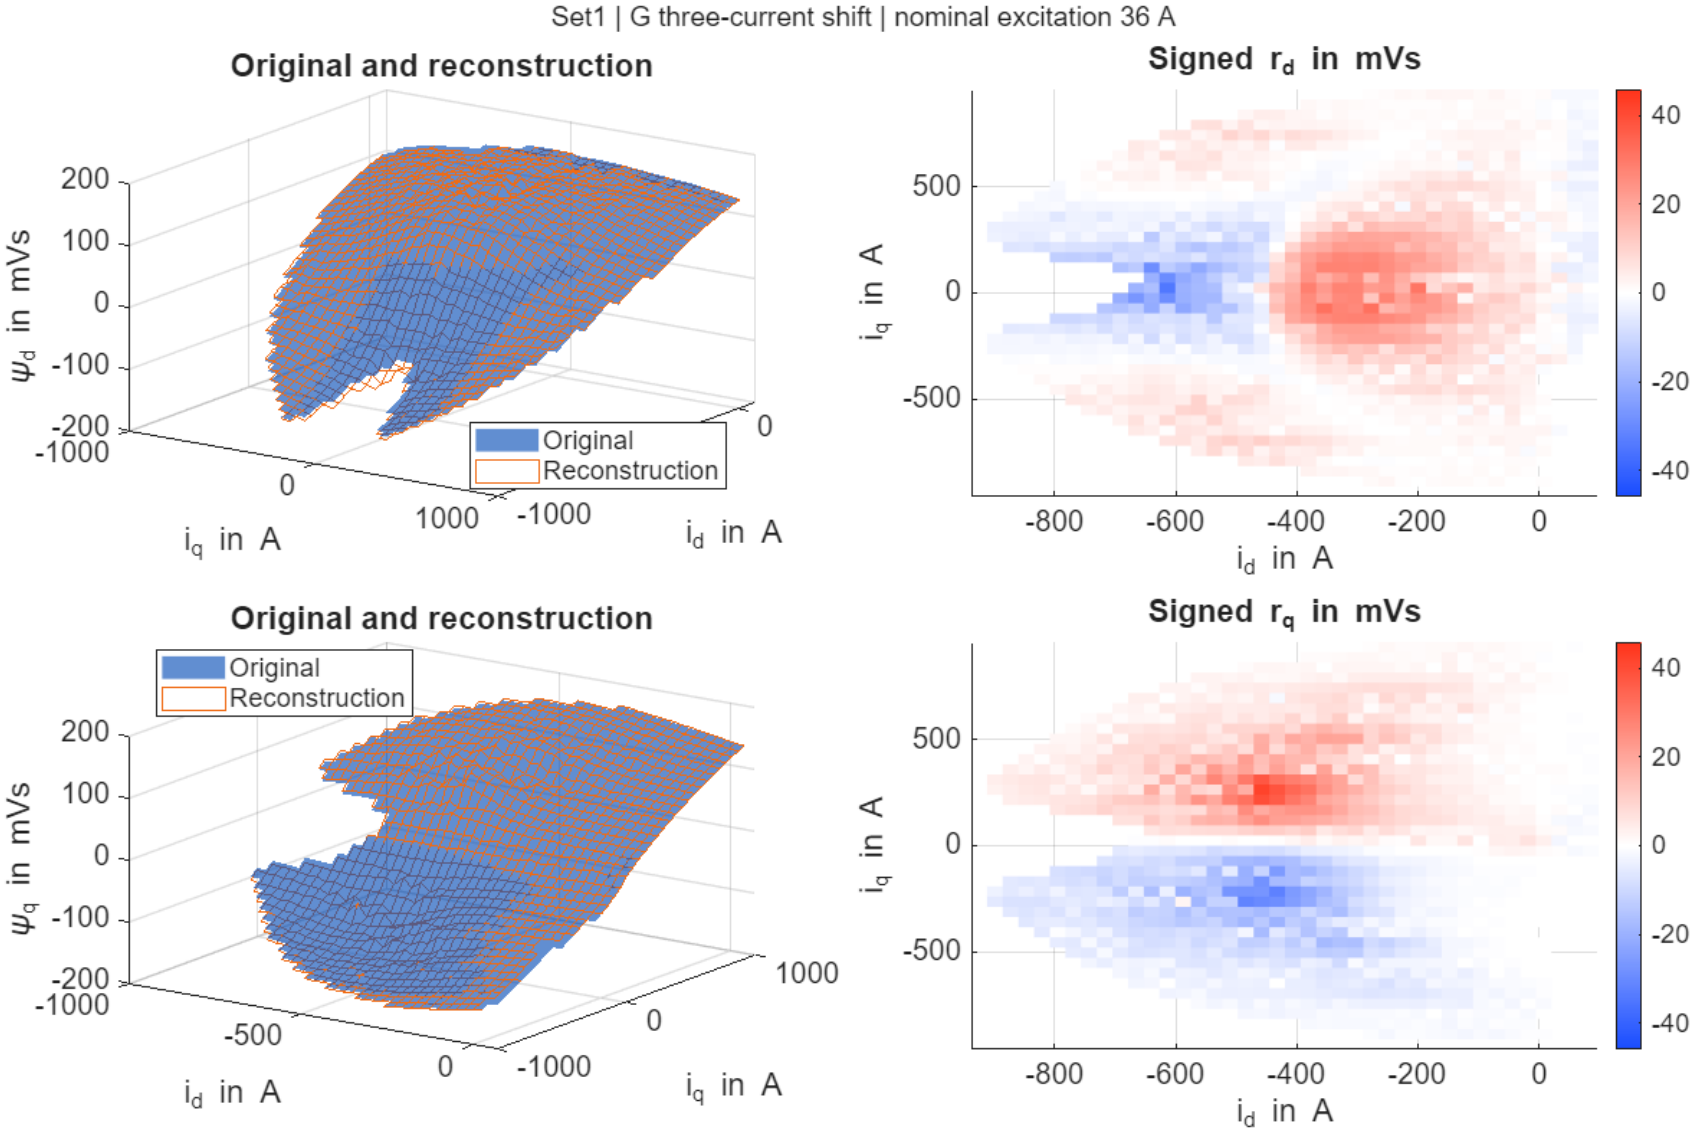

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method H, excitation 36 A

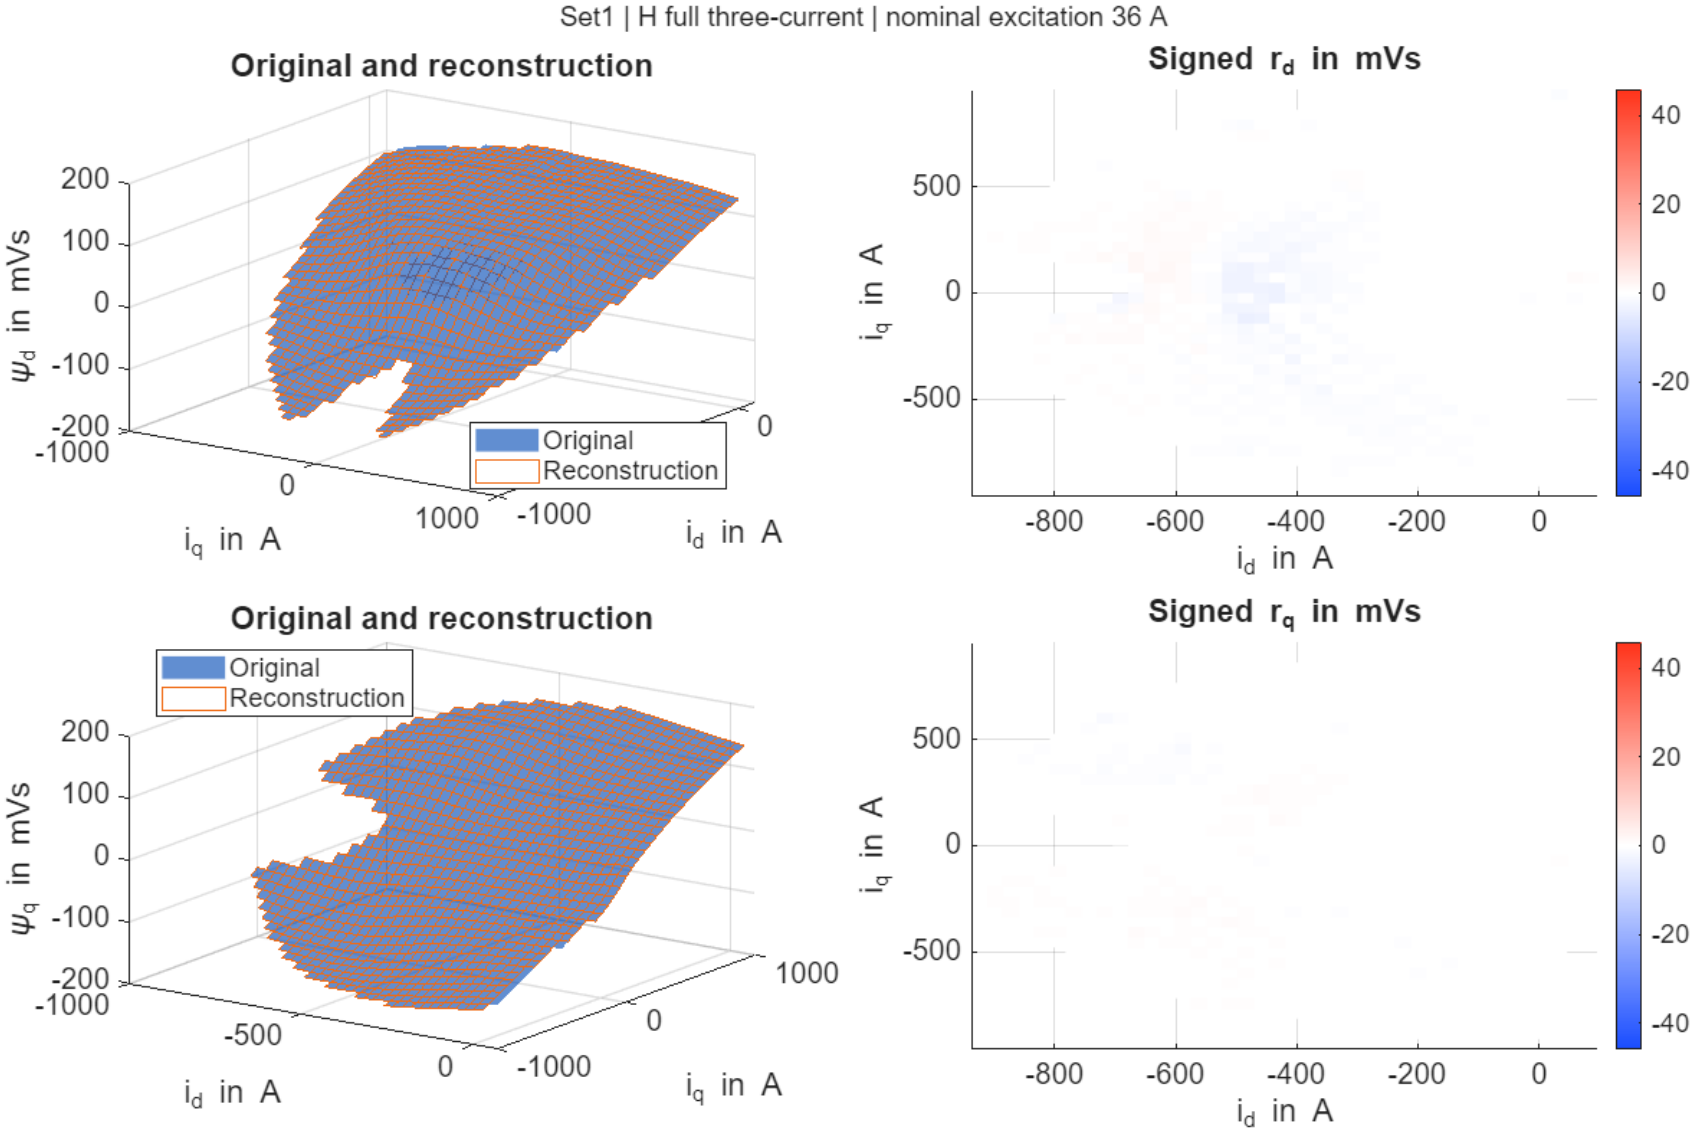

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method A, excitation 40 A

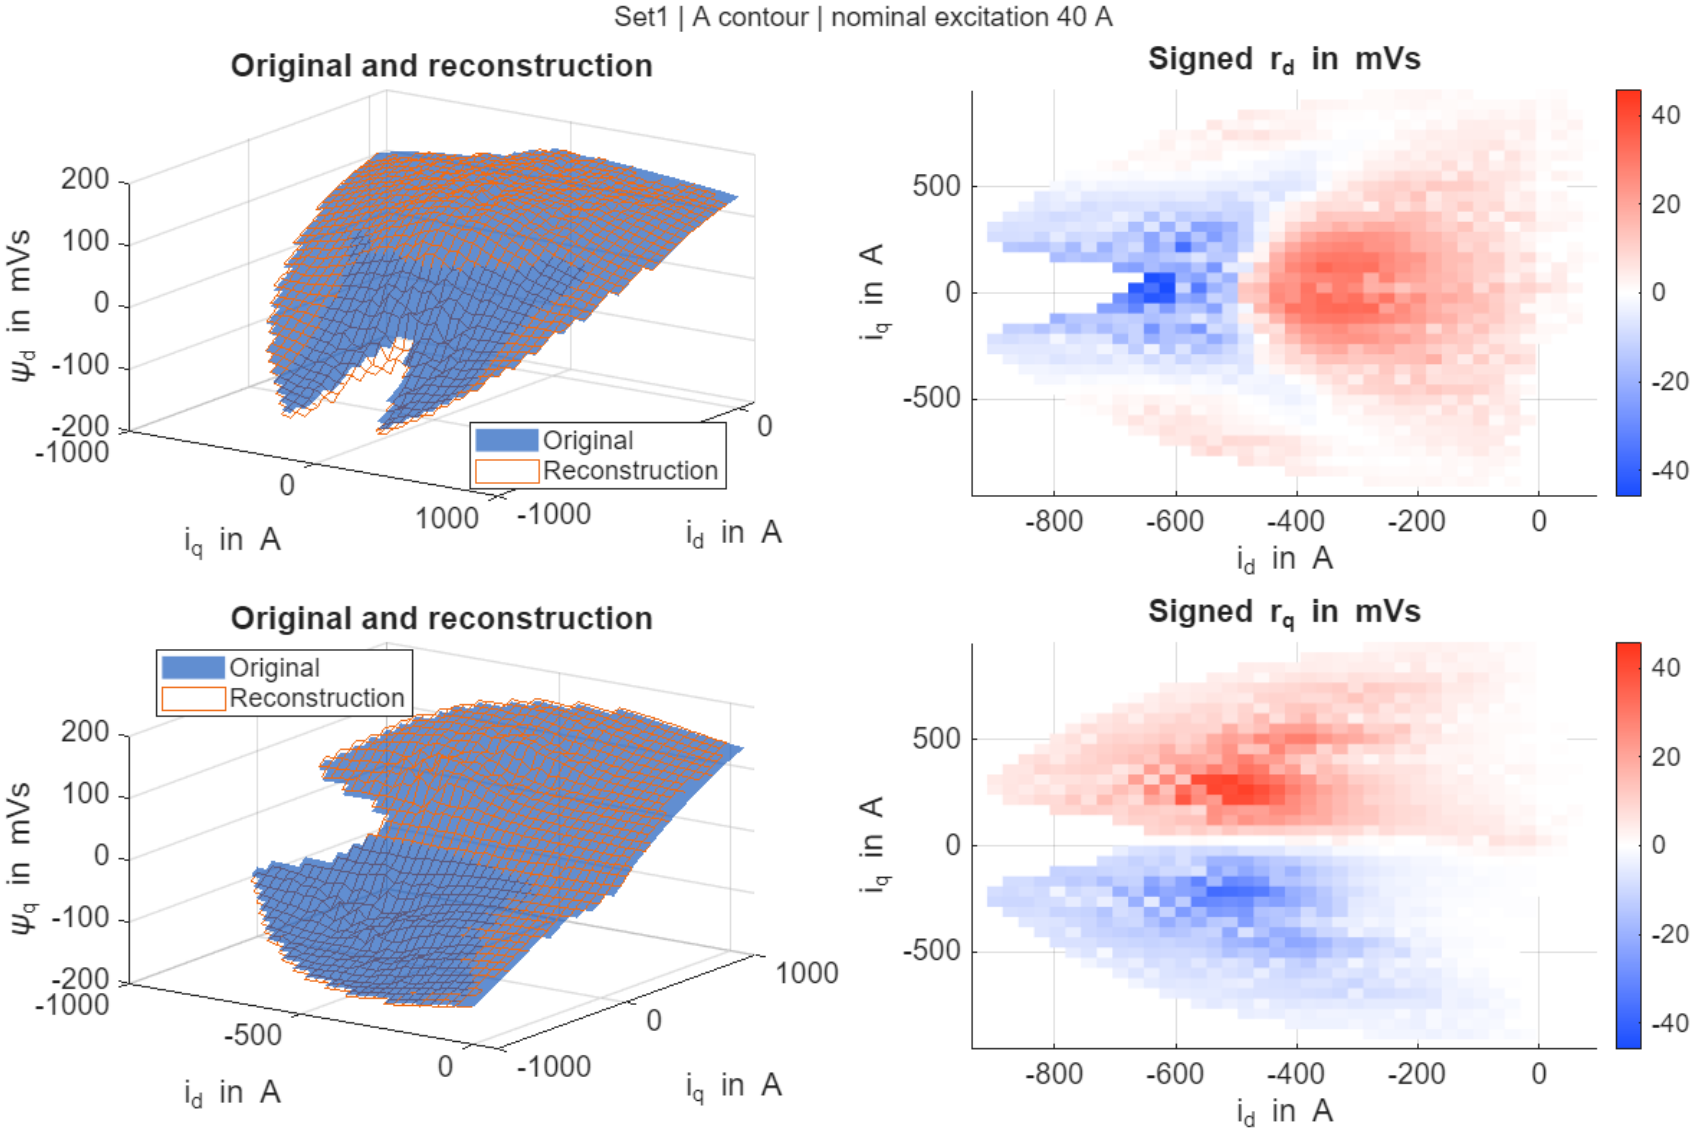

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method B, excitation 40 A

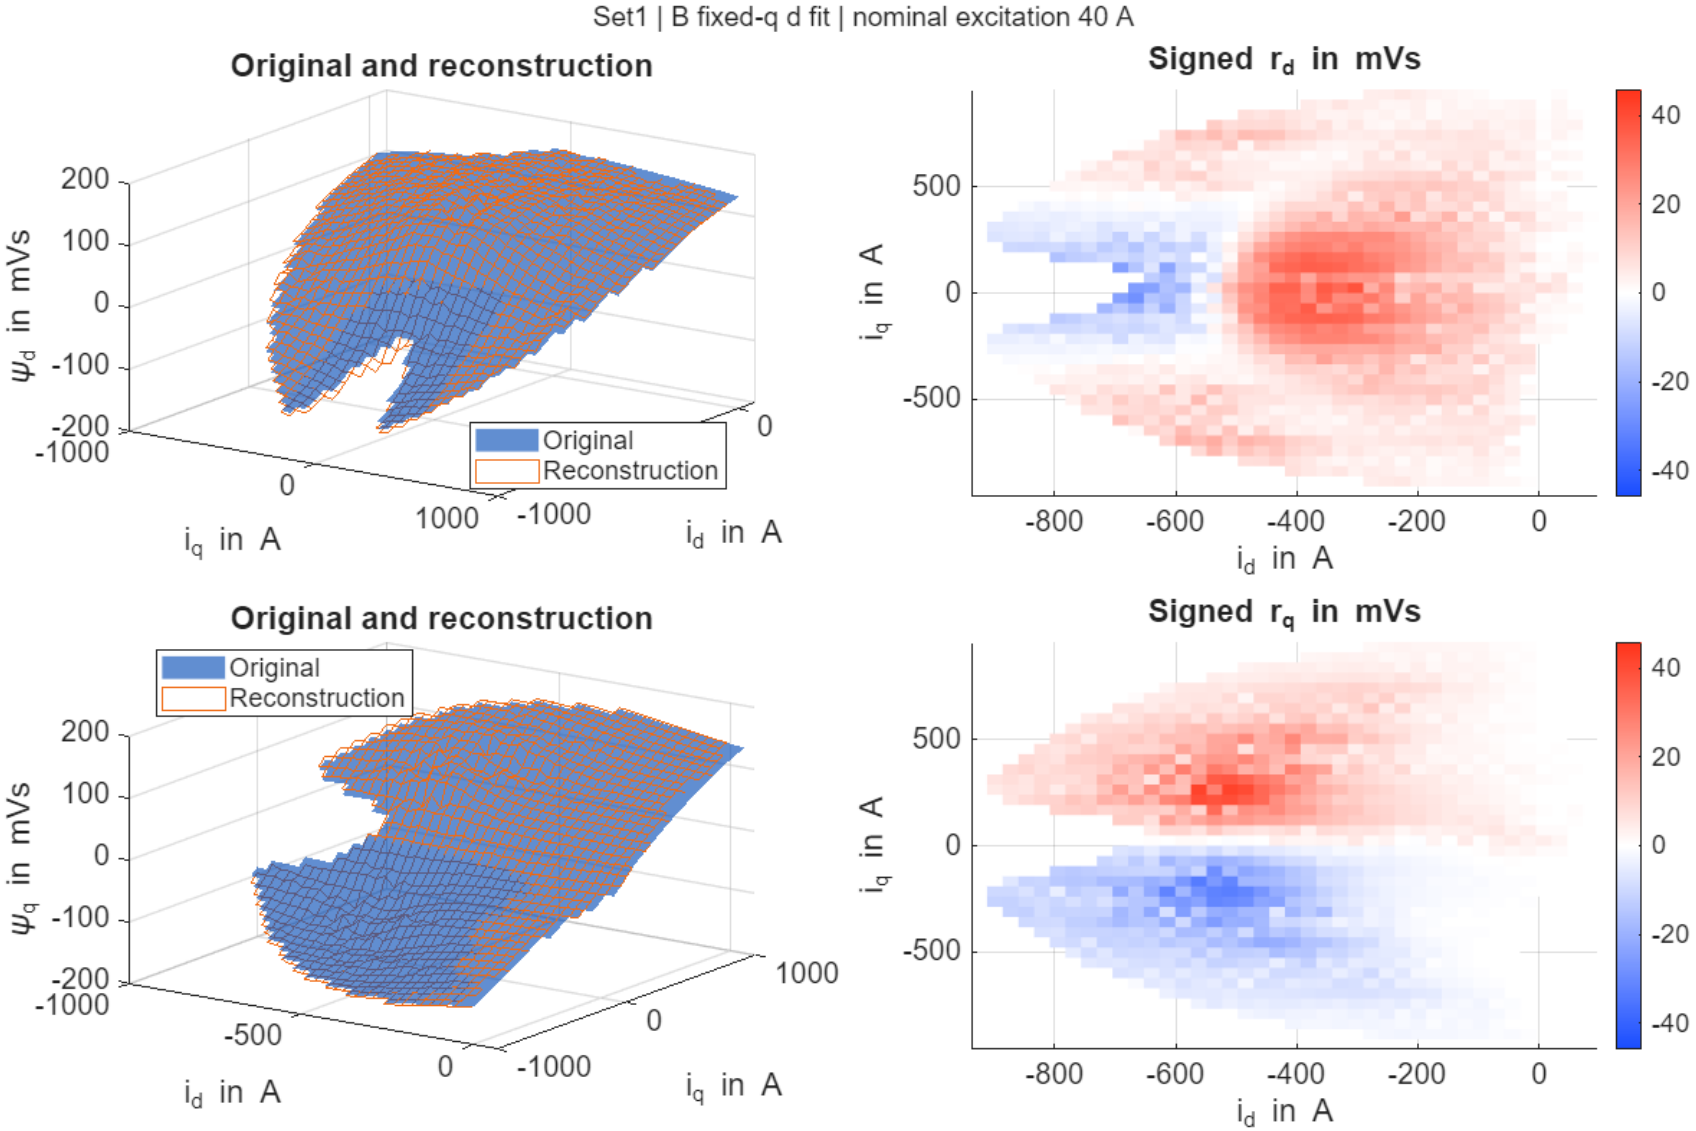

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method C, excitation 40 A

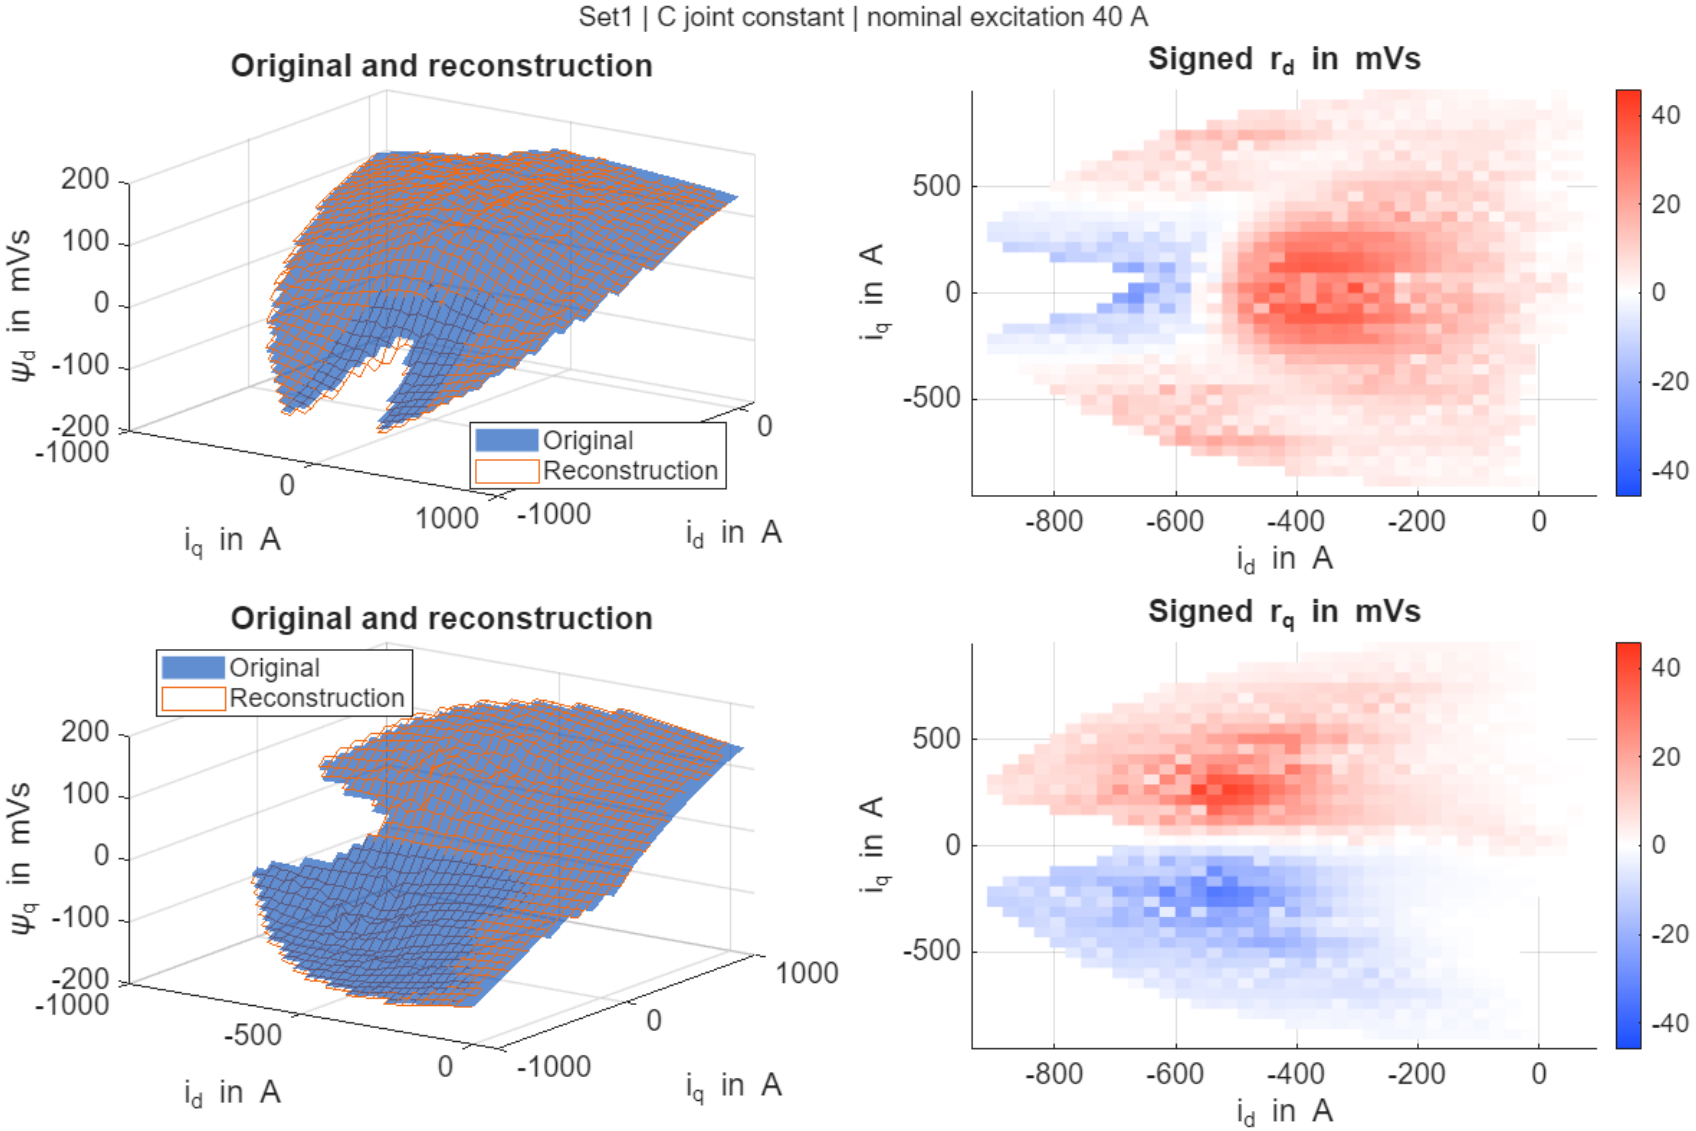

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method D, excitation 40 A

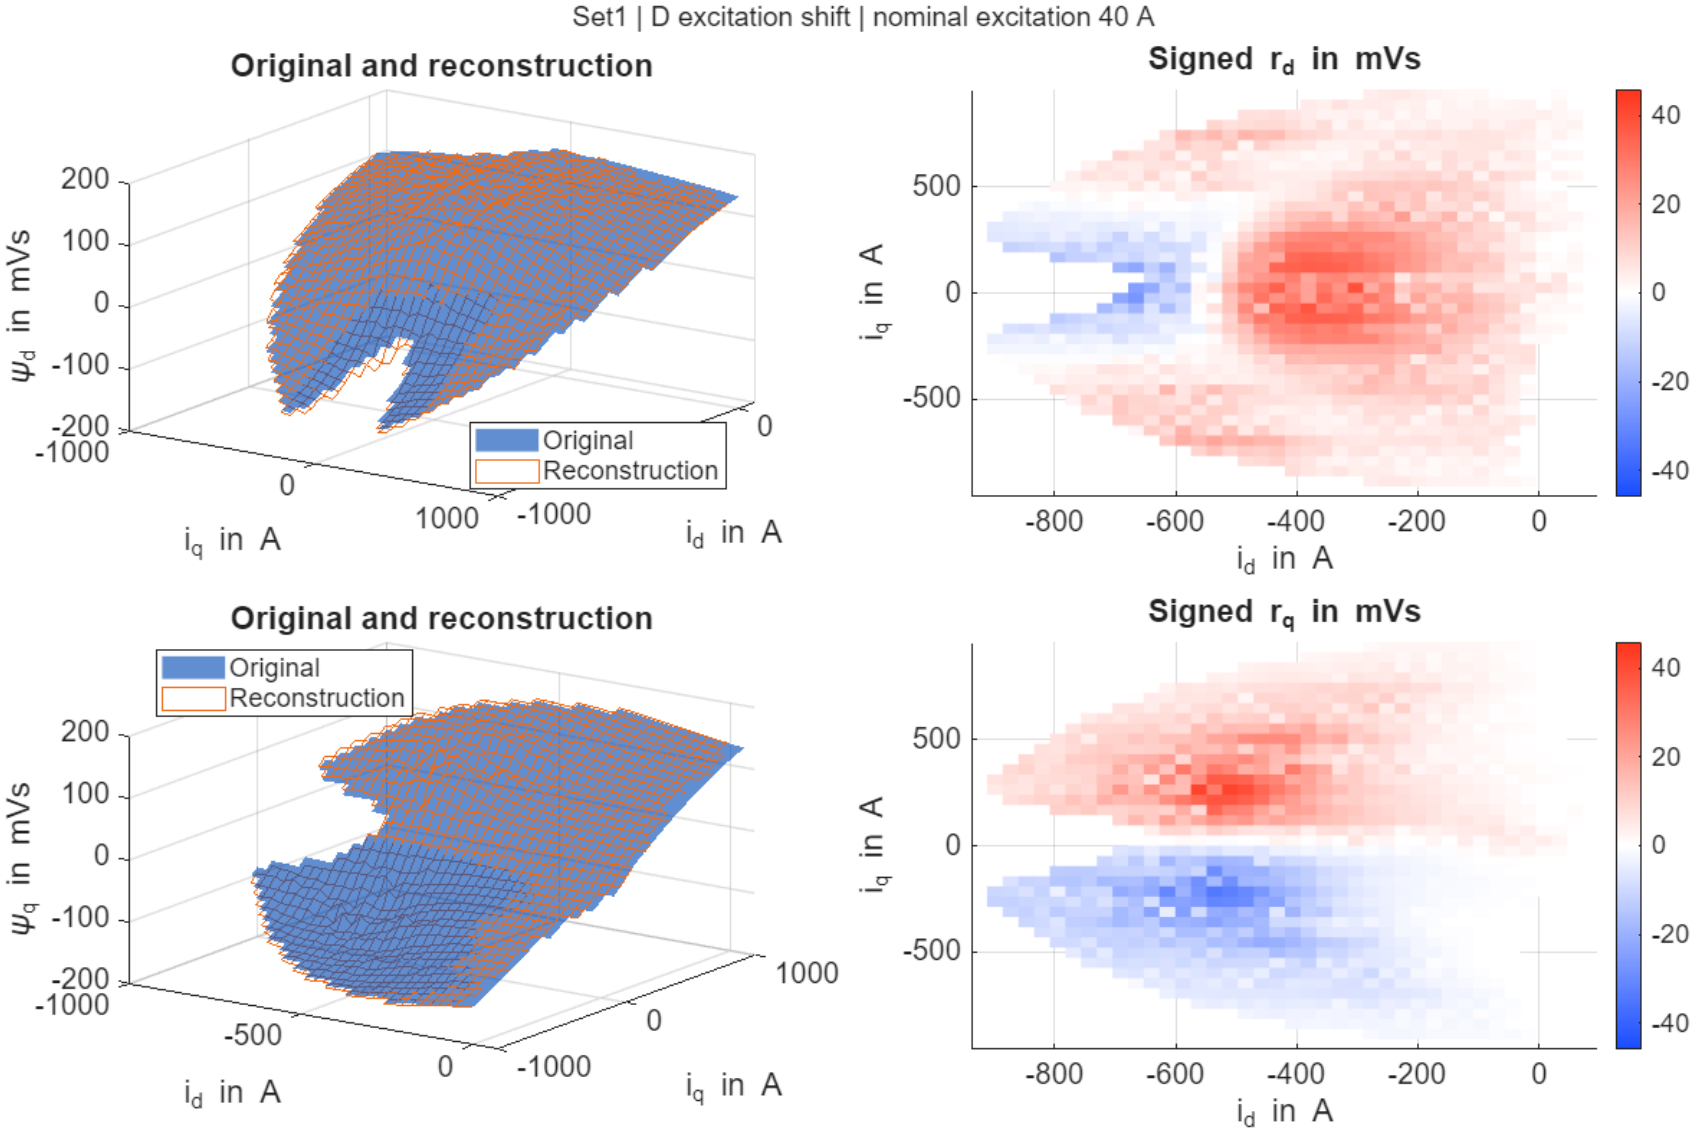

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method E, excitation 40 A

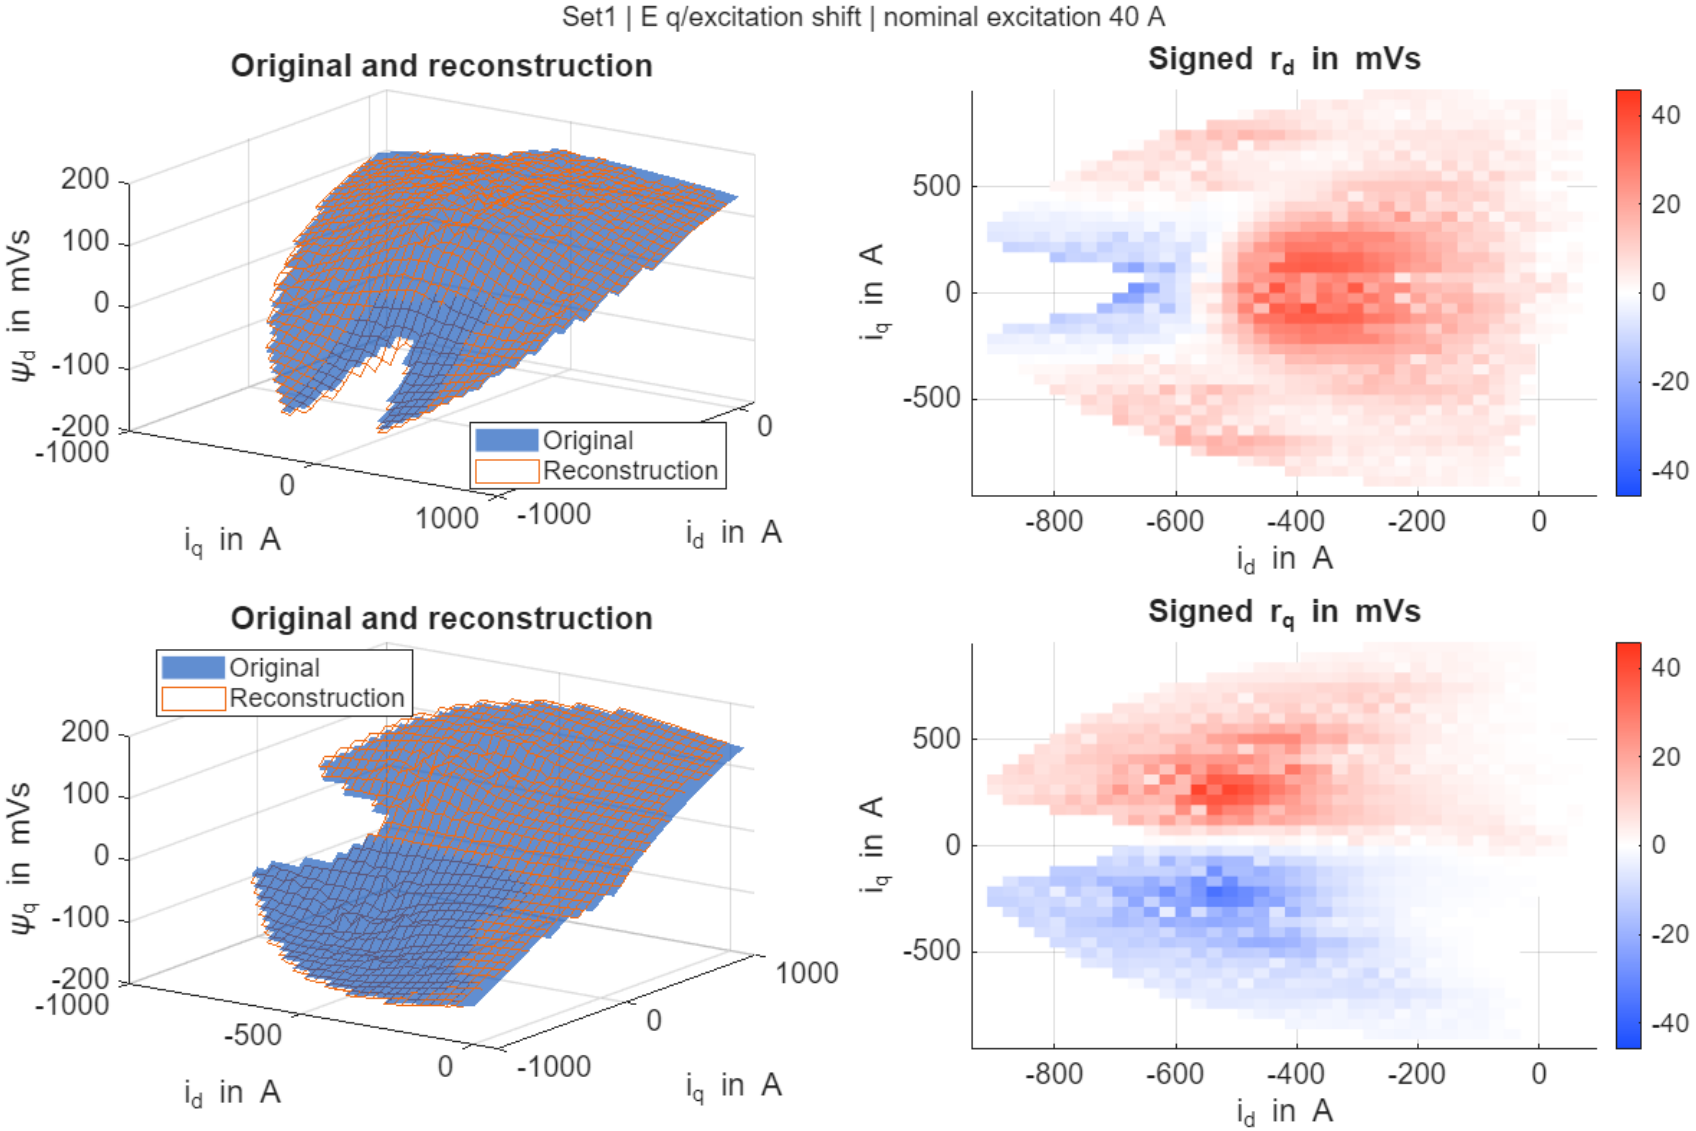

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method F, excitation 40 A

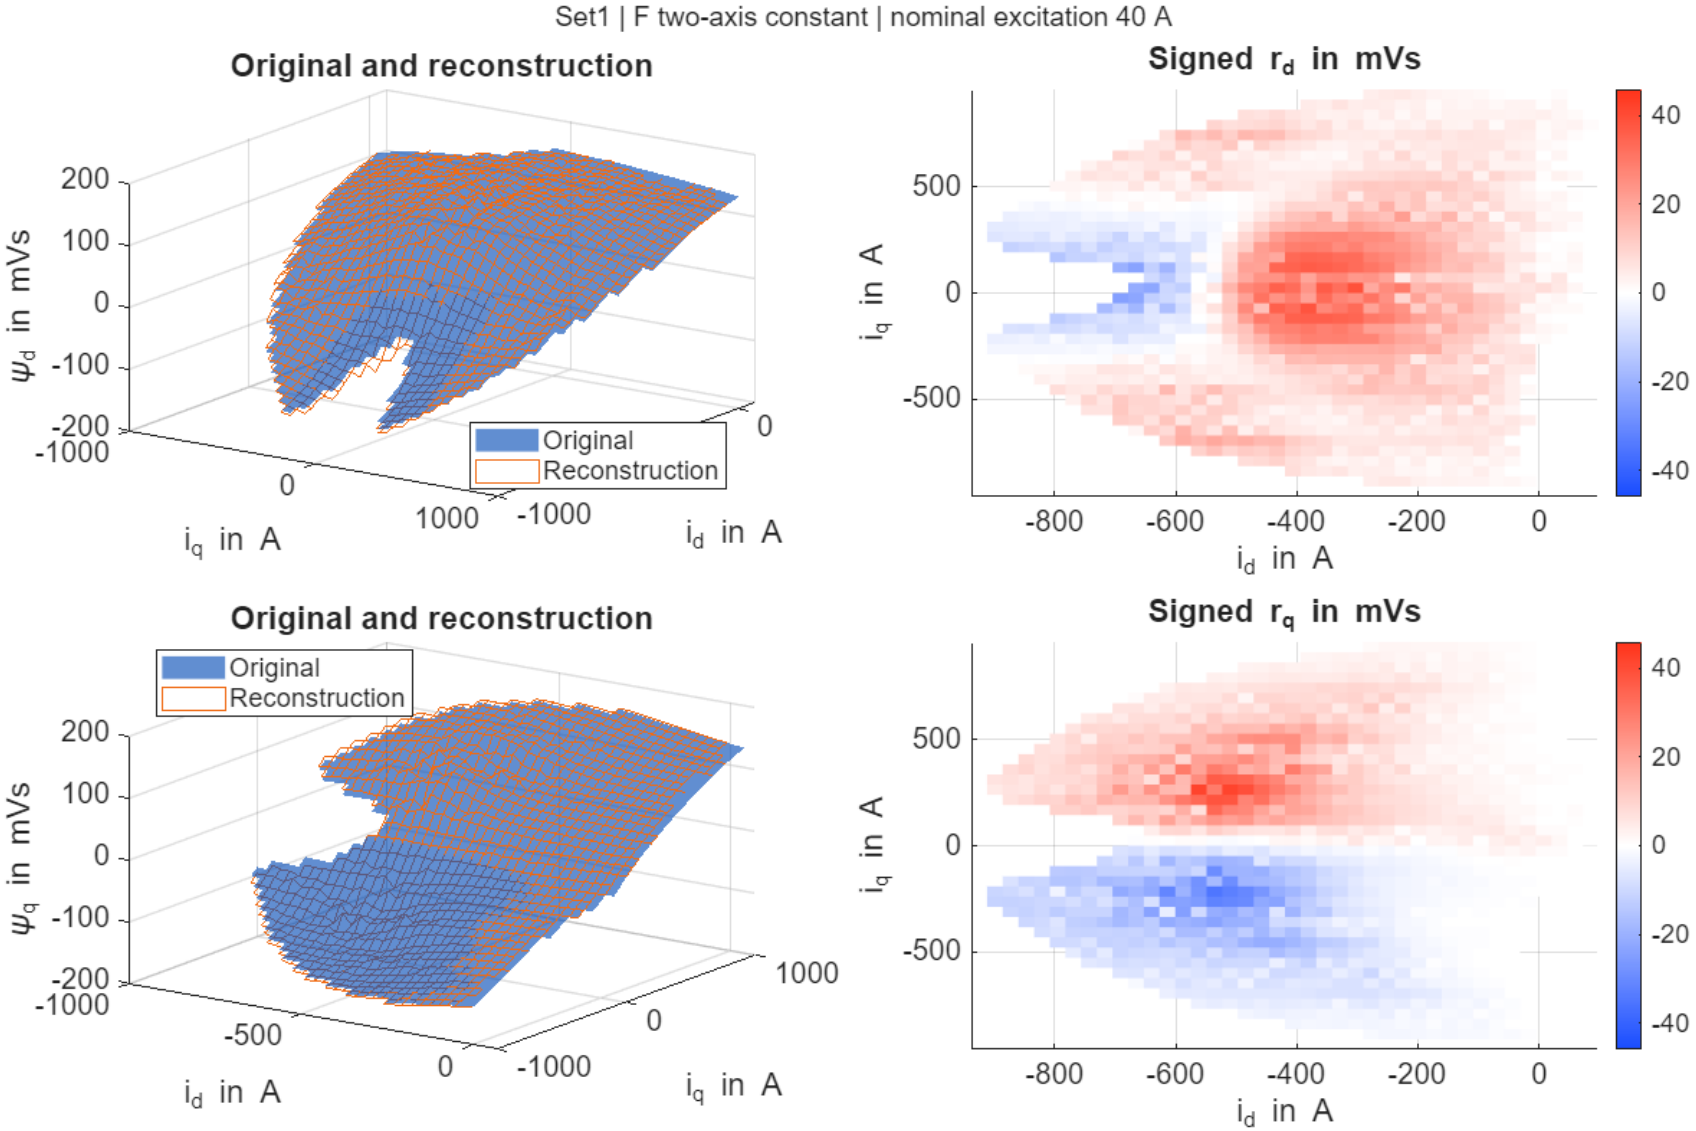

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method G, excitation 40 A

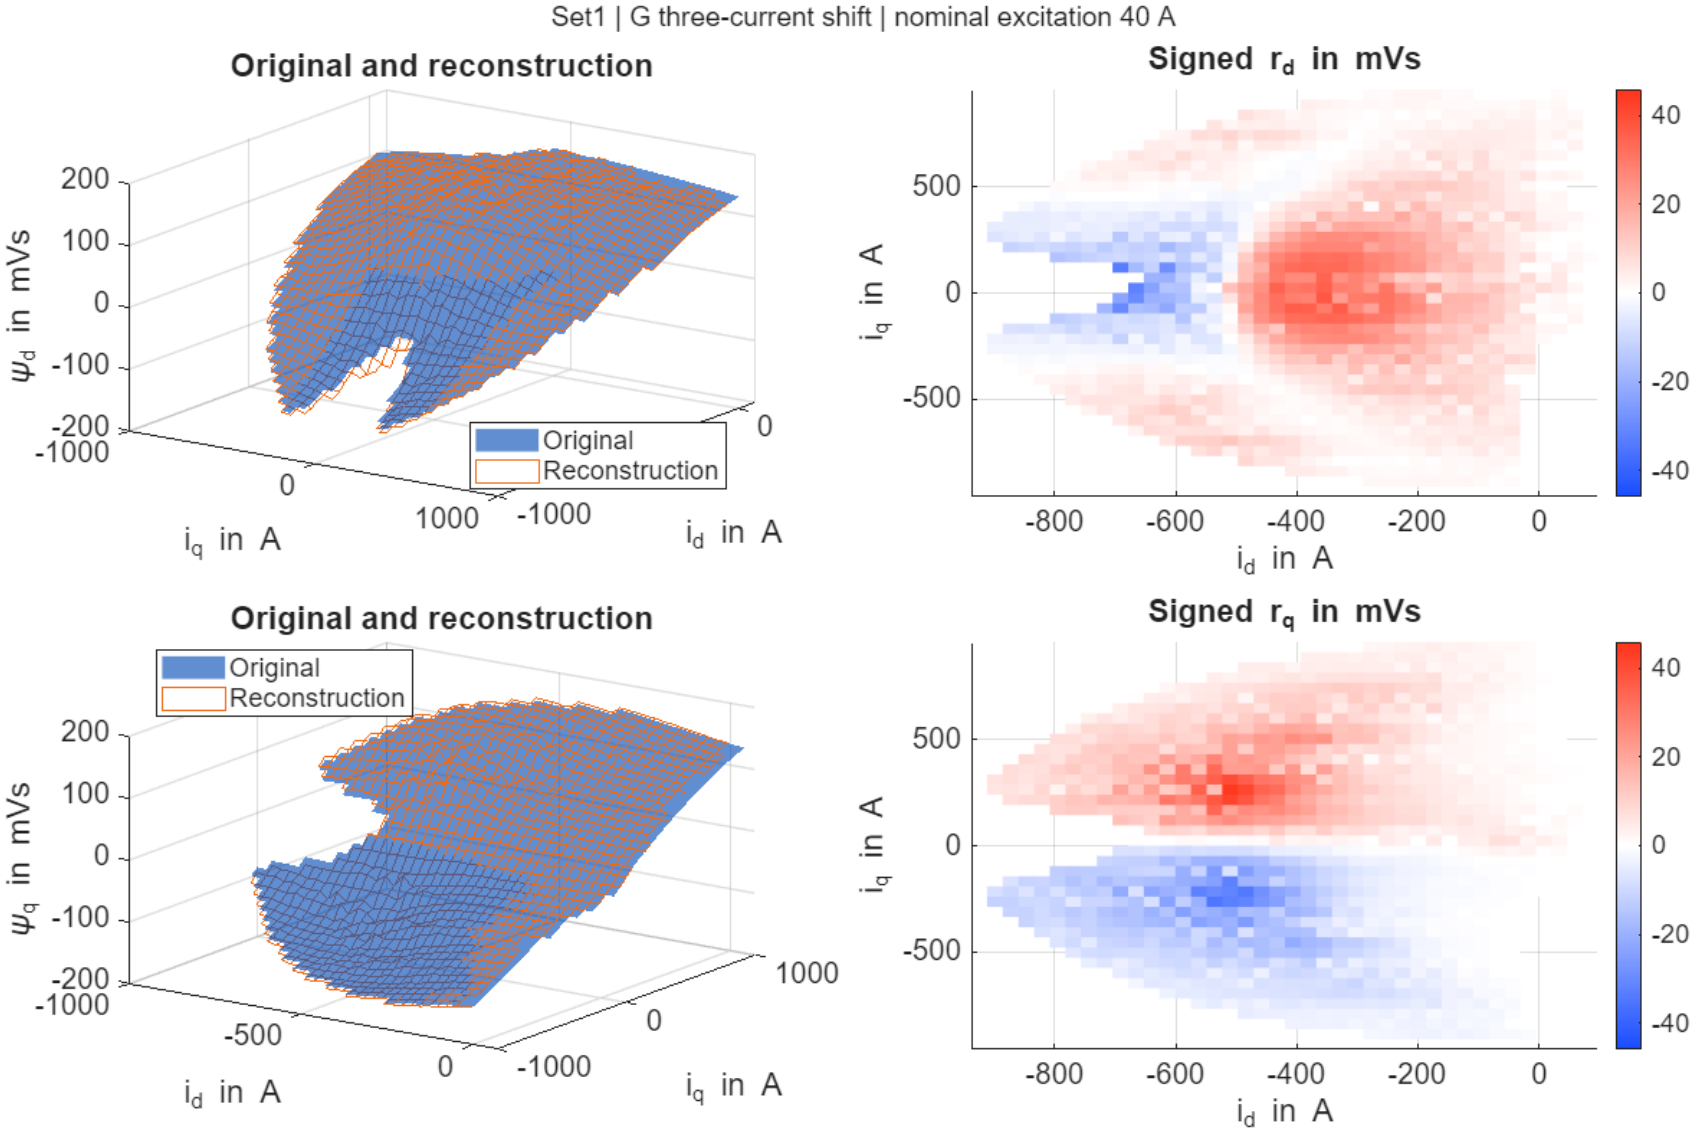

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 1, method H, excitation 40 A

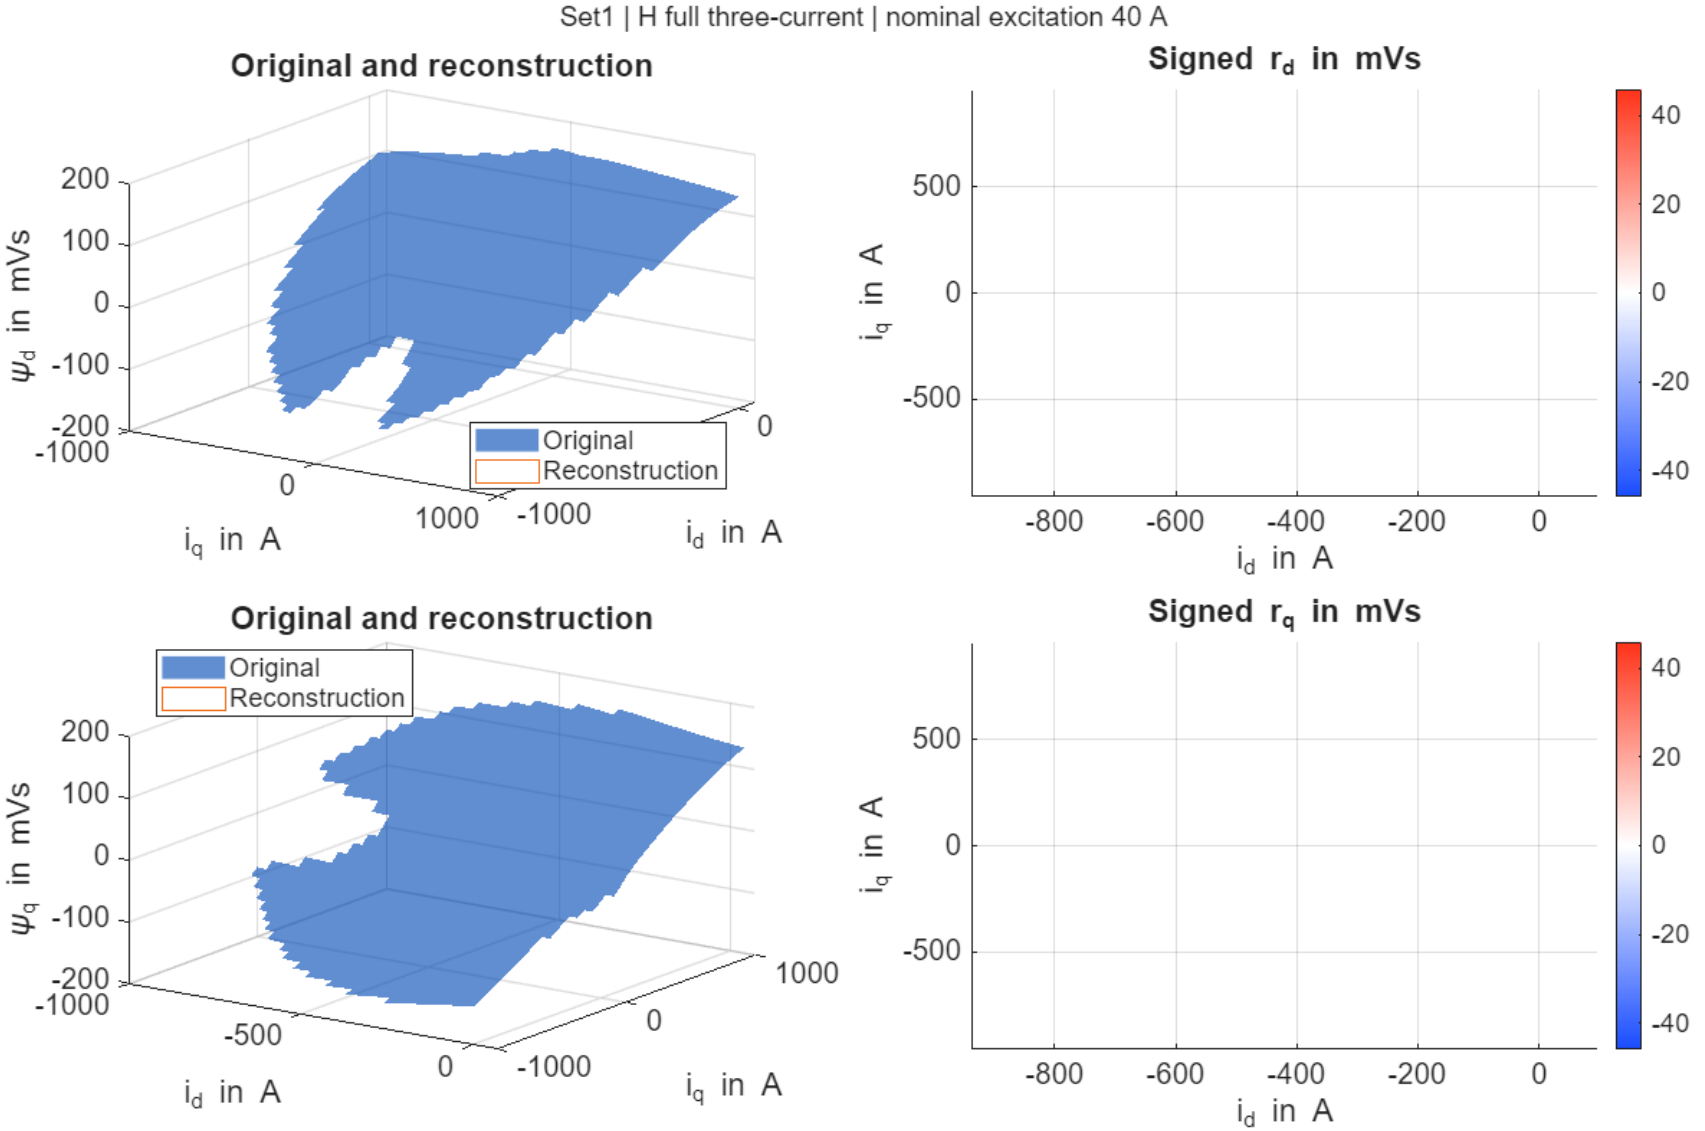

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method A, excitation 0 A

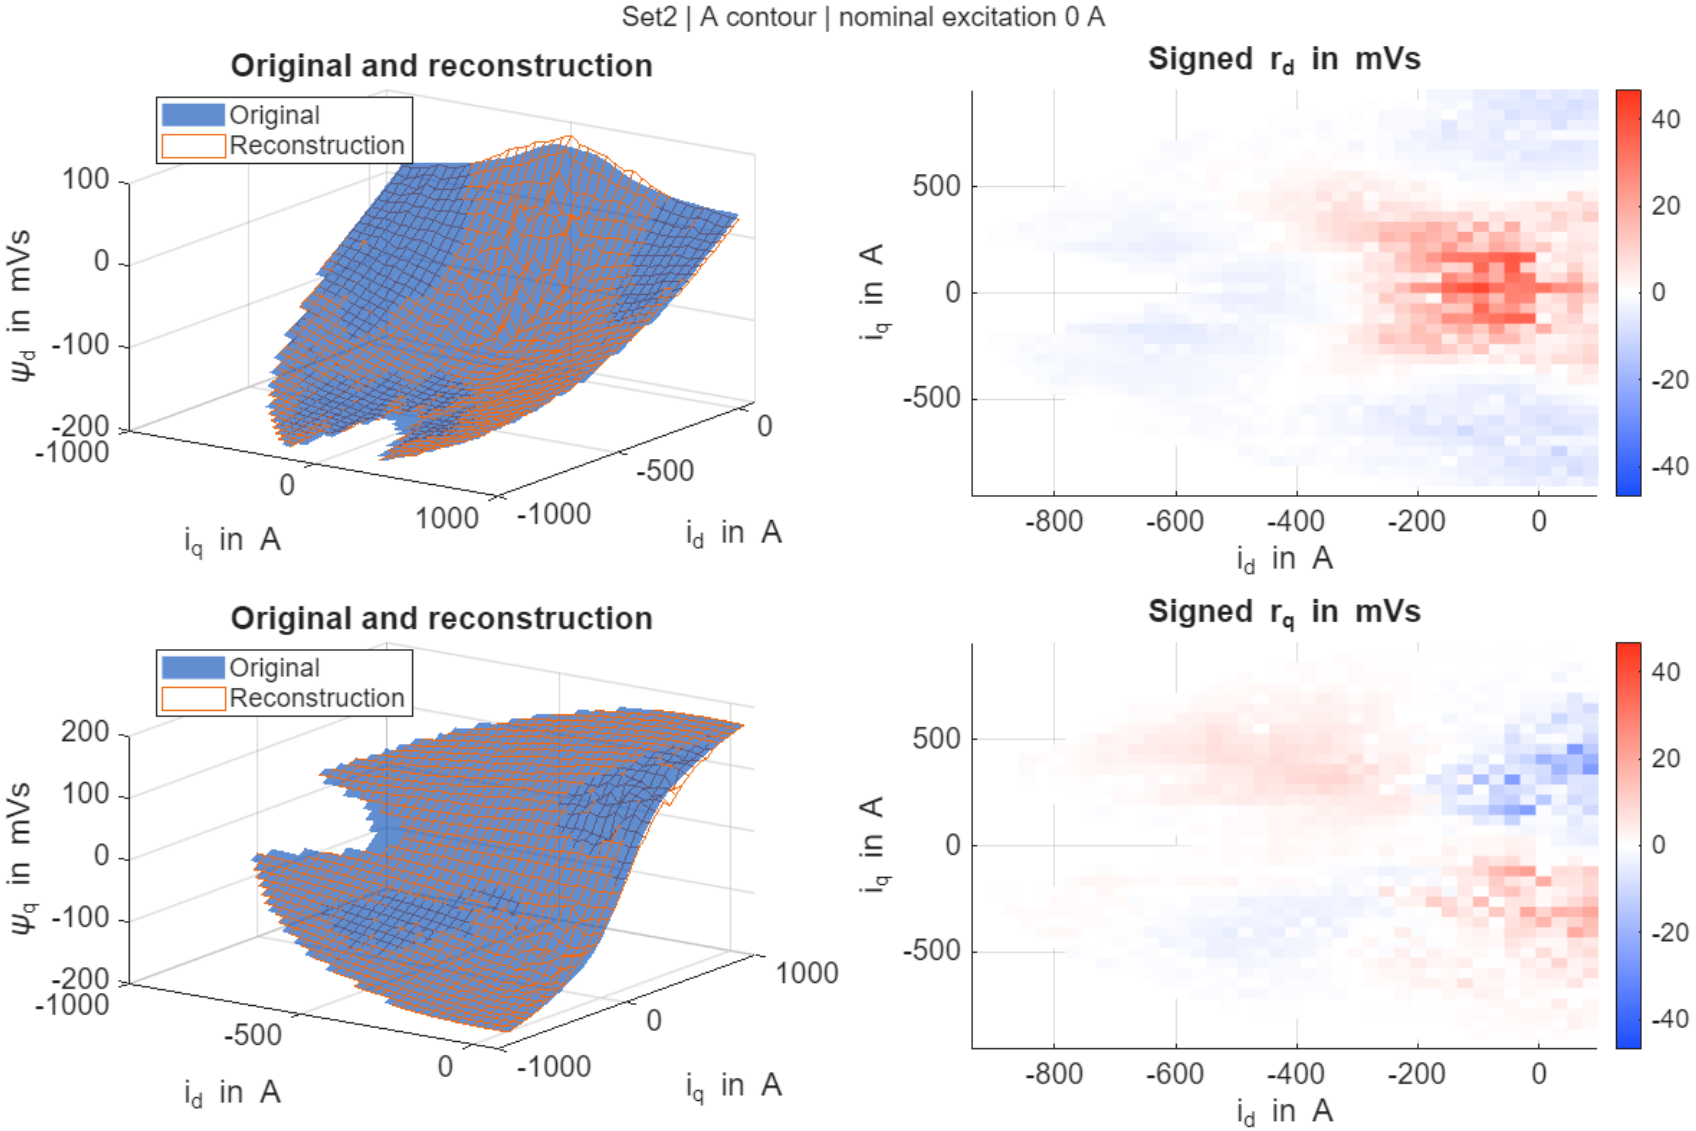

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method B, excitation 0 A

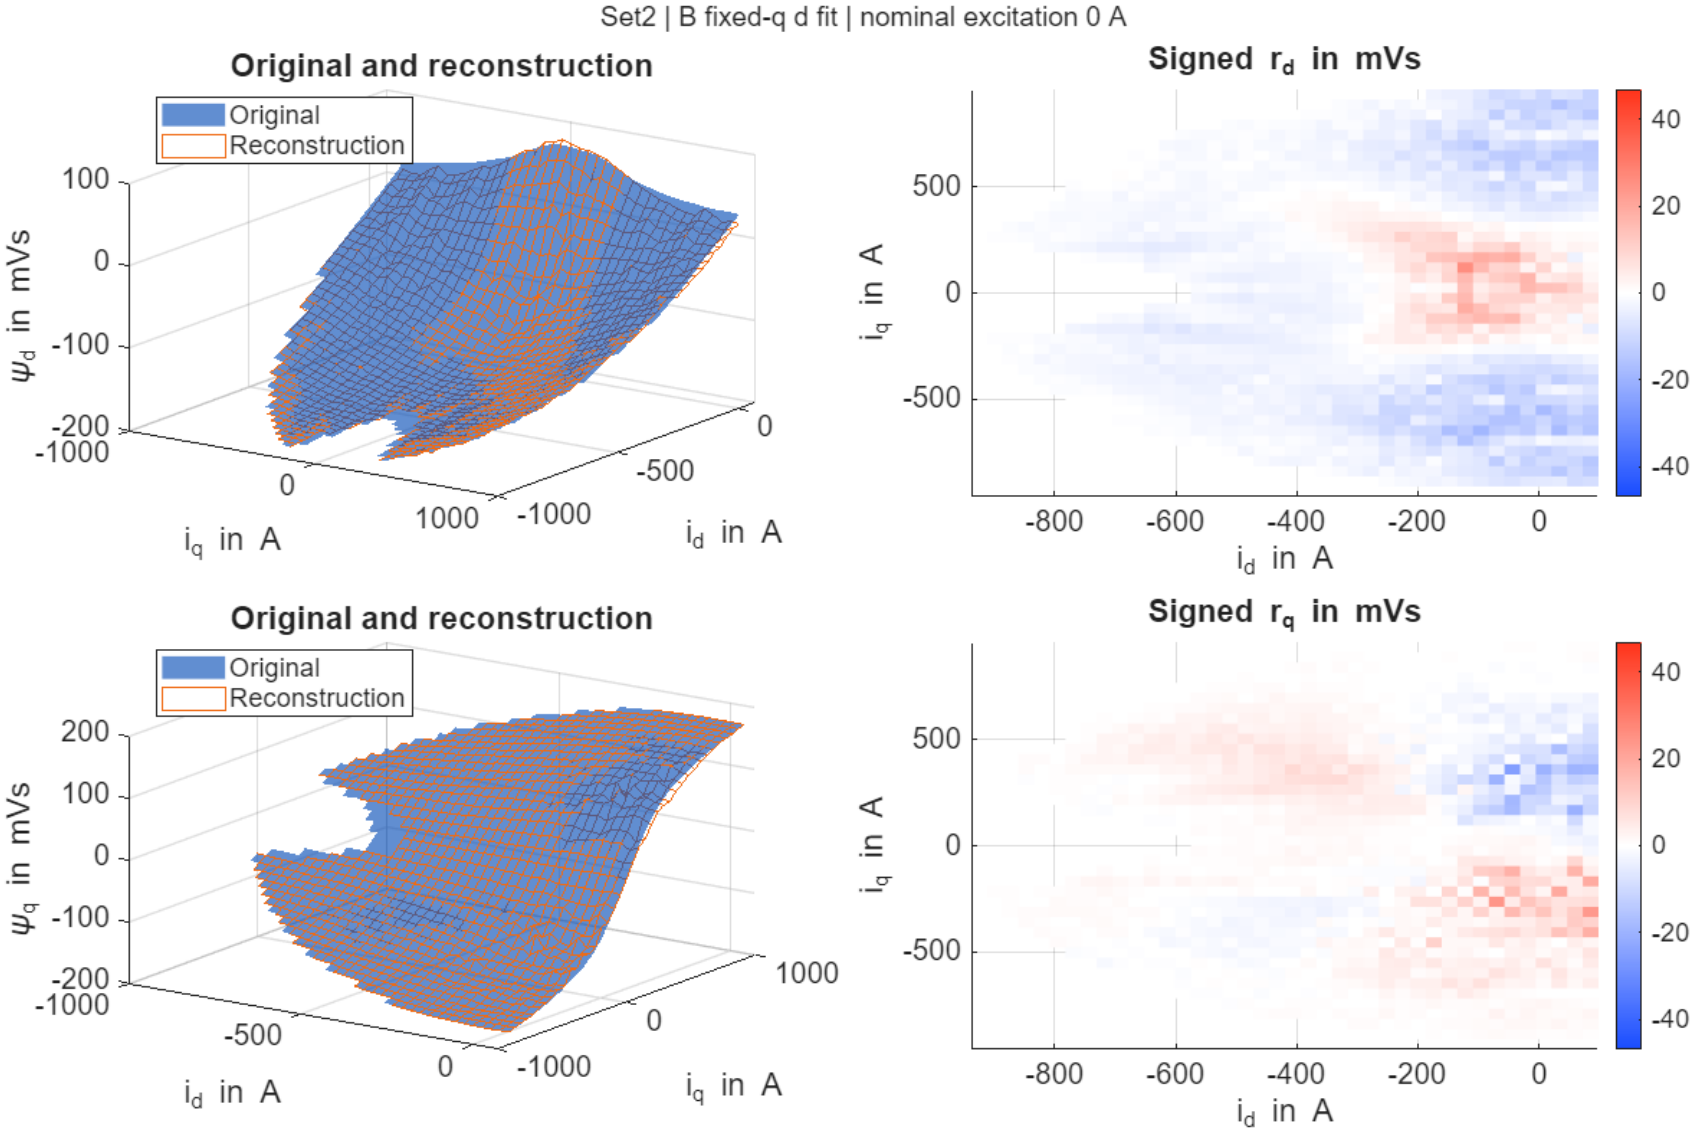

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method C, excitation 0 A

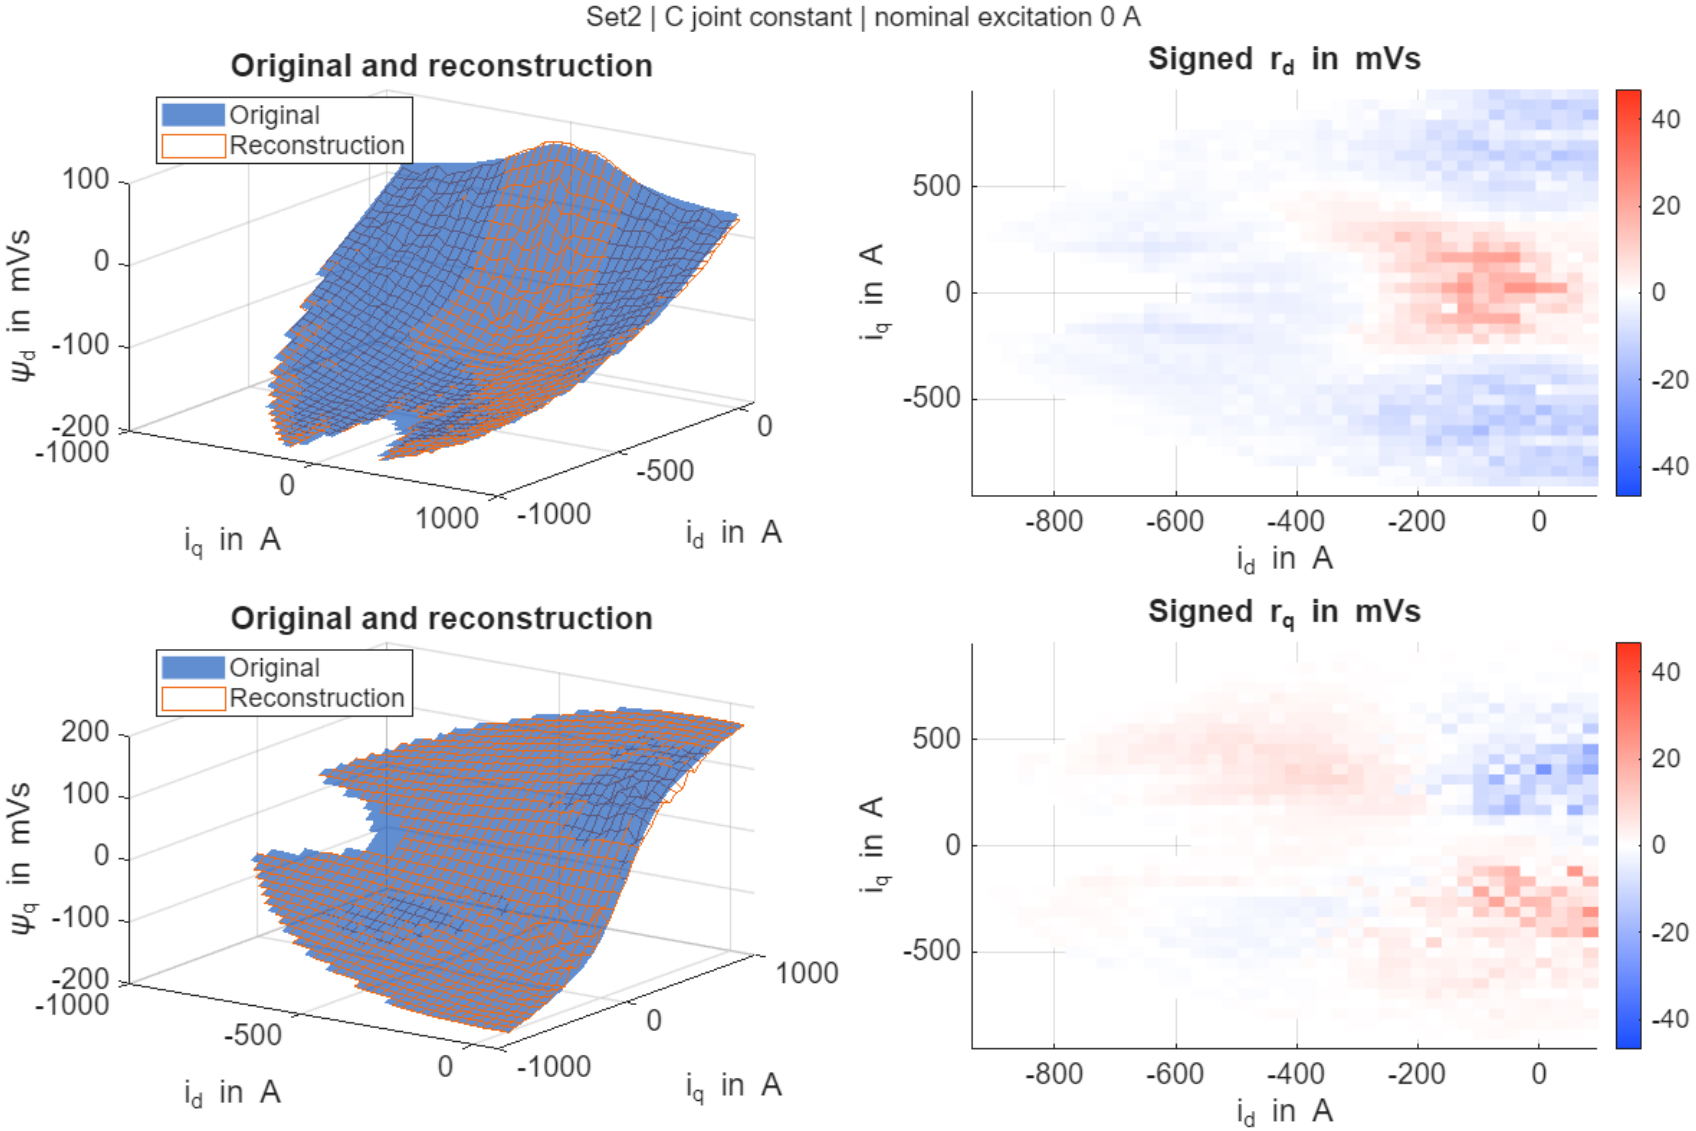

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method D, excitation 0 A

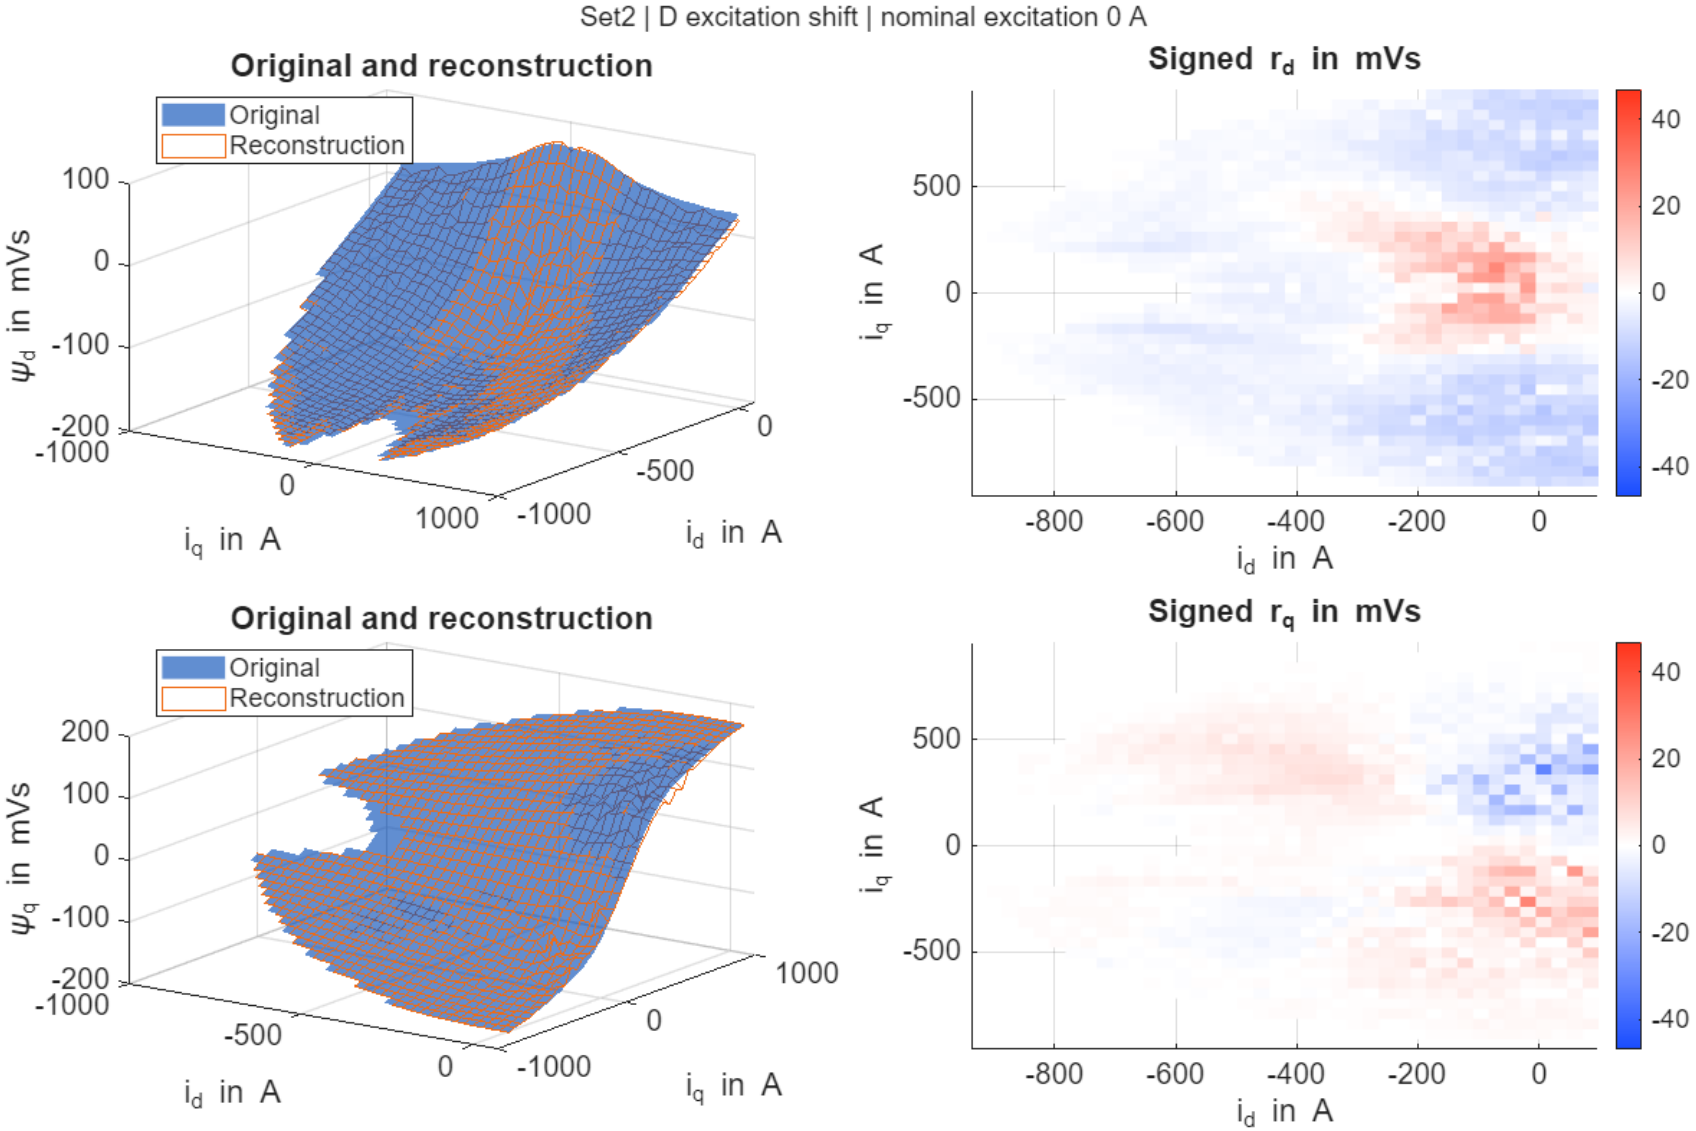

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method E, excitation 0 A

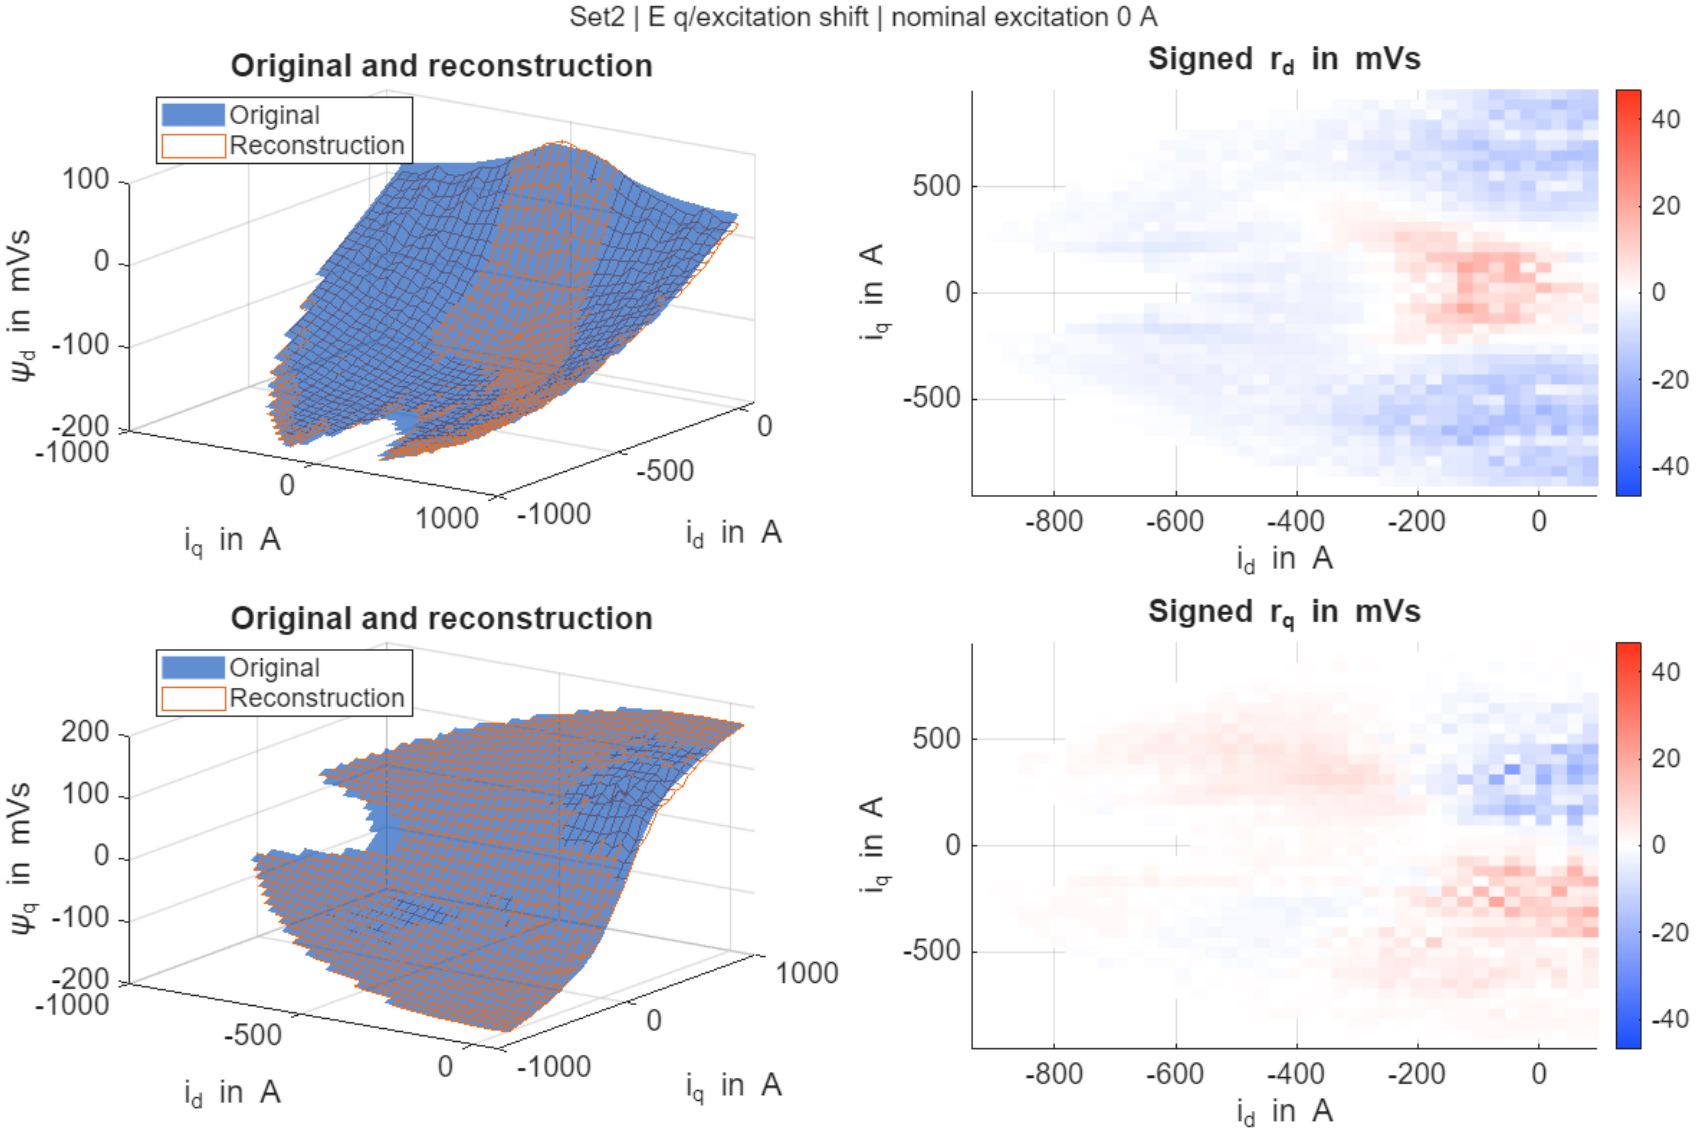

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method F, excitation 0 A

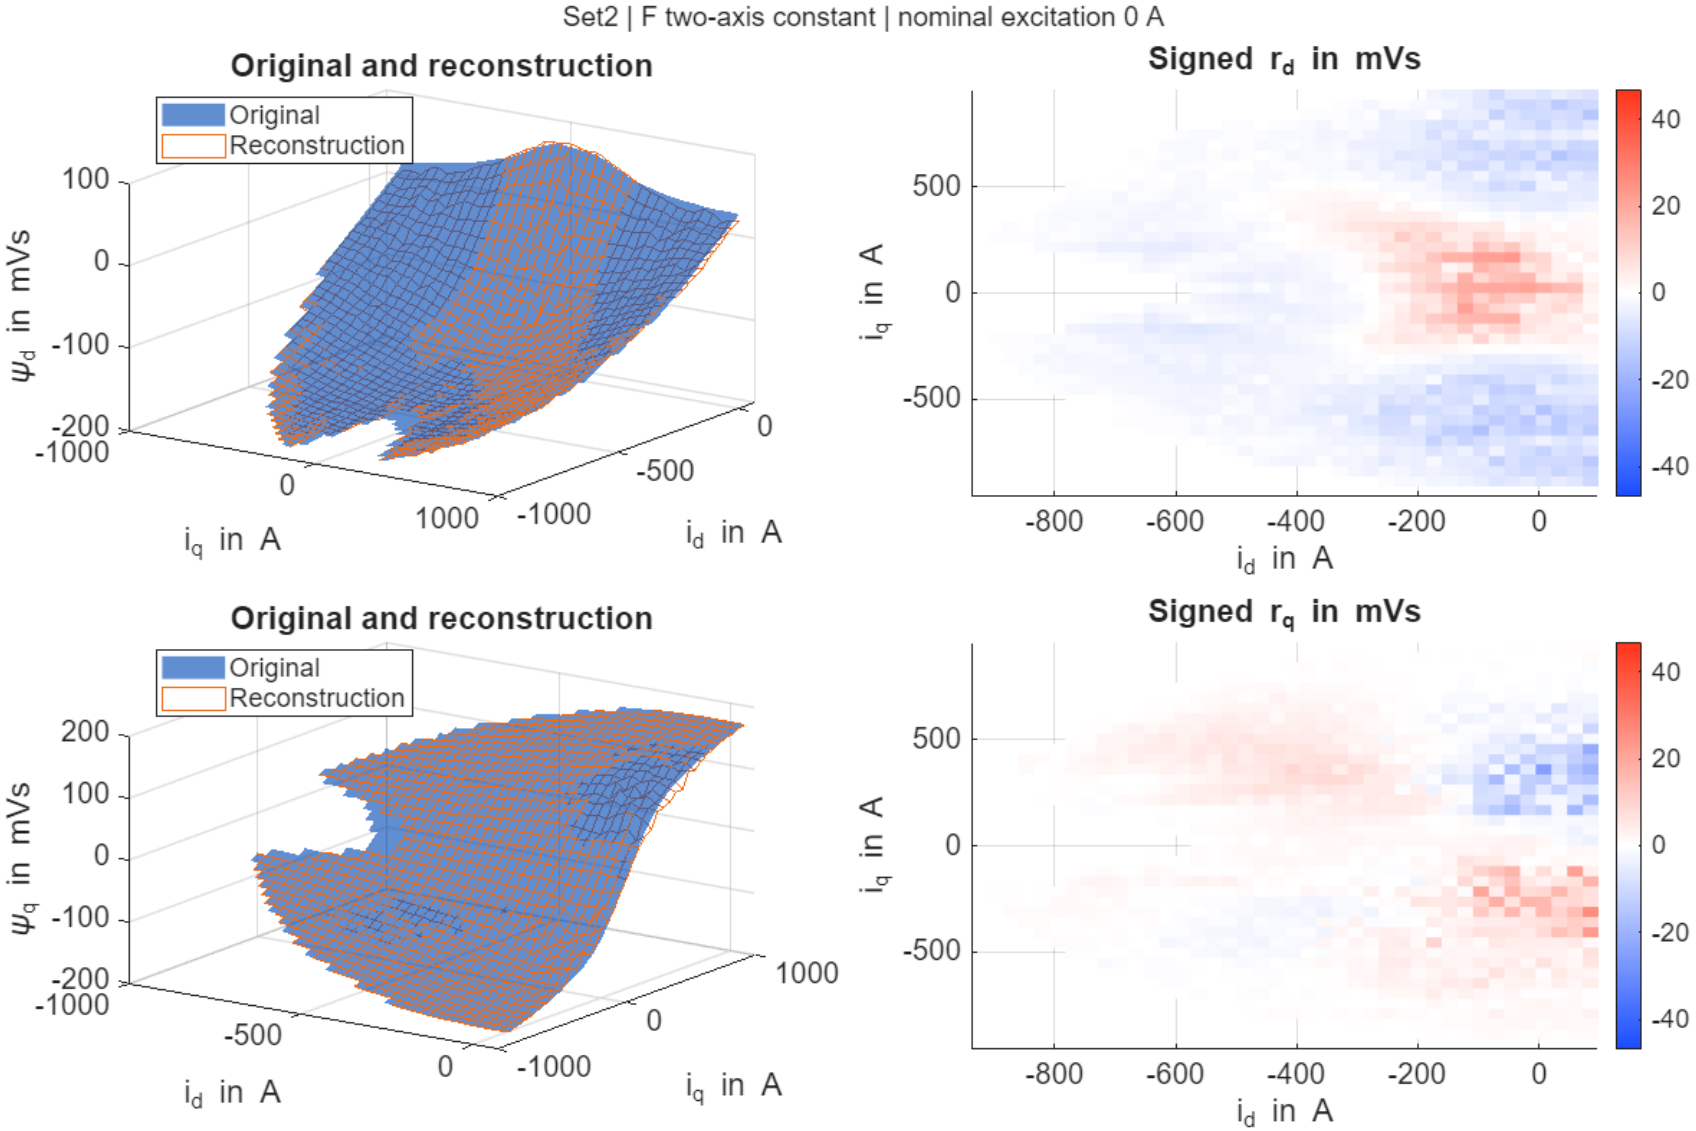

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method G, excitation 0 A

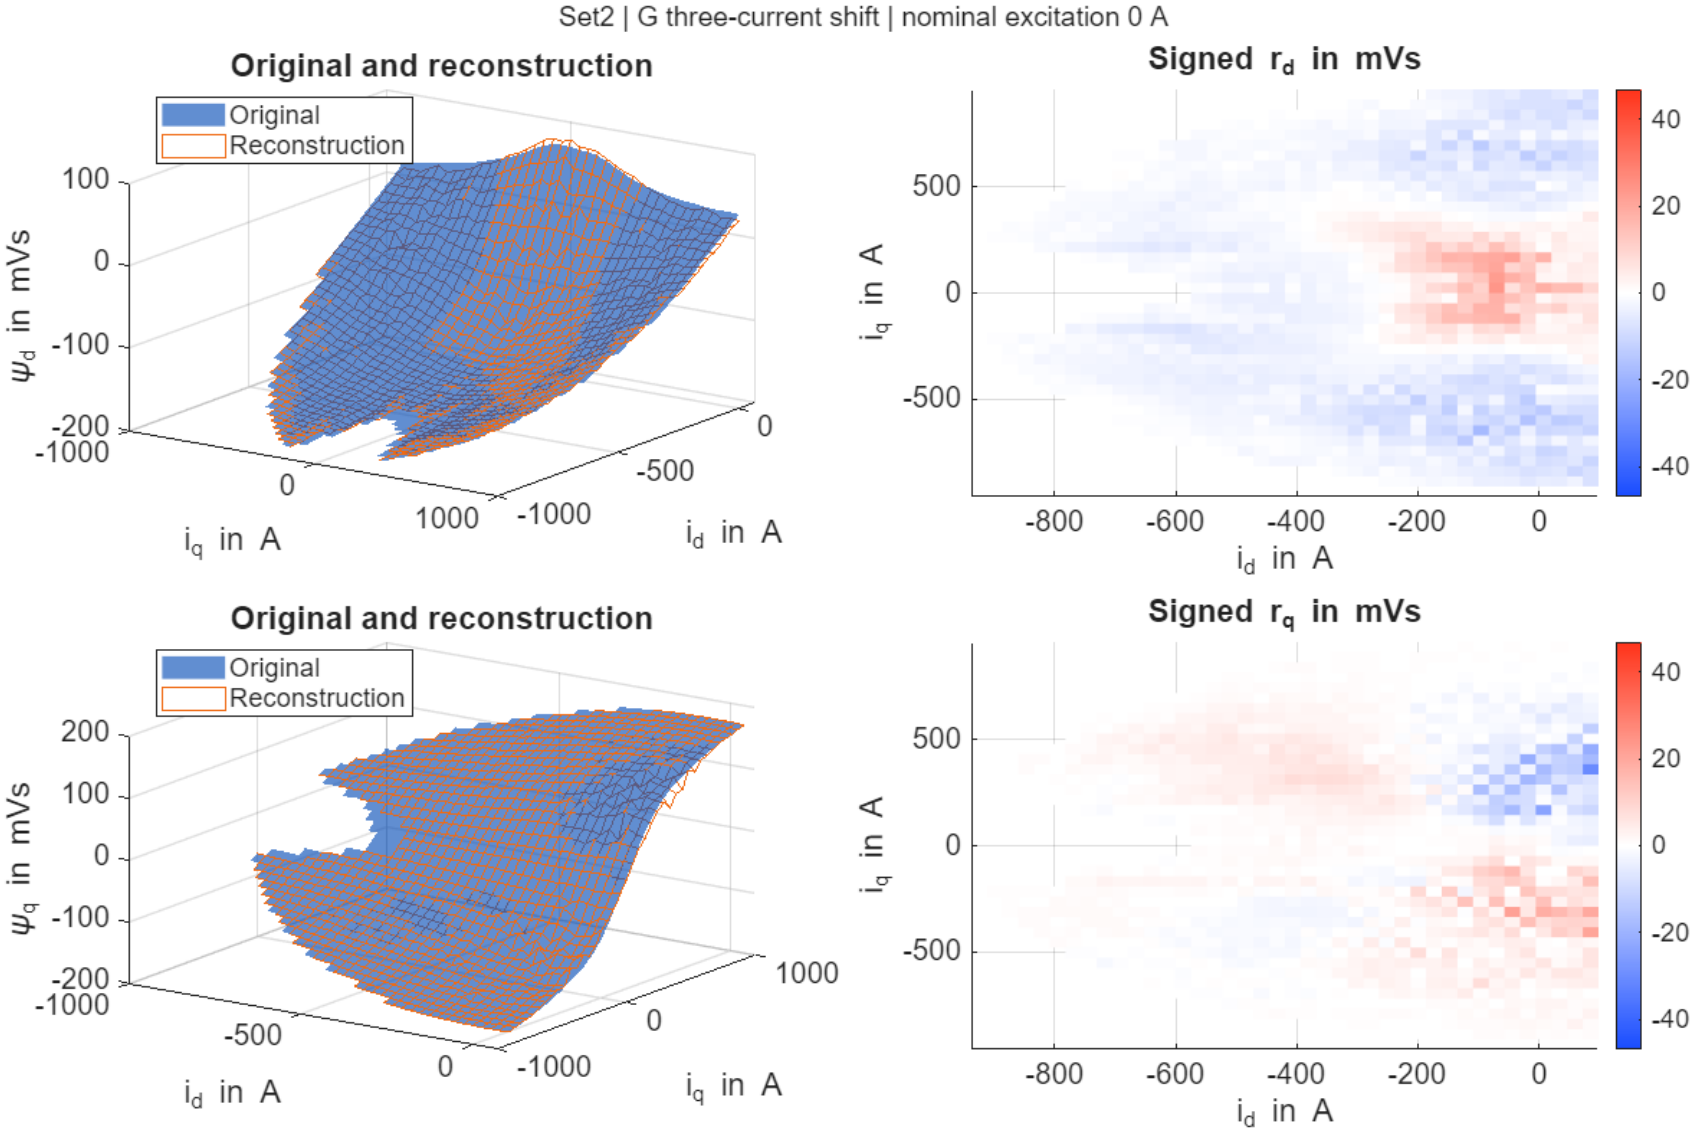

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method H, excitation 0 A

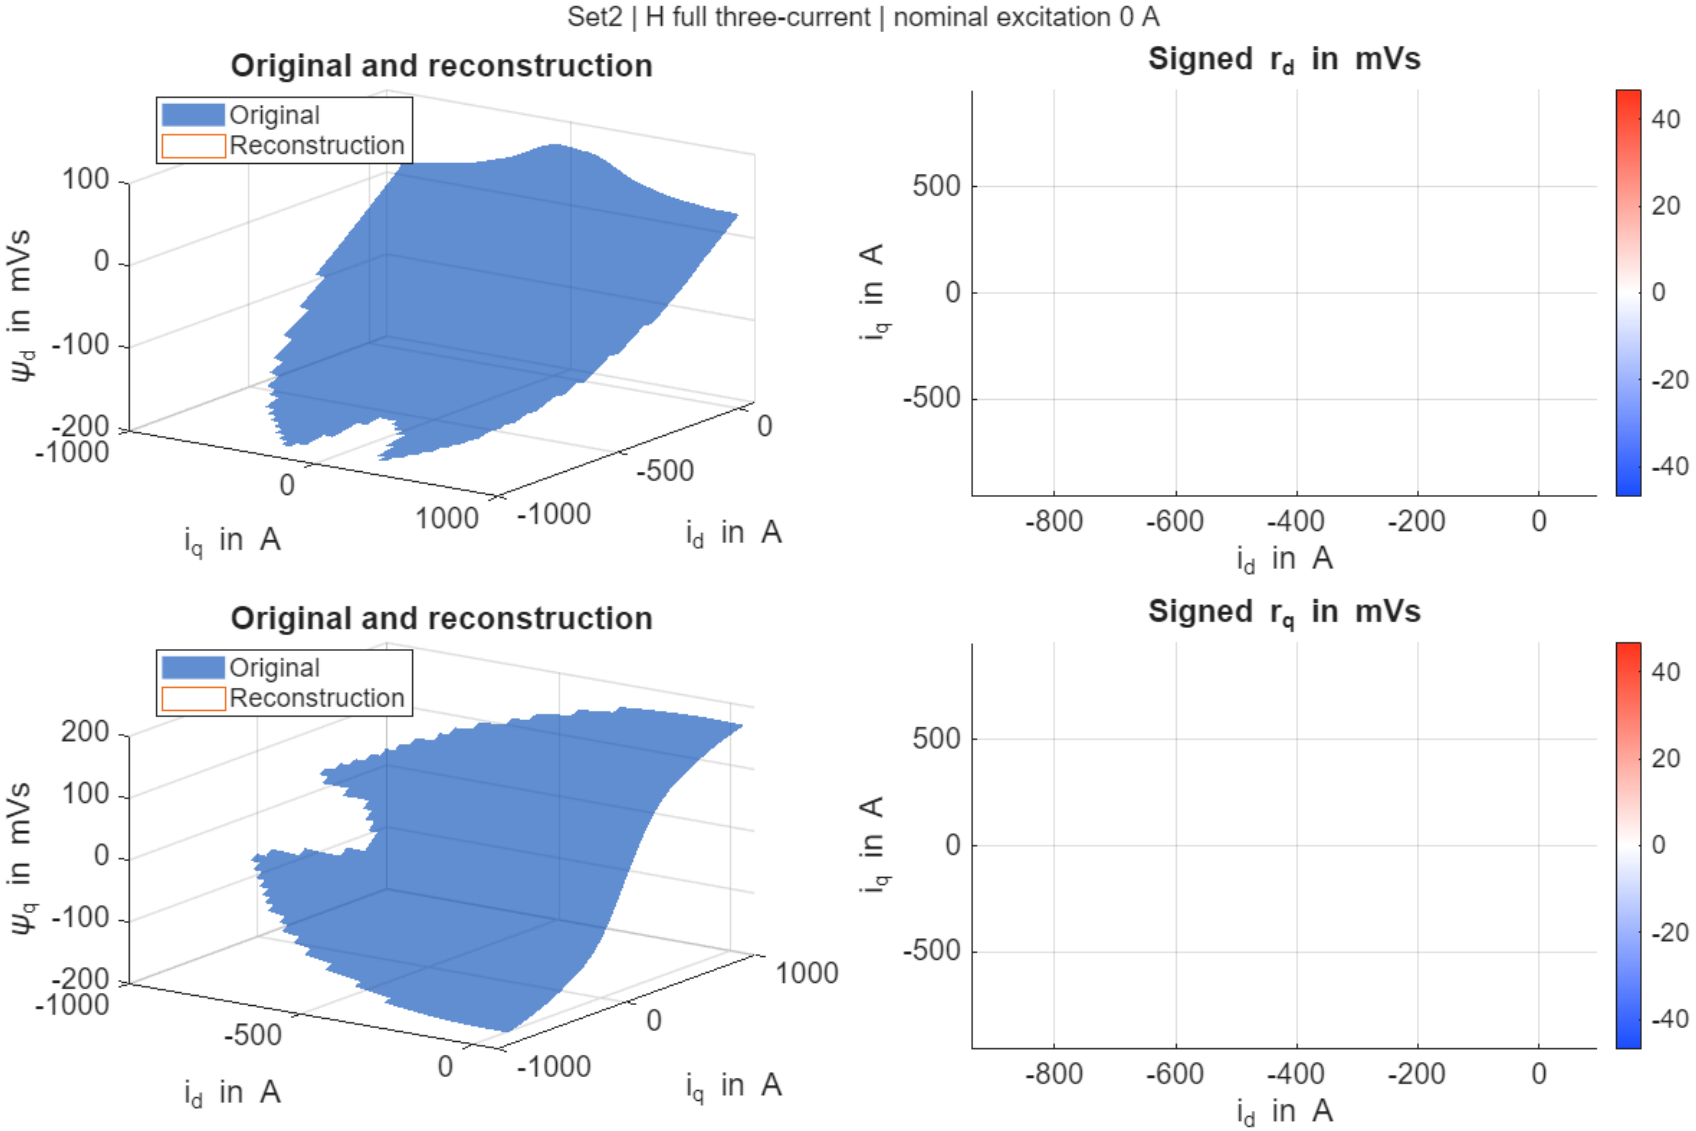

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method A, excitation 2 A

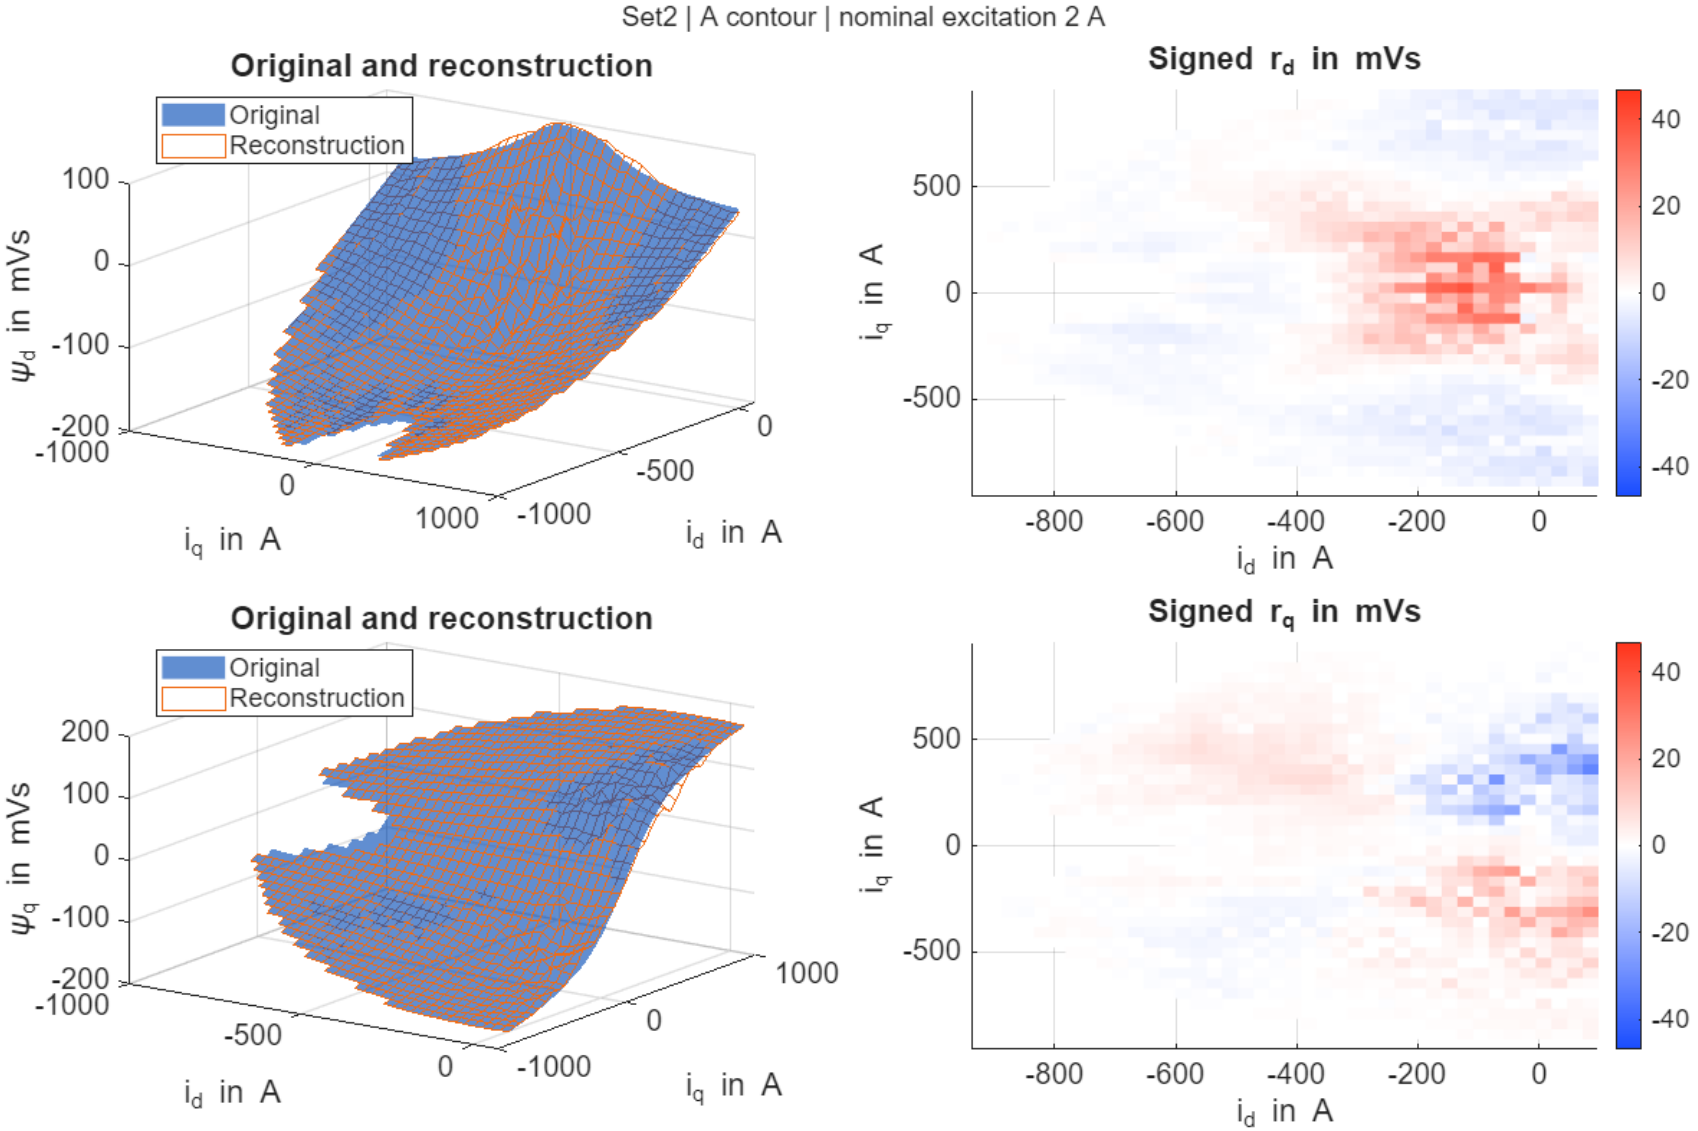

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method B, excitation 2 A

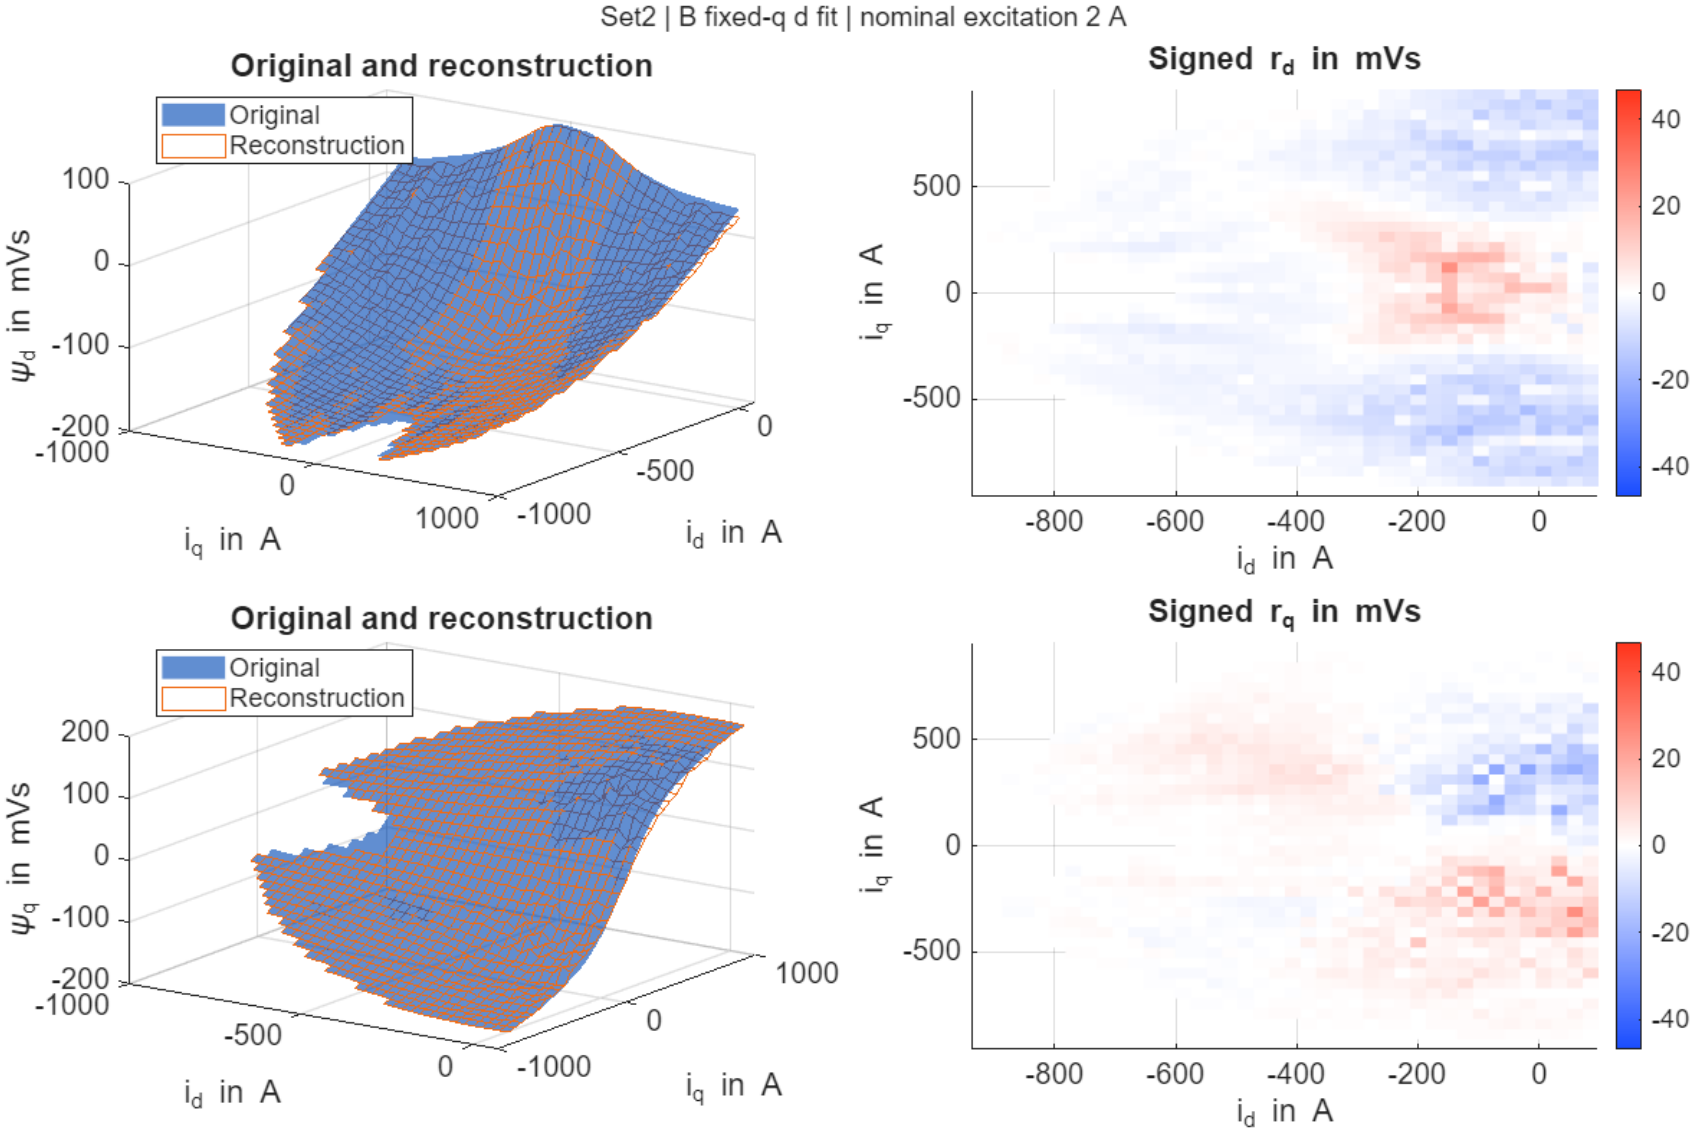

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method C, excitation 2 A

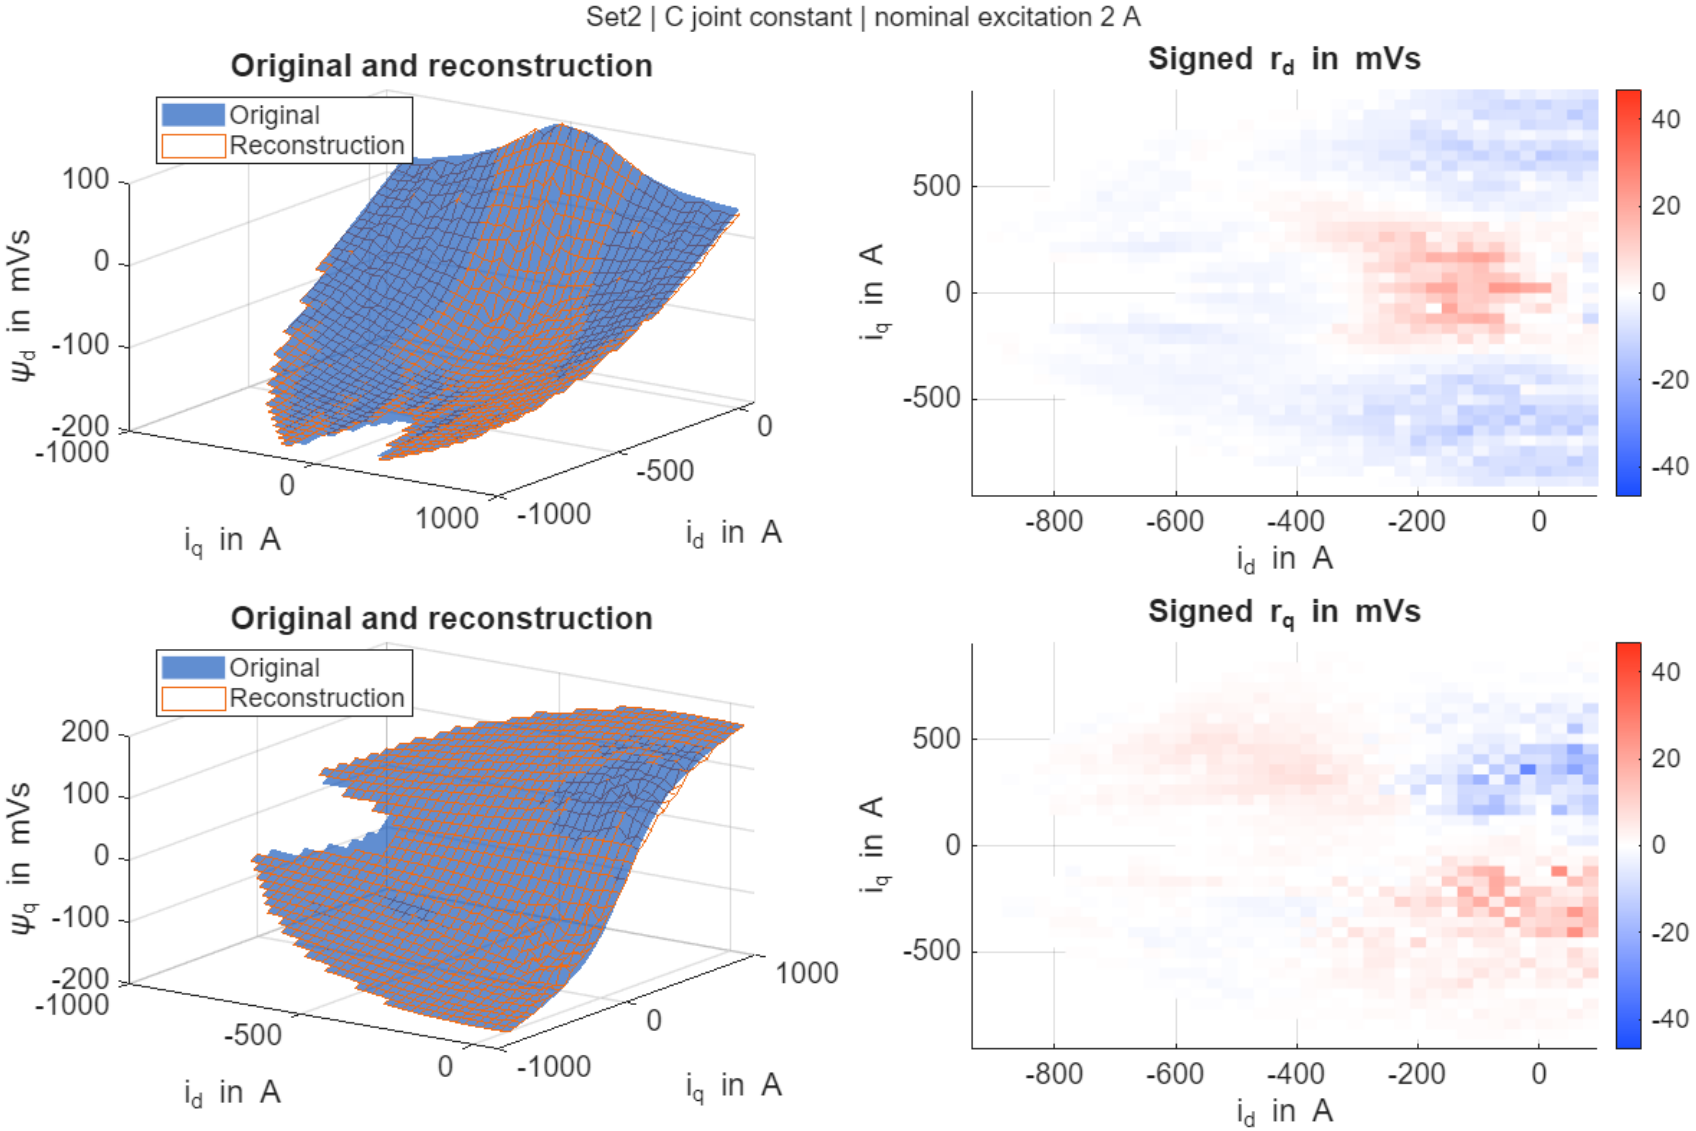

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method D, excitation 2 A

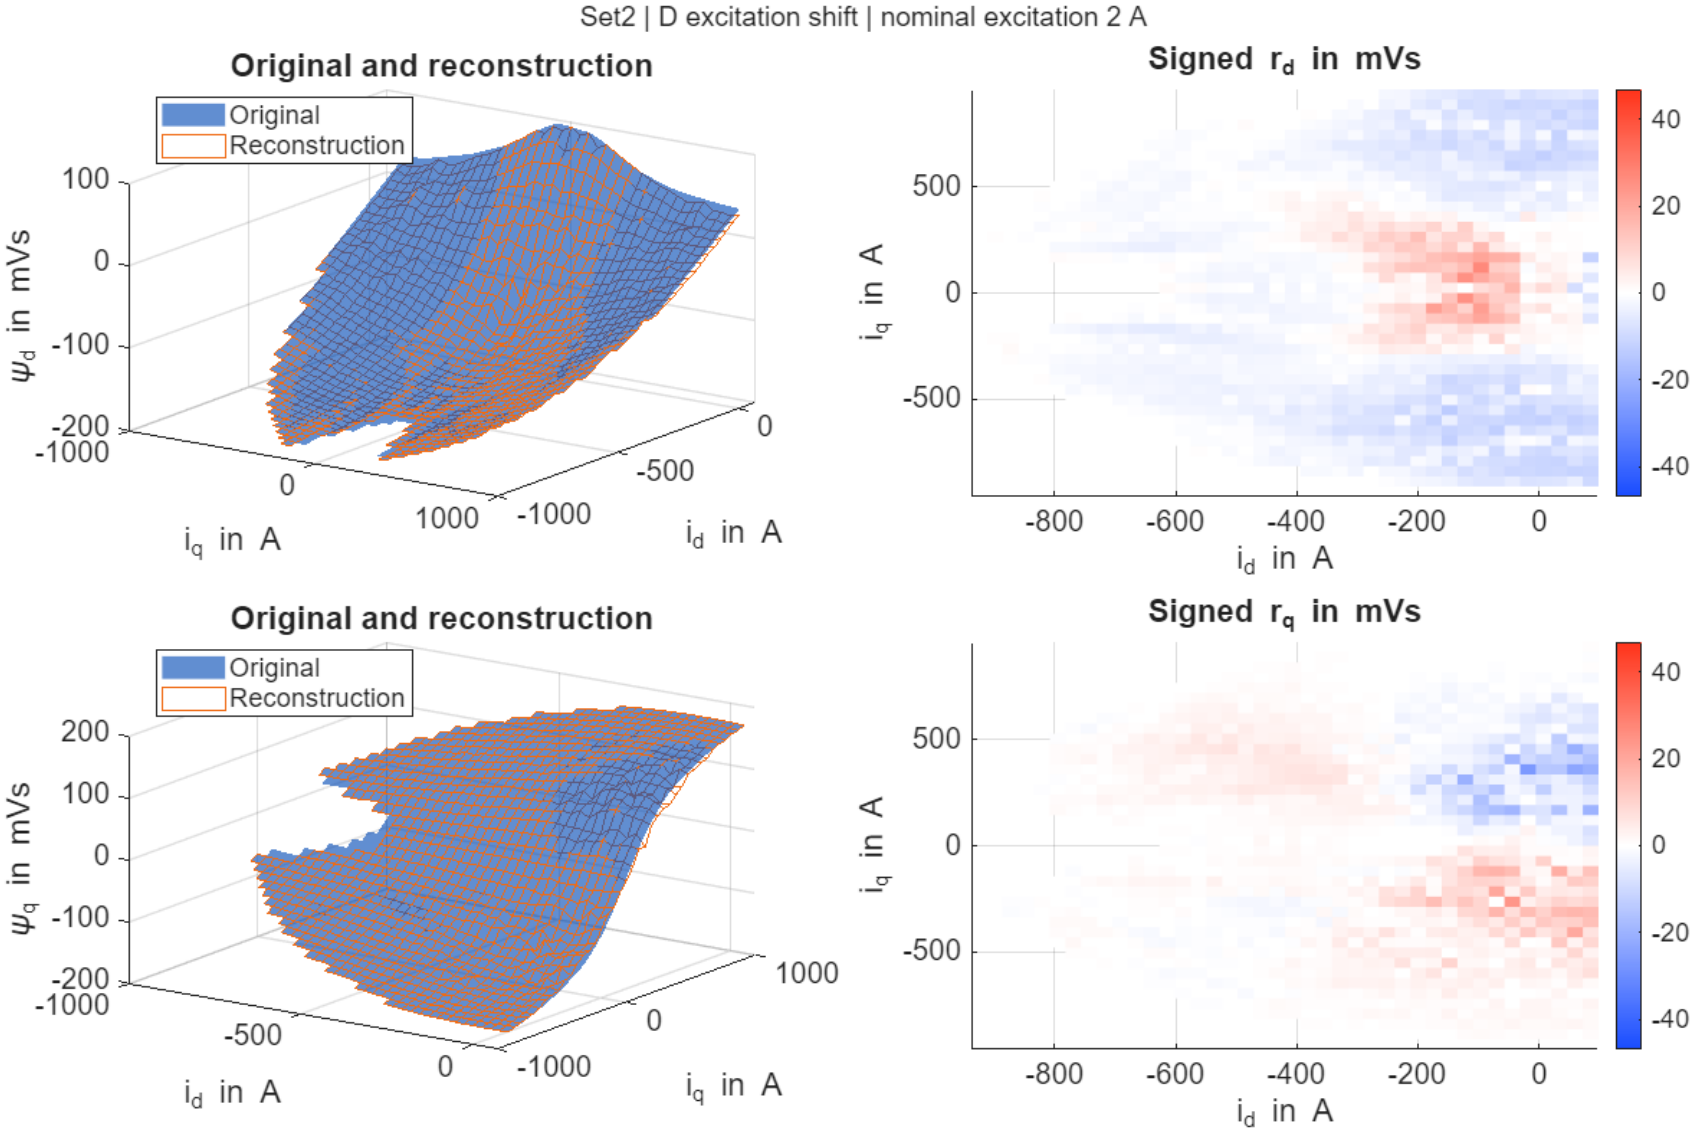

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method E, excitation 2 A

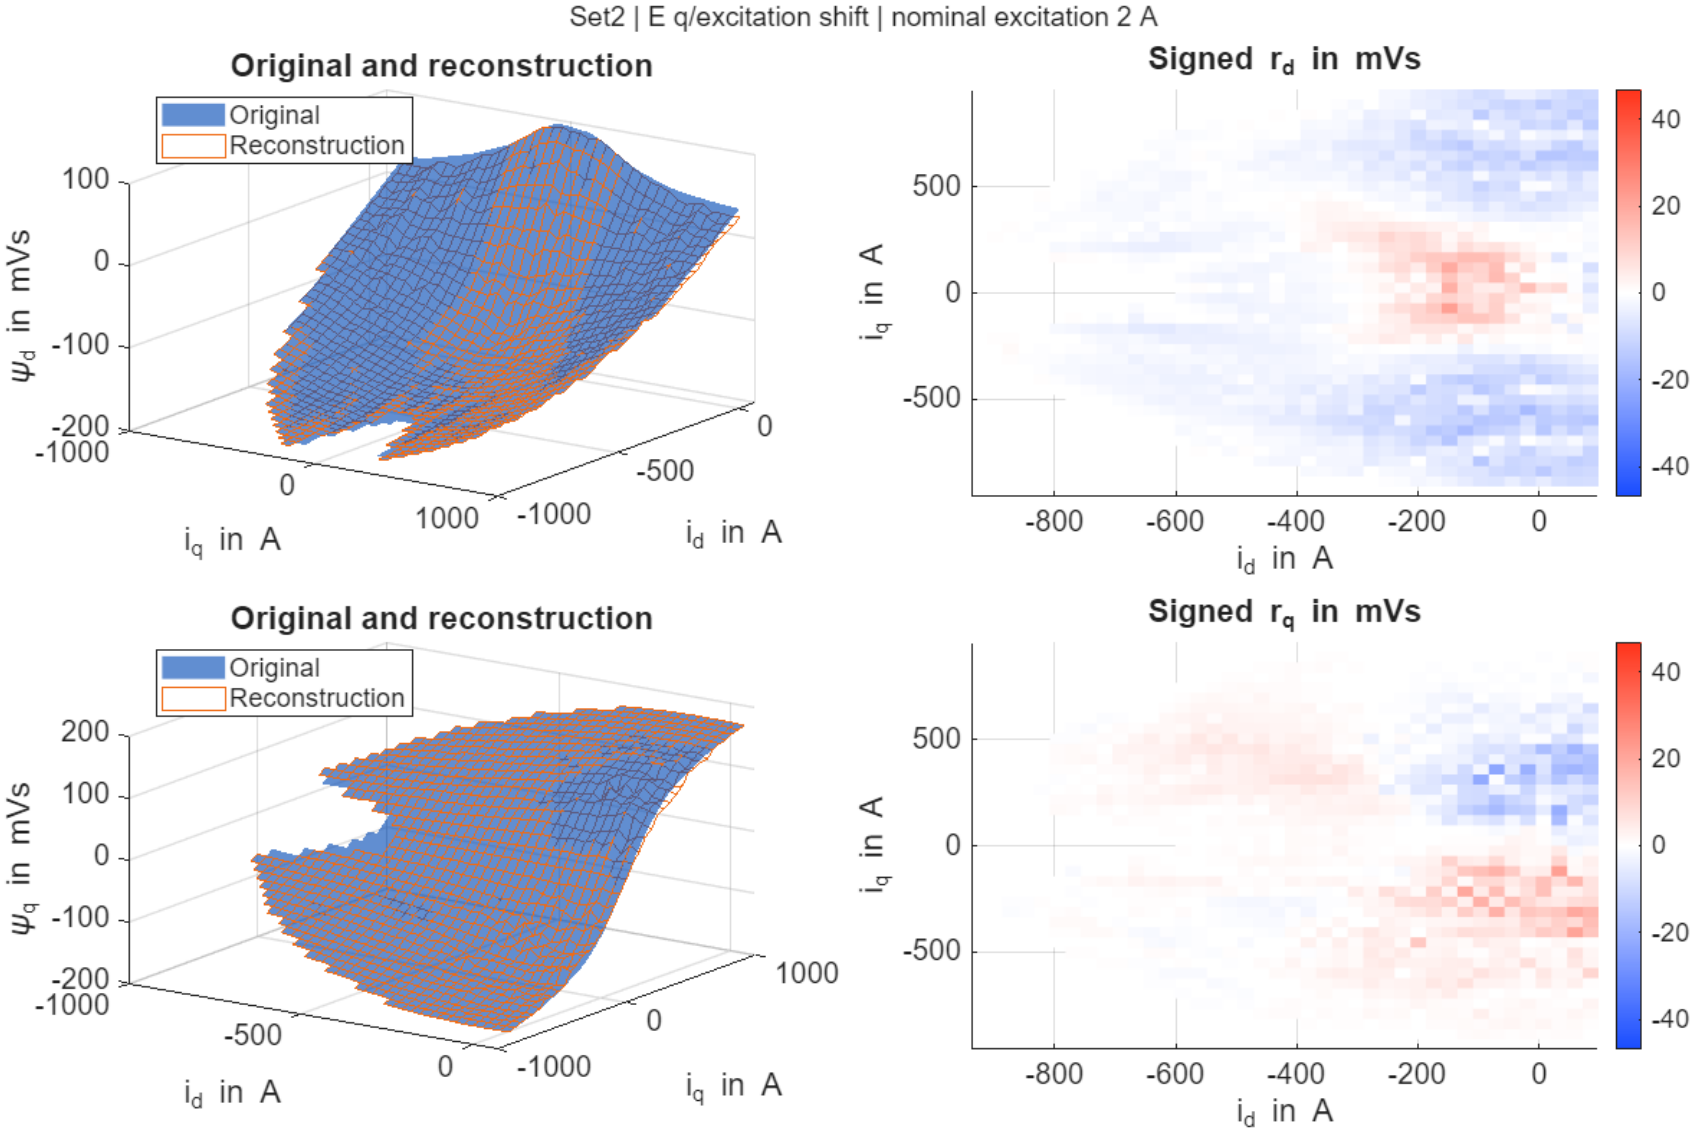

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method F, excitation 2 A

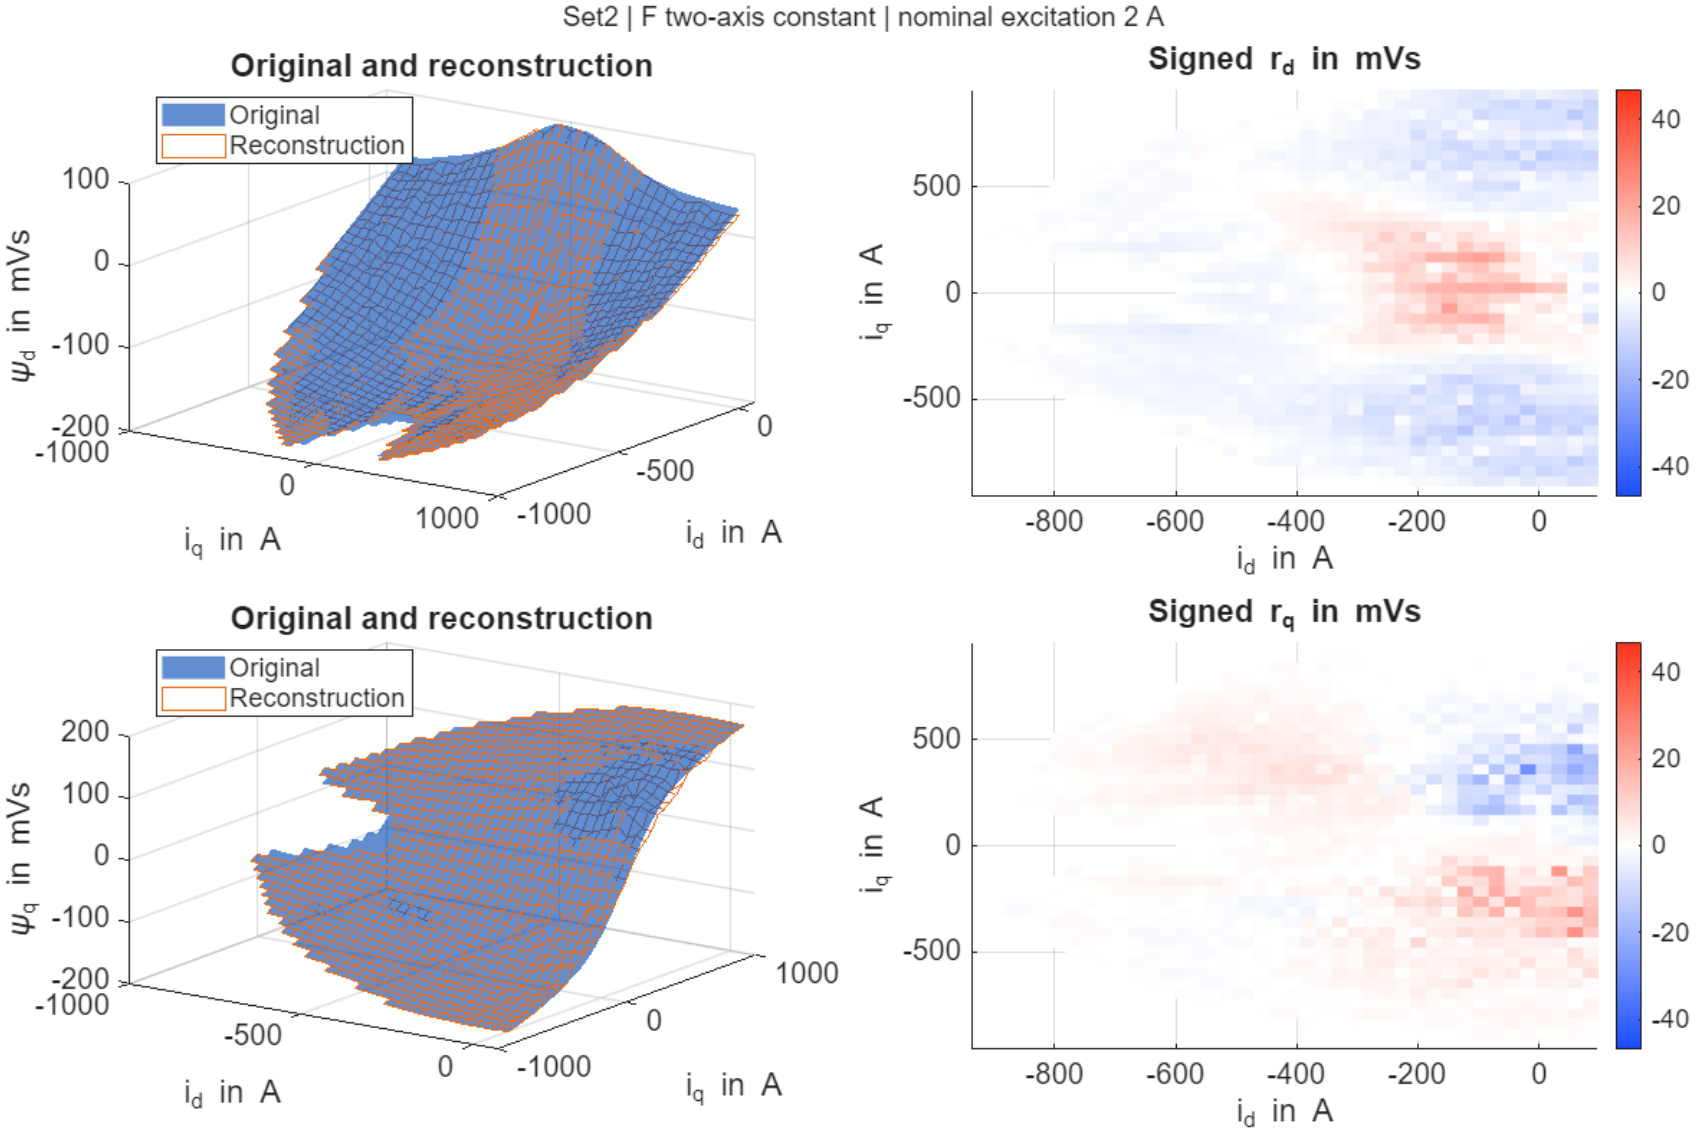

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method G, excitation 2 A

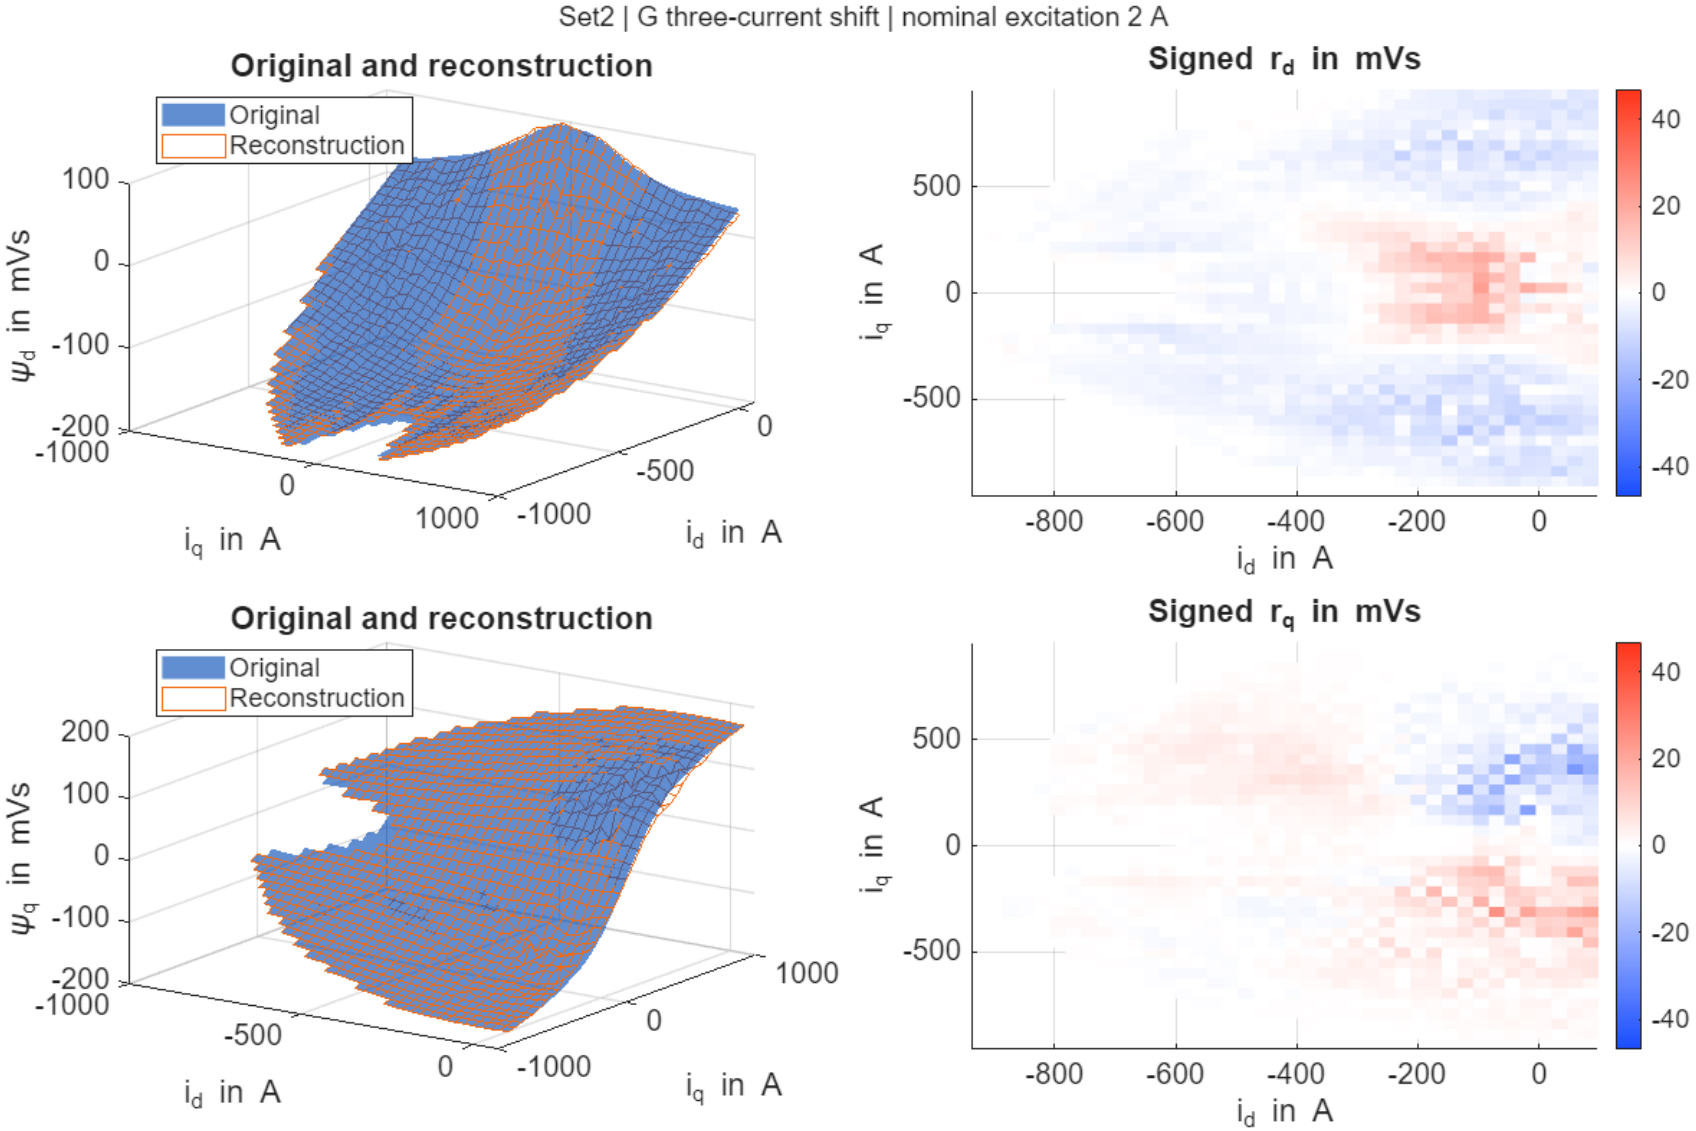

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method H, excitation 2 A

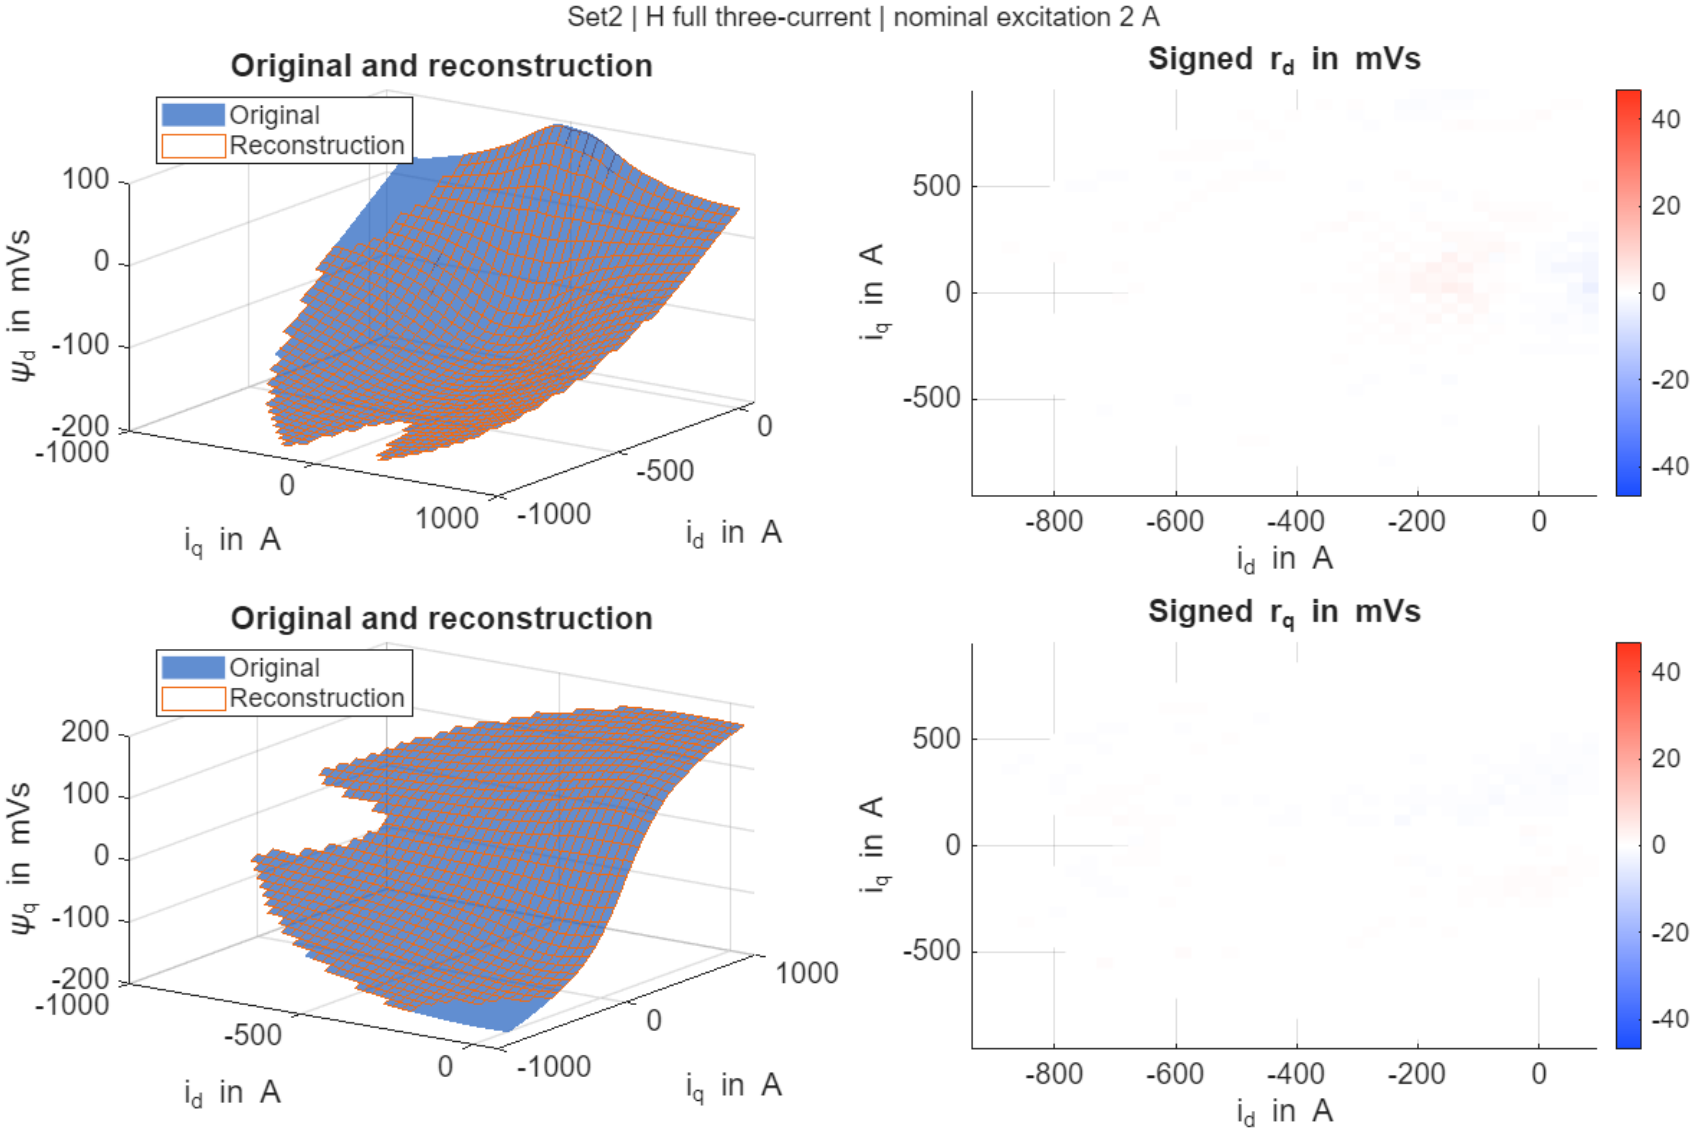

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method A, excitation 5 A

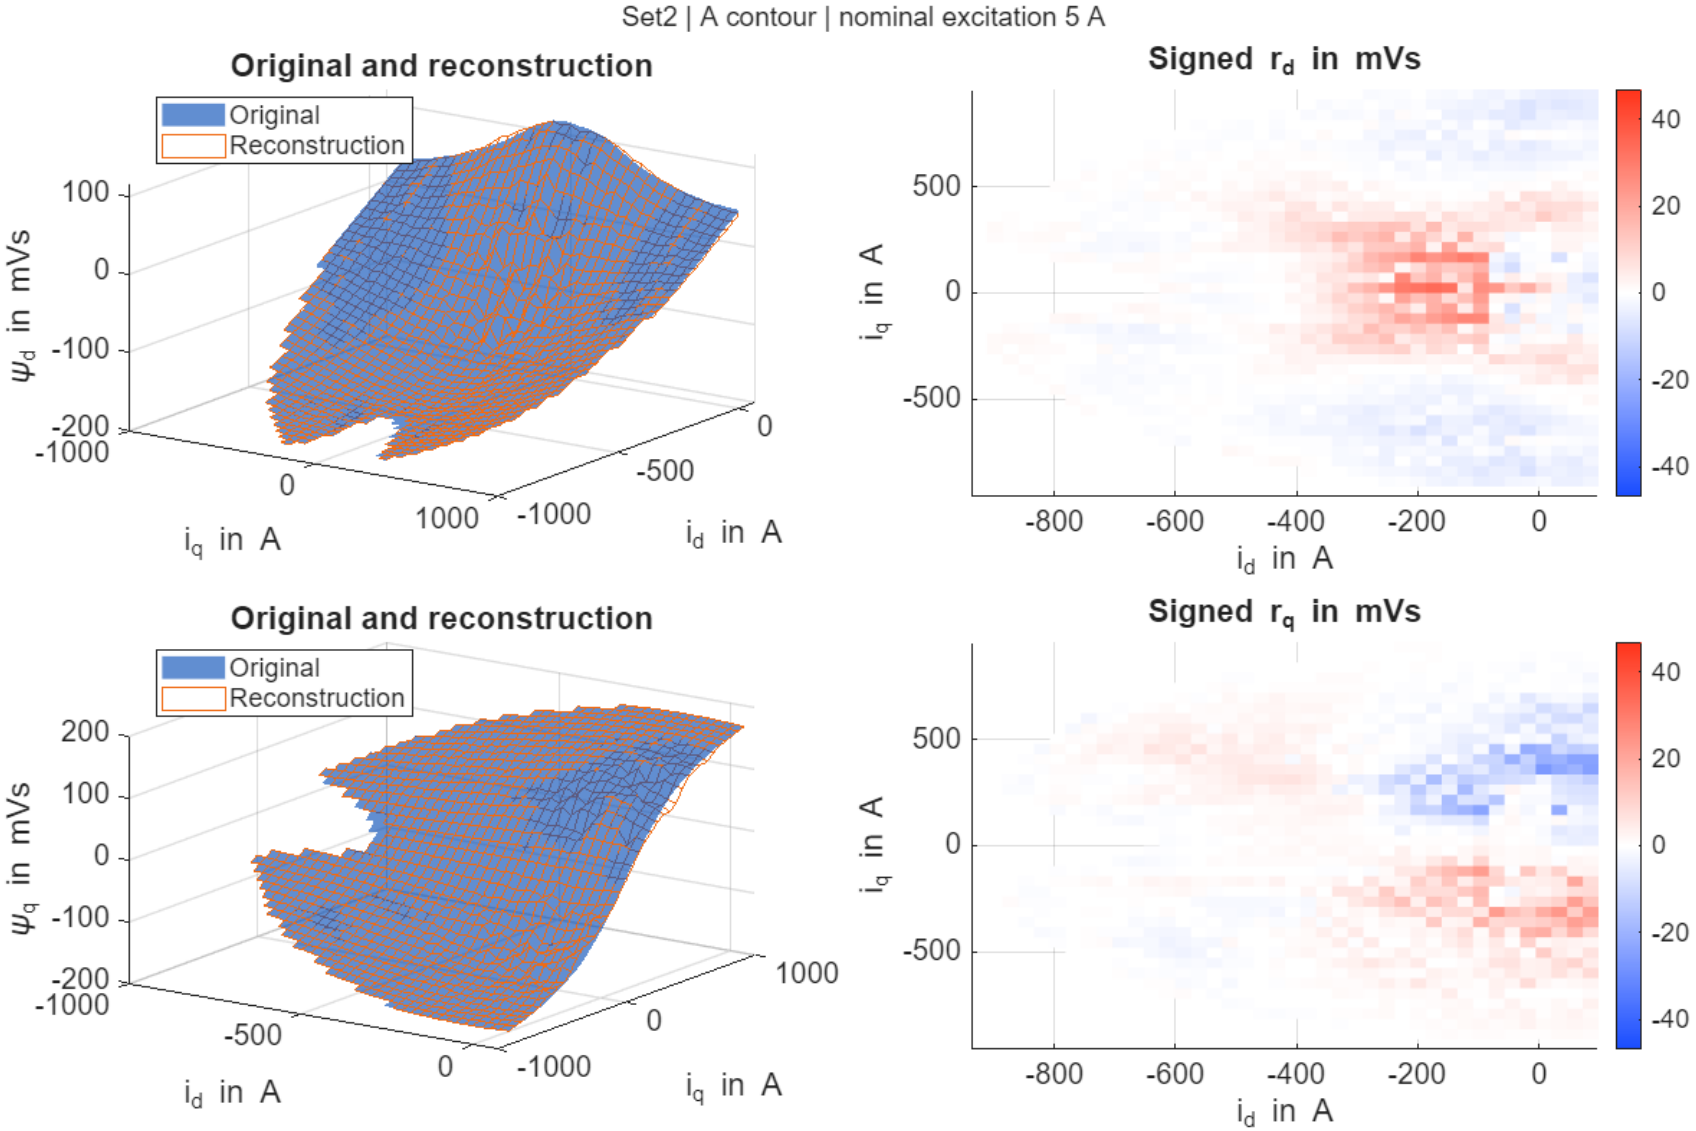

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method B, excitation 5 A

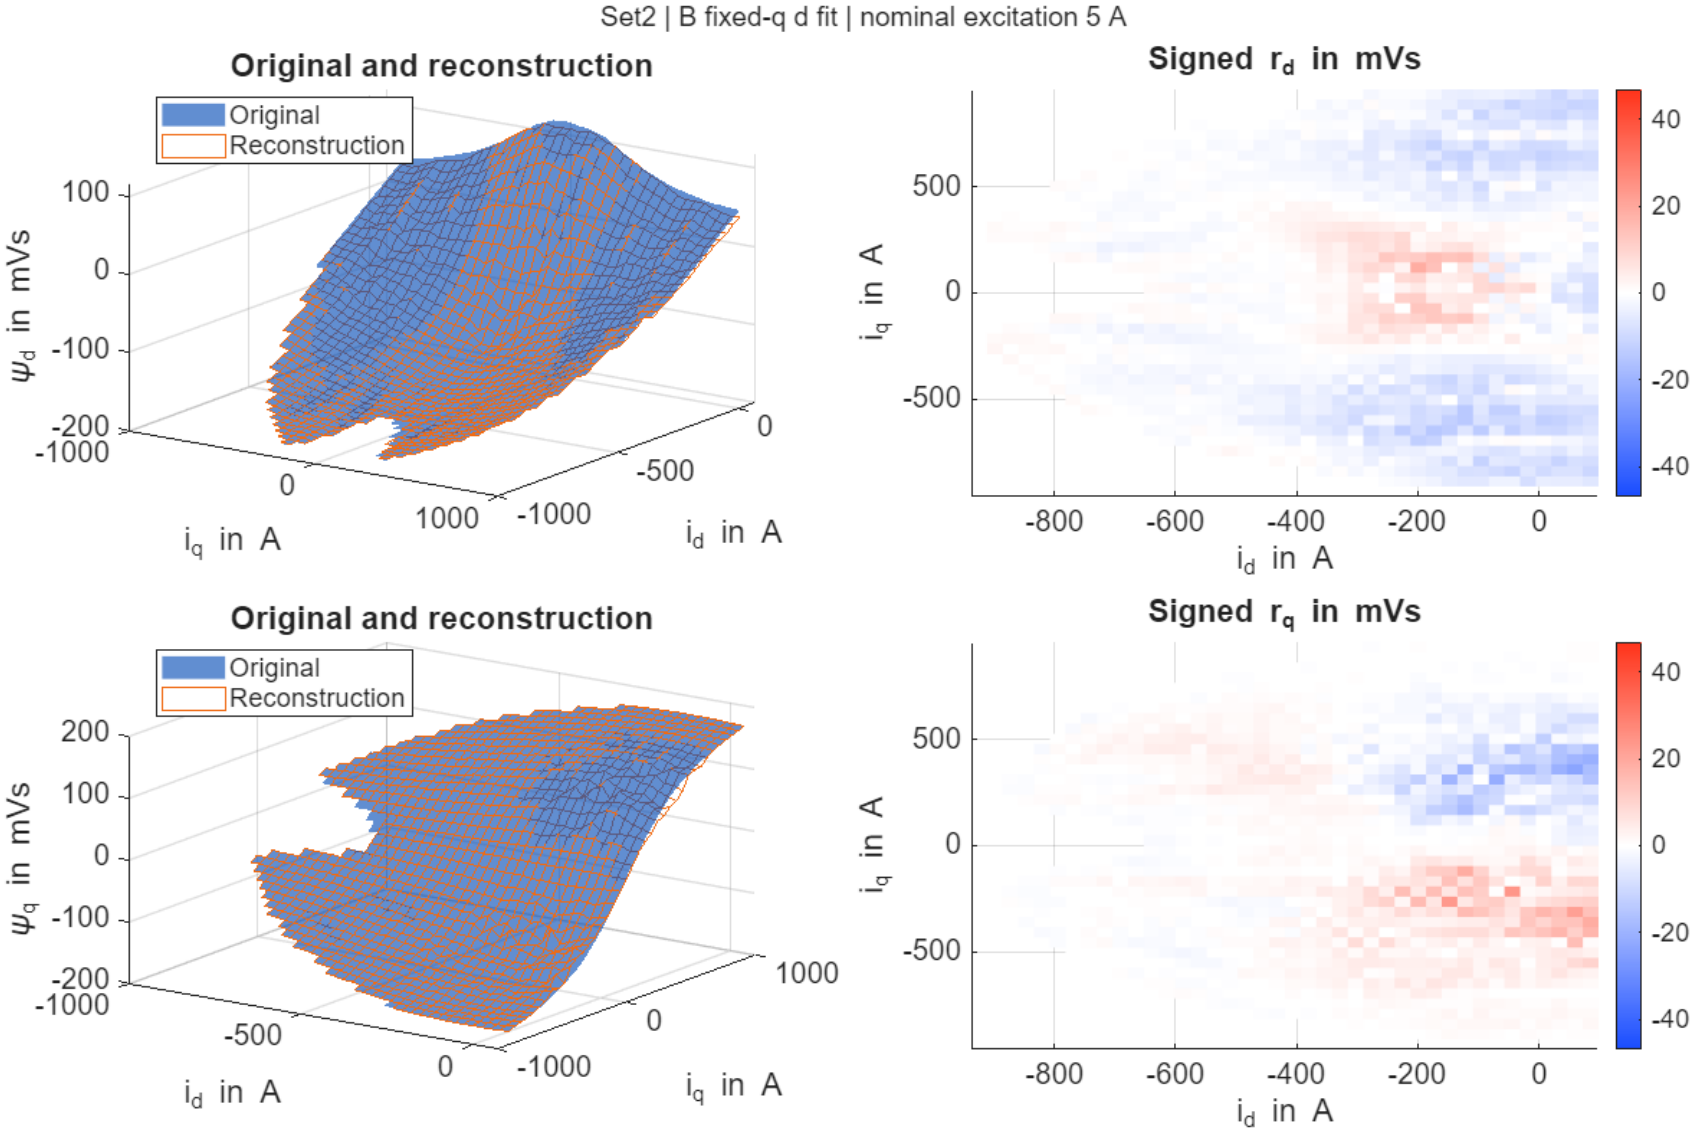

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method C, excitation 5 A

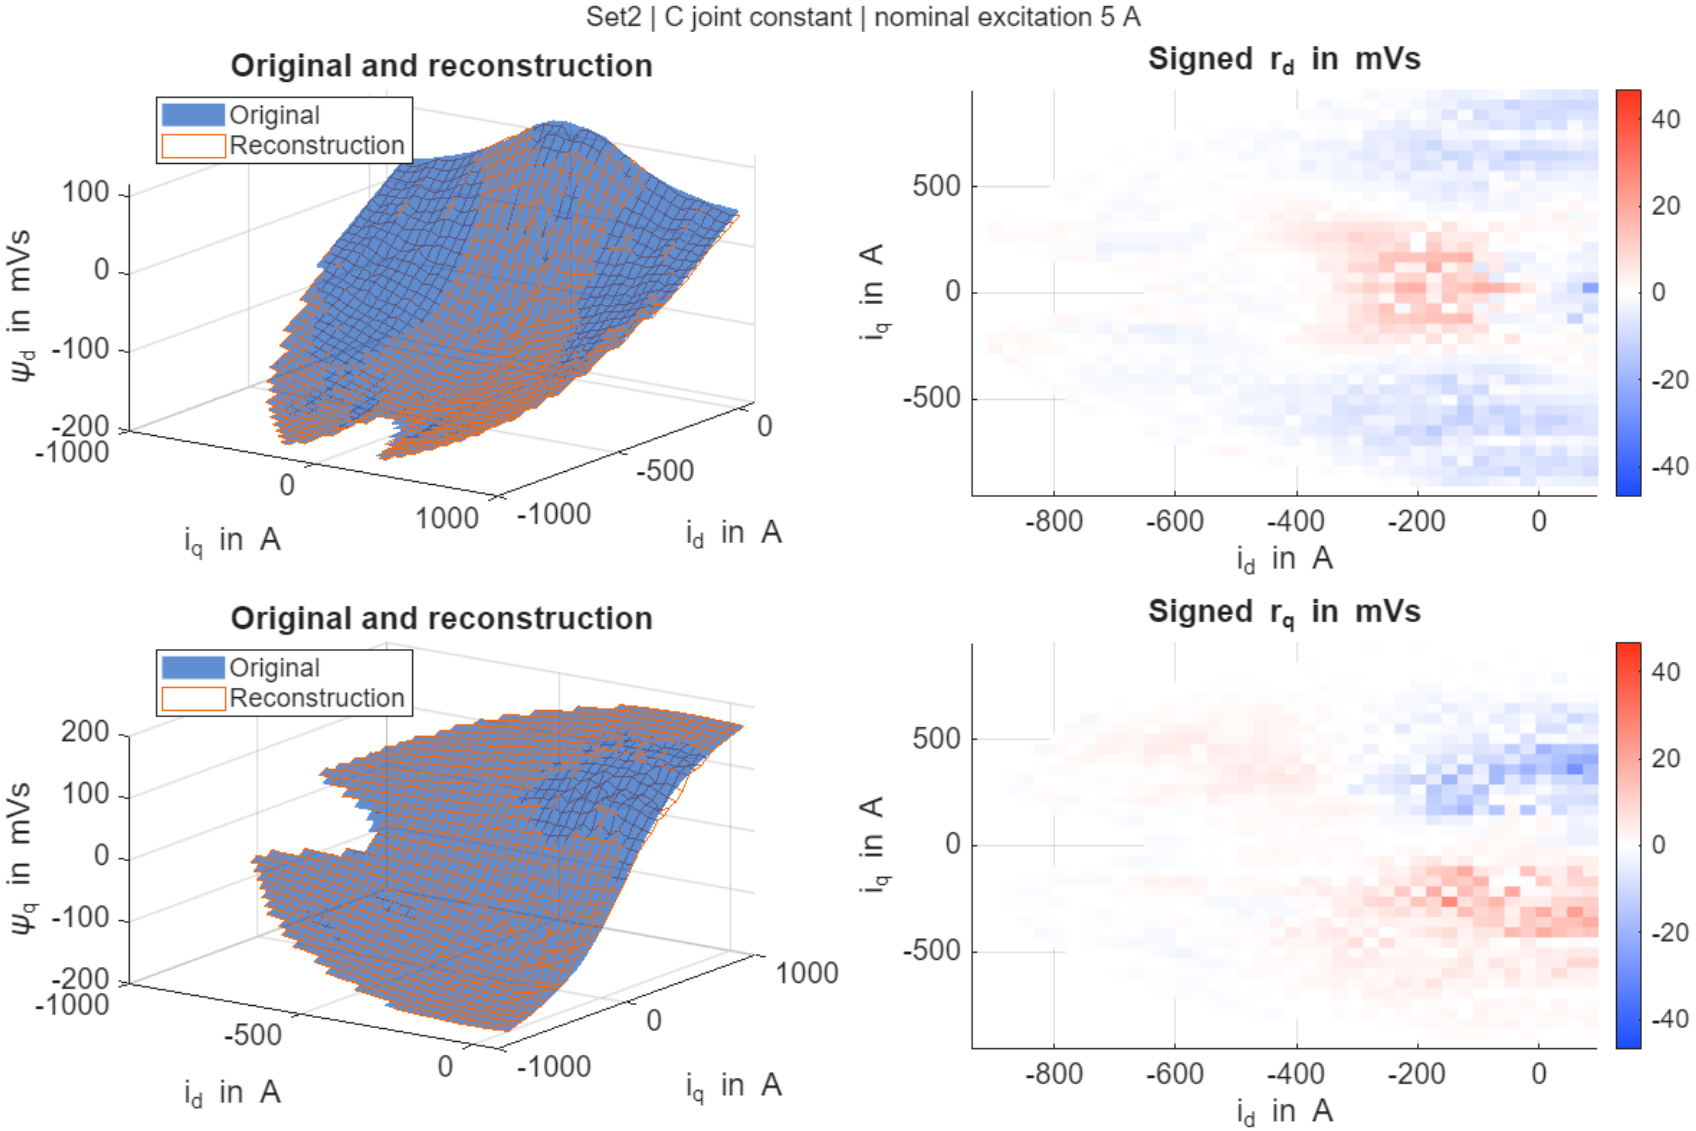

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method D, excitation 5 A

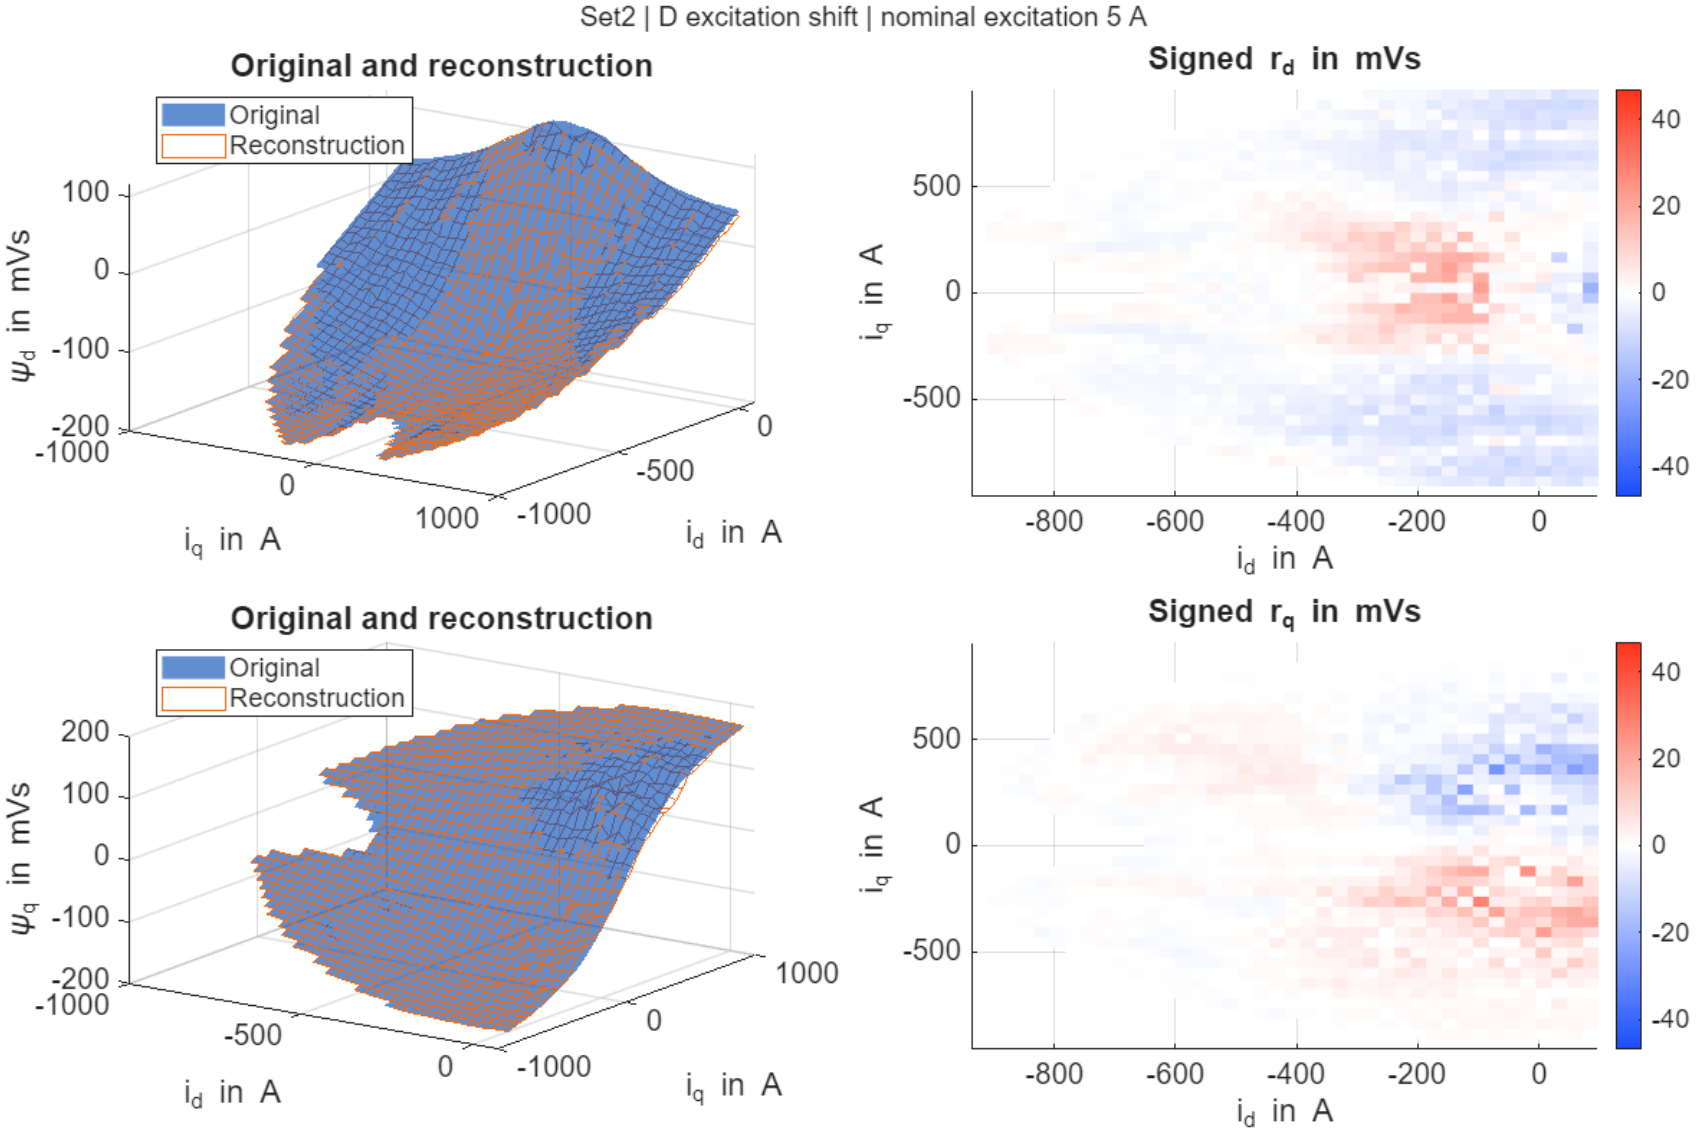

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method E, excitation 5 A

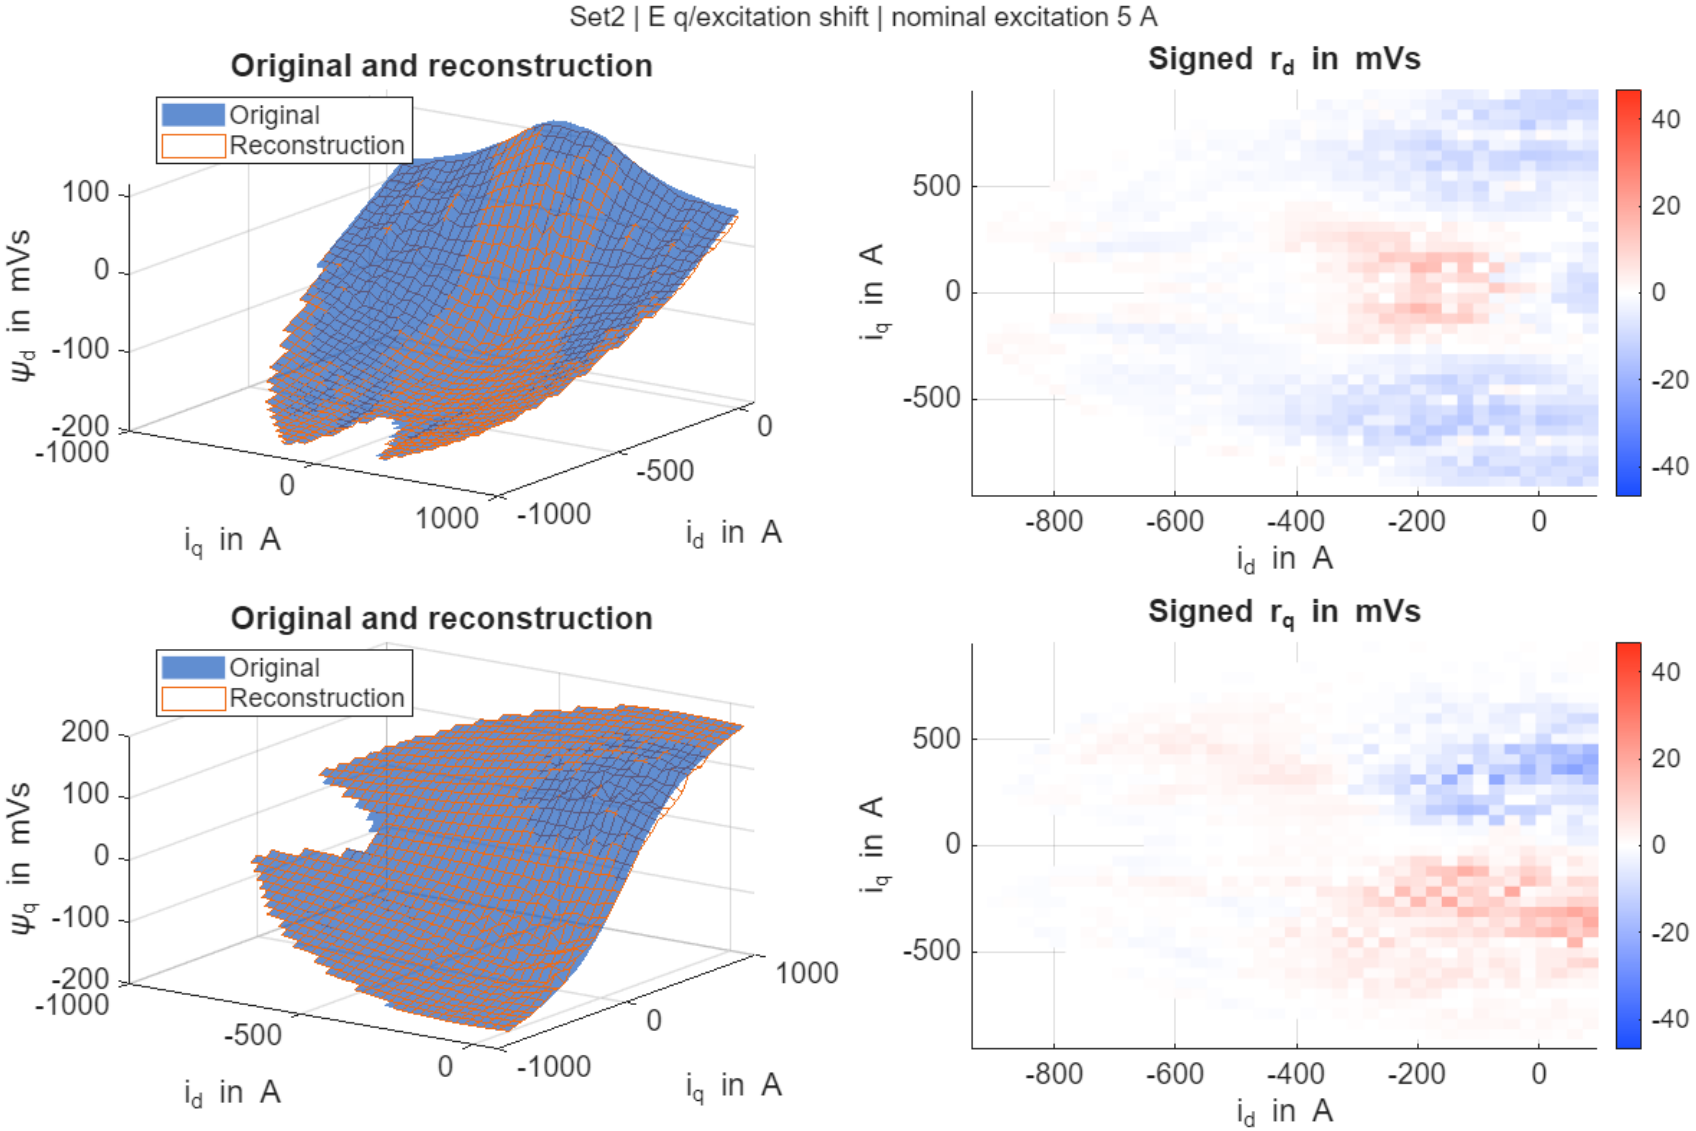

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method F, excitation 5 A

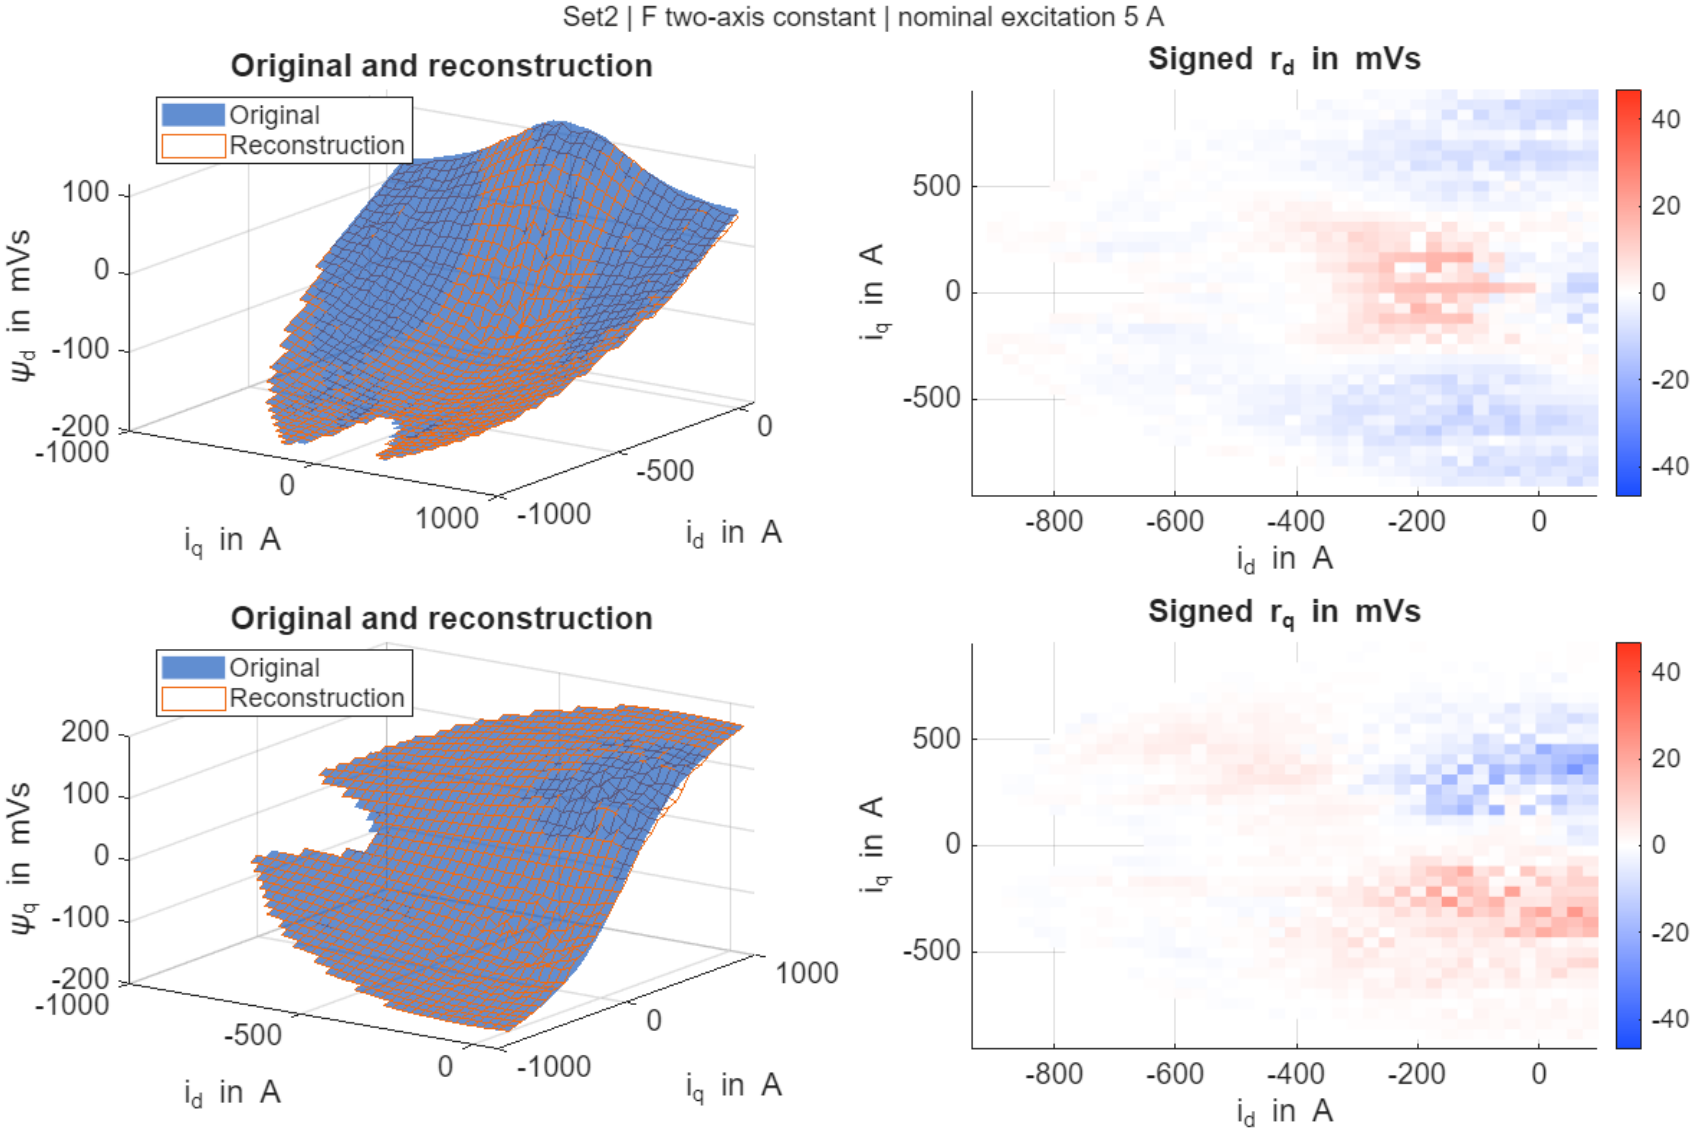

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method G, excitation 5 A

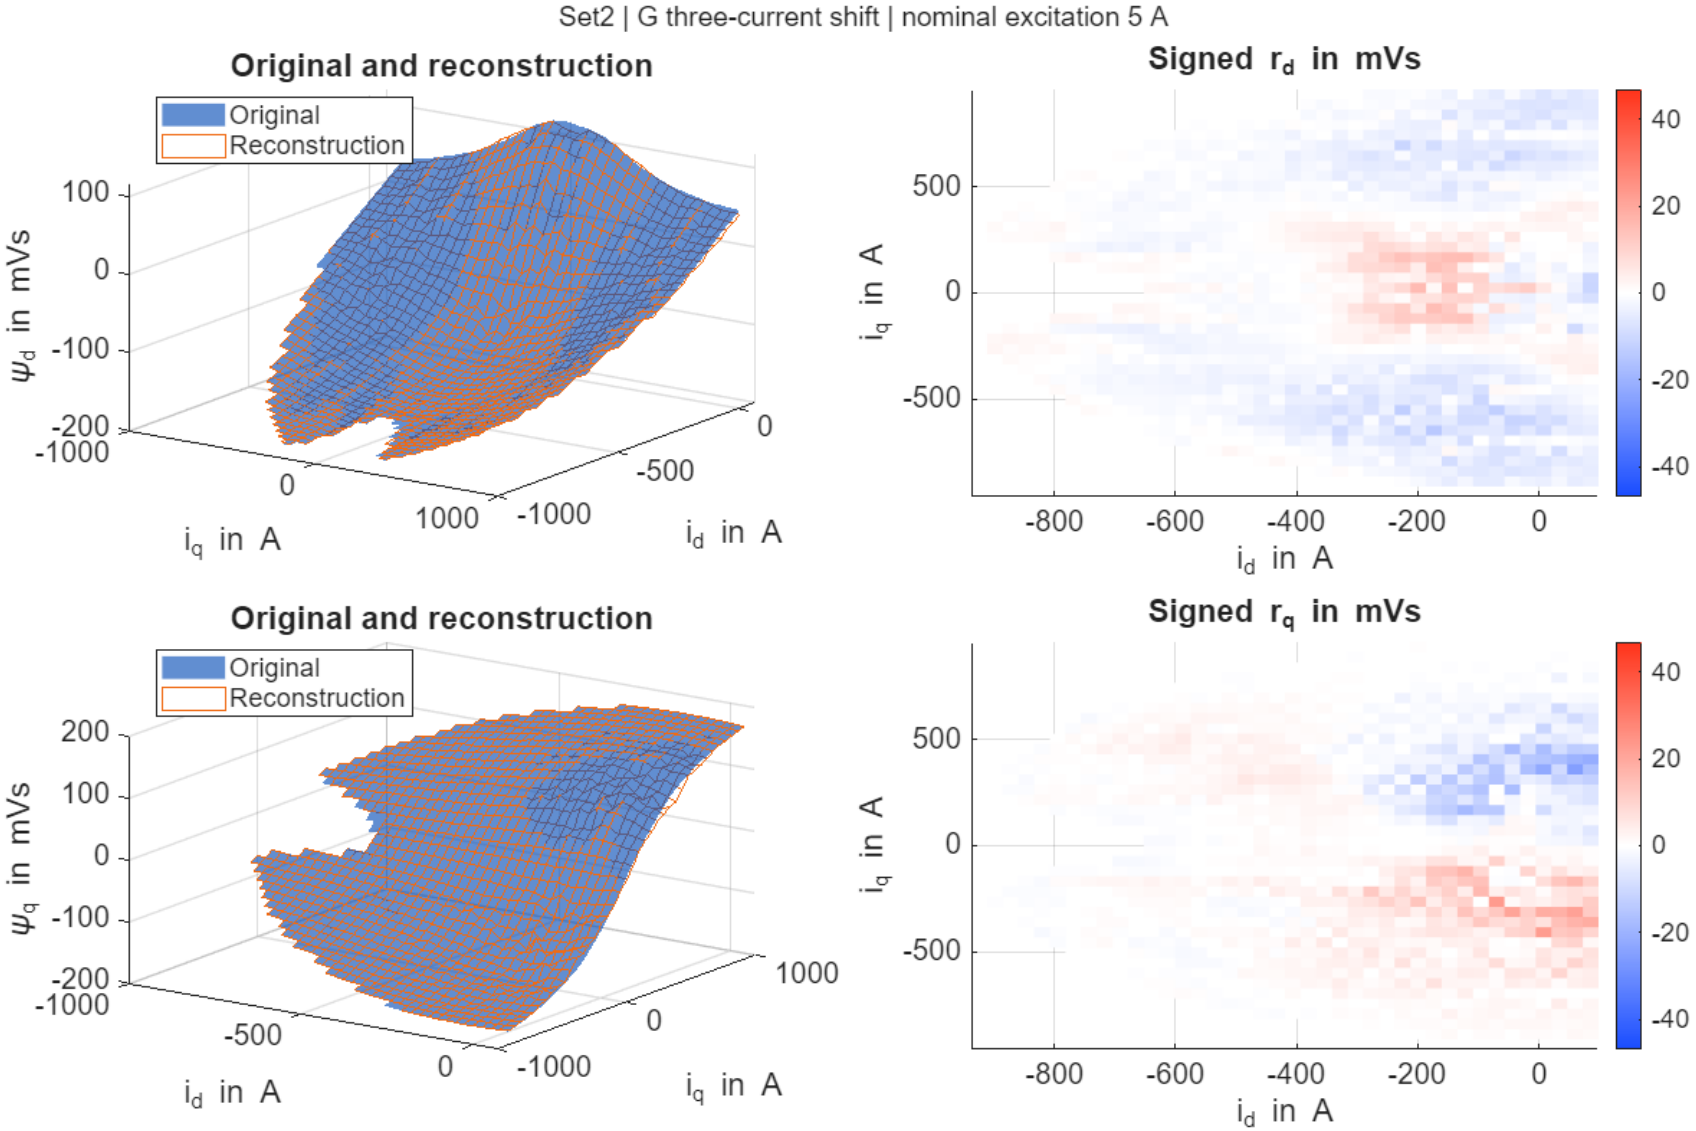

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method H, excitation 5 A

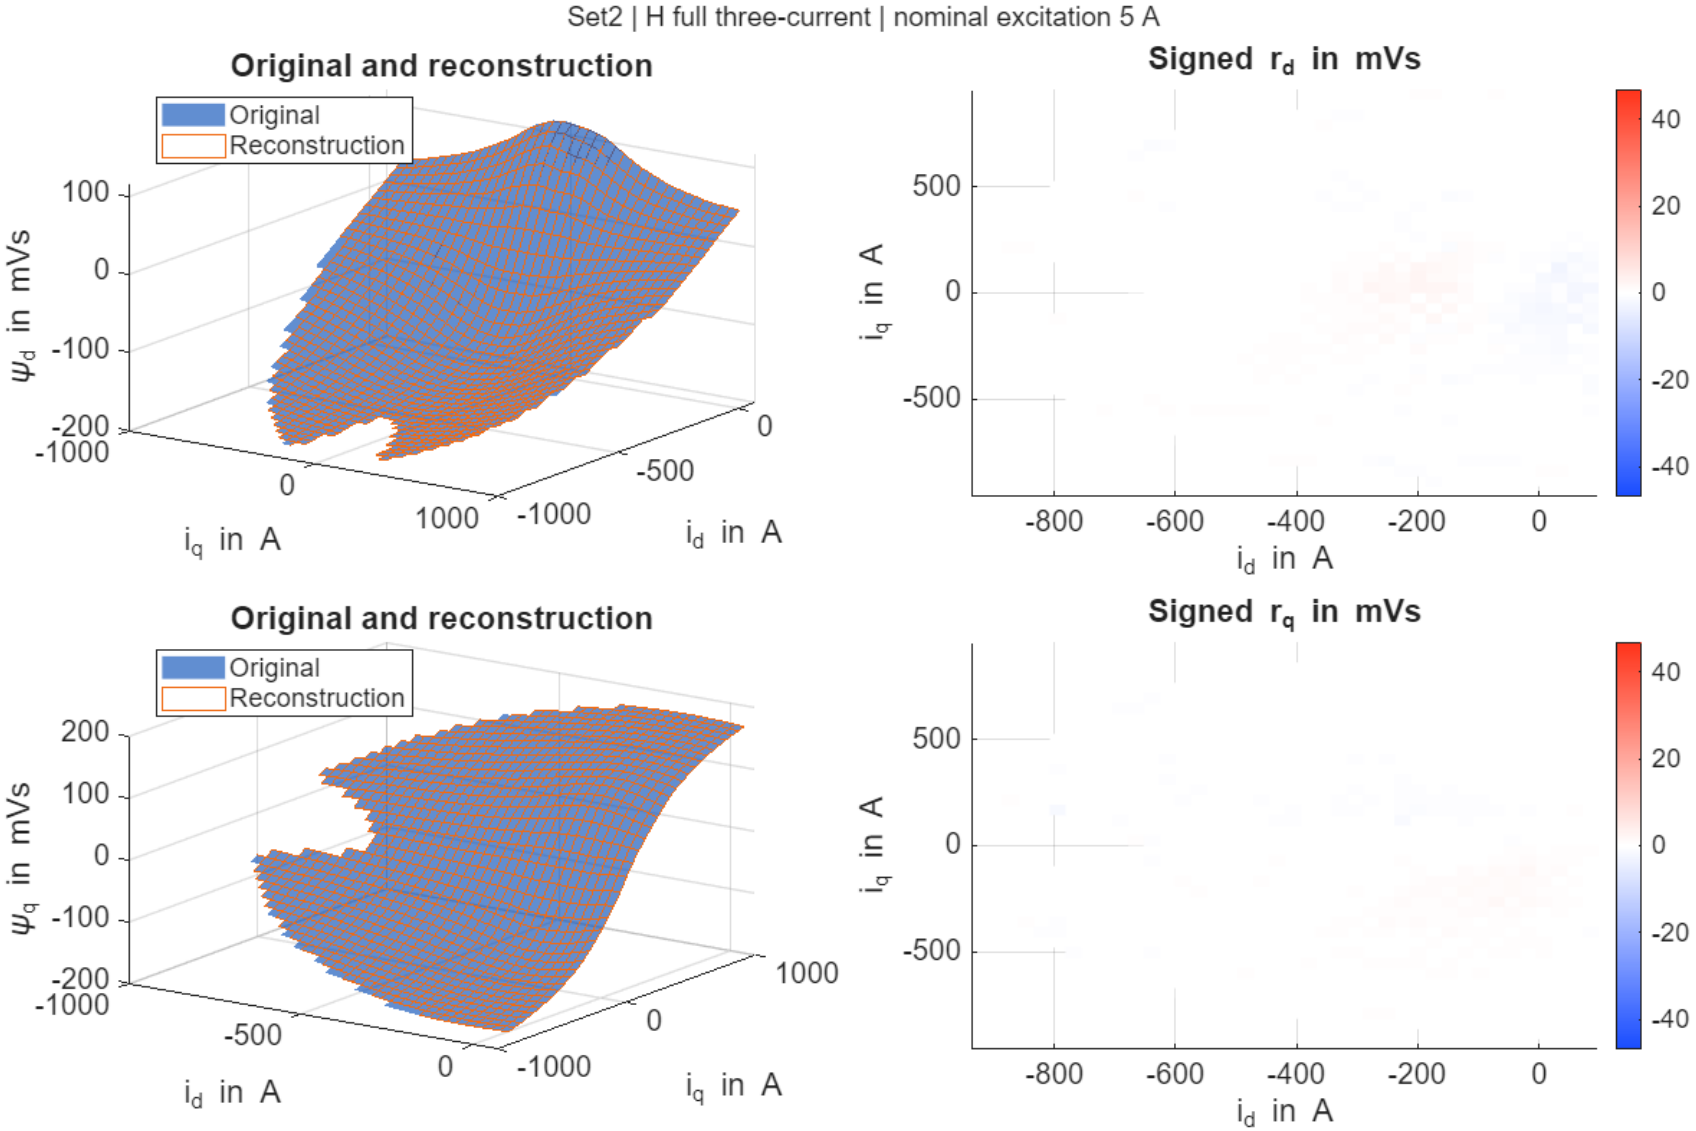

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method A, excitation 8 A

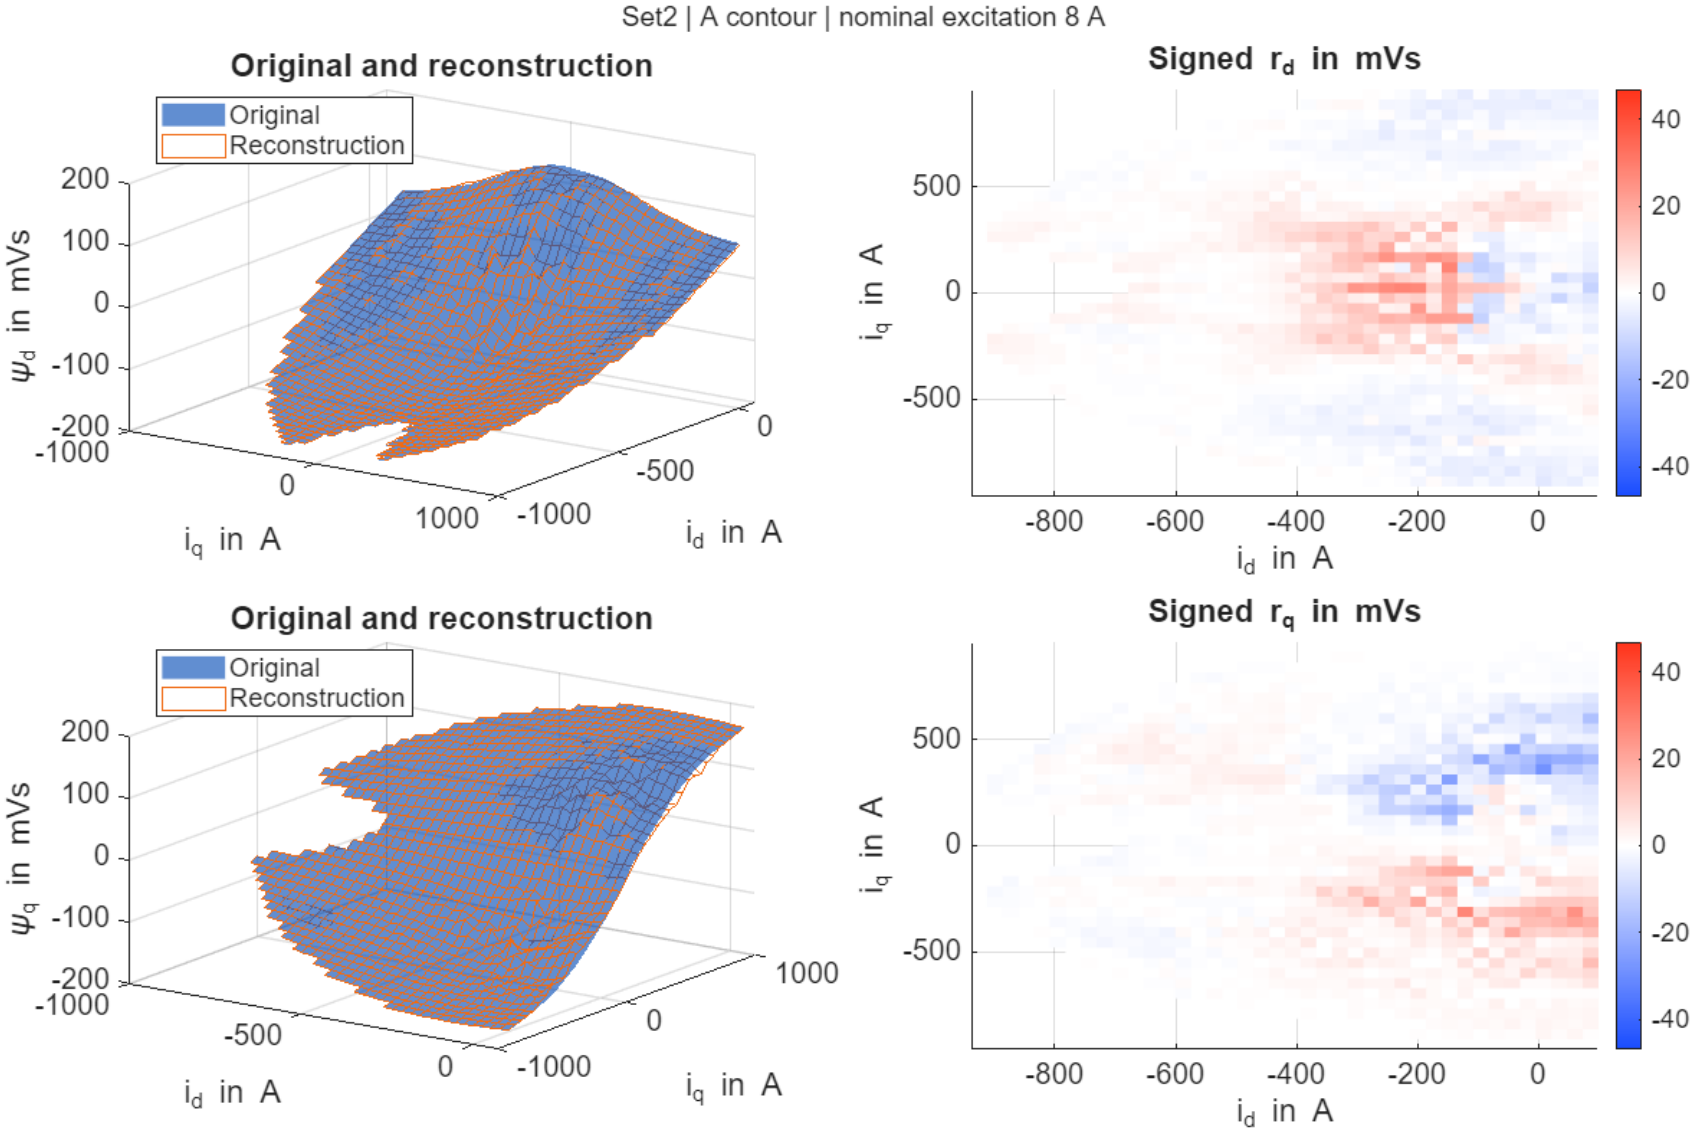

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method B, excitation 8 A

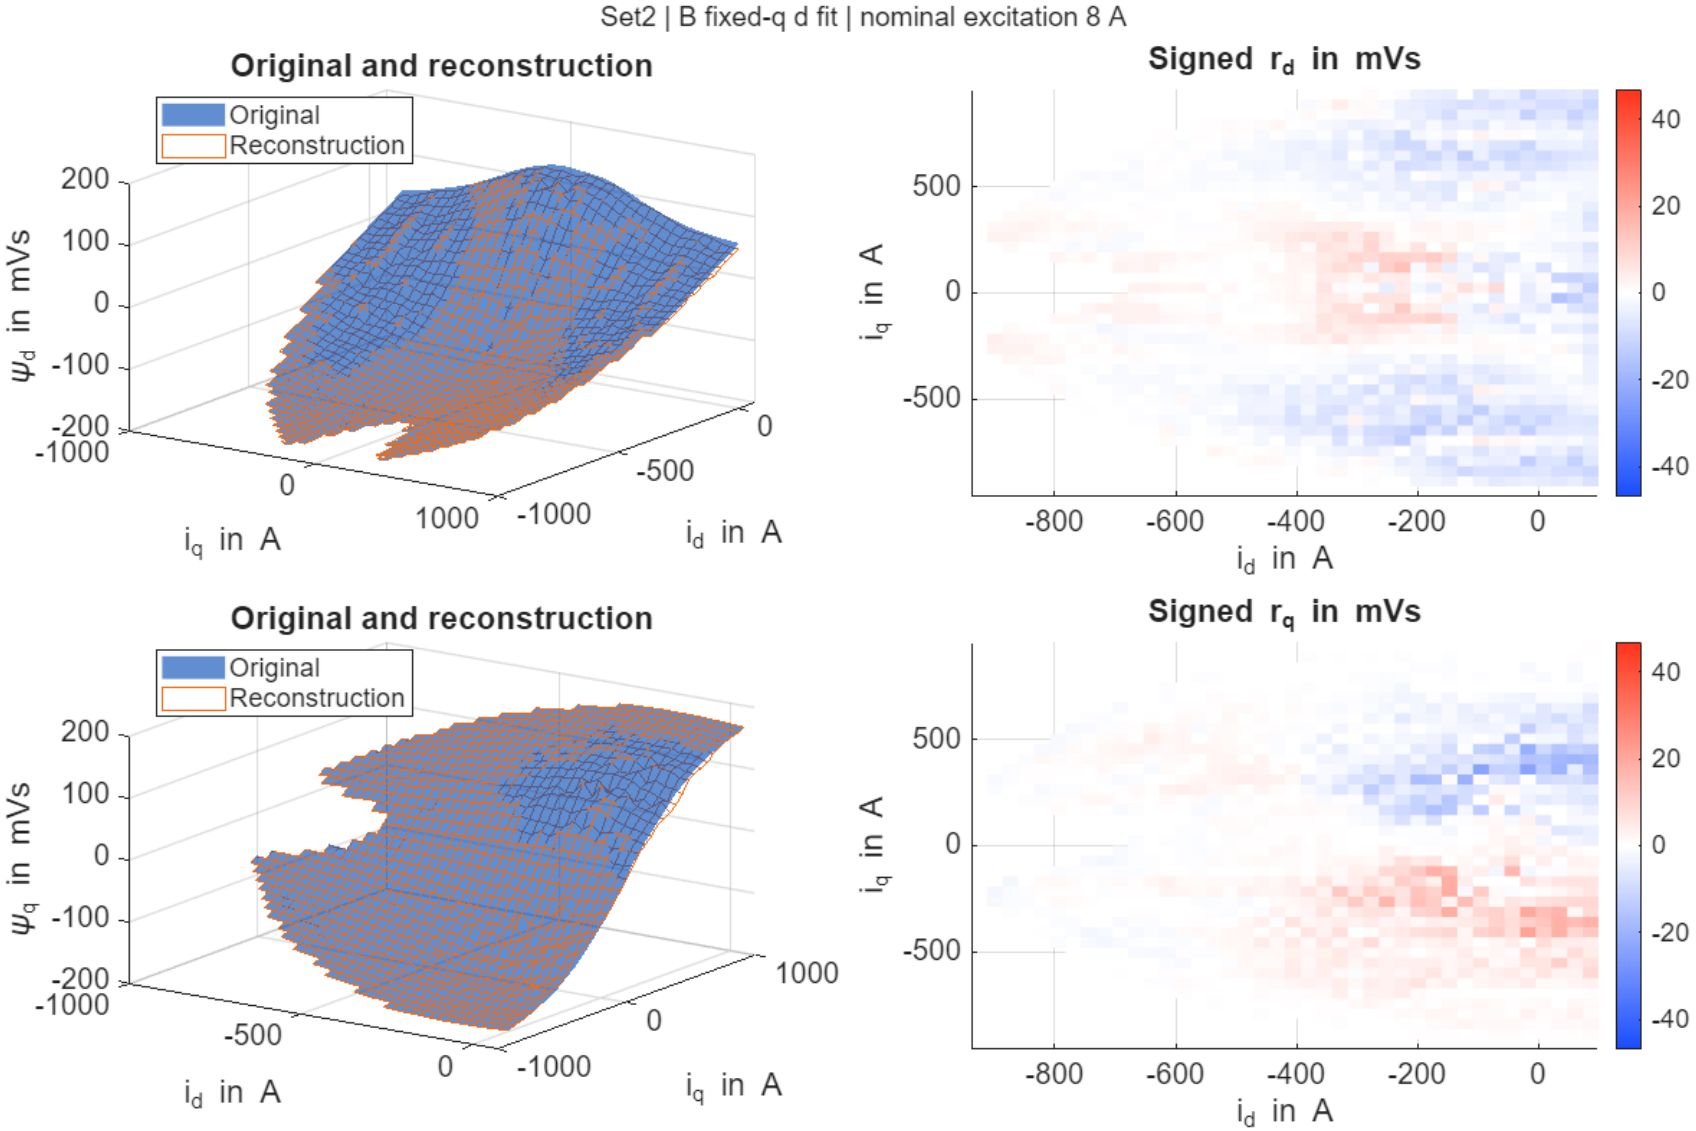

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method C, excitation 8 A

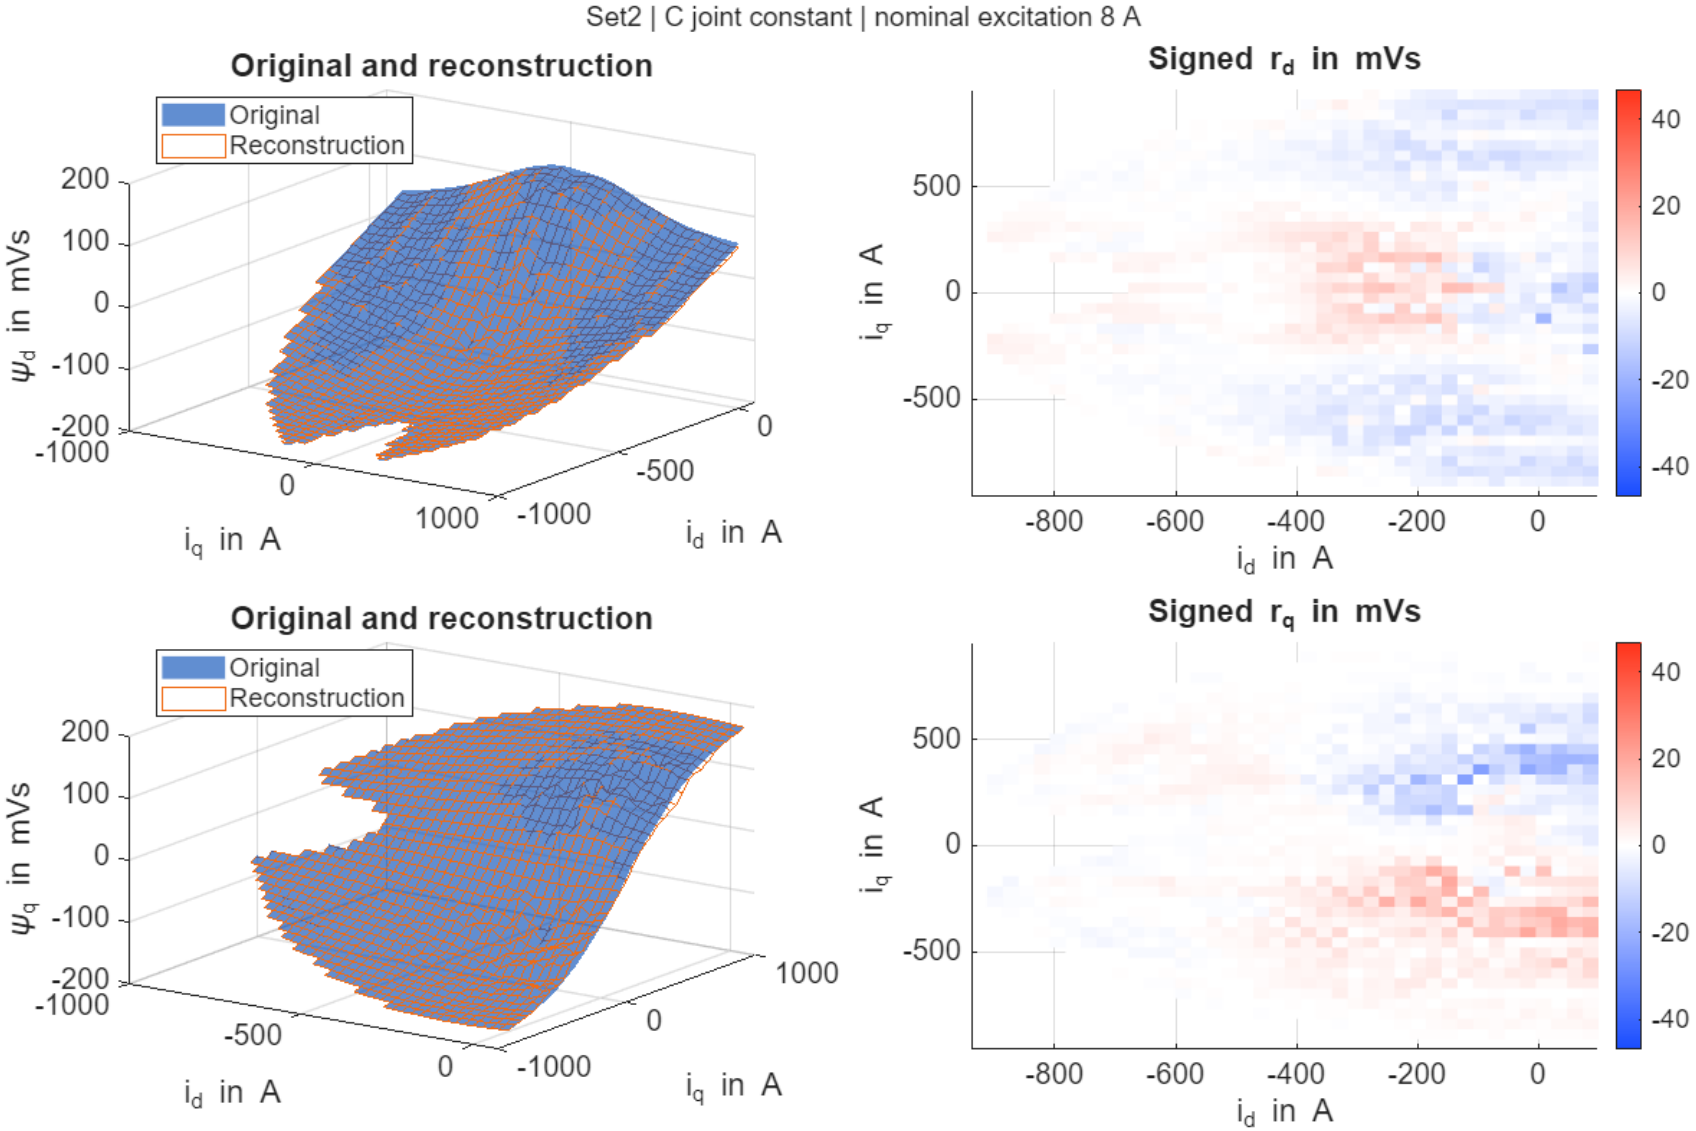

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method D, excitation 8 A

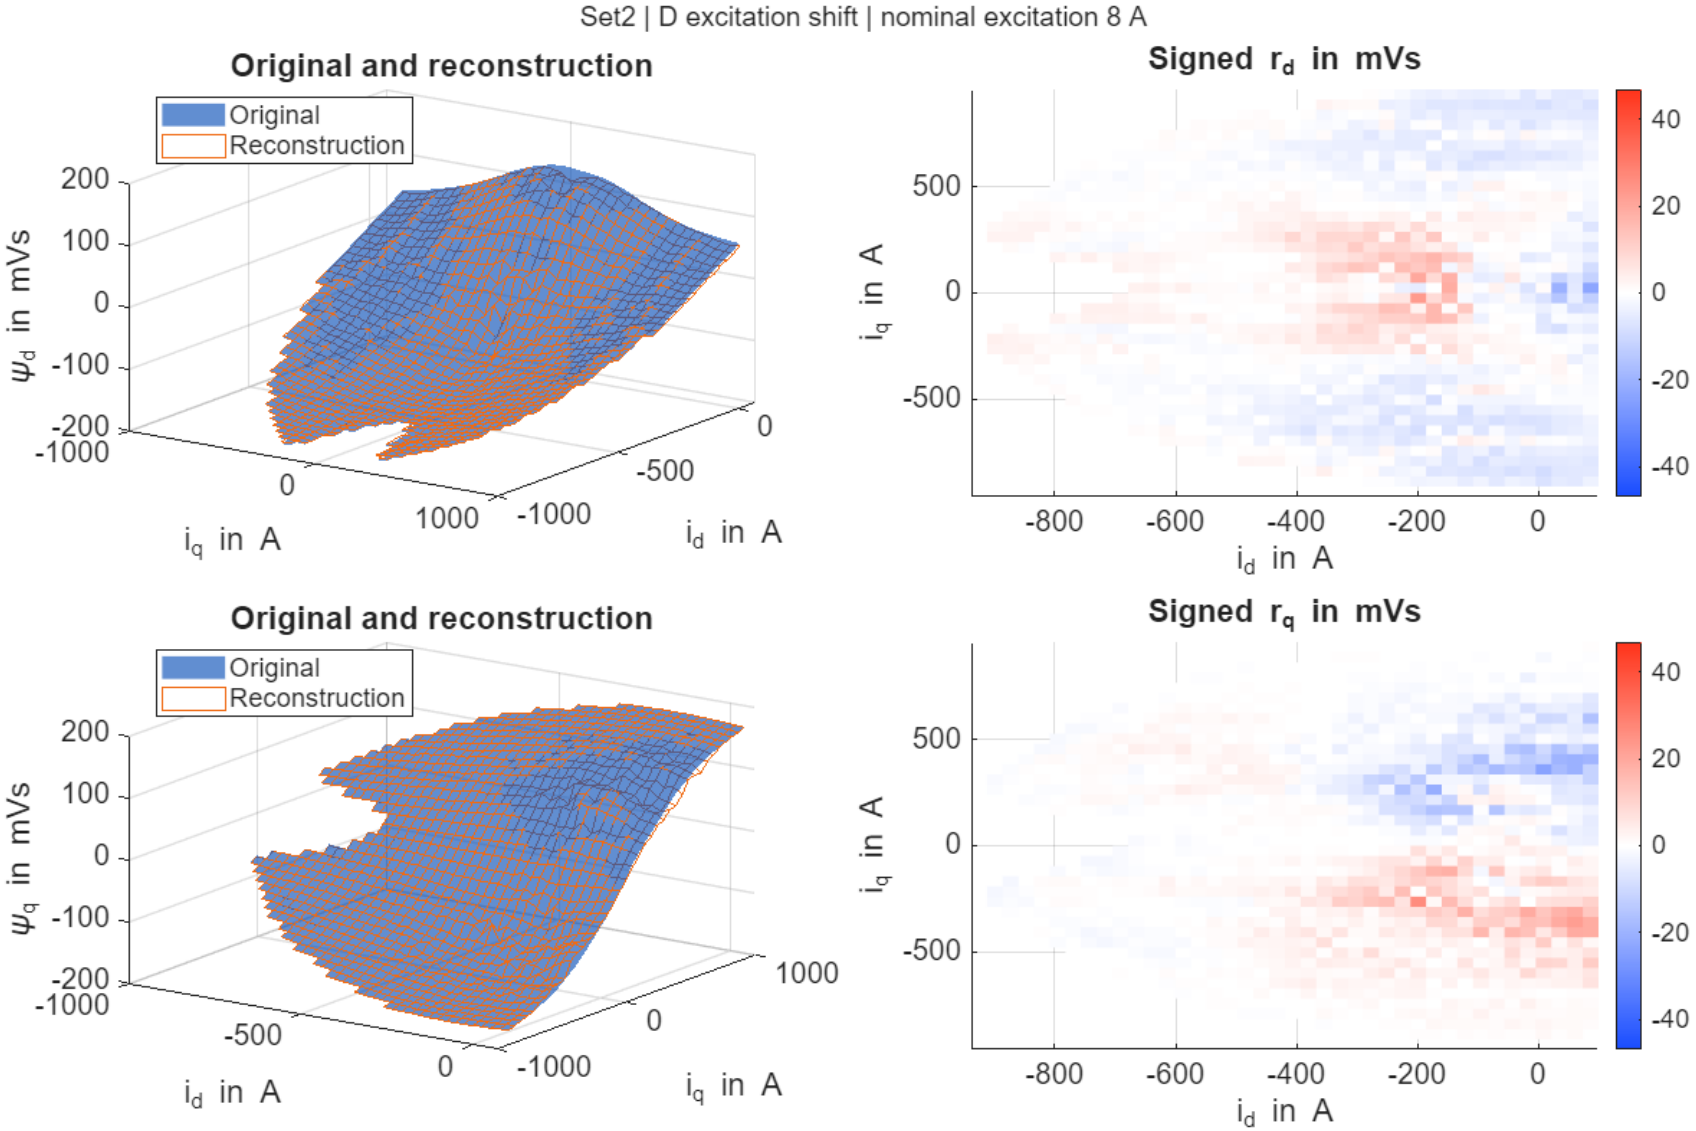

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method E, excitation 8 A

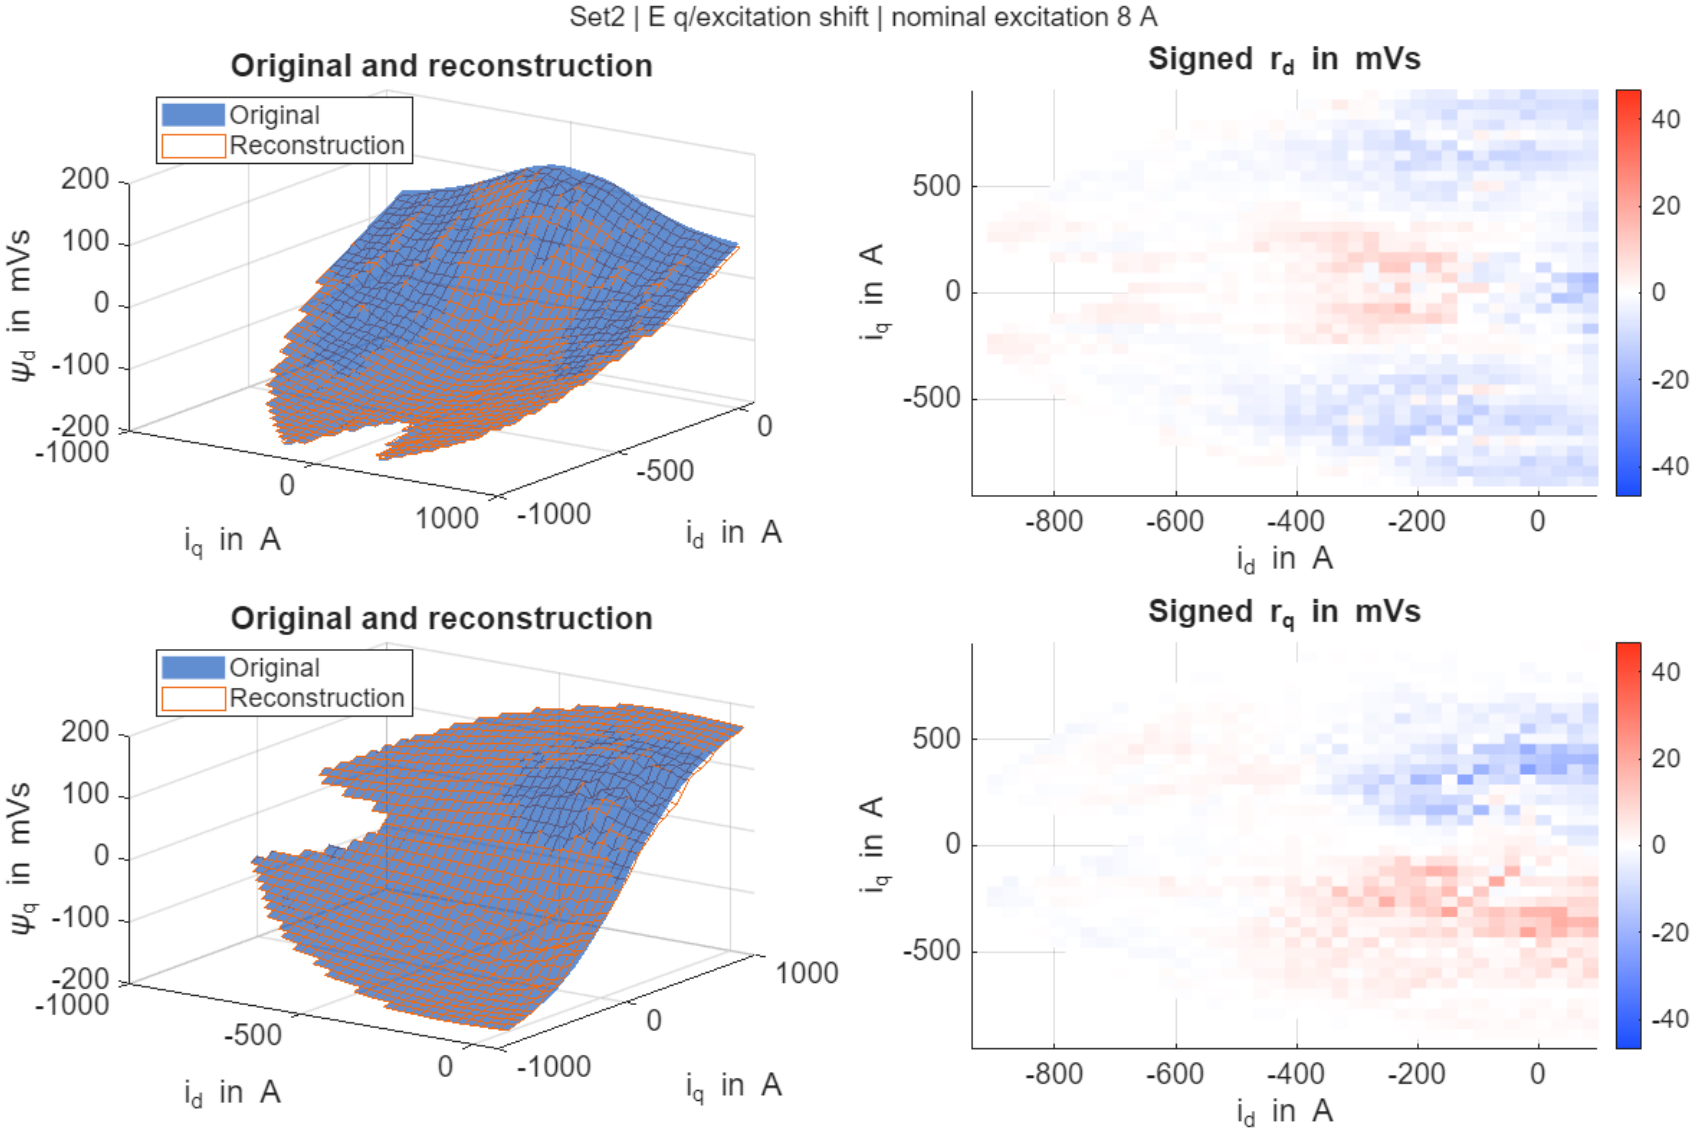

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method F, excitation 8 A

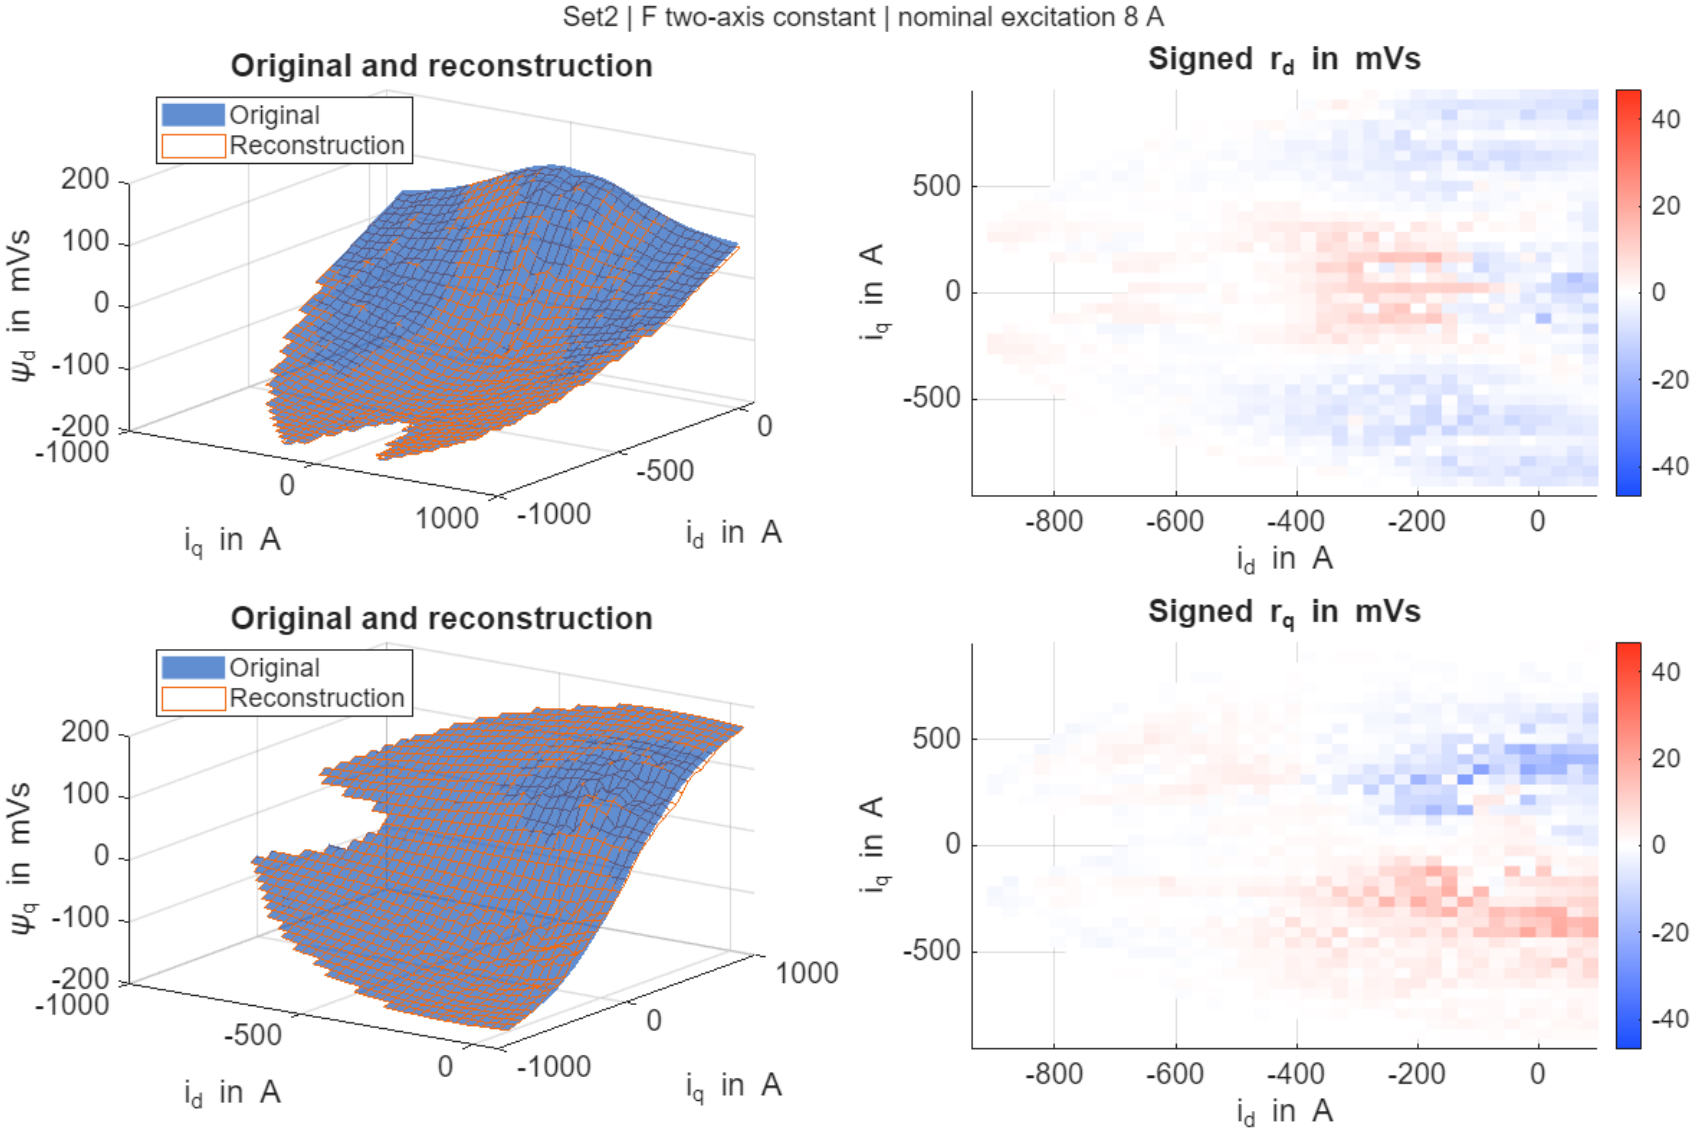

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method G, excitation 8 A

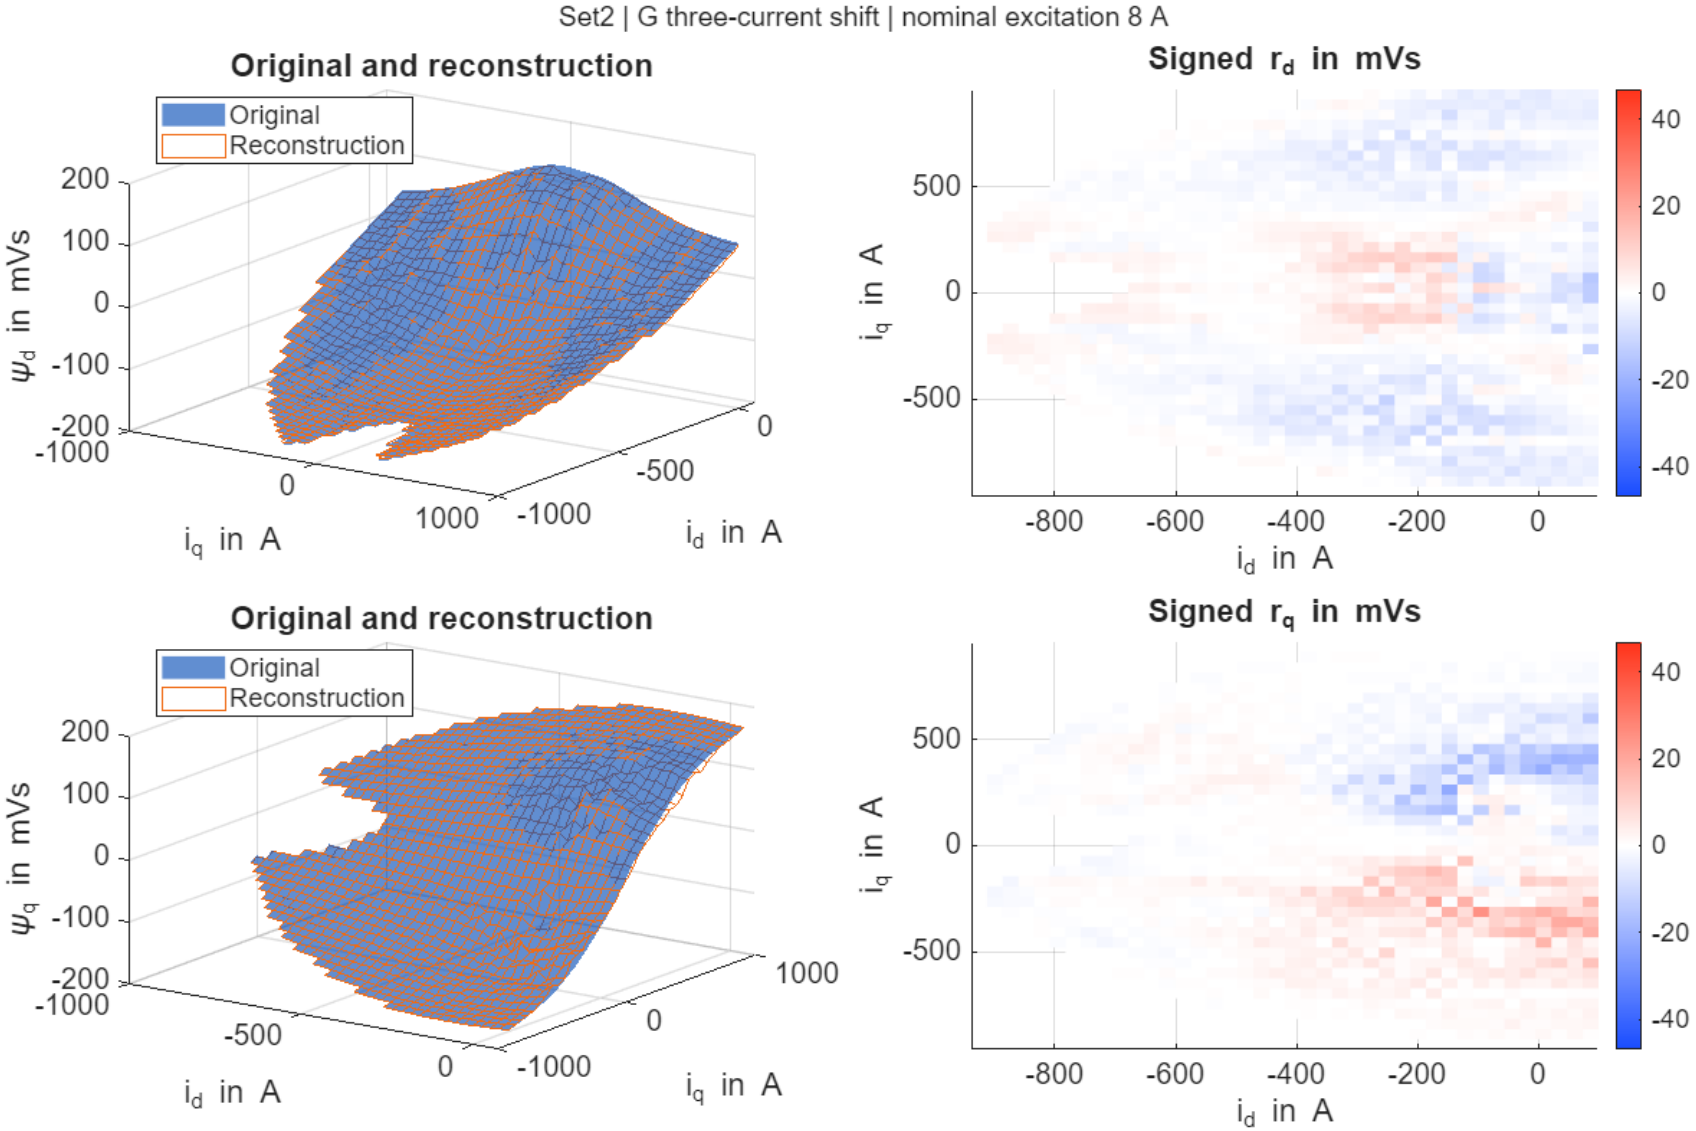

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method H, excitation 8 A

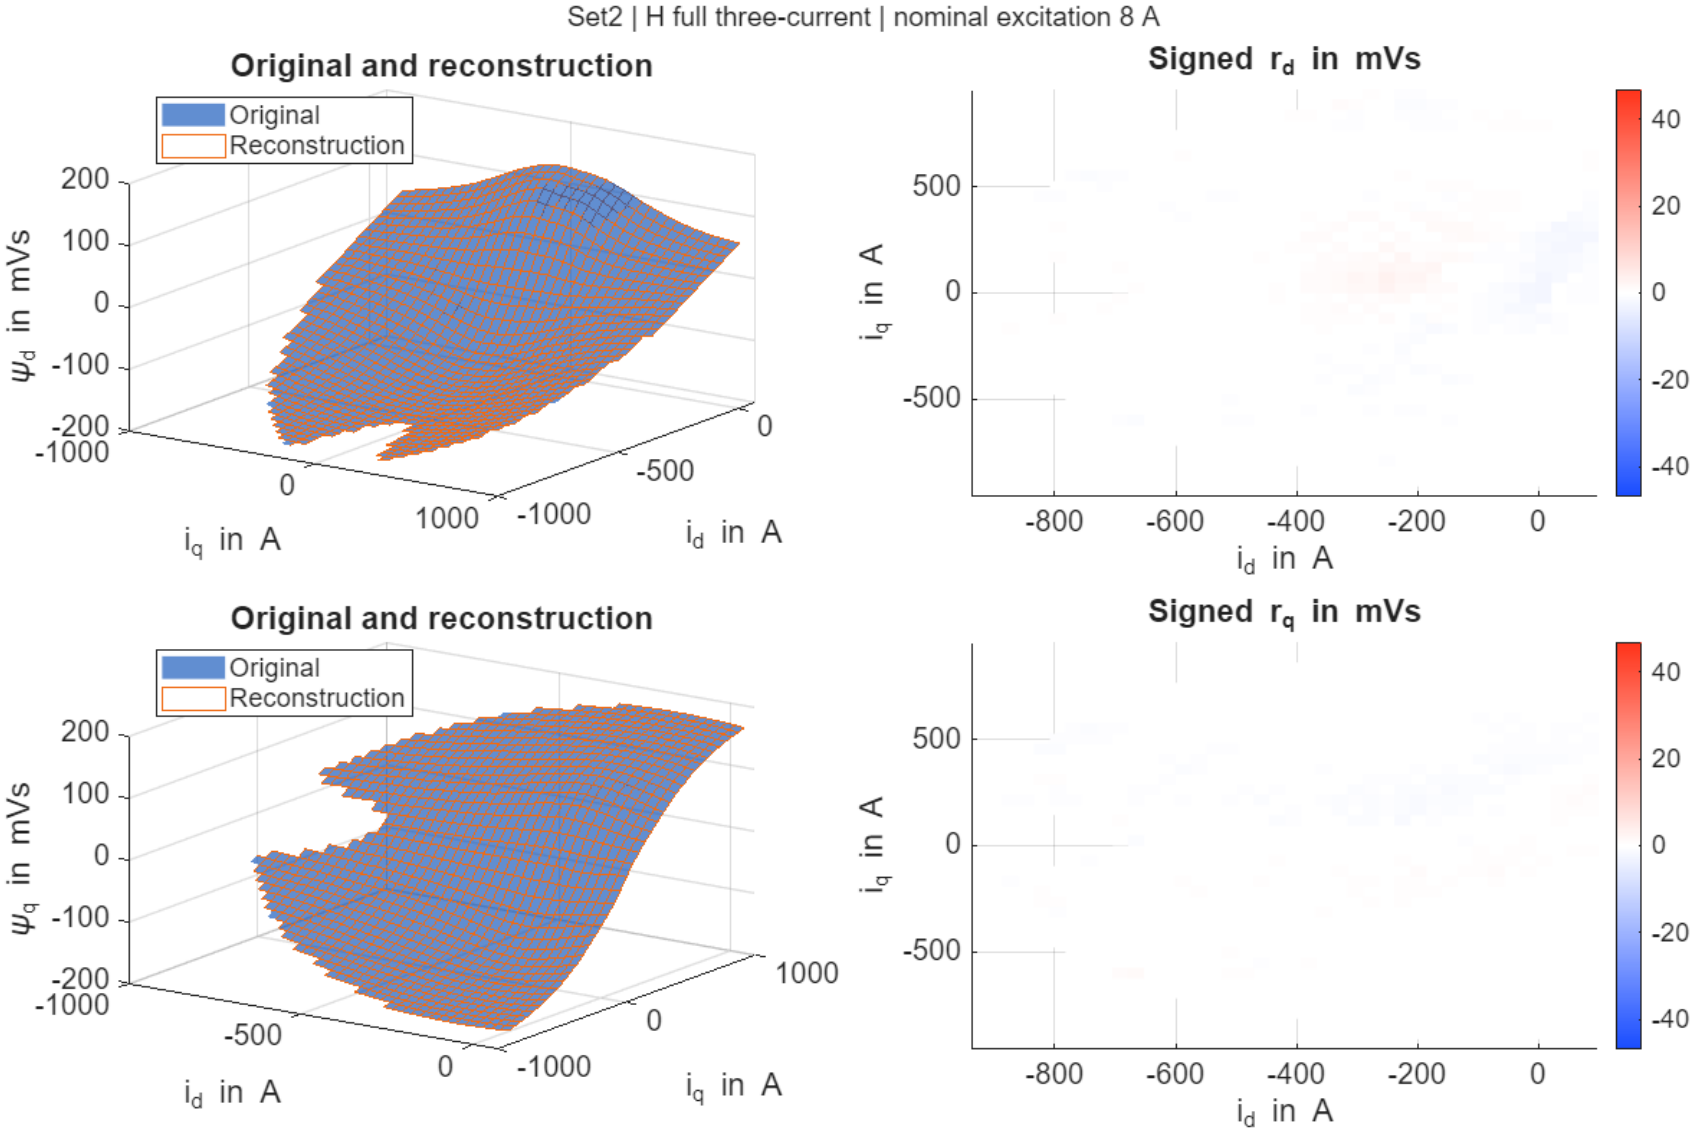

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method A, excitation 11 A

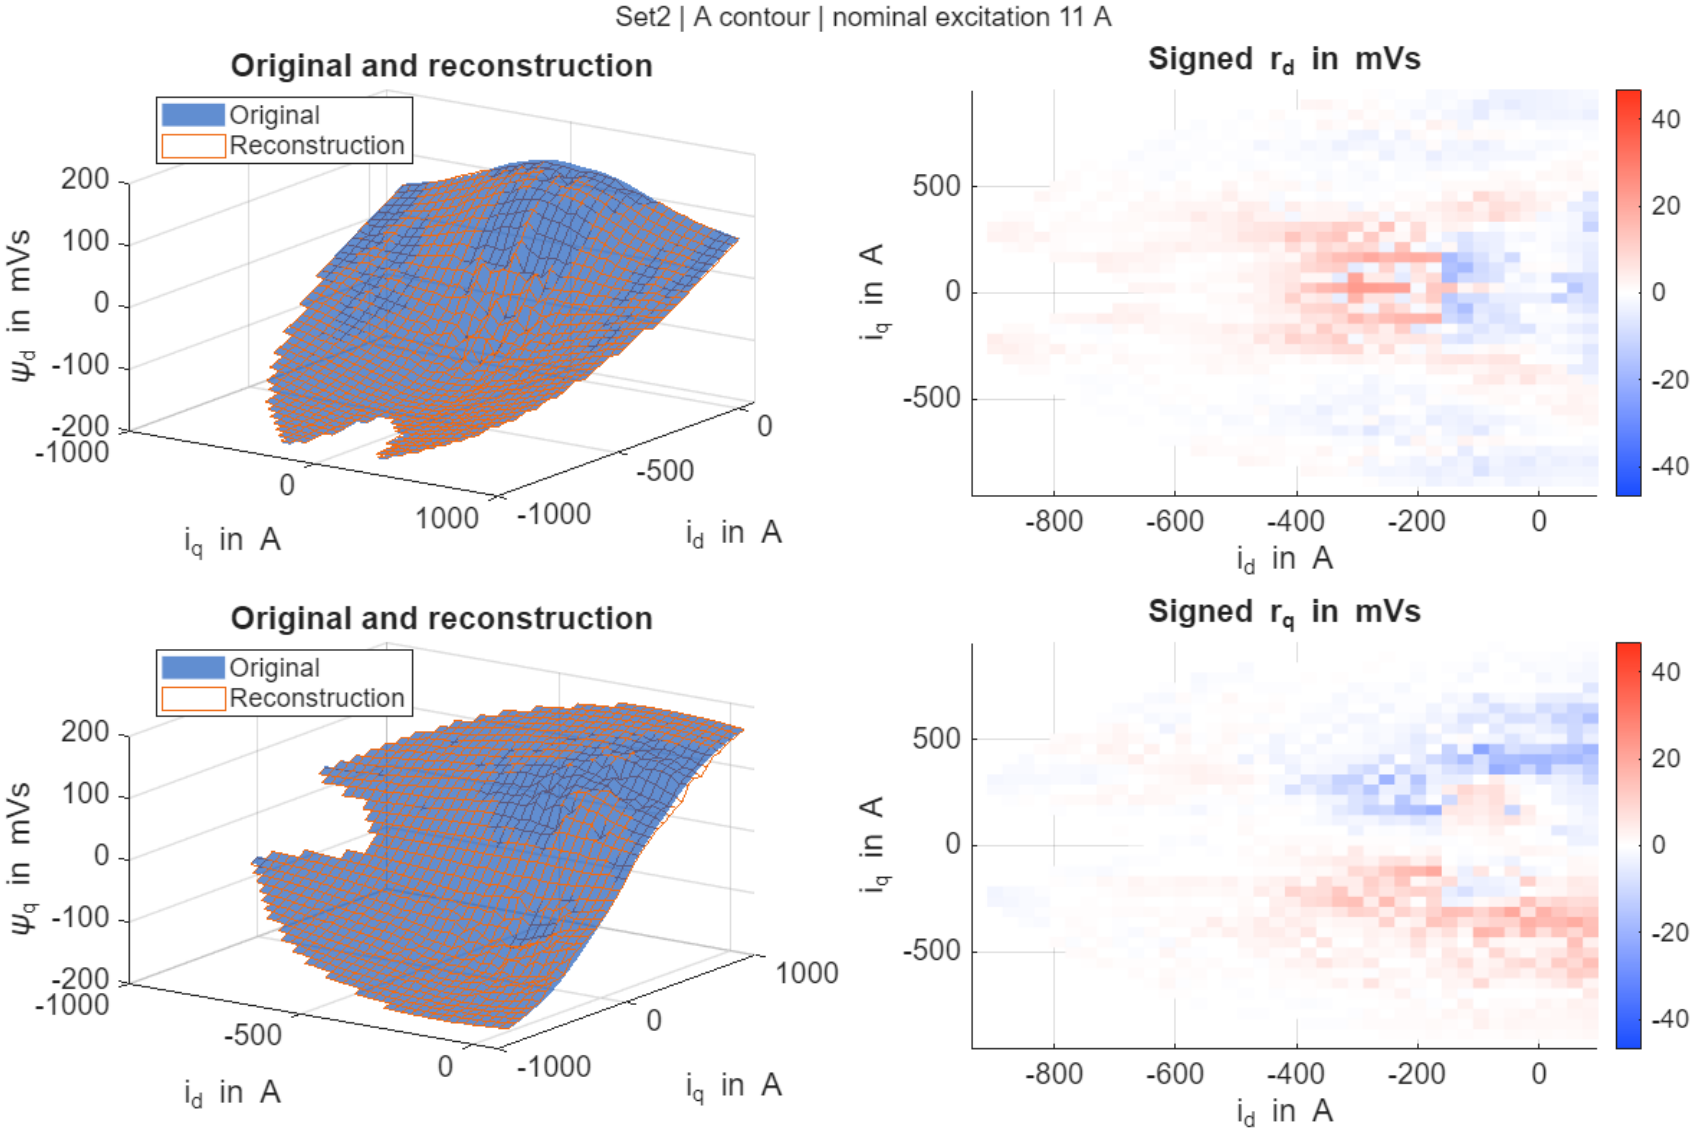

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method B, excitation 11 A

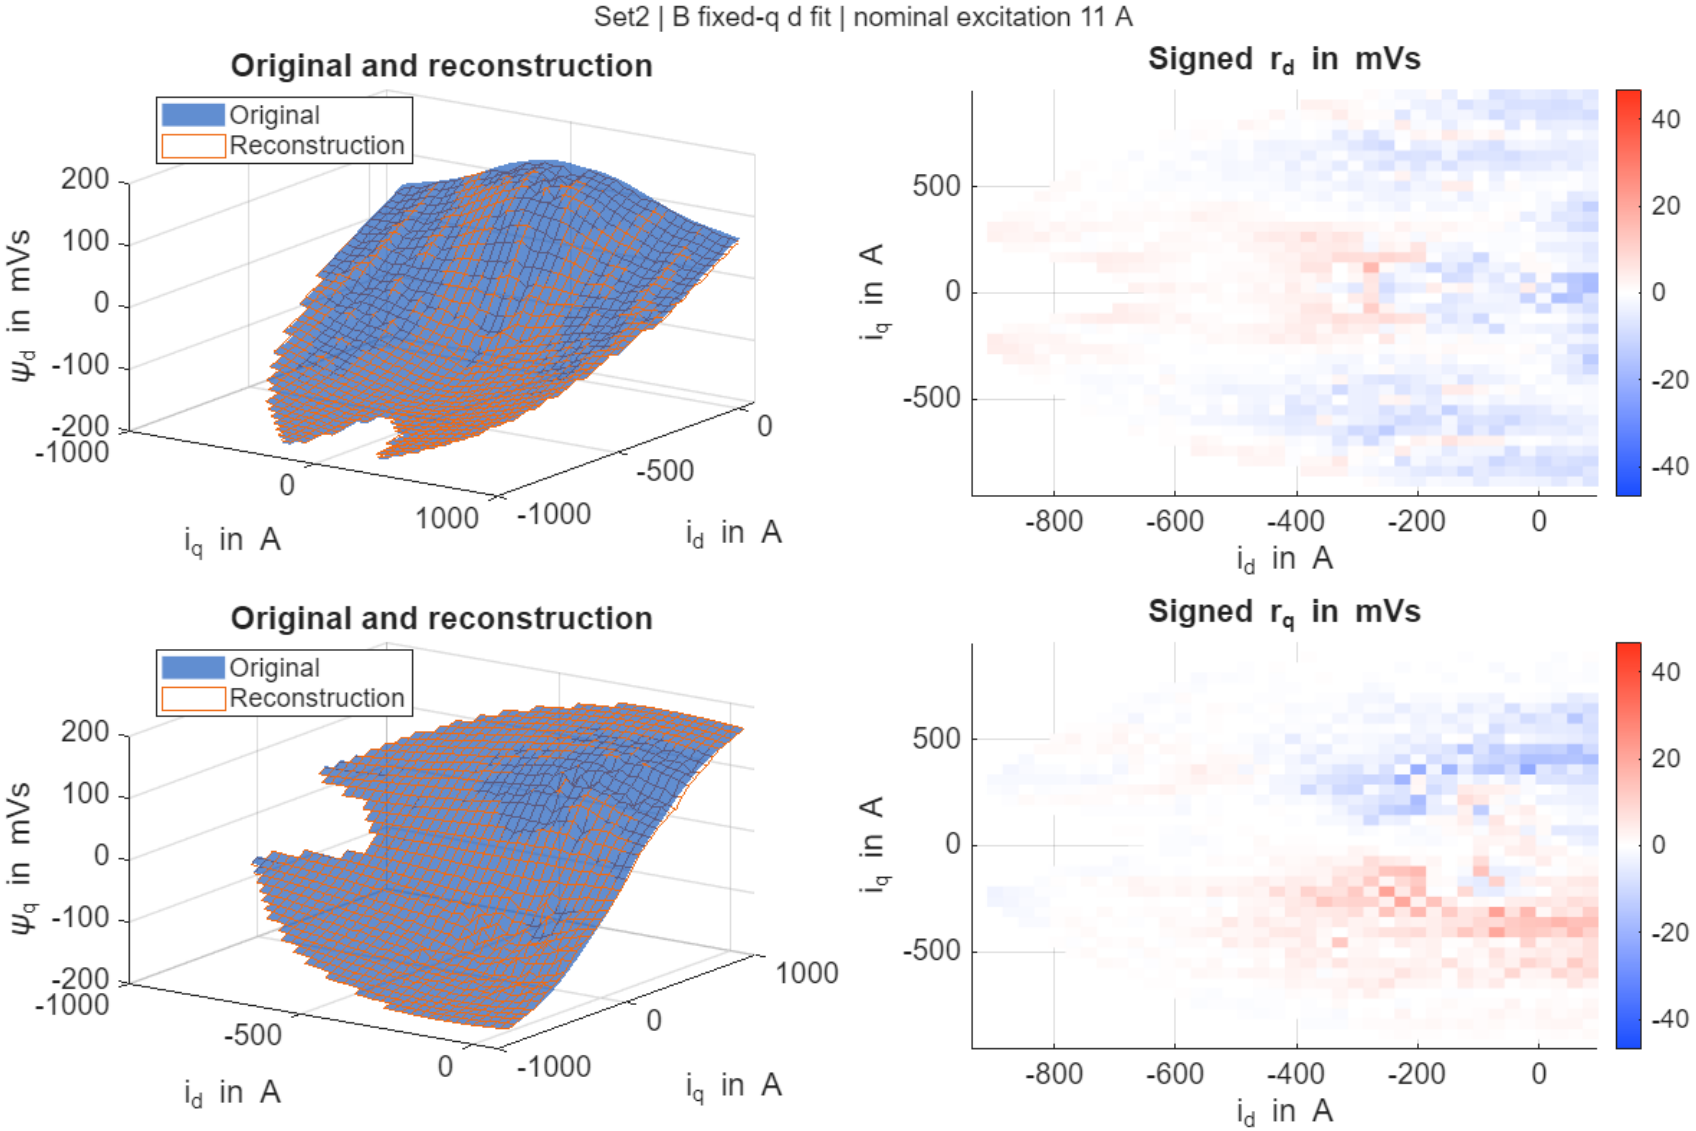

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method C, excitation 11 A

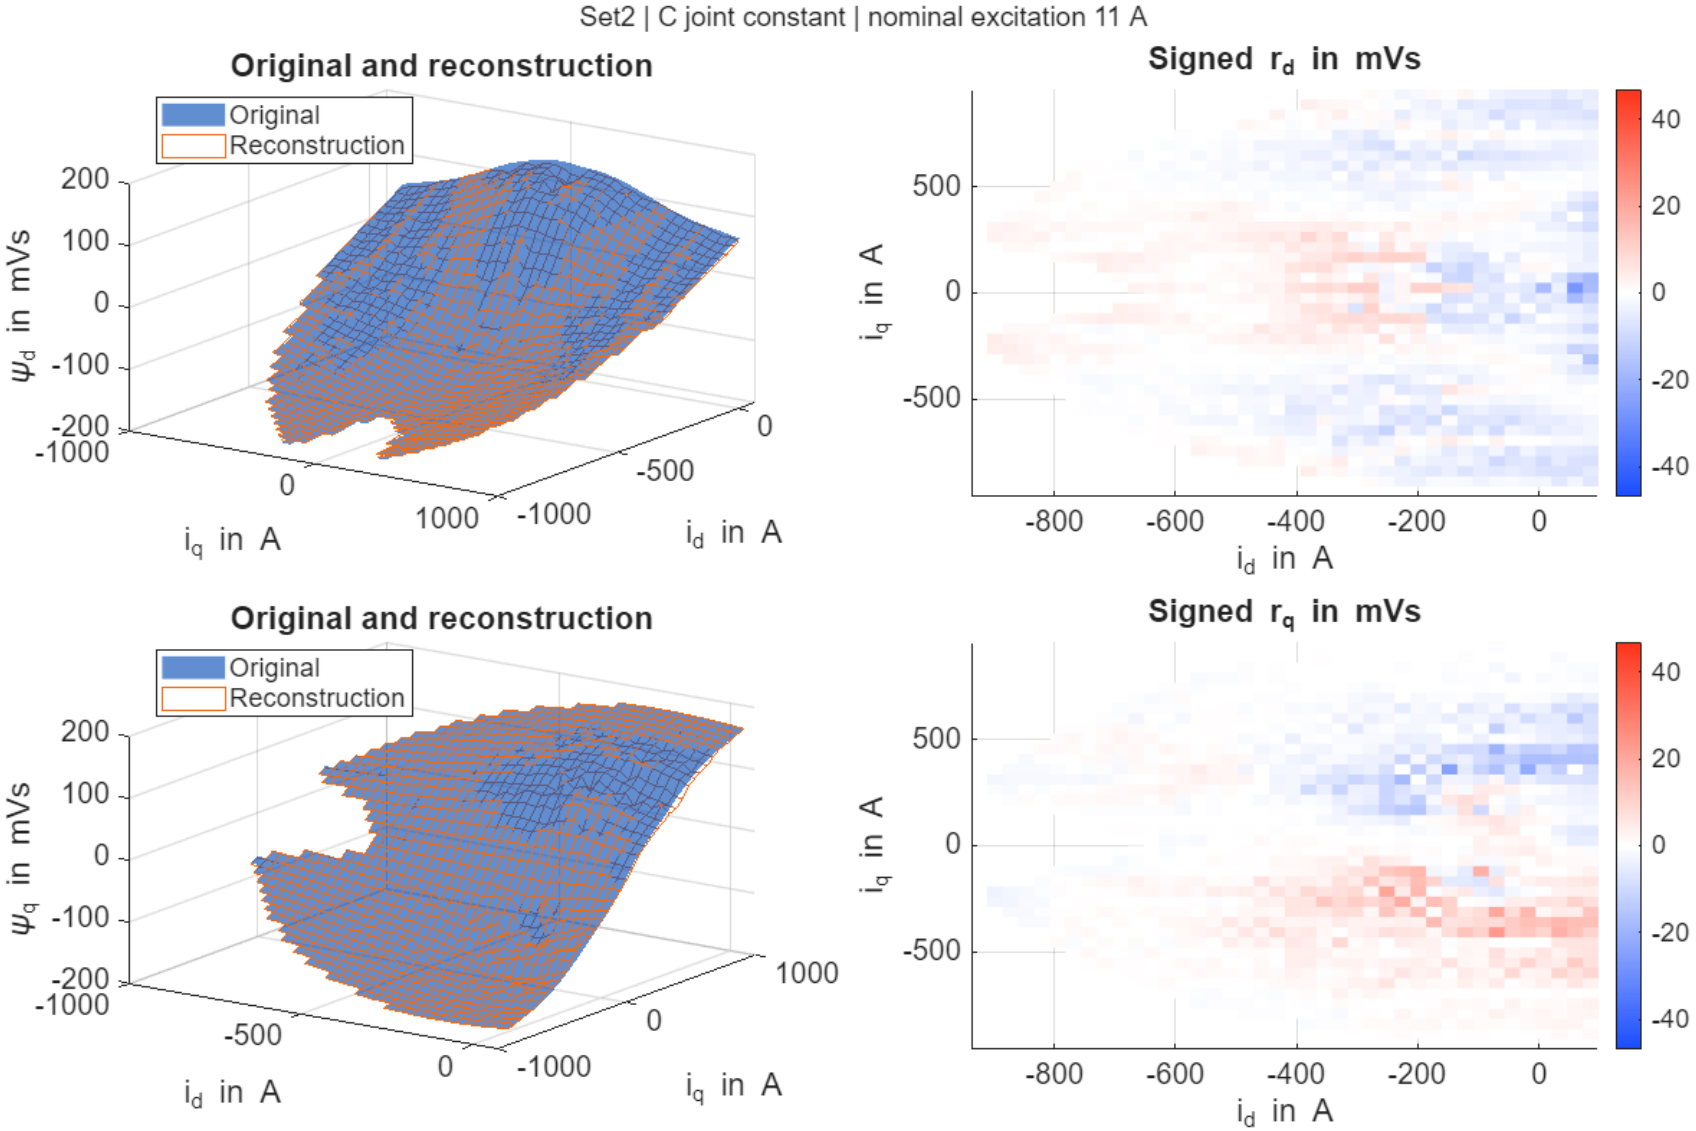

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method D, excitation 11 A

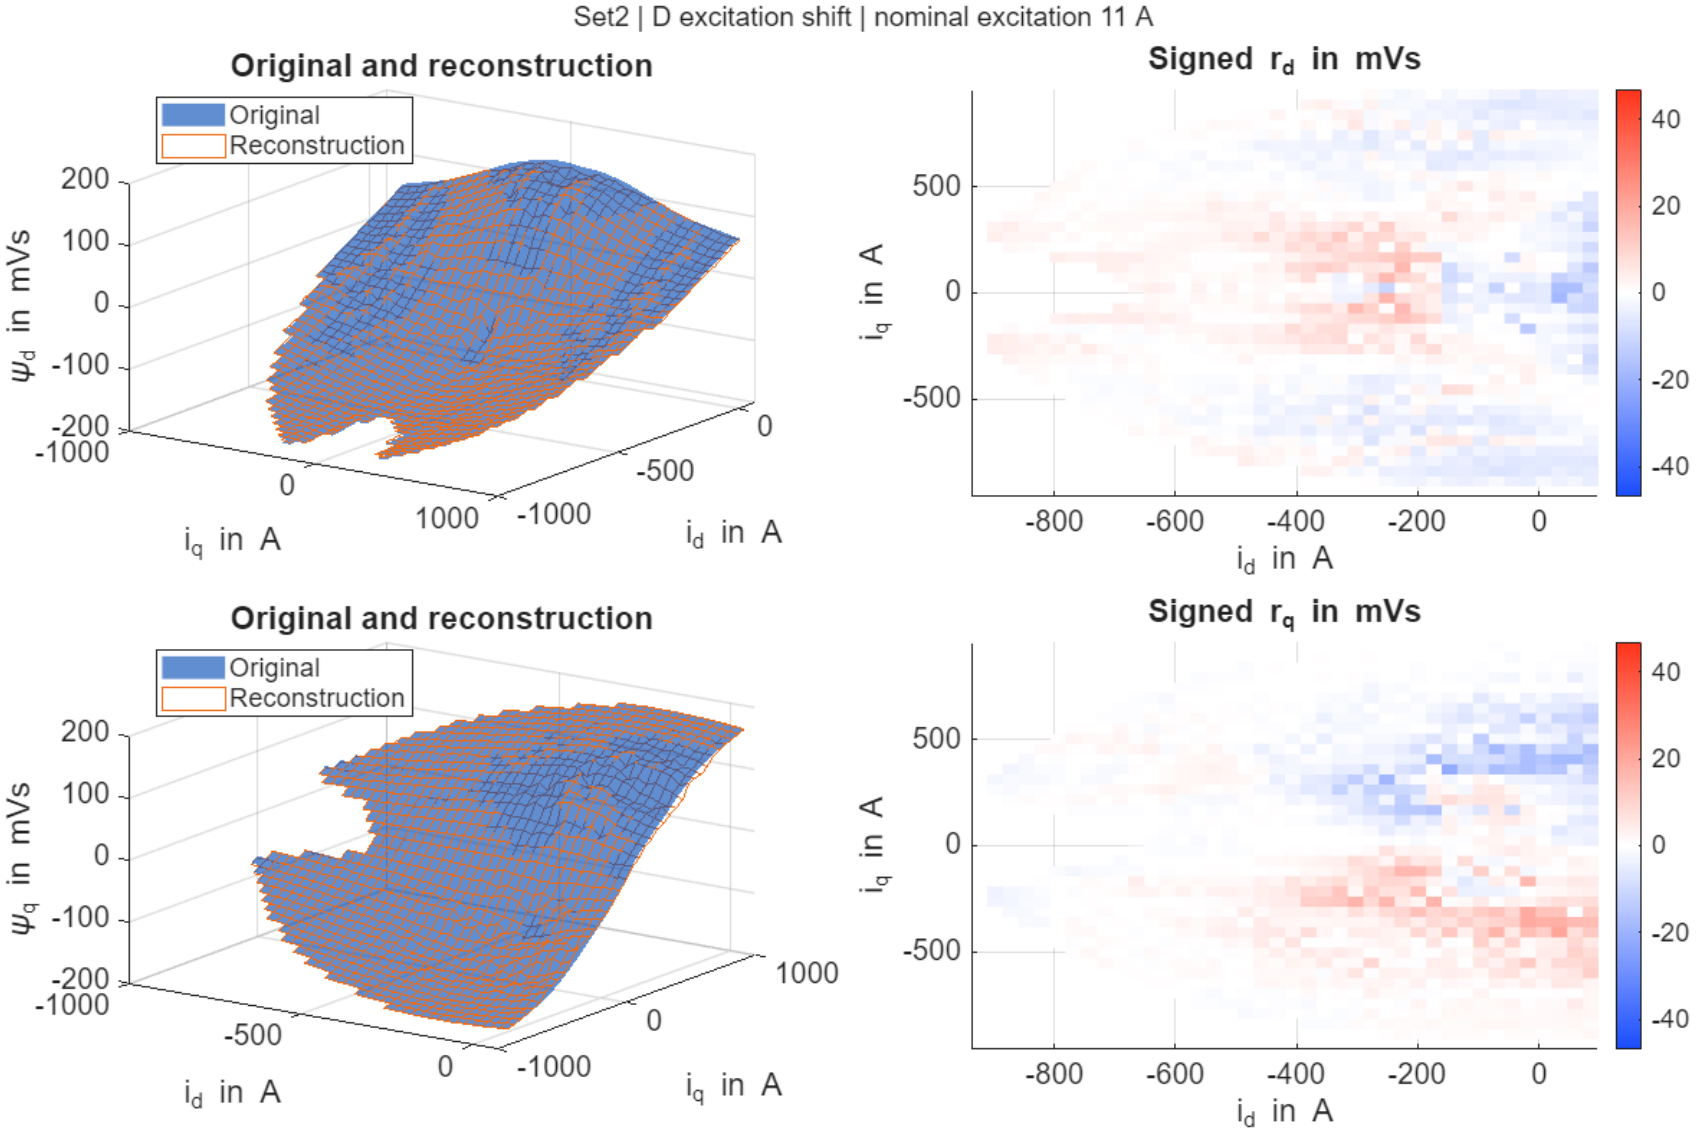

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method E, excitation 11 A

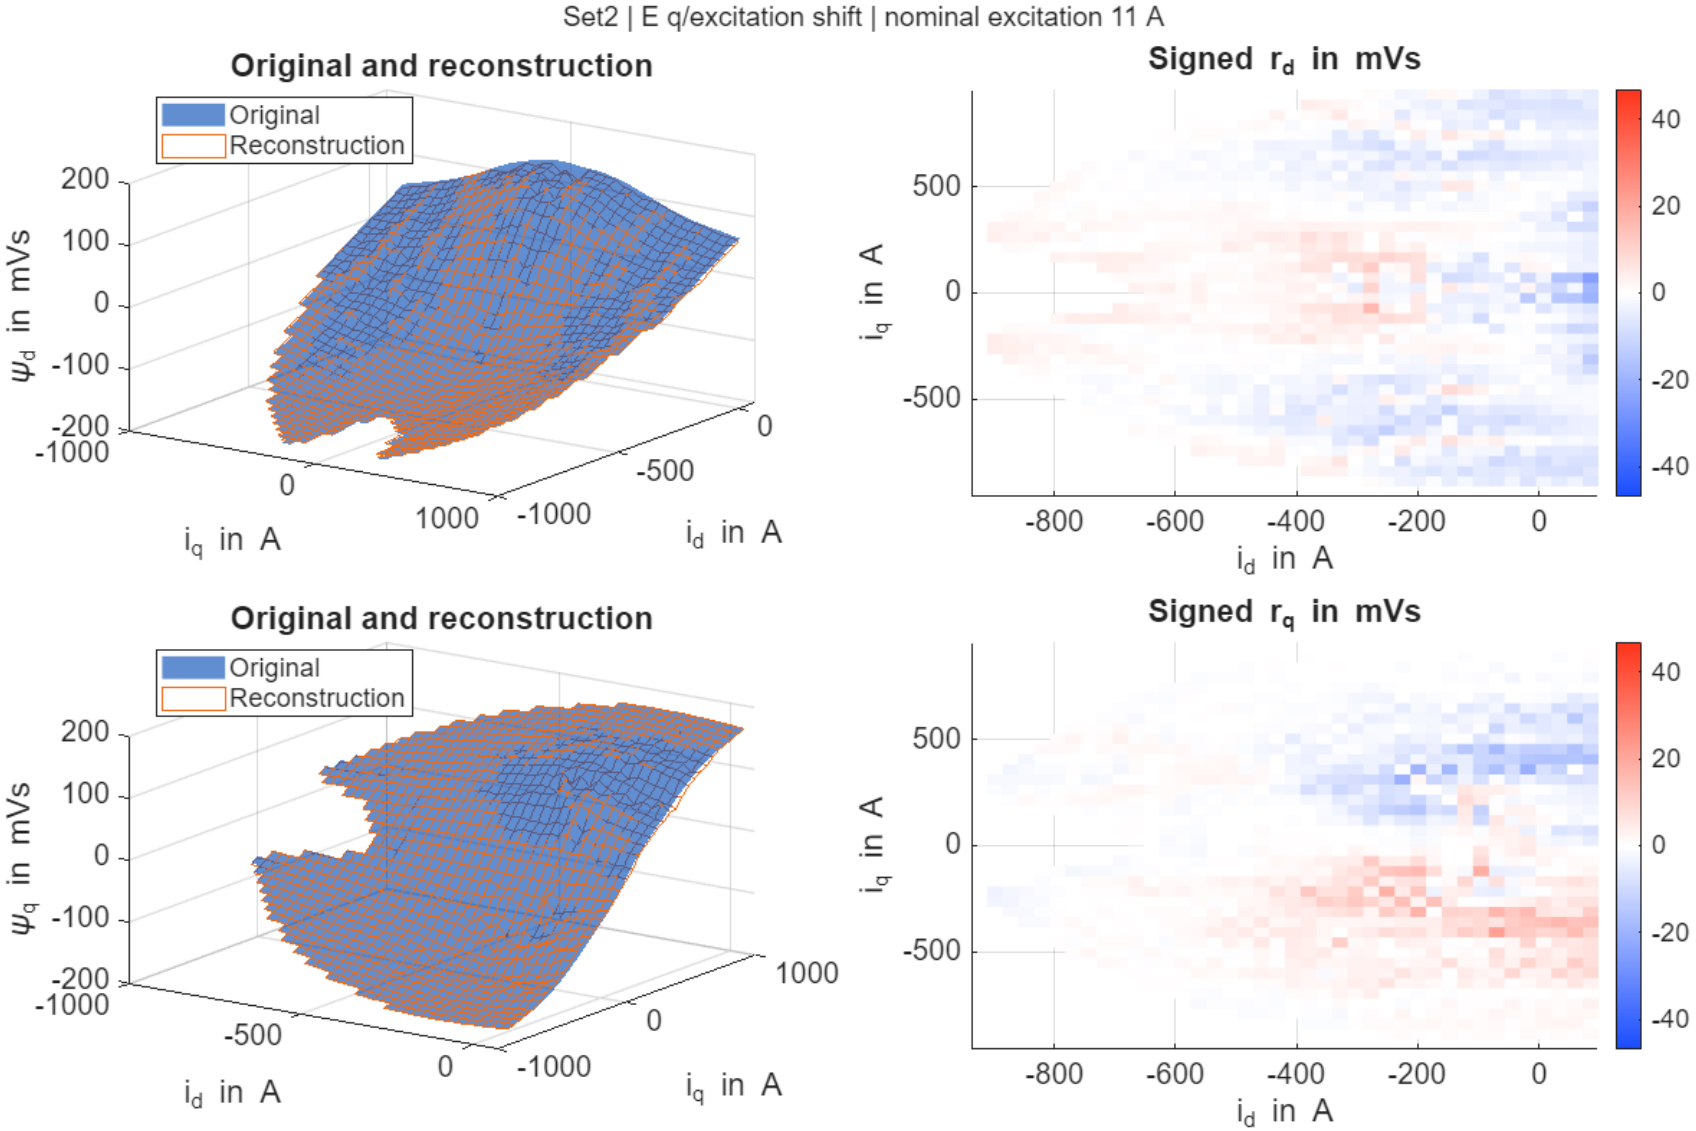

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method F, excitation 11 A

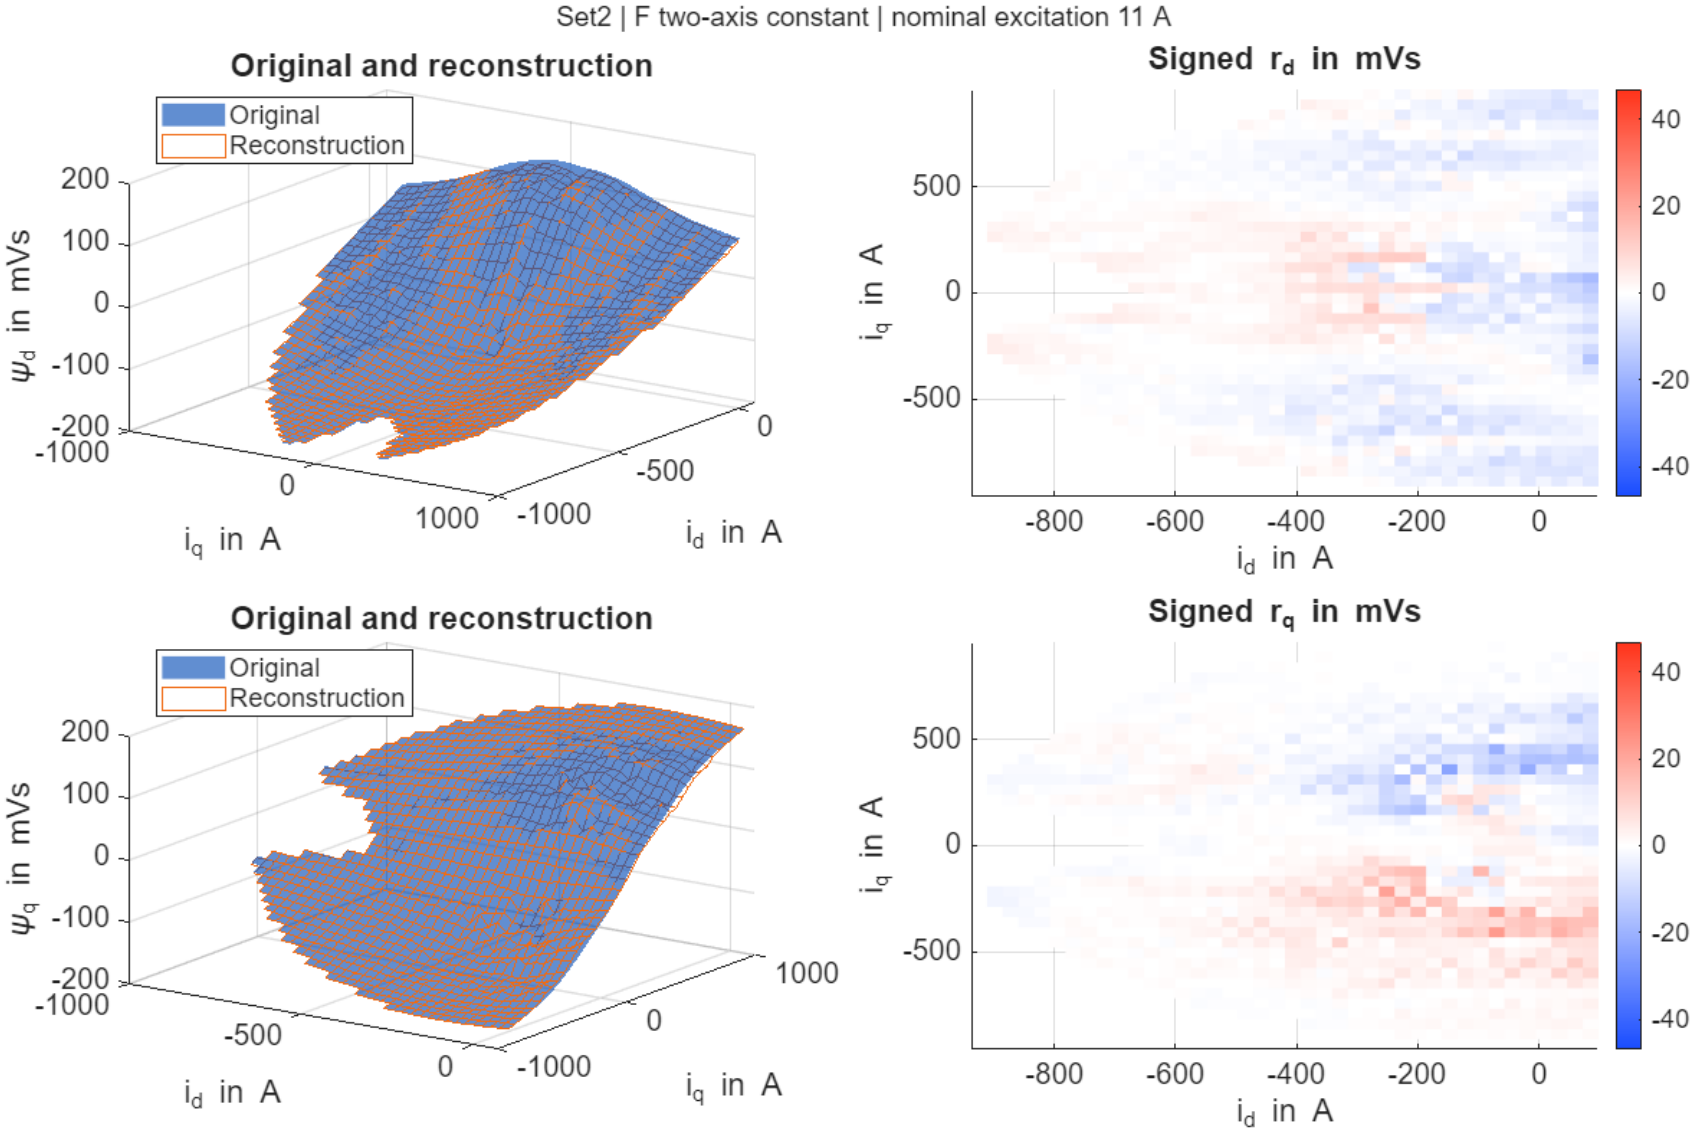

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method G, excitation 11 A

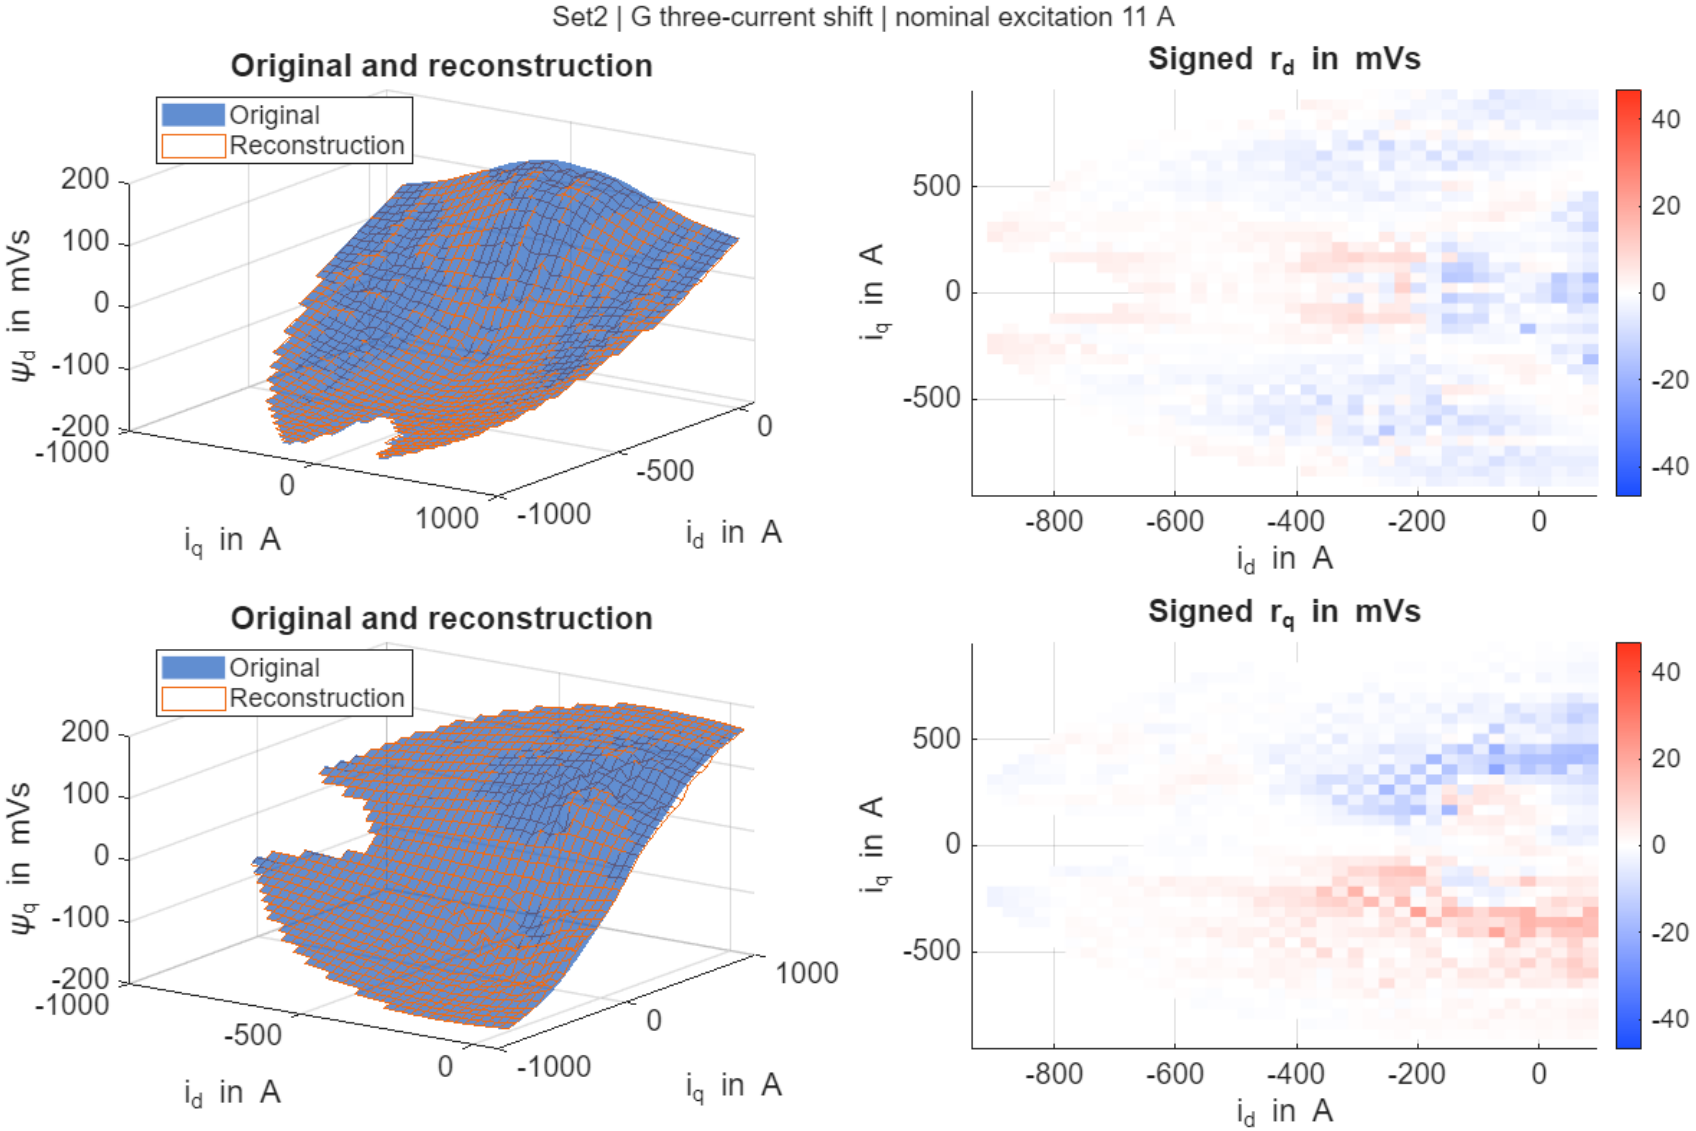

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method H, excitation 11 A

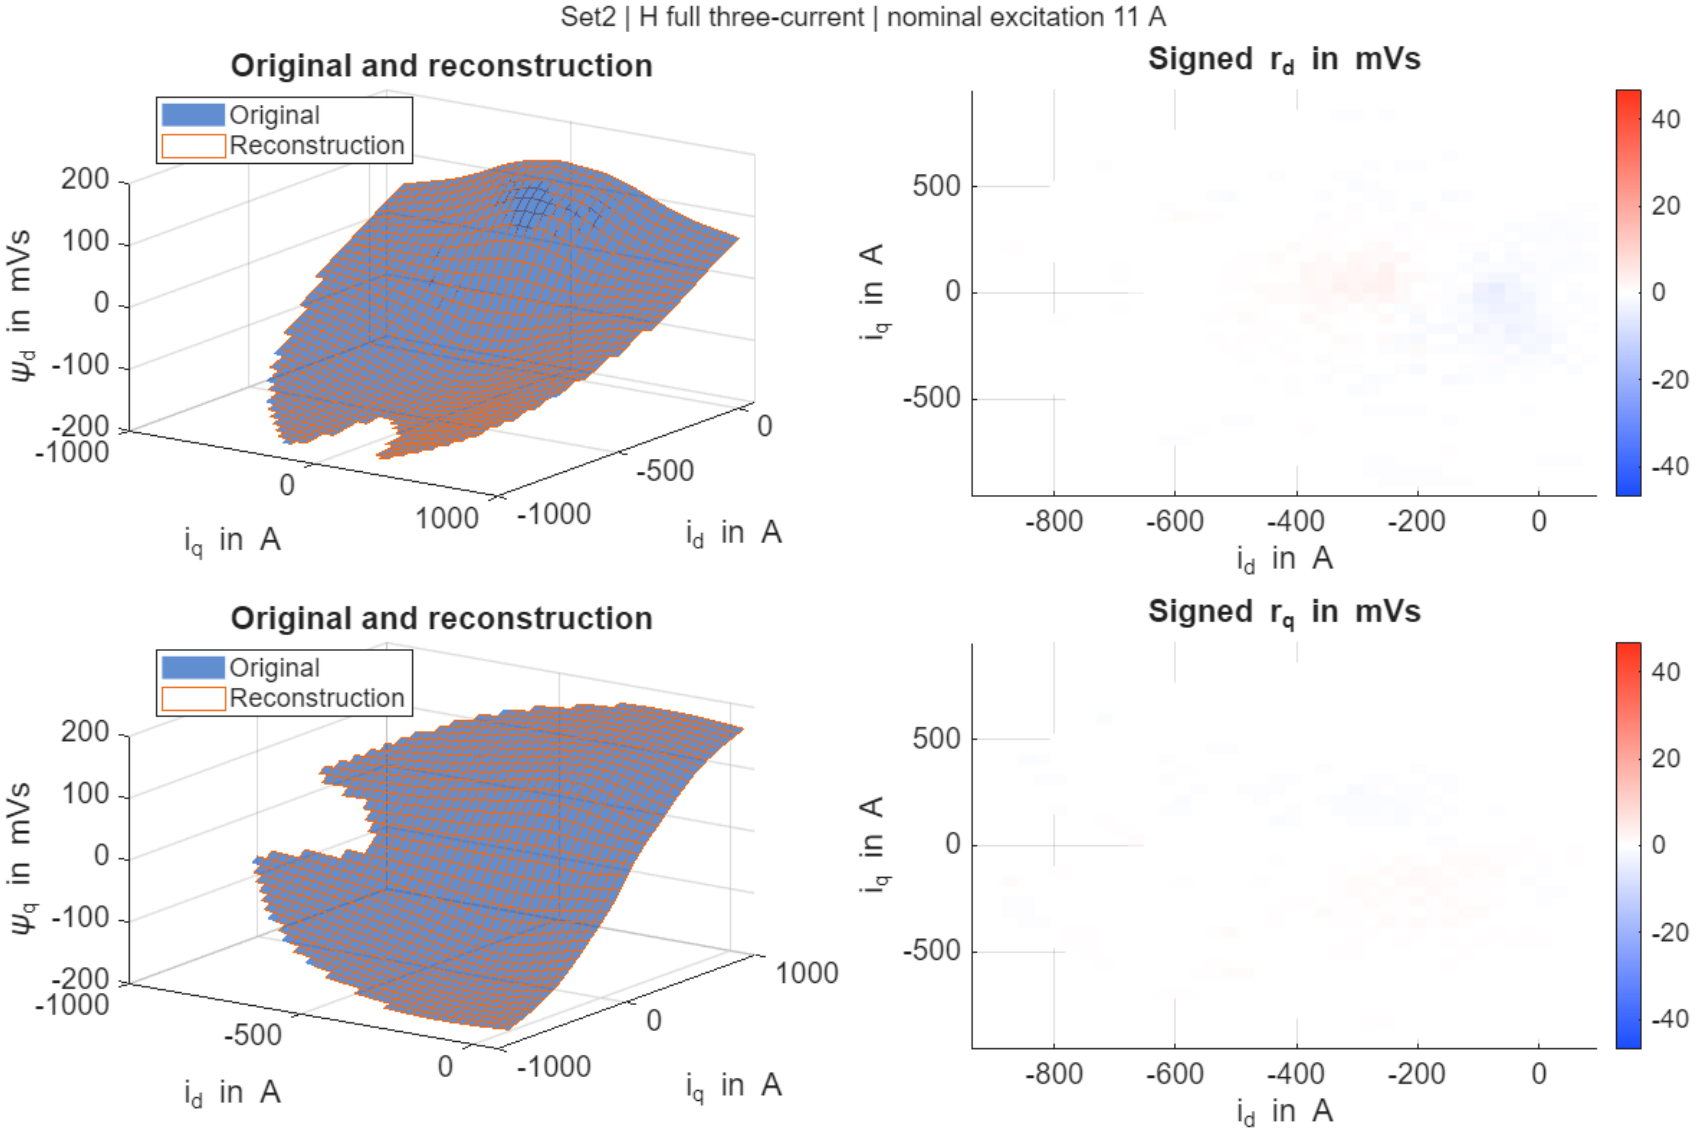

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method A, excitation 14 A

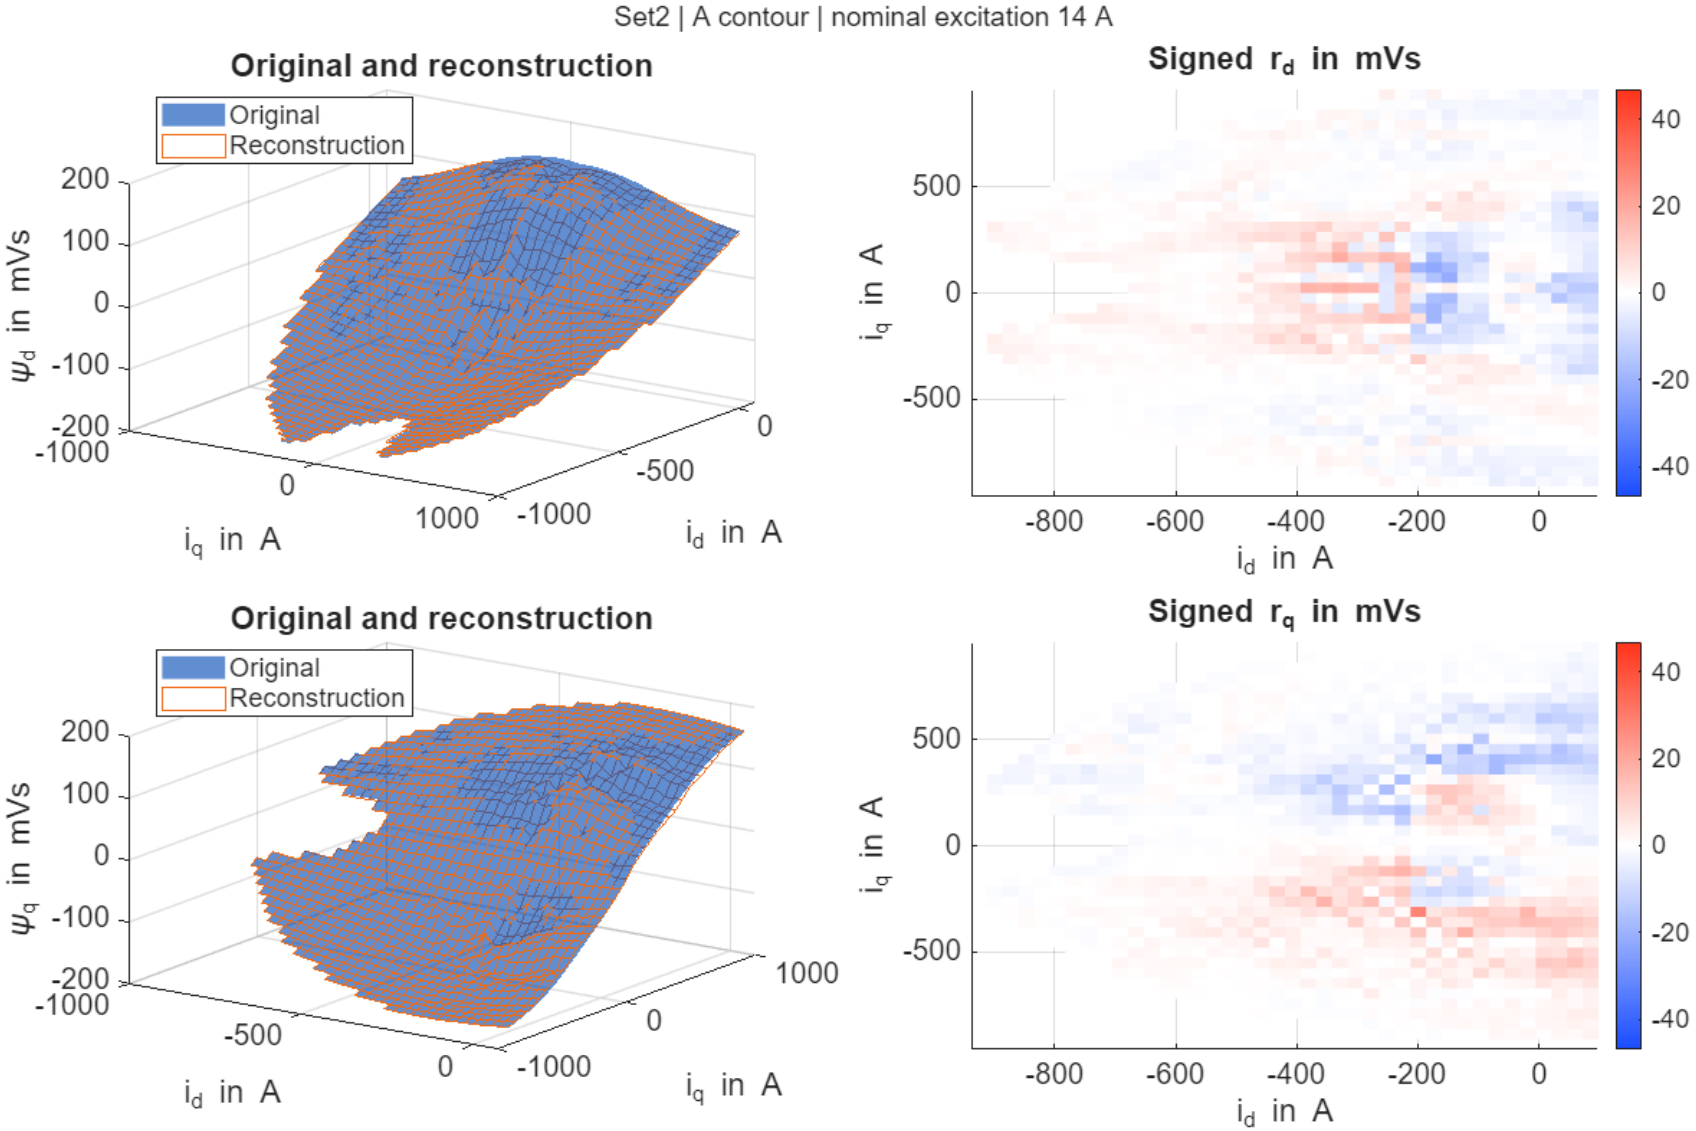

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method B, excitation 14 A

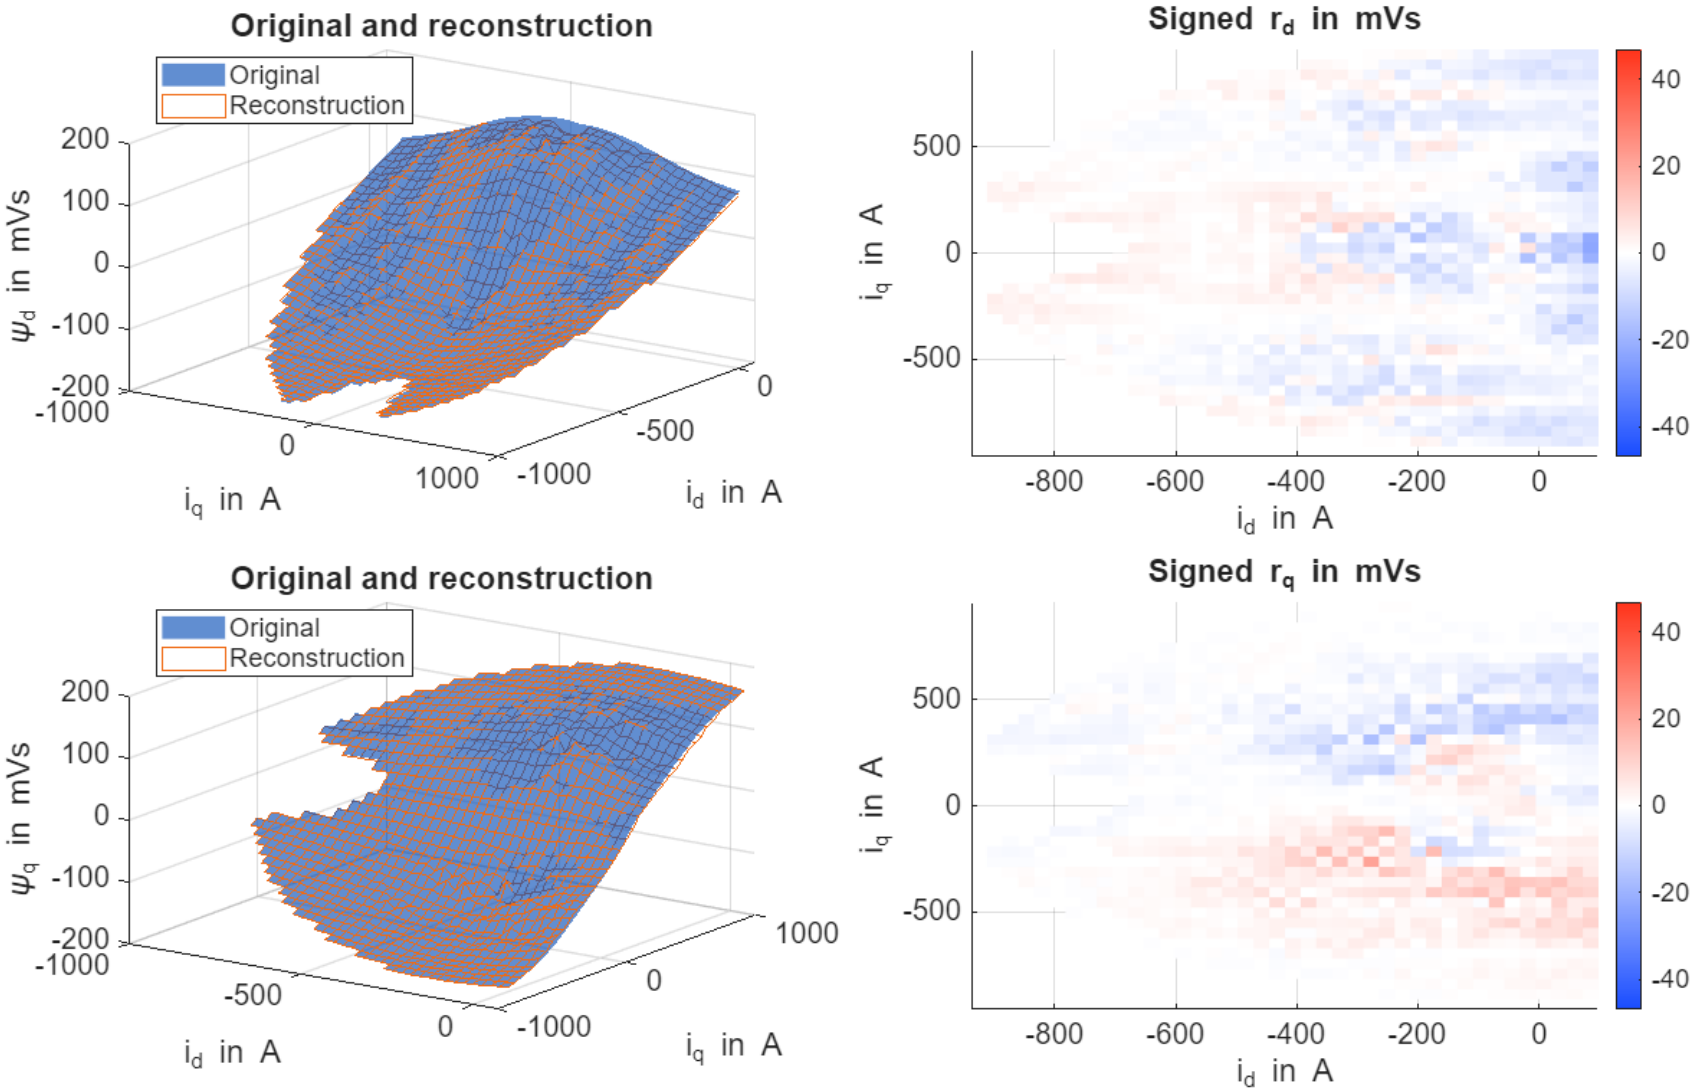

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method C, excitation 14 A

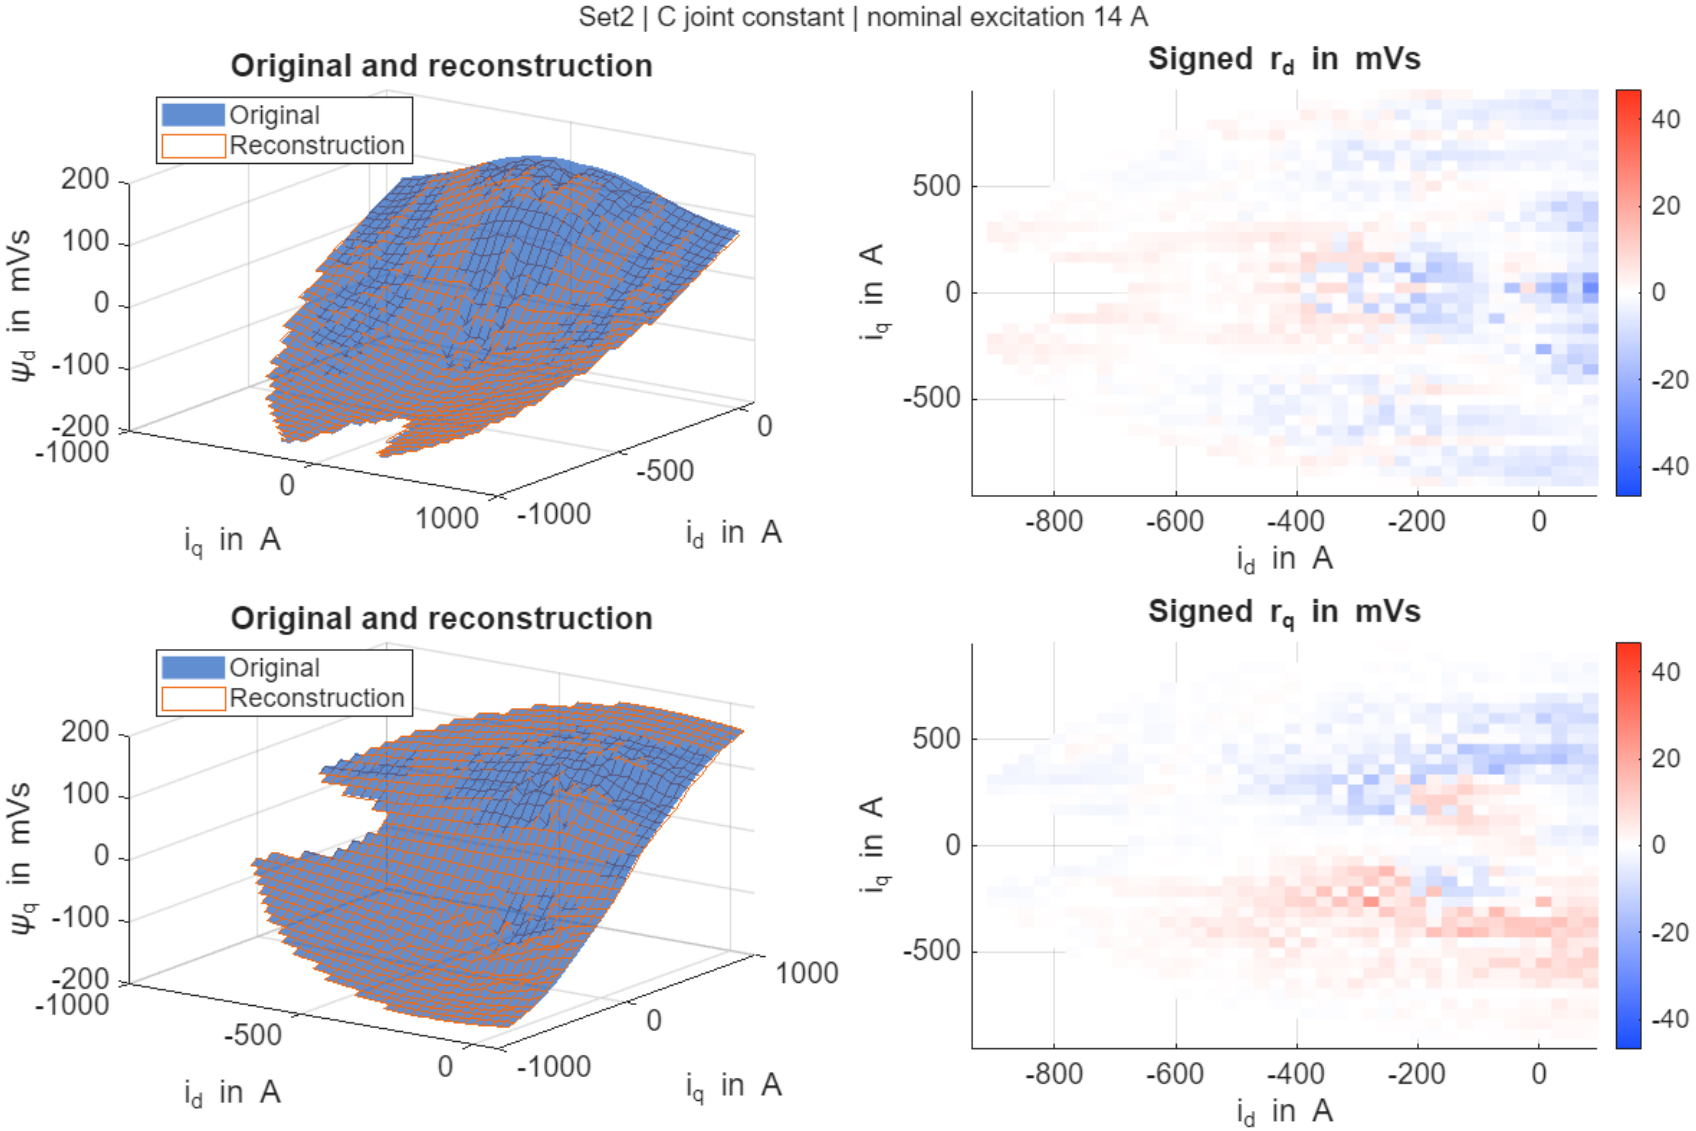

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method D, excitation 14 A

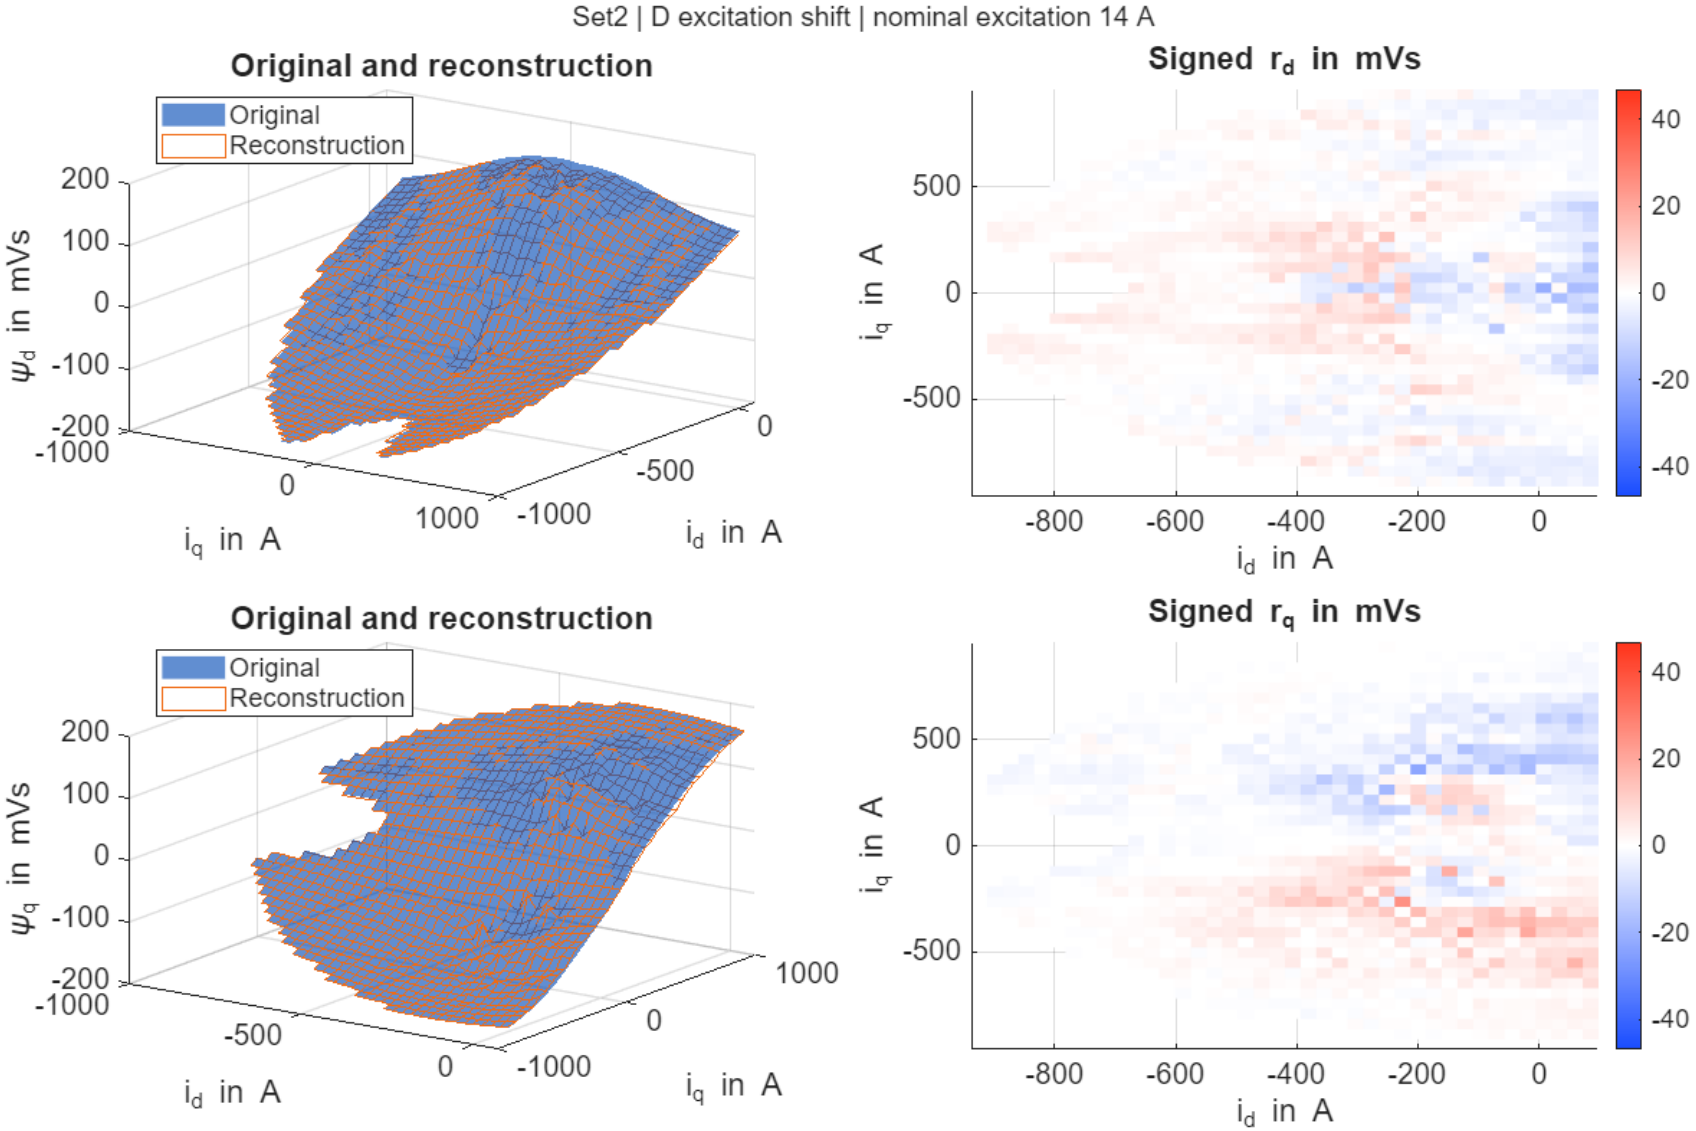

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method E, excitation 14 A

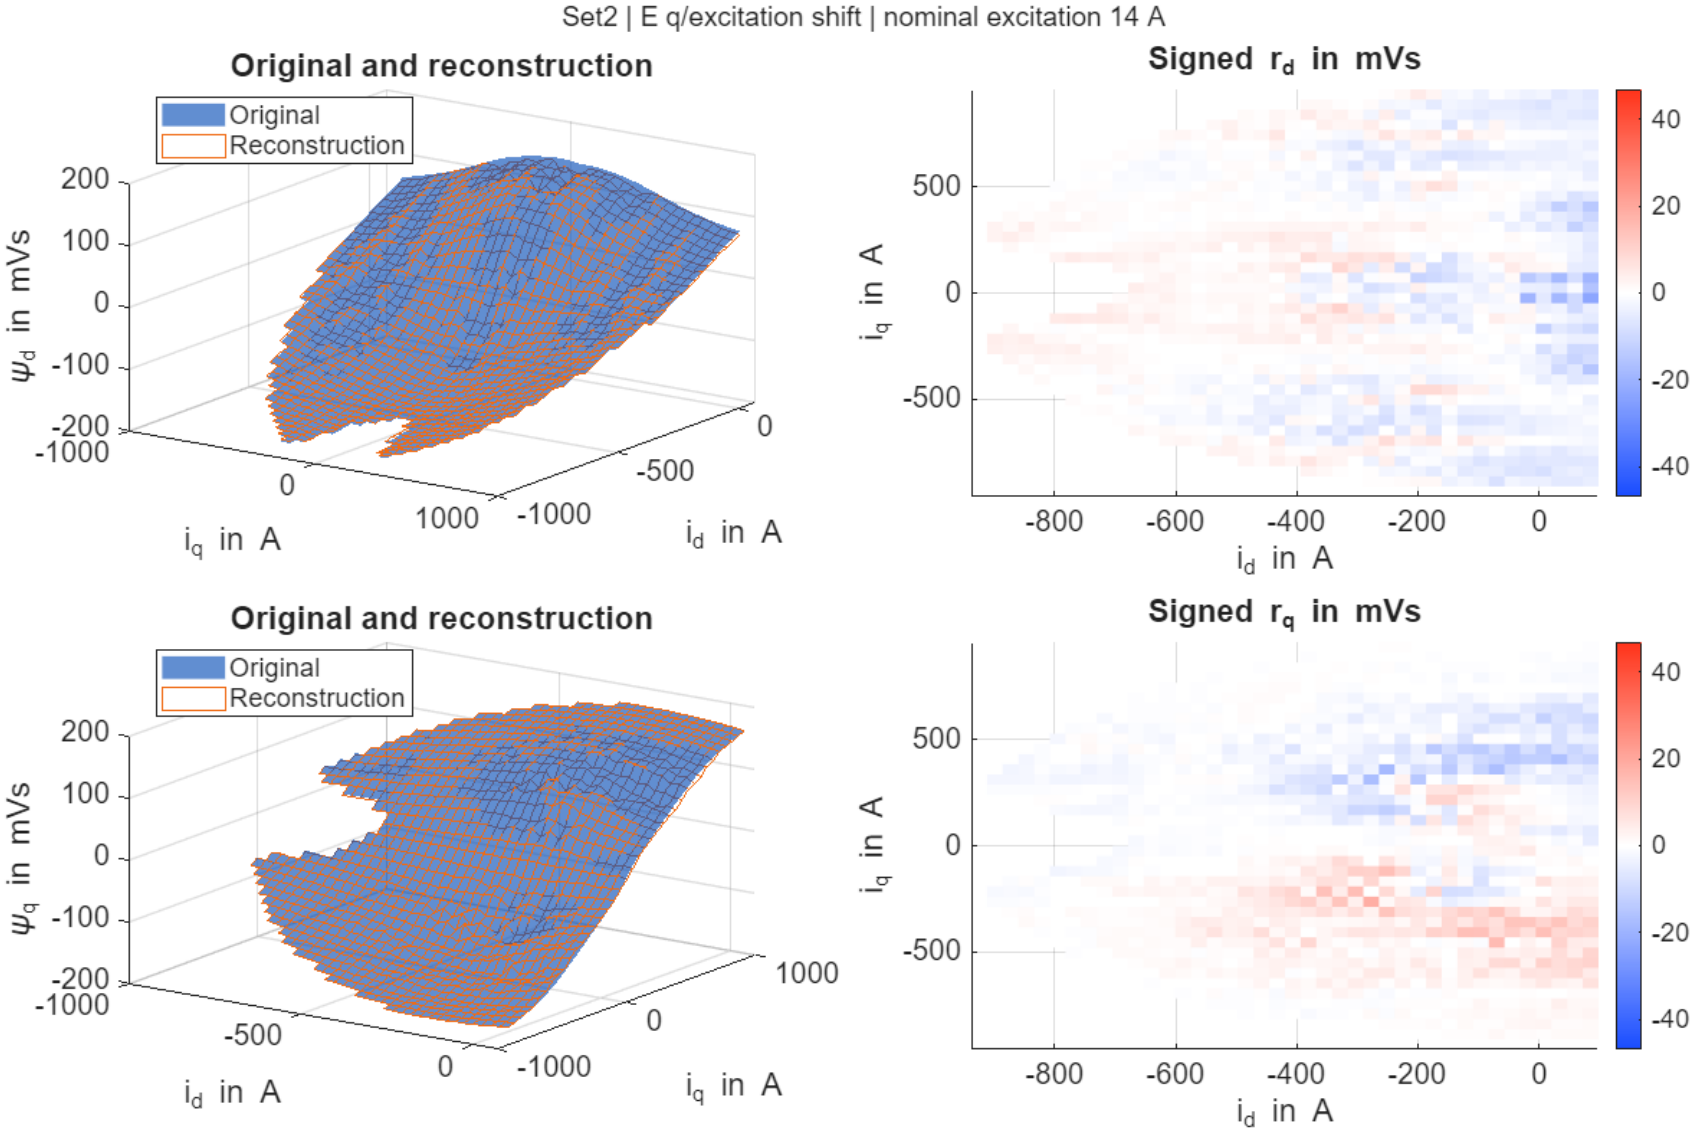

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method F, excitation 14 A

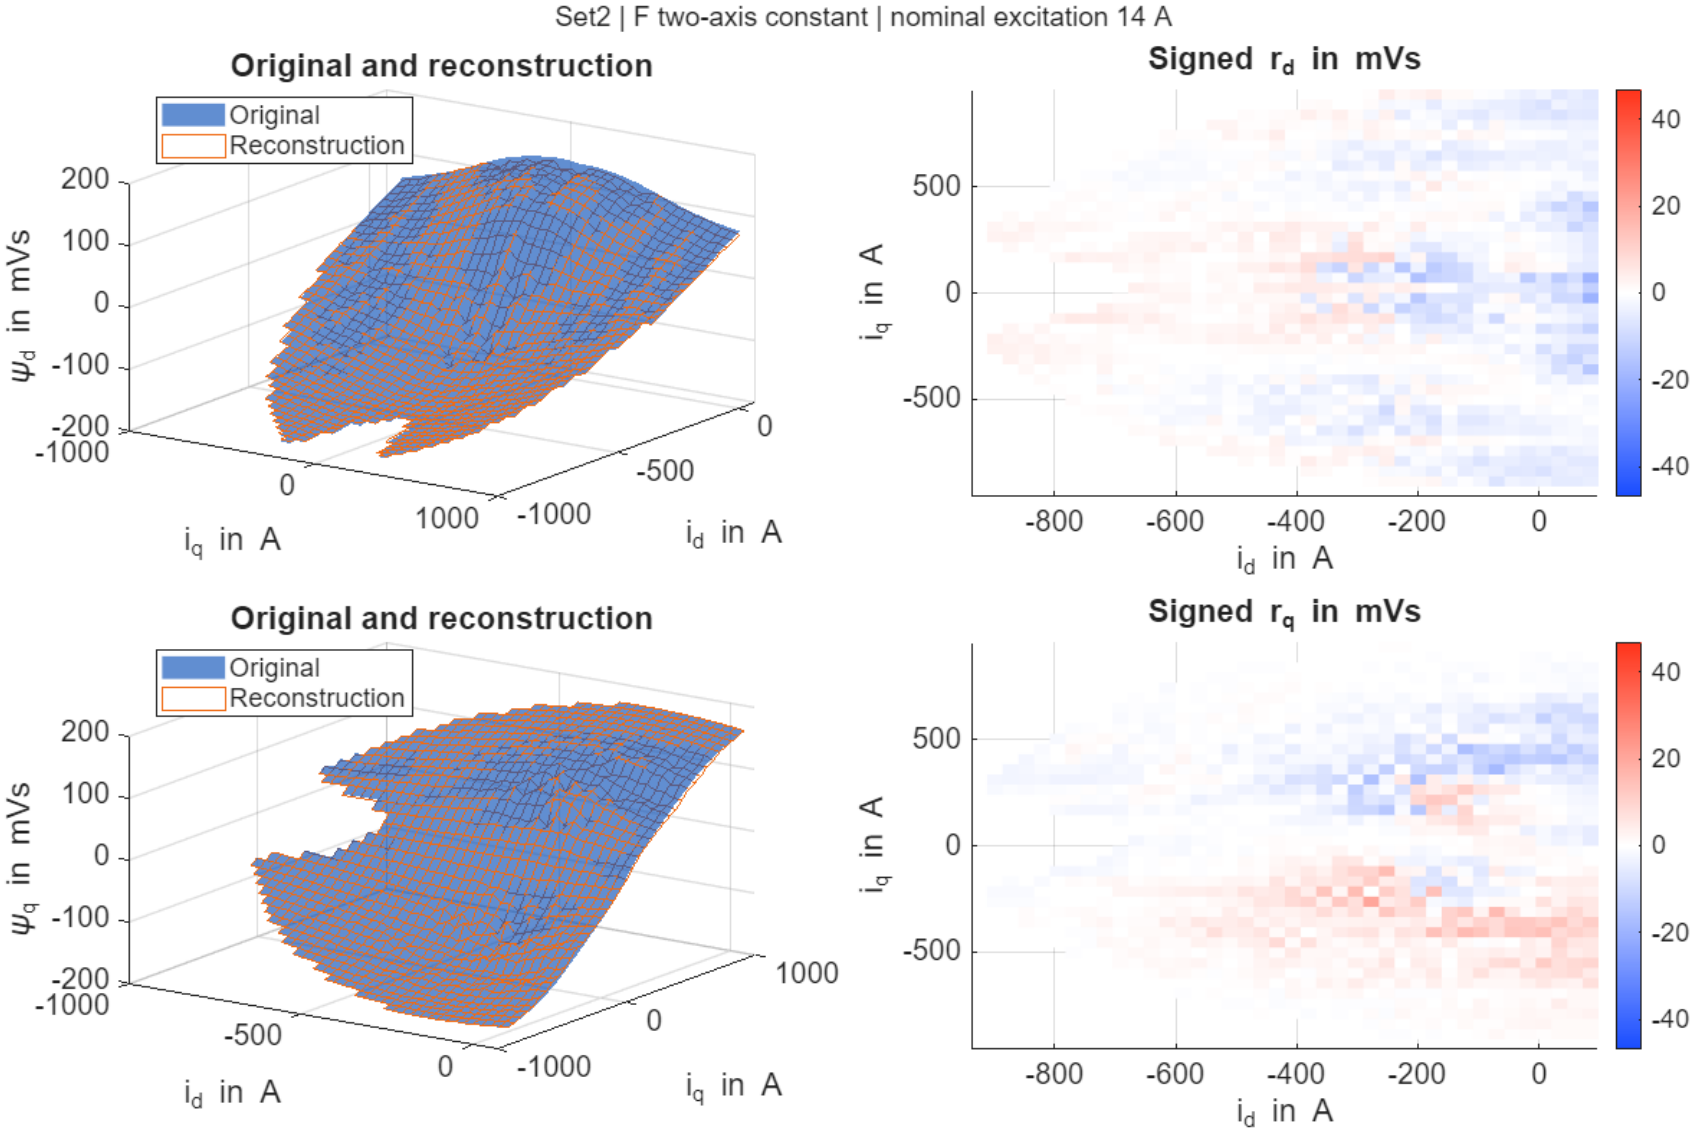

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method G, excitation 14 A

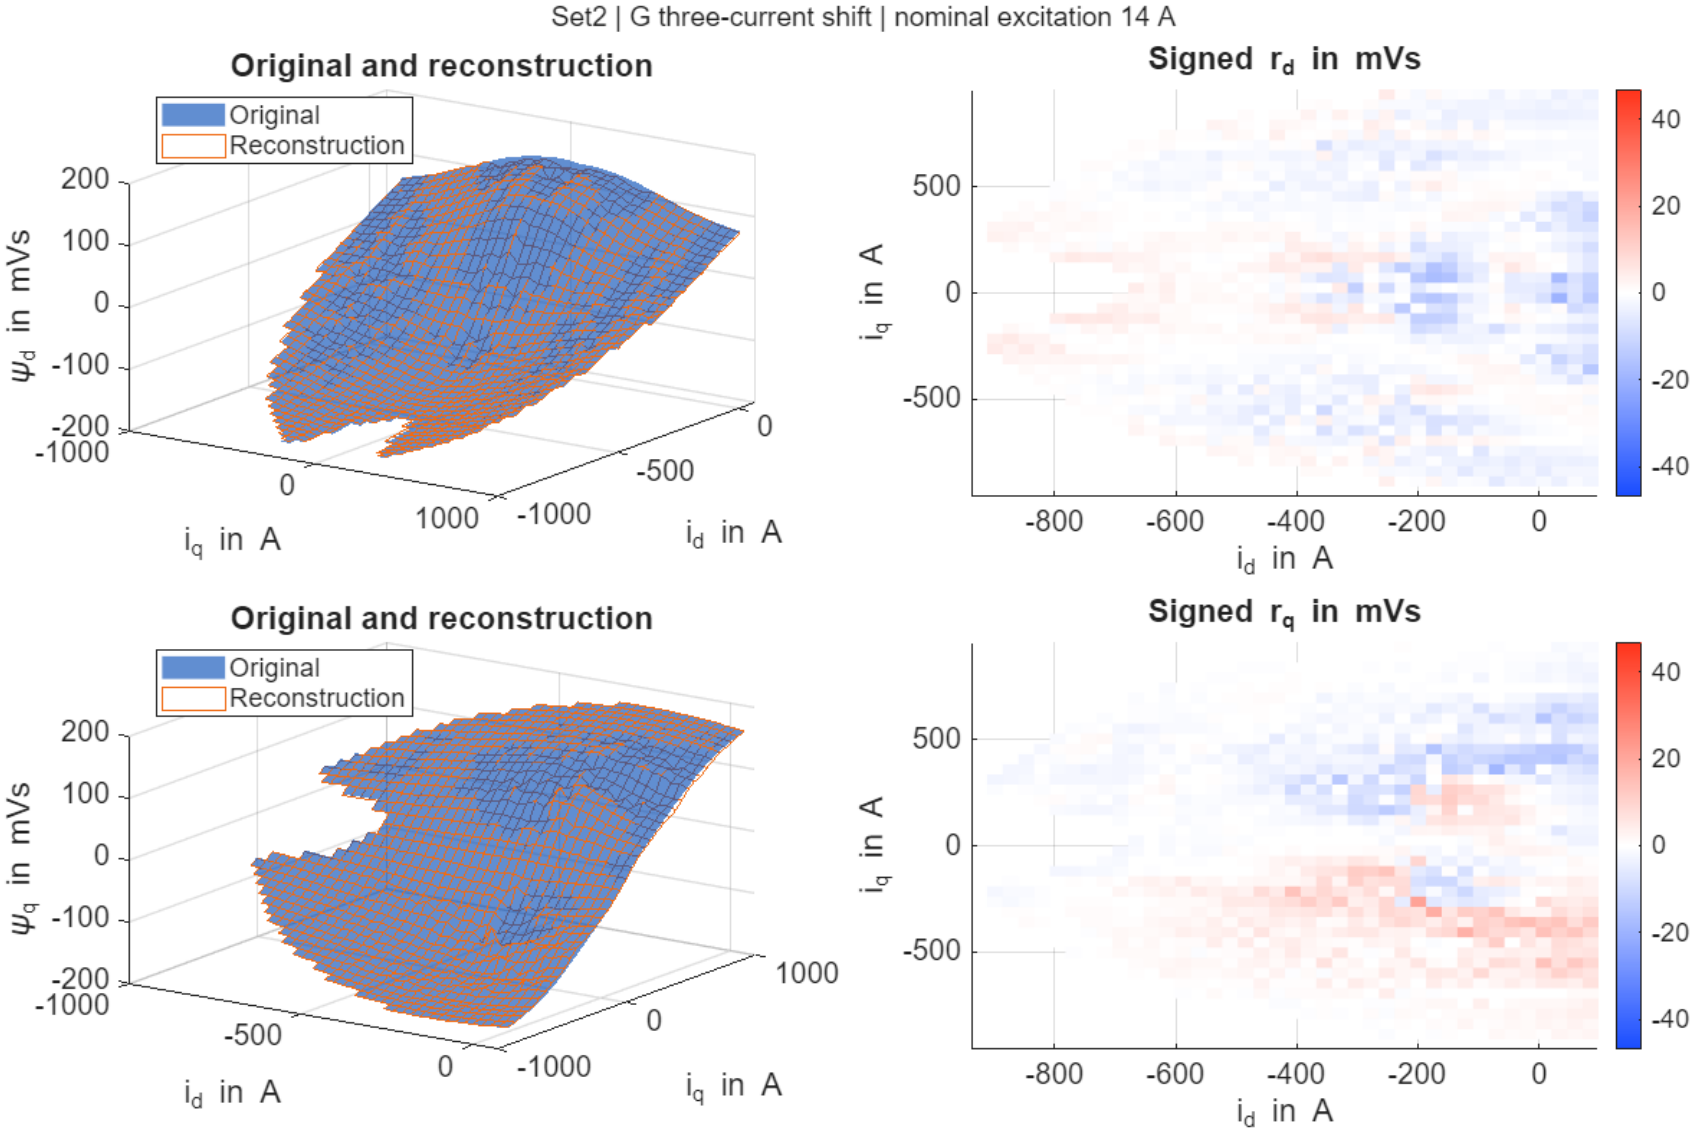

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method H, excitation 14 A

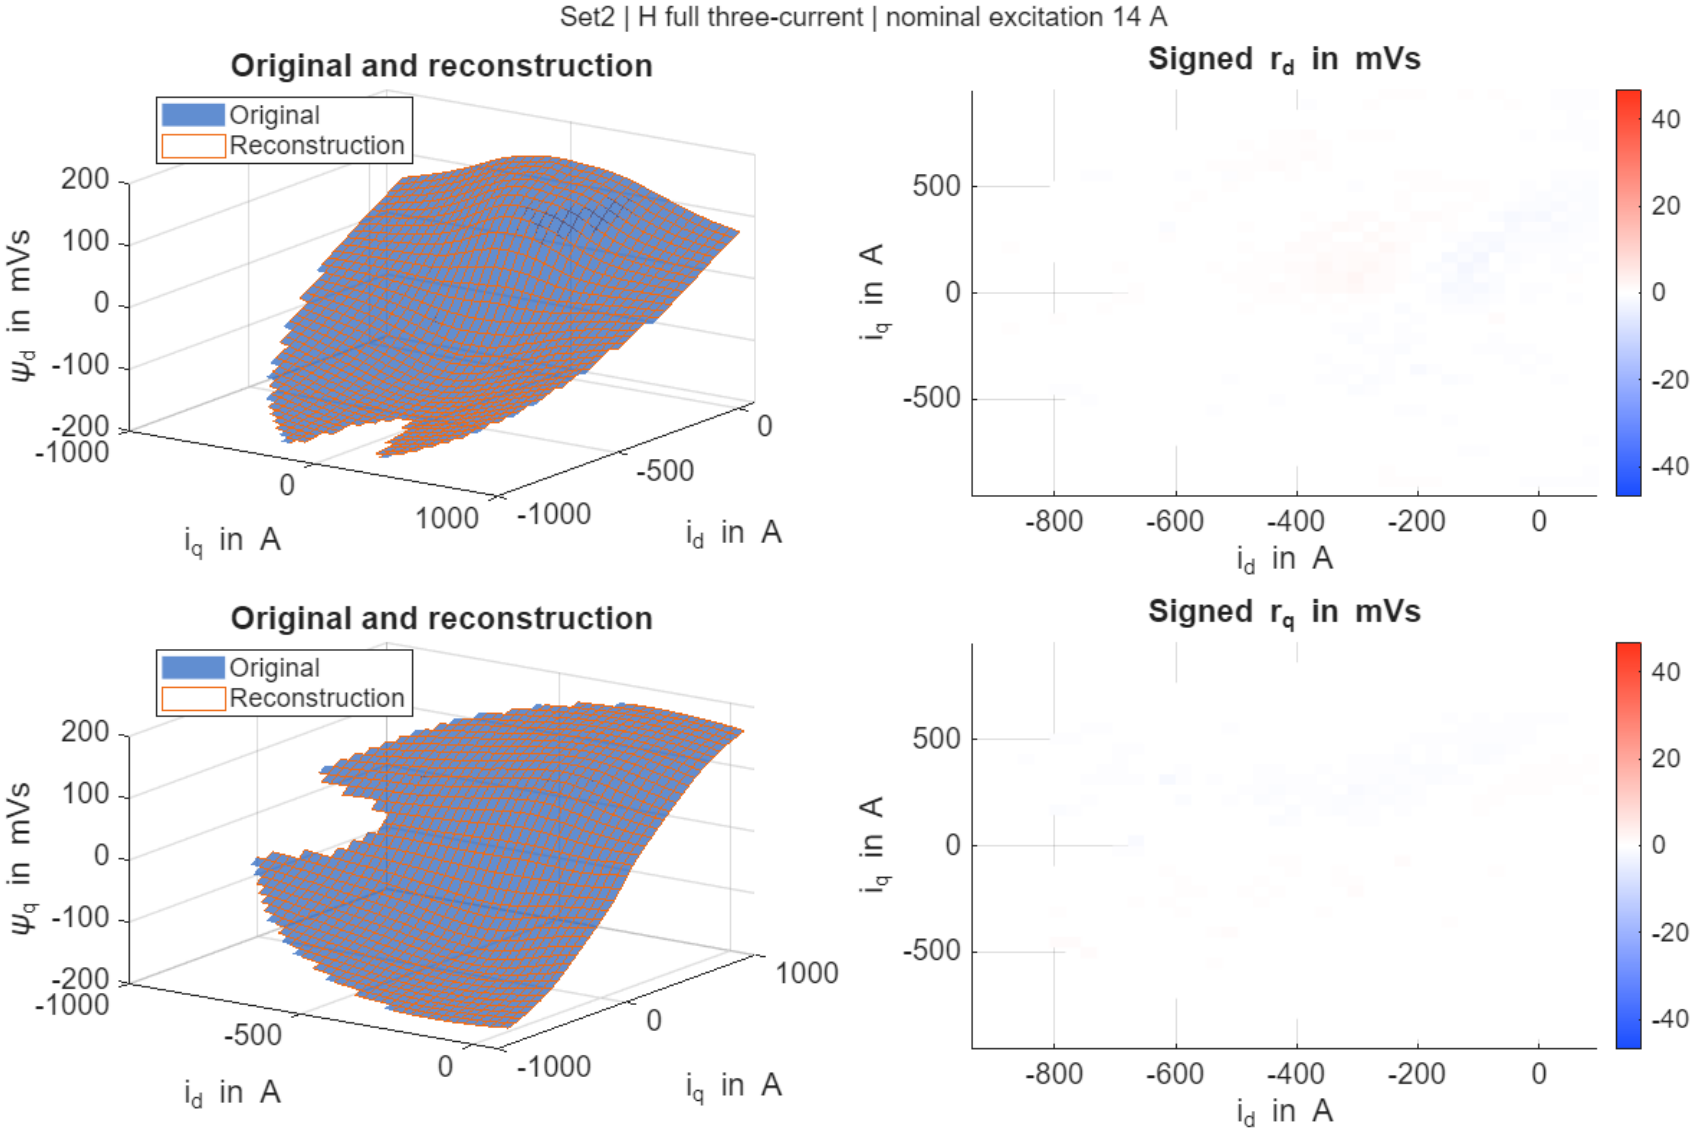

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method A, excitation 17 A

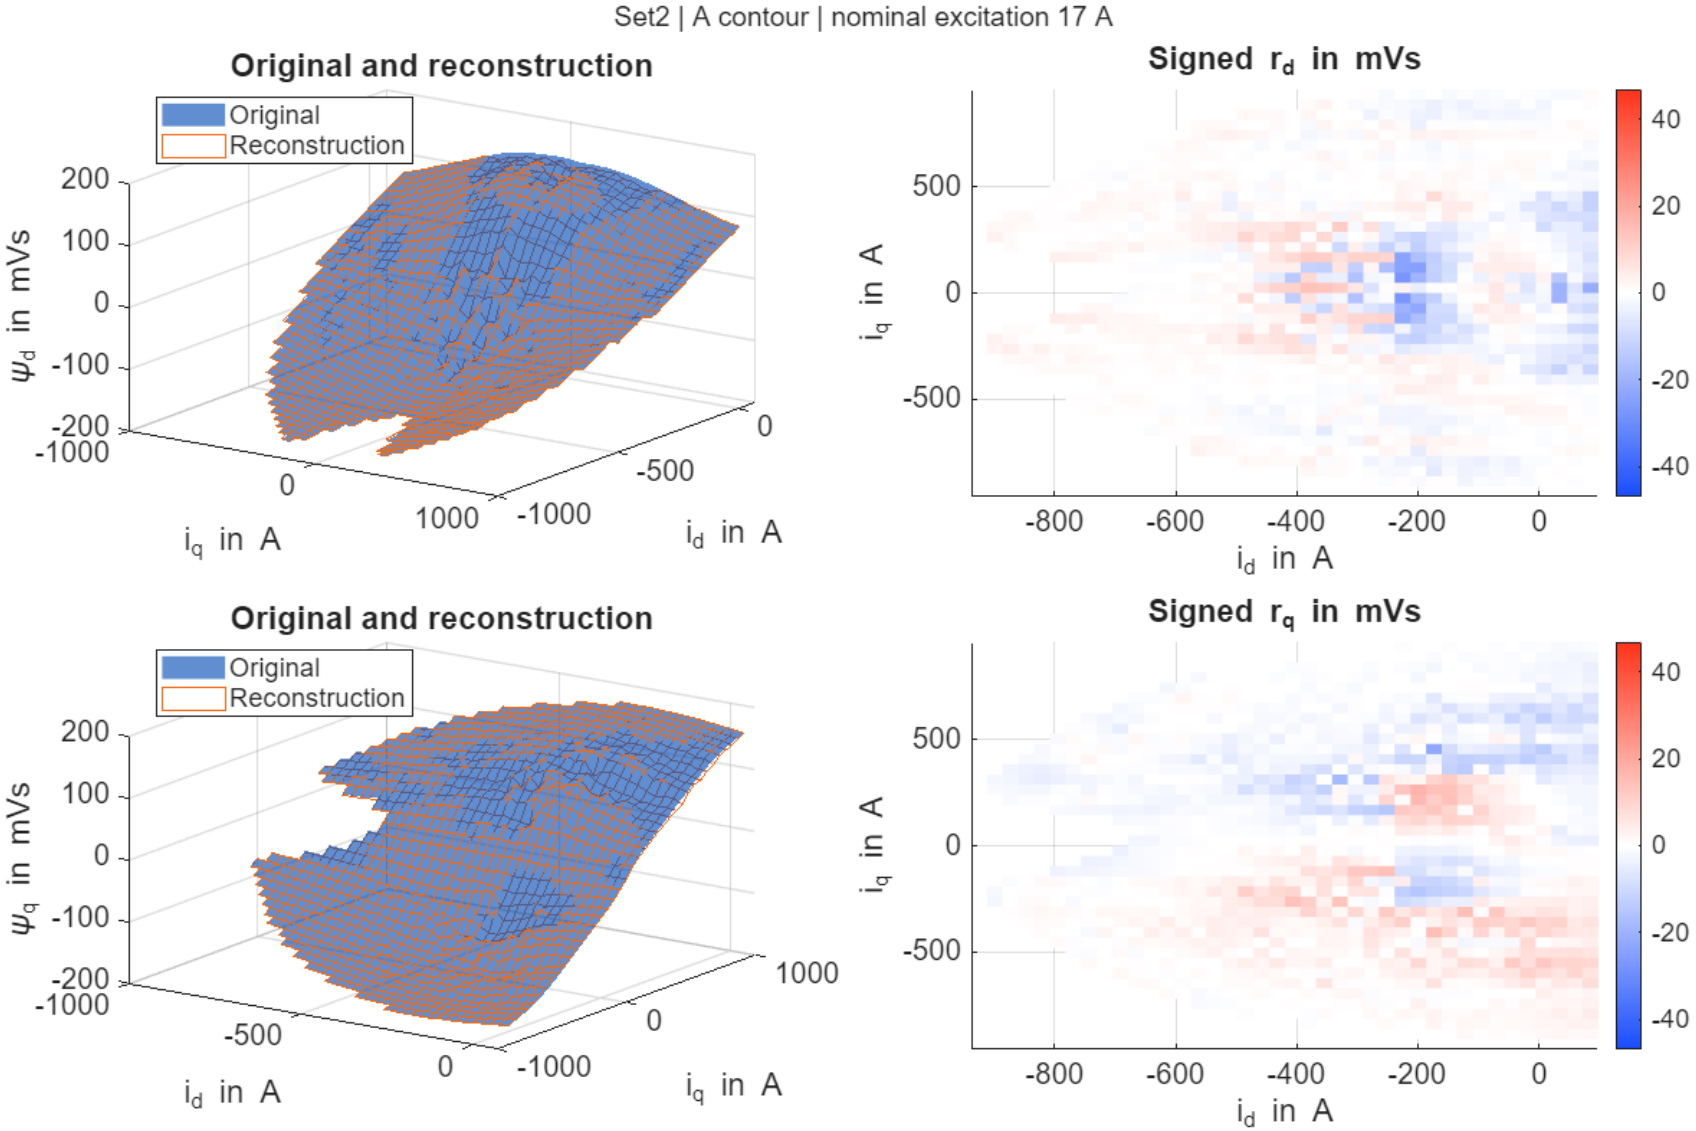

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method B, excitation 17 A

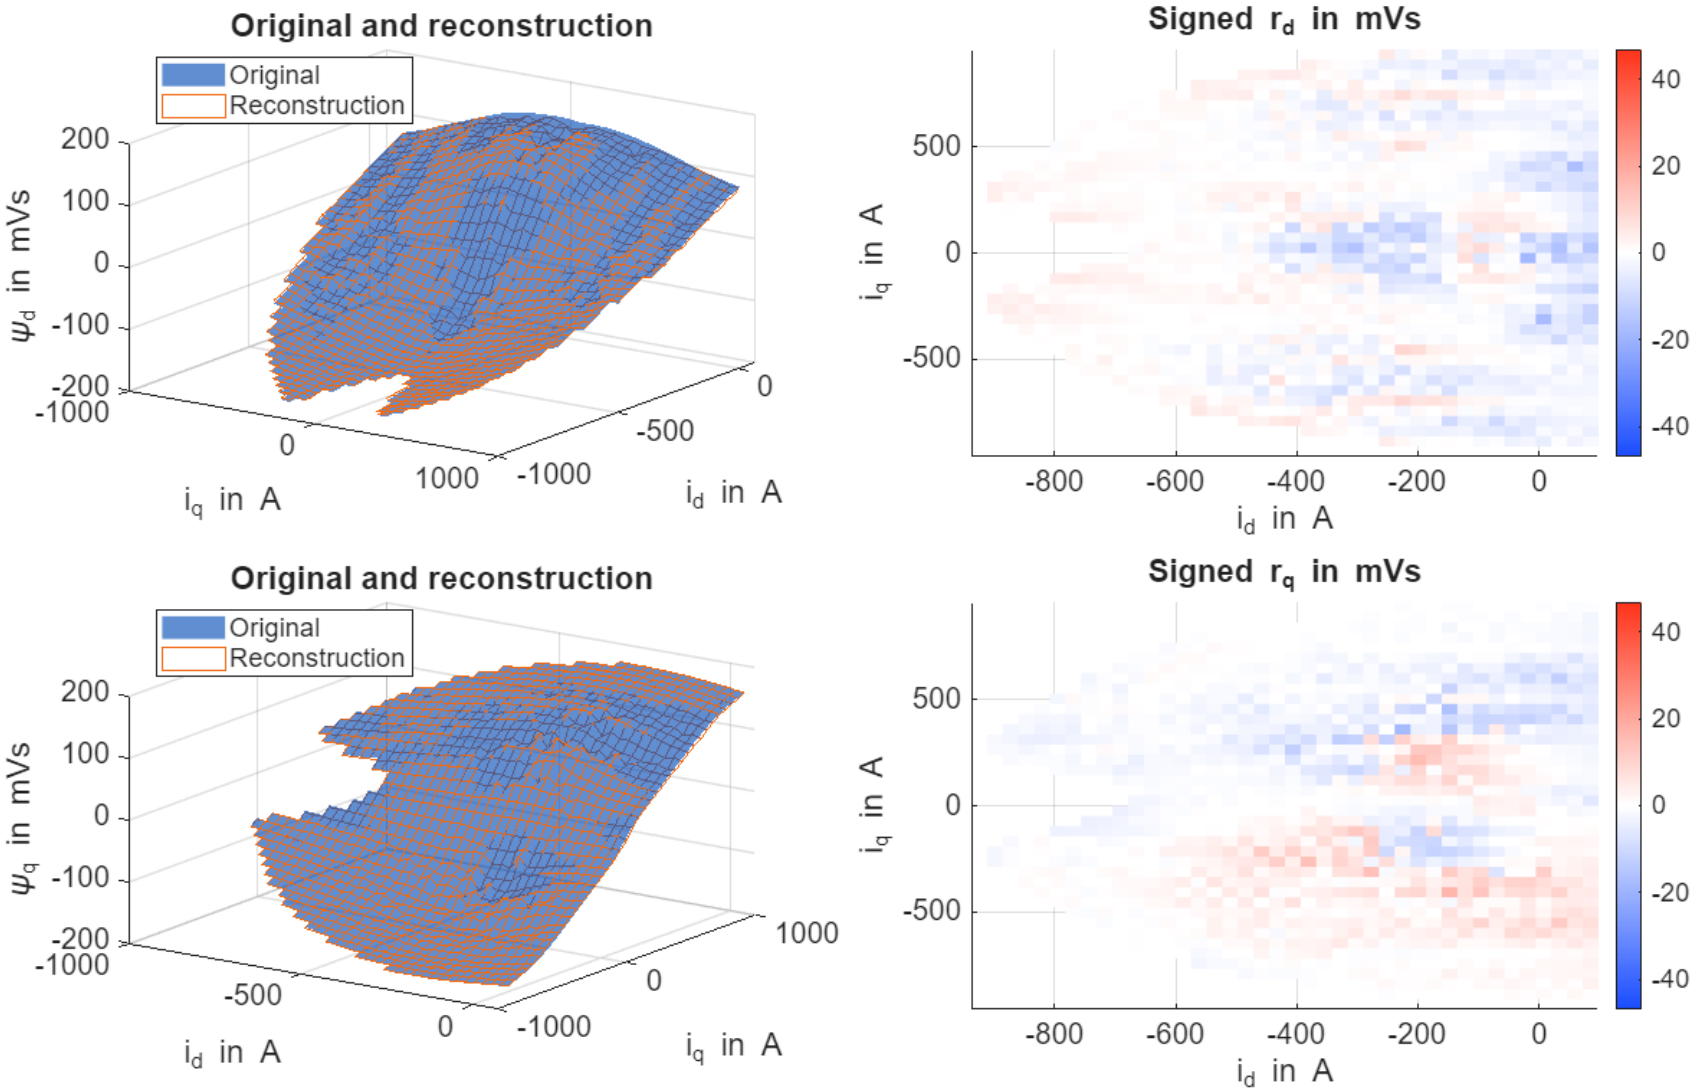

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method C, excitation 17 A

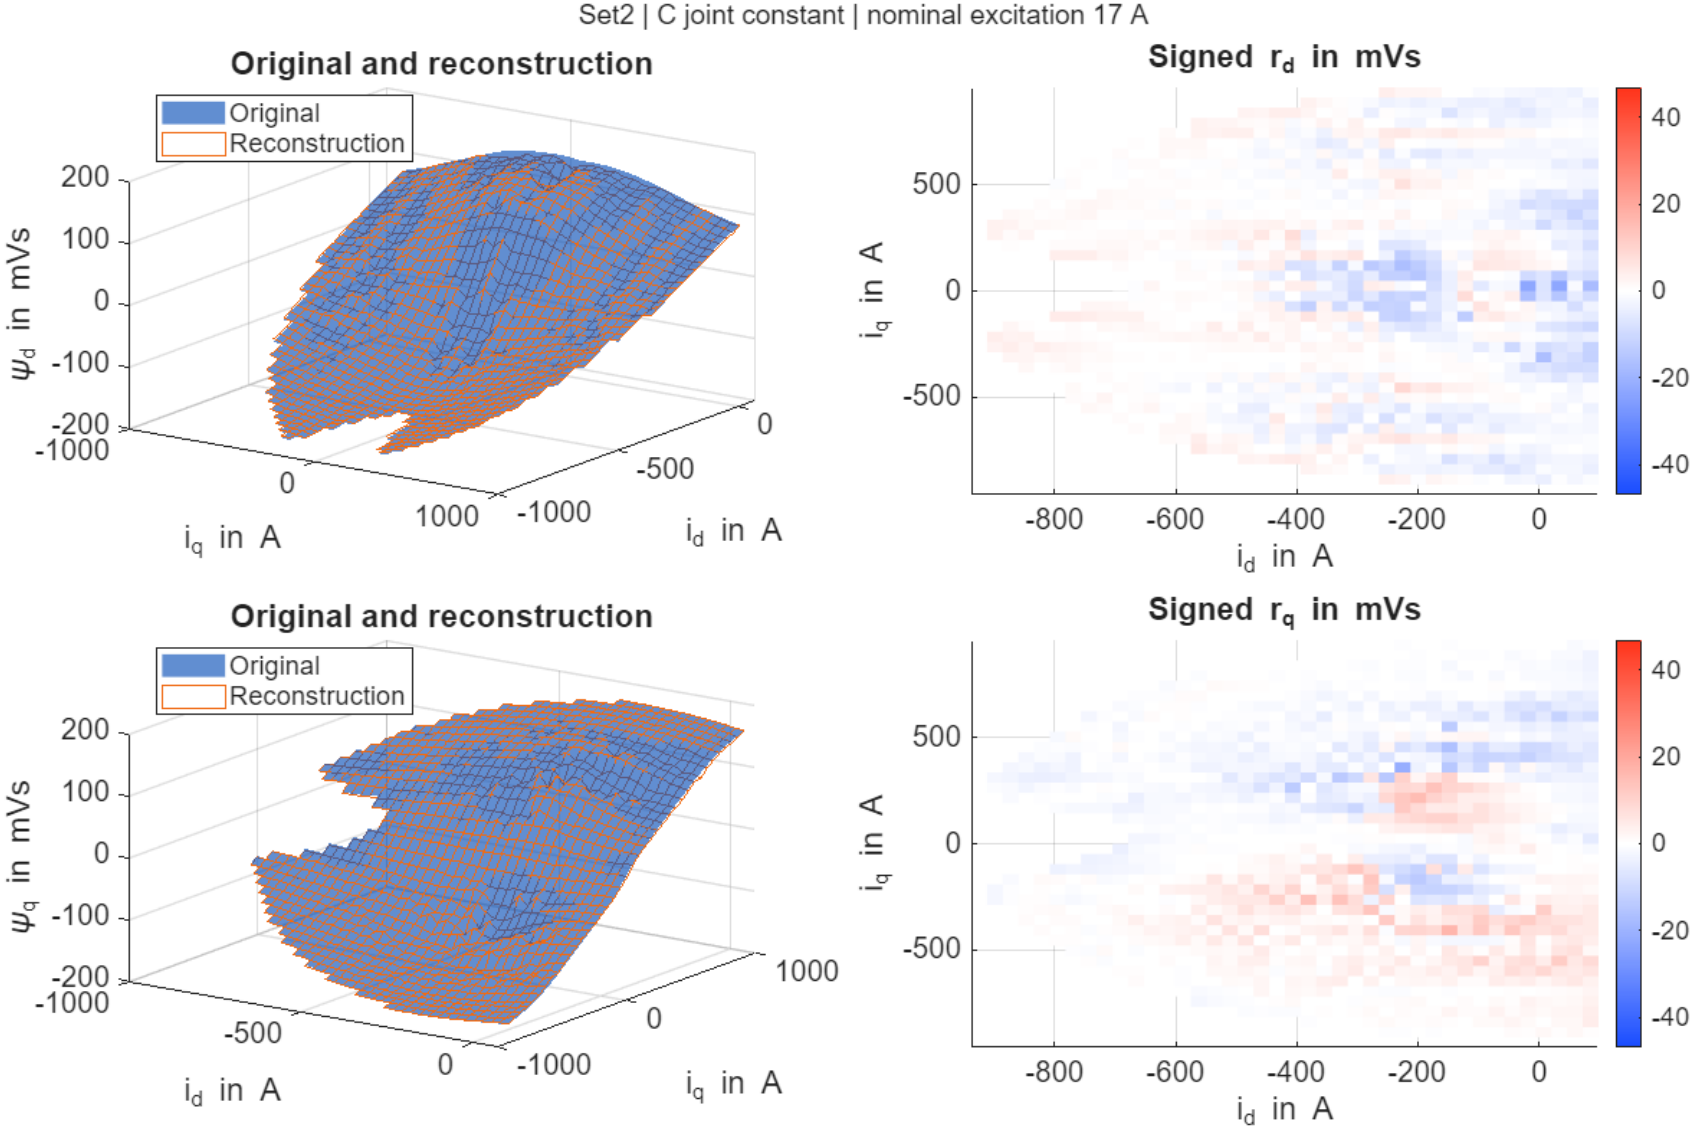

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method D, excitation 17 A

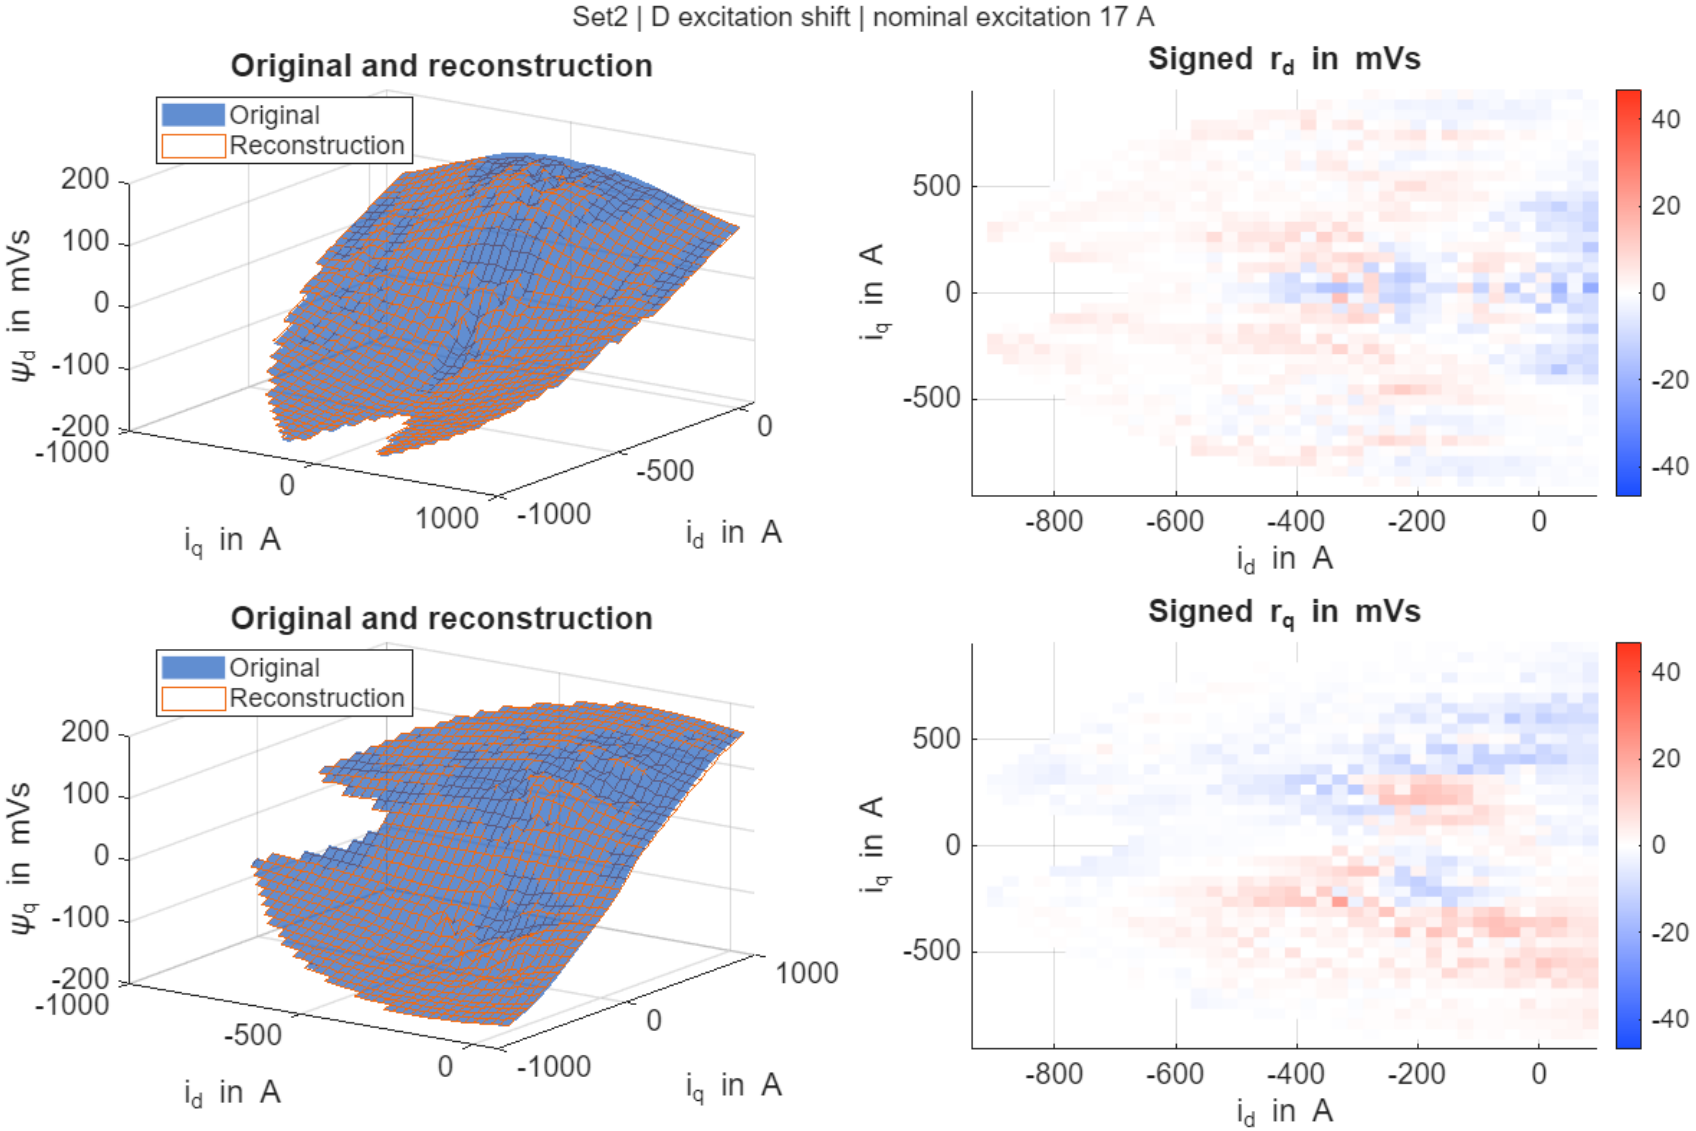

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method E, excitation 17 A

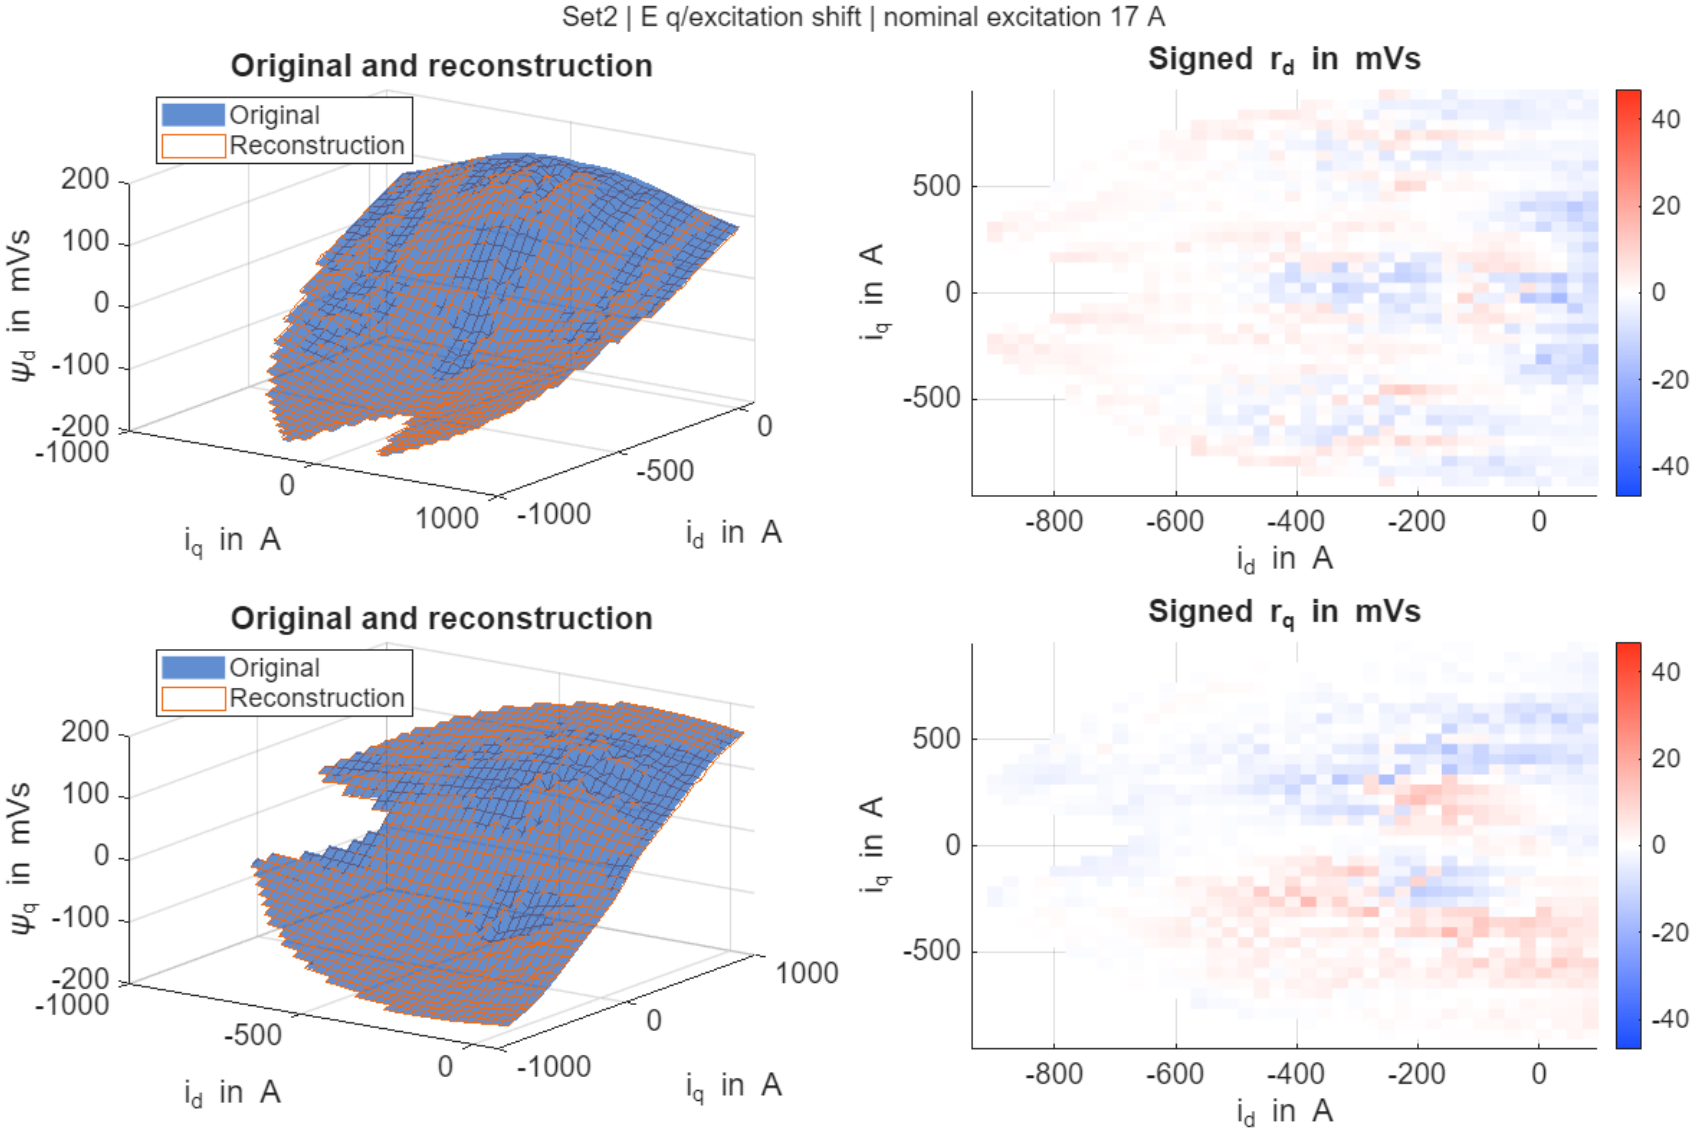

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method F, excitation 17 A

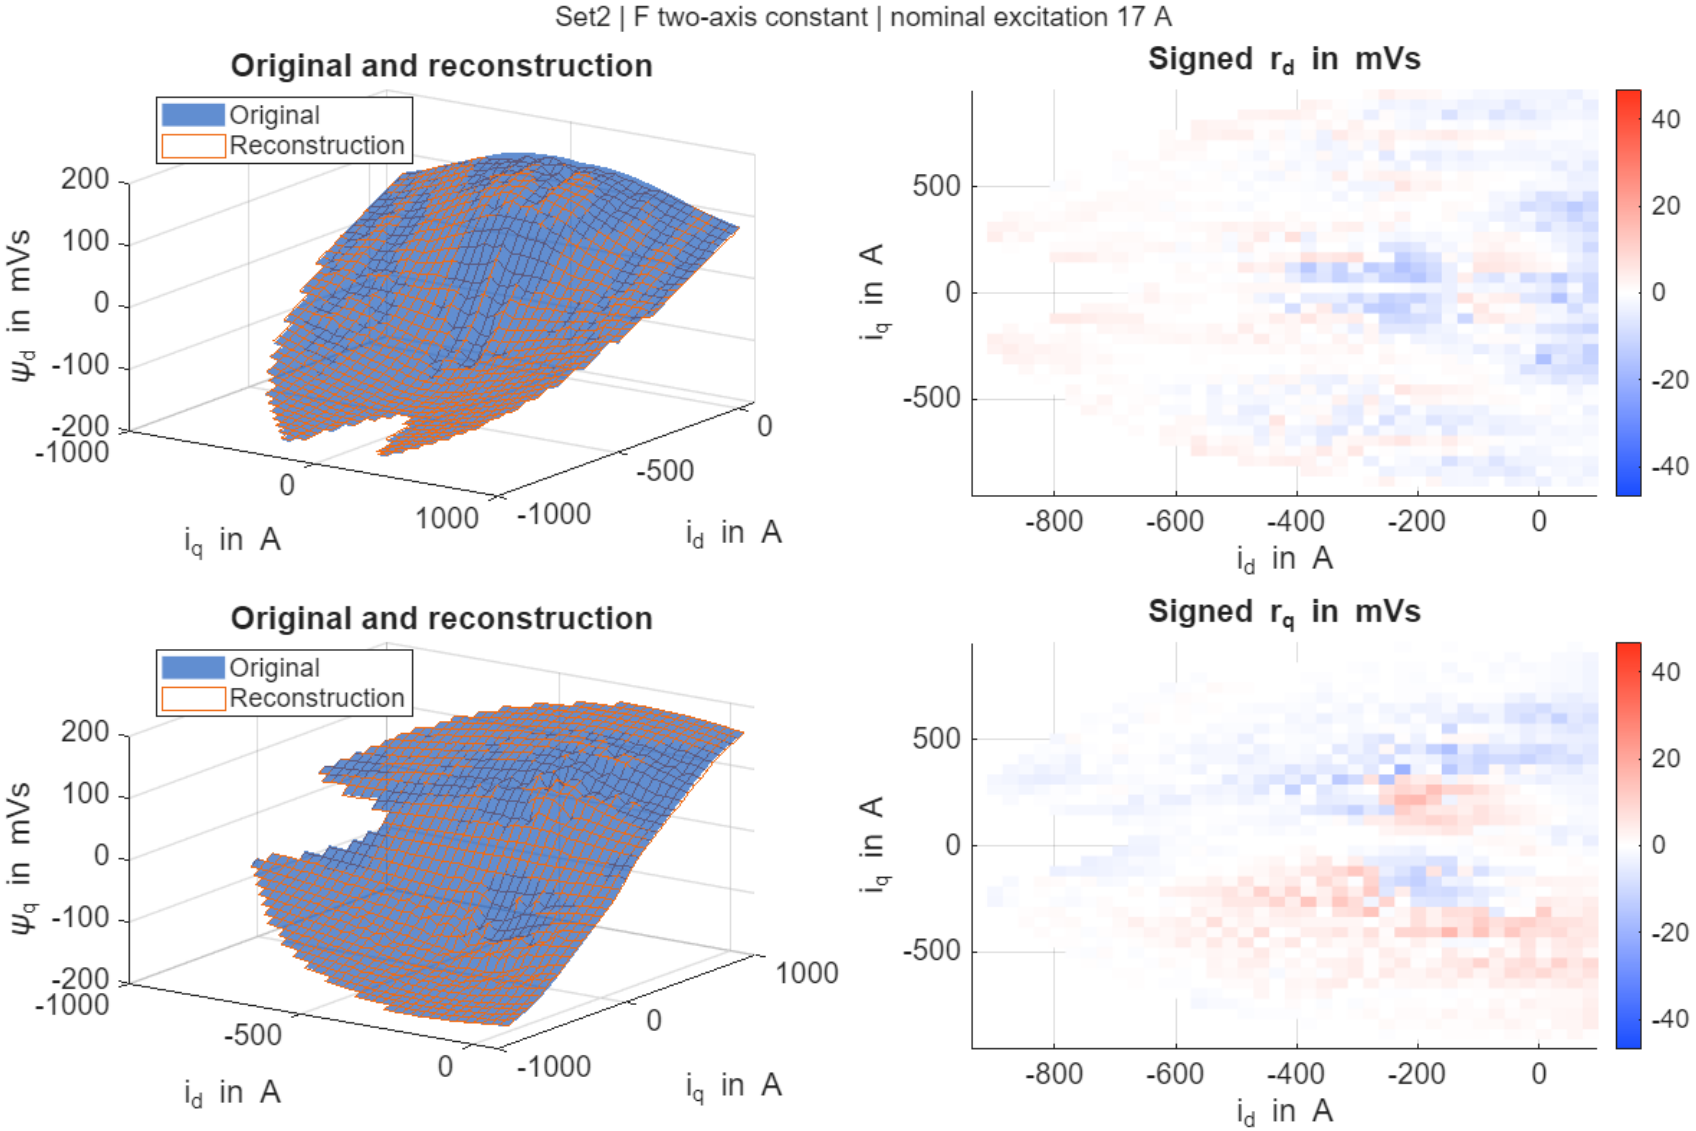

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method G, excitation 17 A

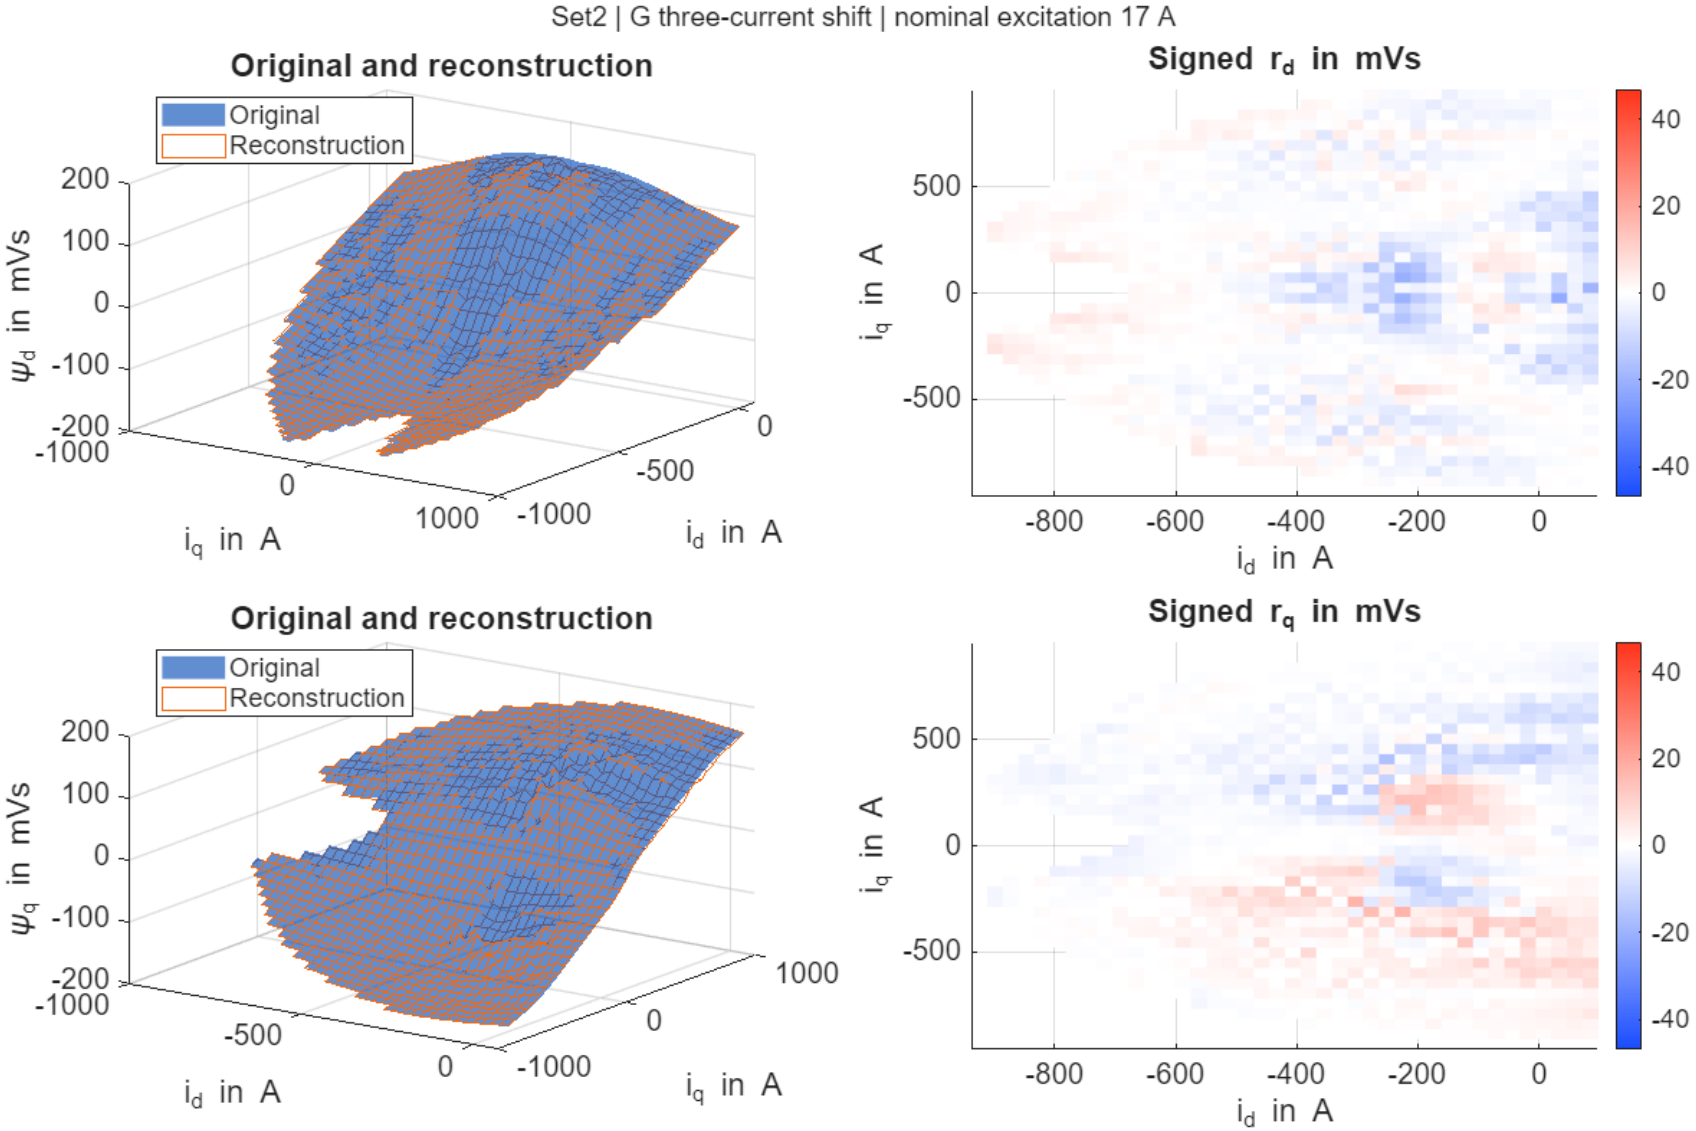

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method H, excitation 17 A

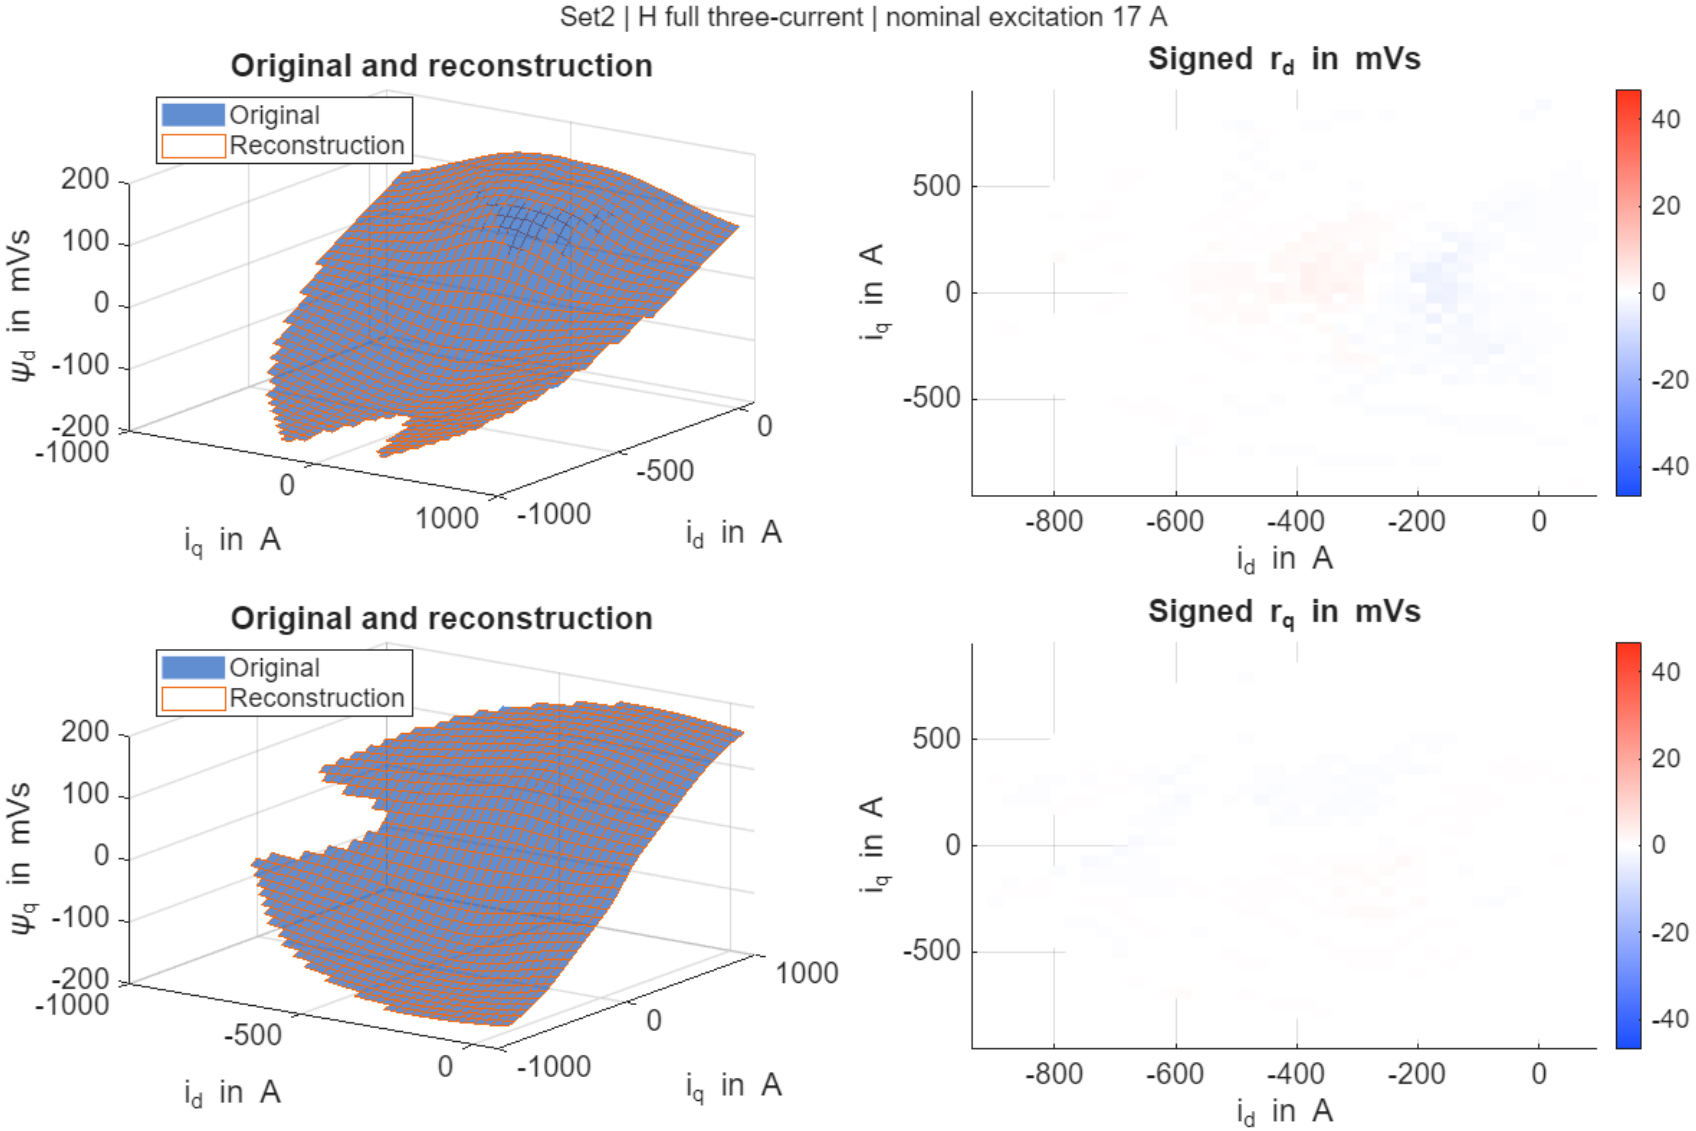

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method A, excitation 20 A

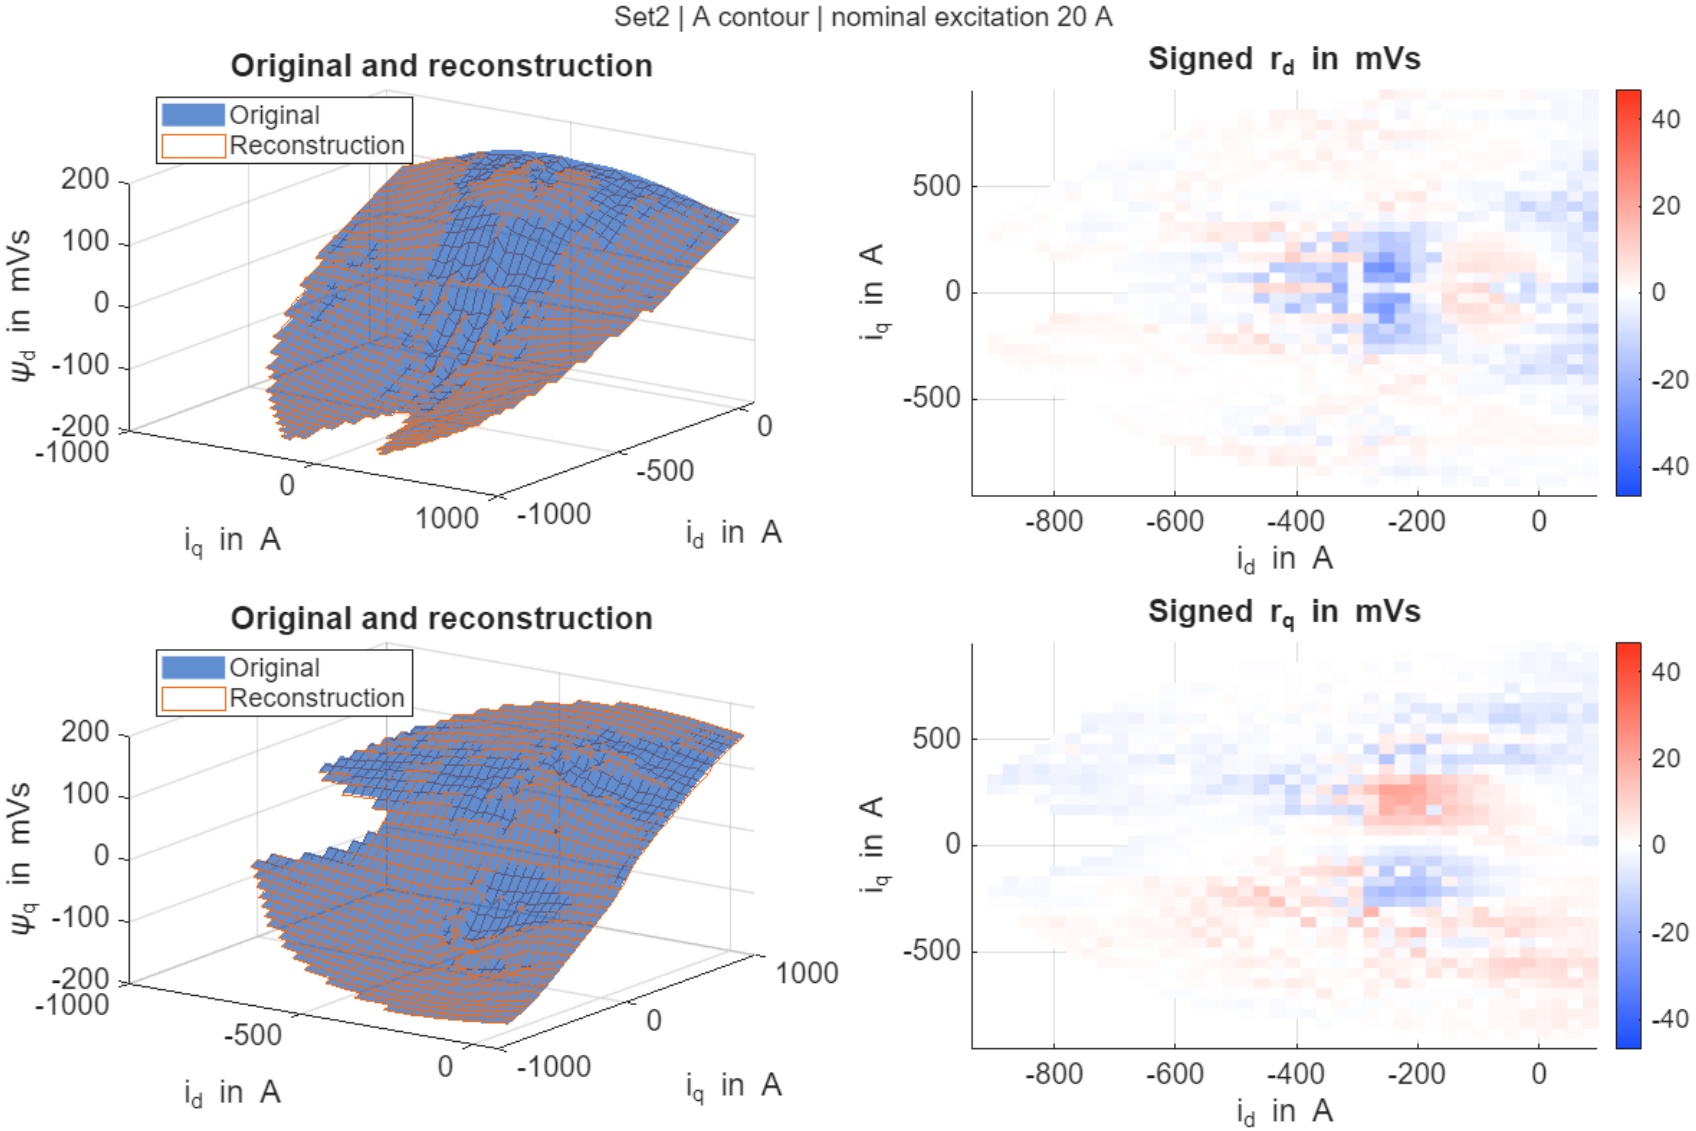

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method B, excitation 20 A

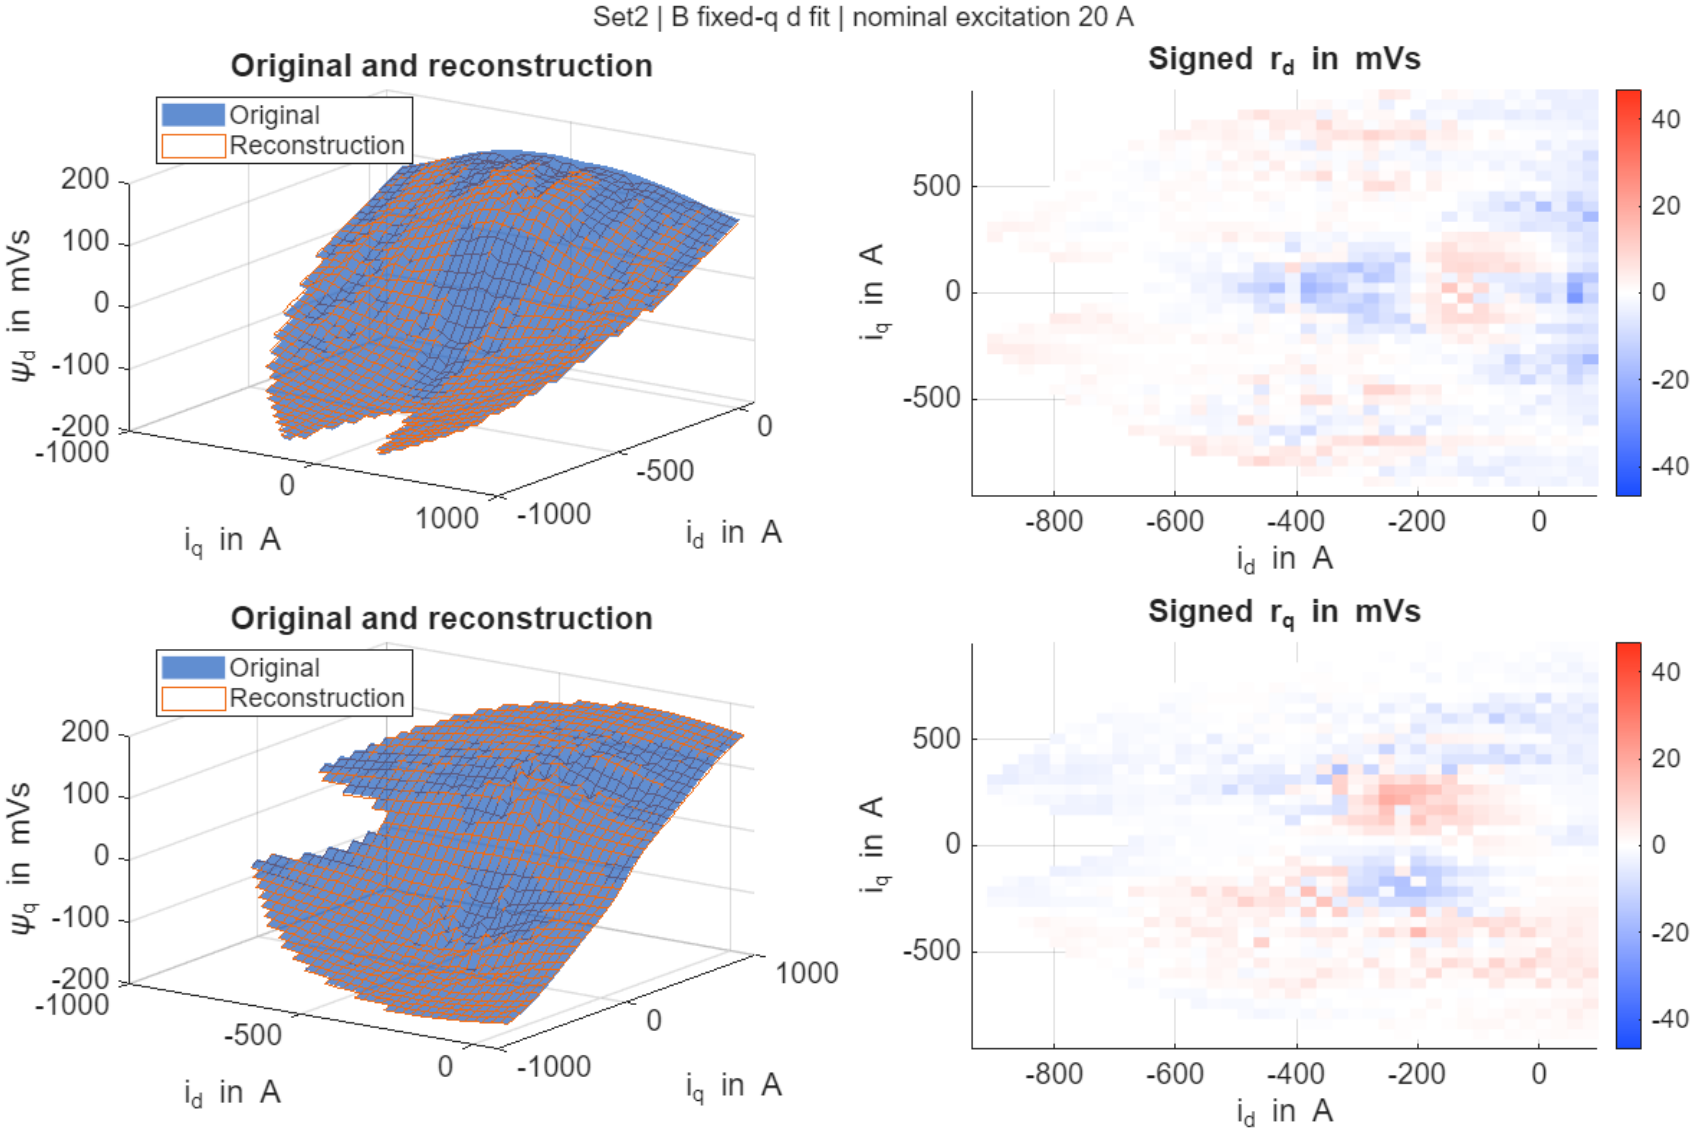

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method C, excitation 20 A

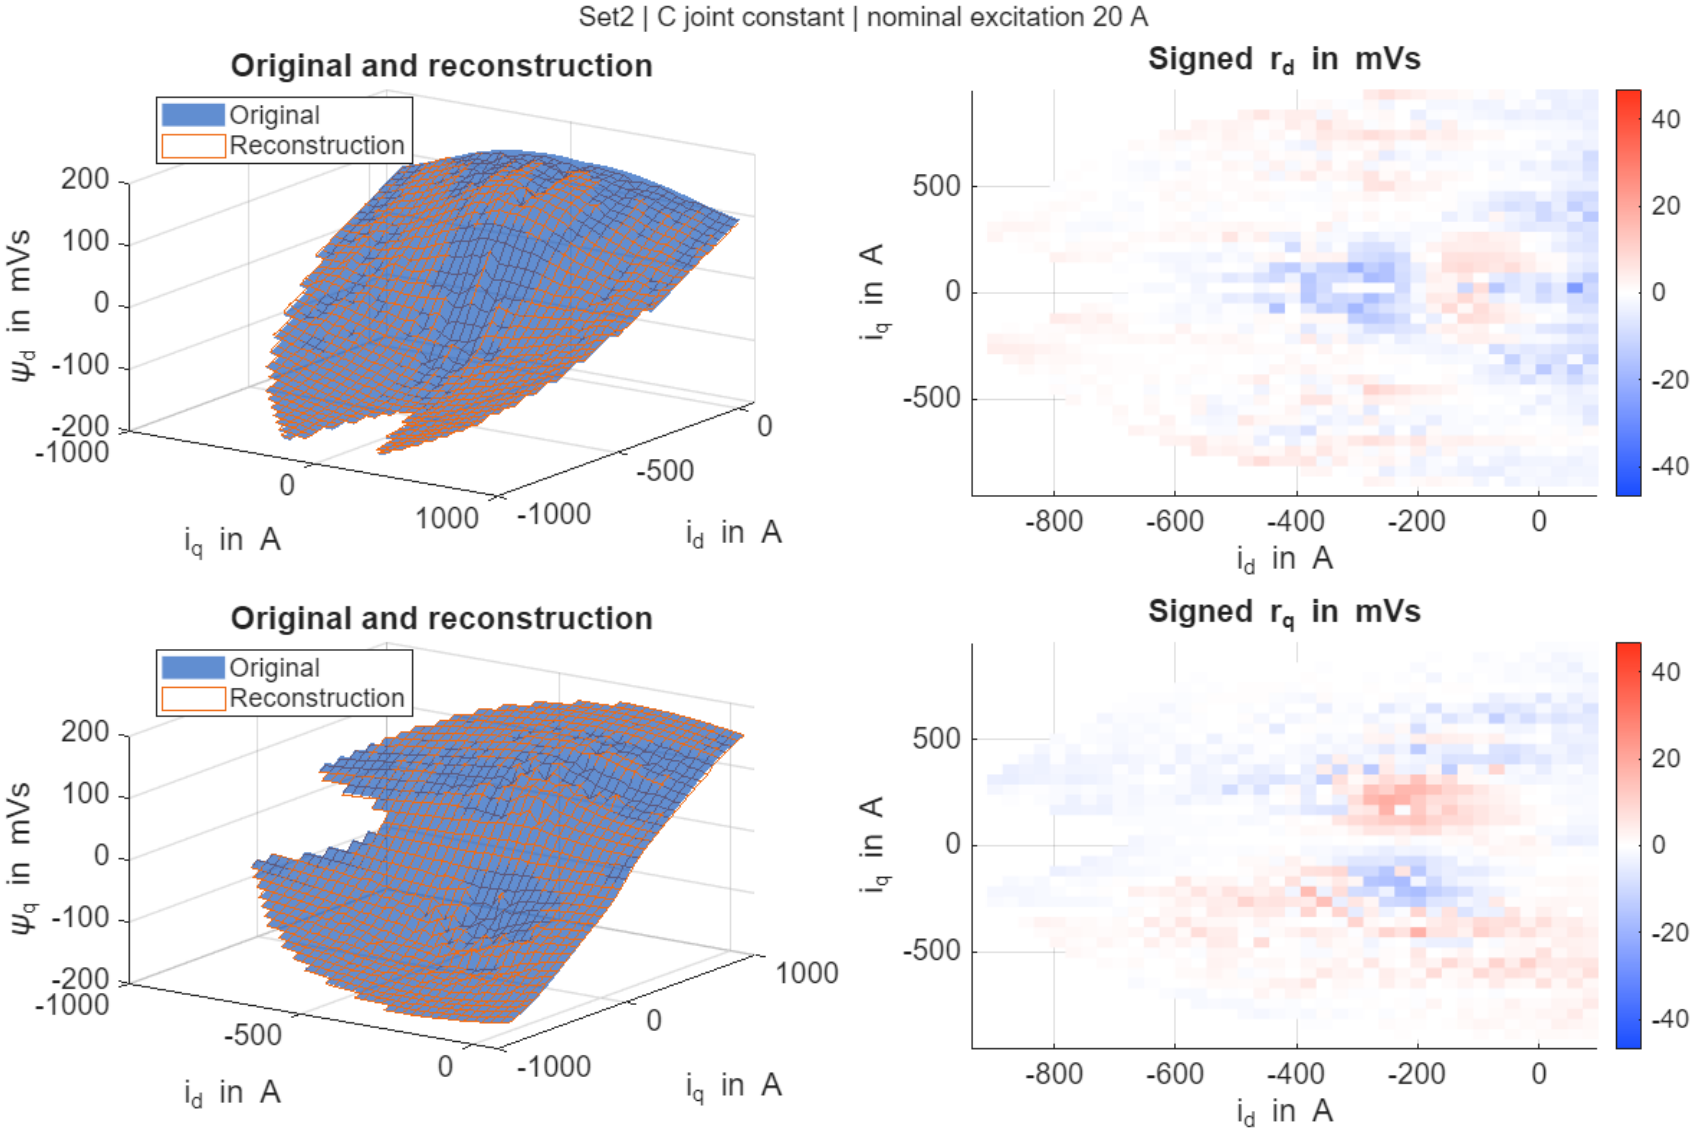

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method D, excitation 20 A

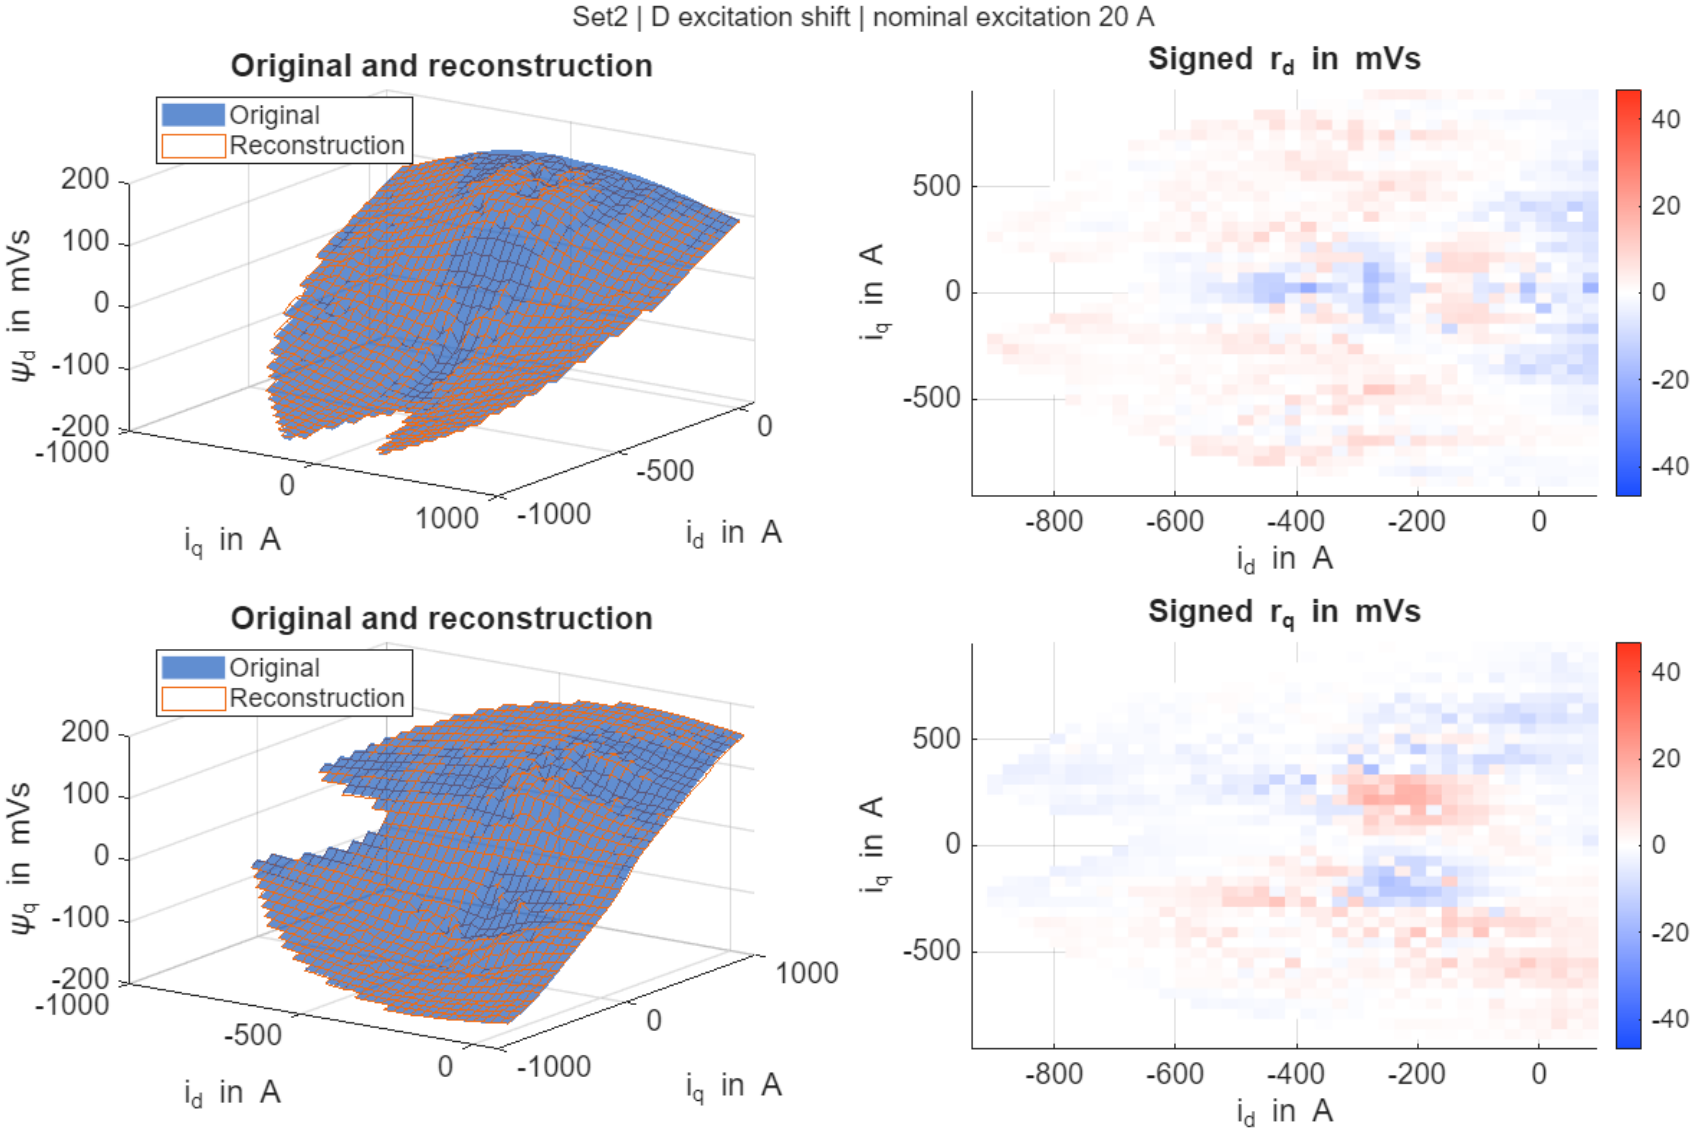

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method E, excitation 20 A

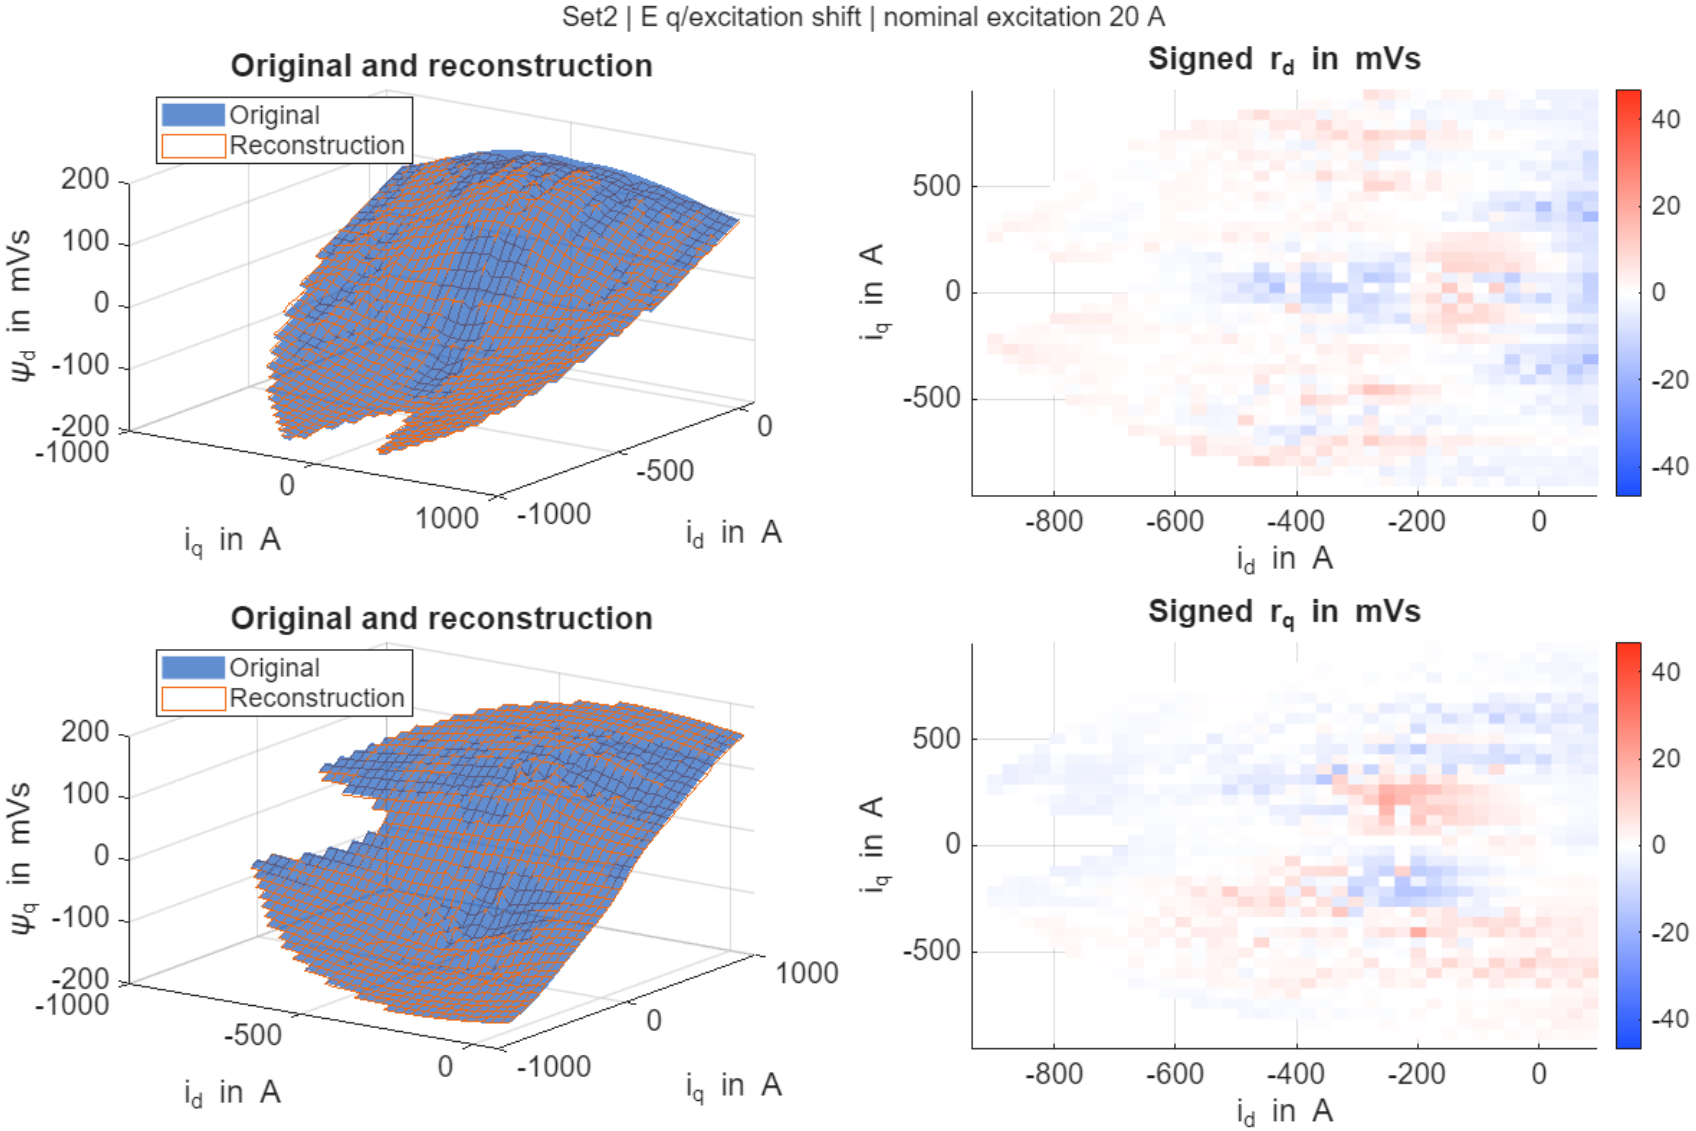

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method F, excitation 20 A

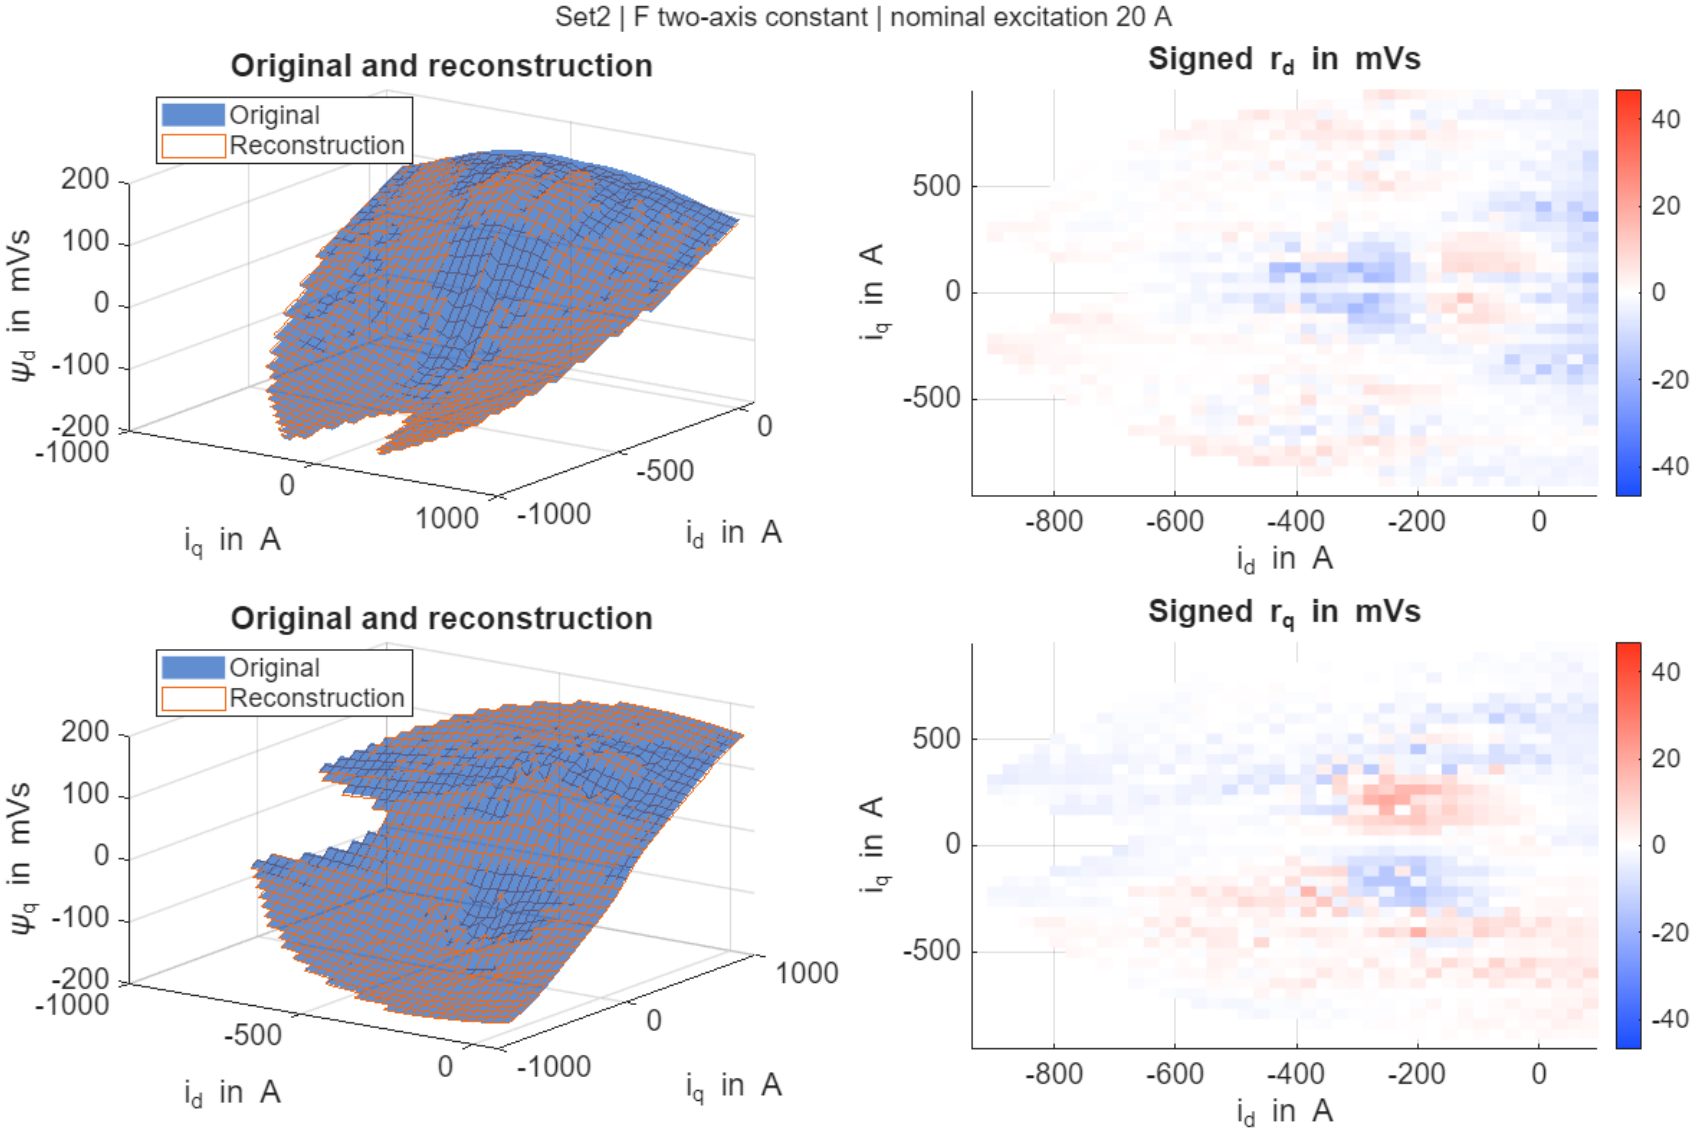

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method G, excitation 20 A

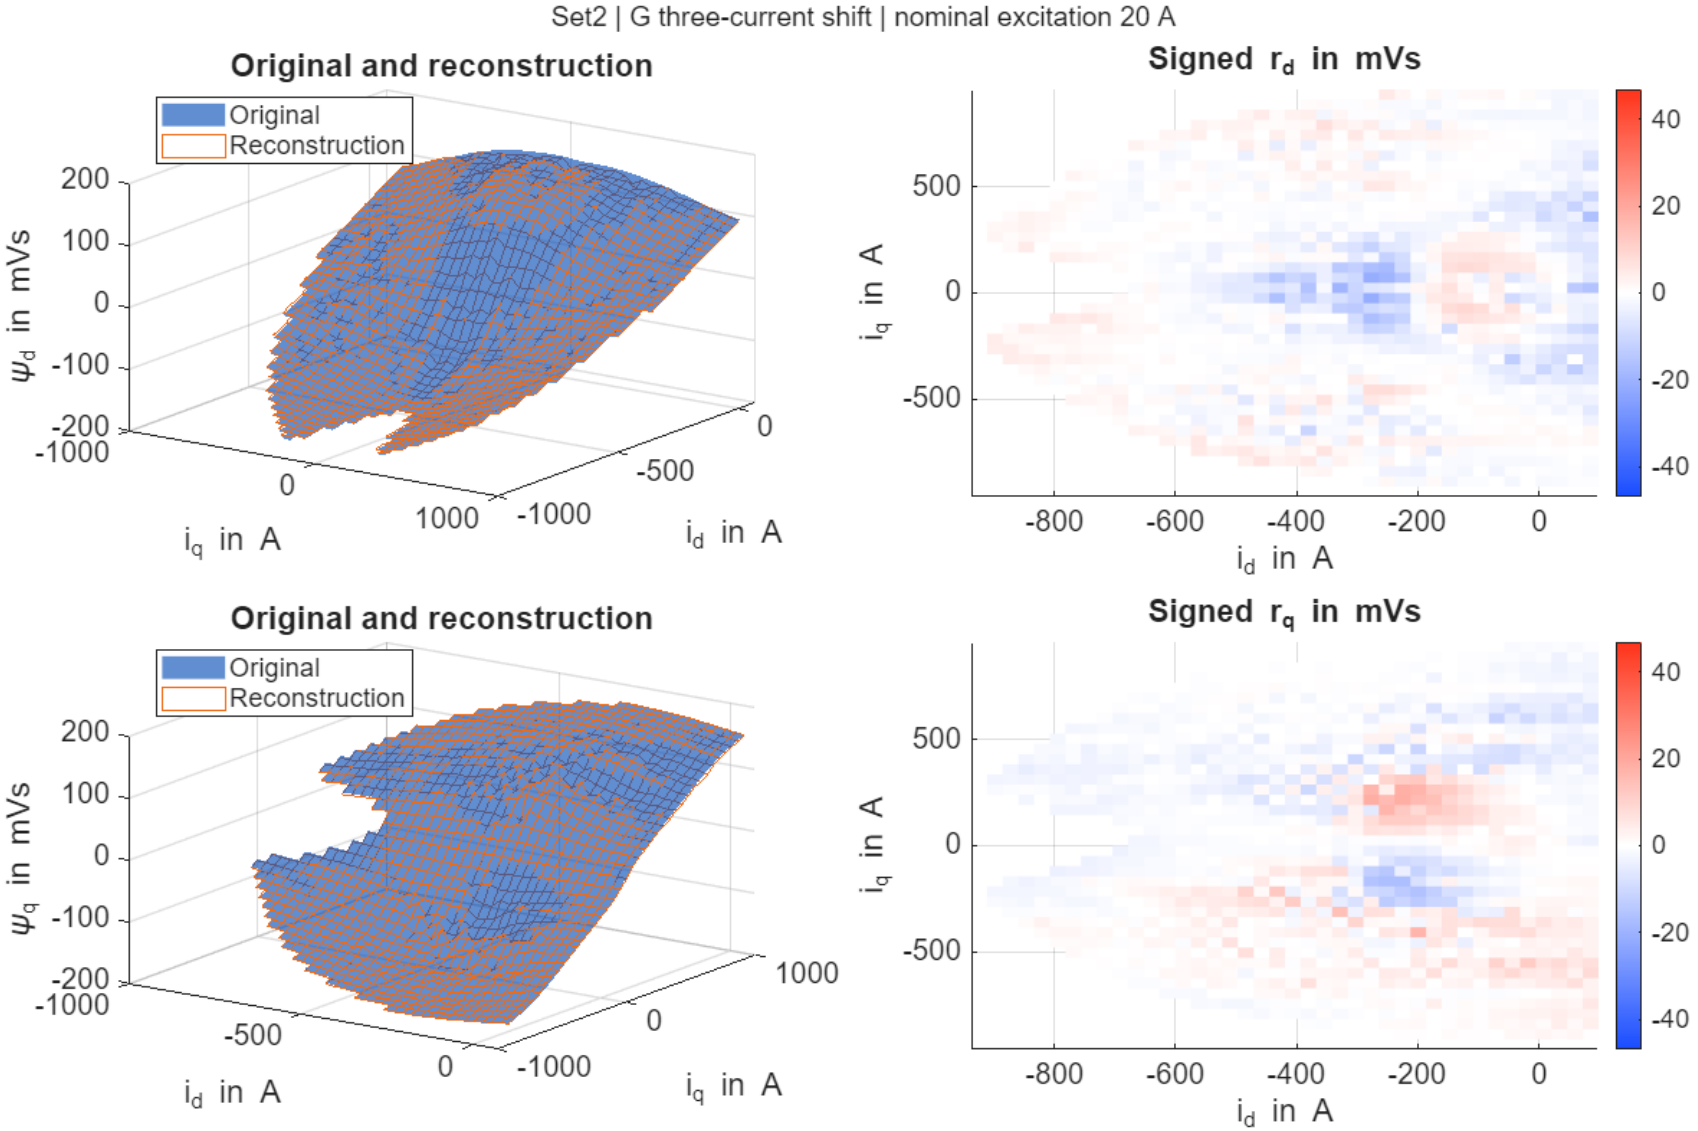

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method H, excitation 20 A

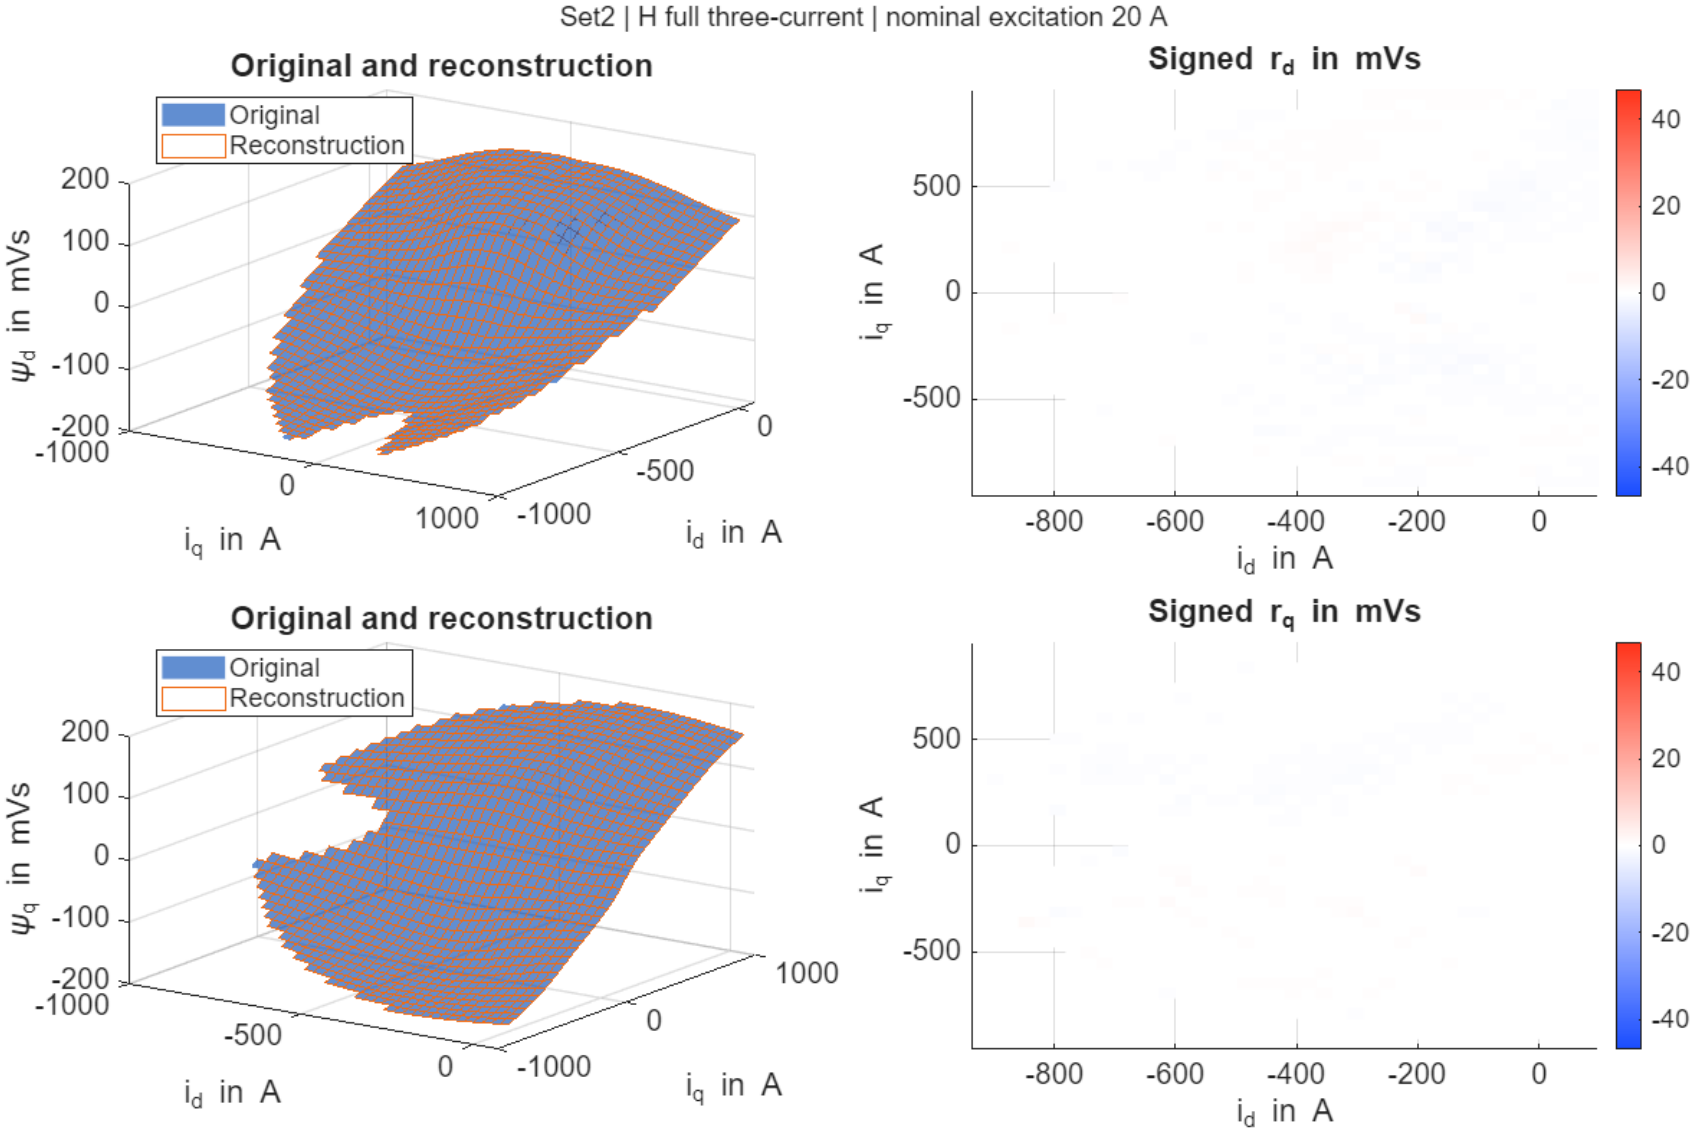

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method A, excitation 23 A

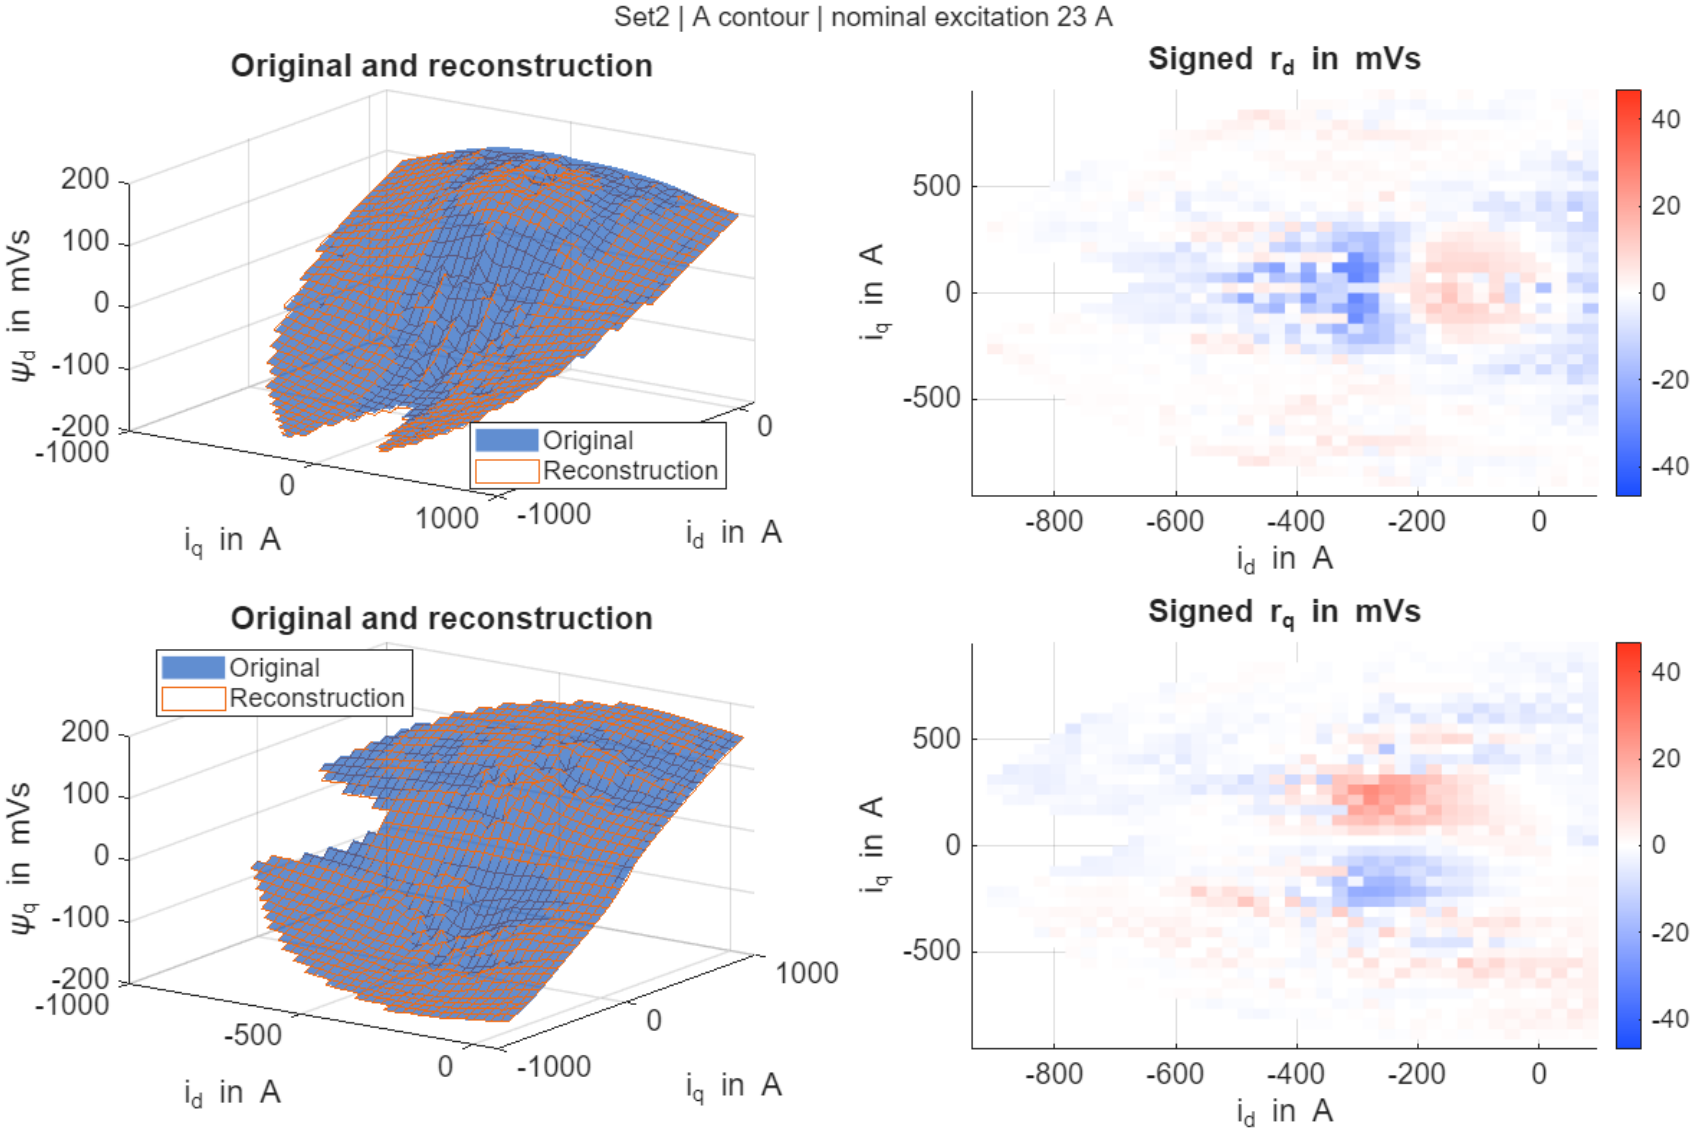

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method B, excitation 23 A

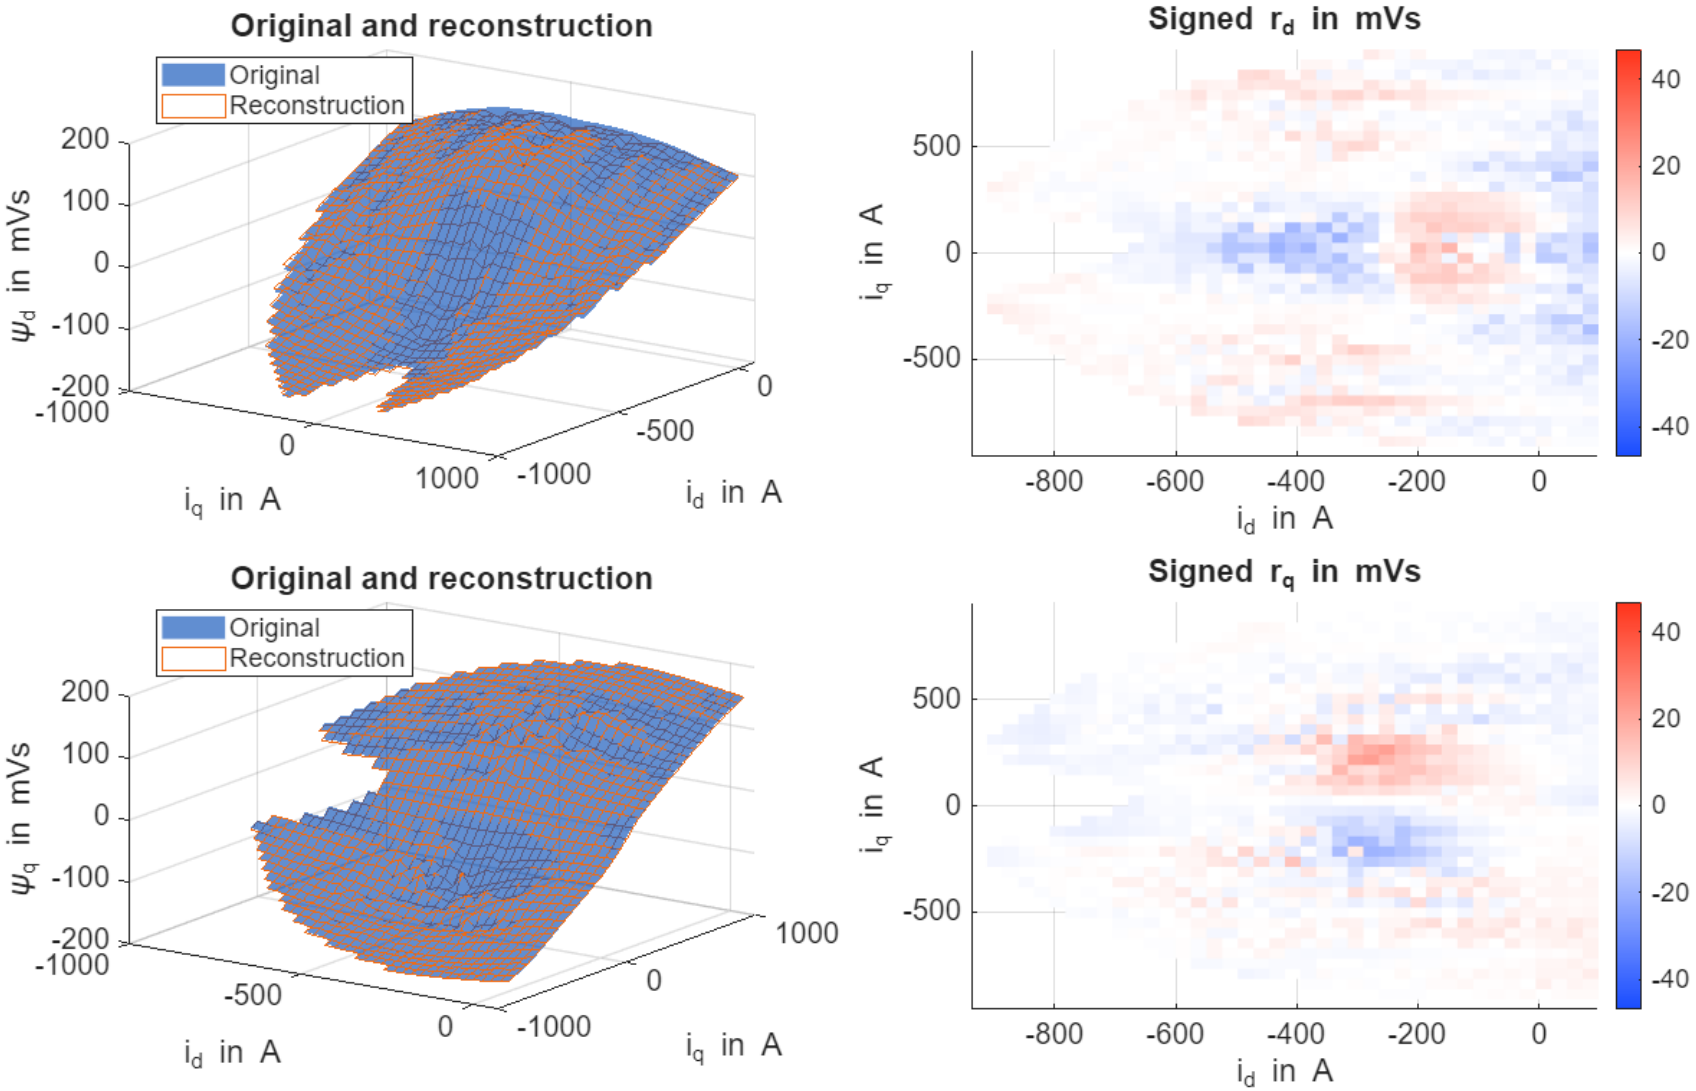

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method C, excitation 23 A

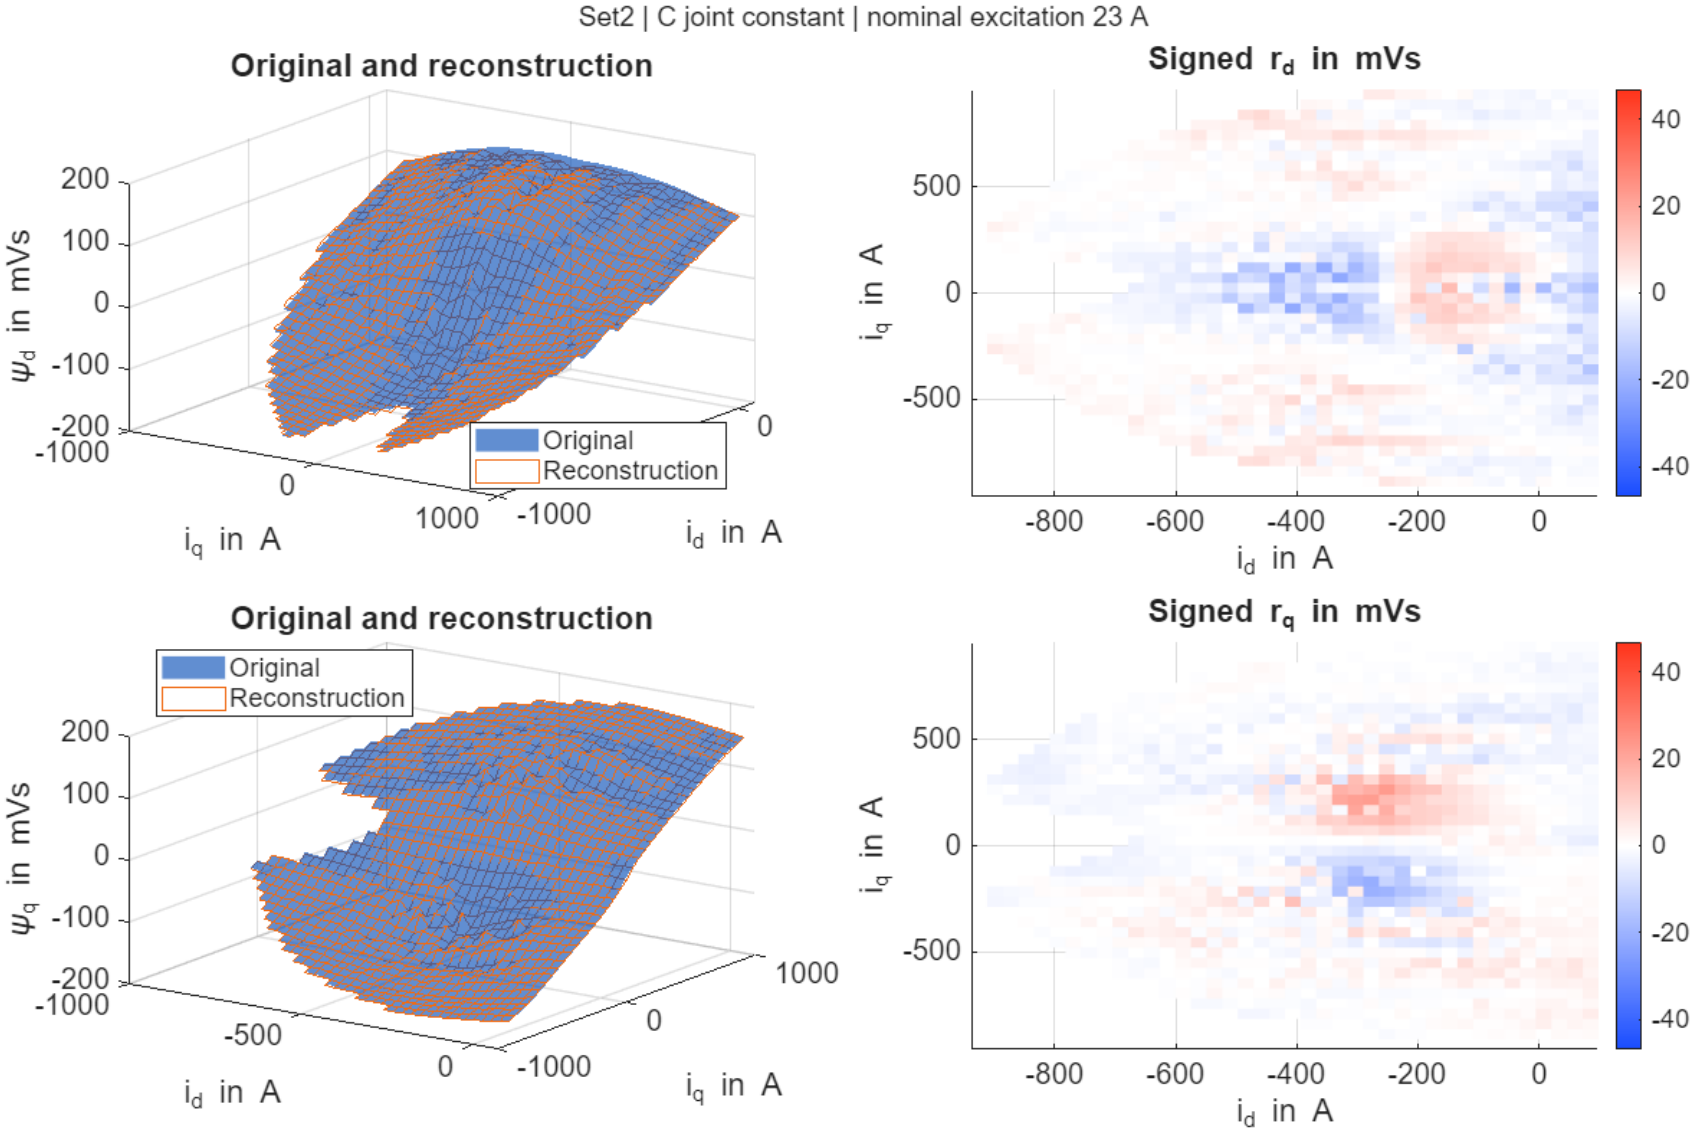

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method D, excitation 23 A

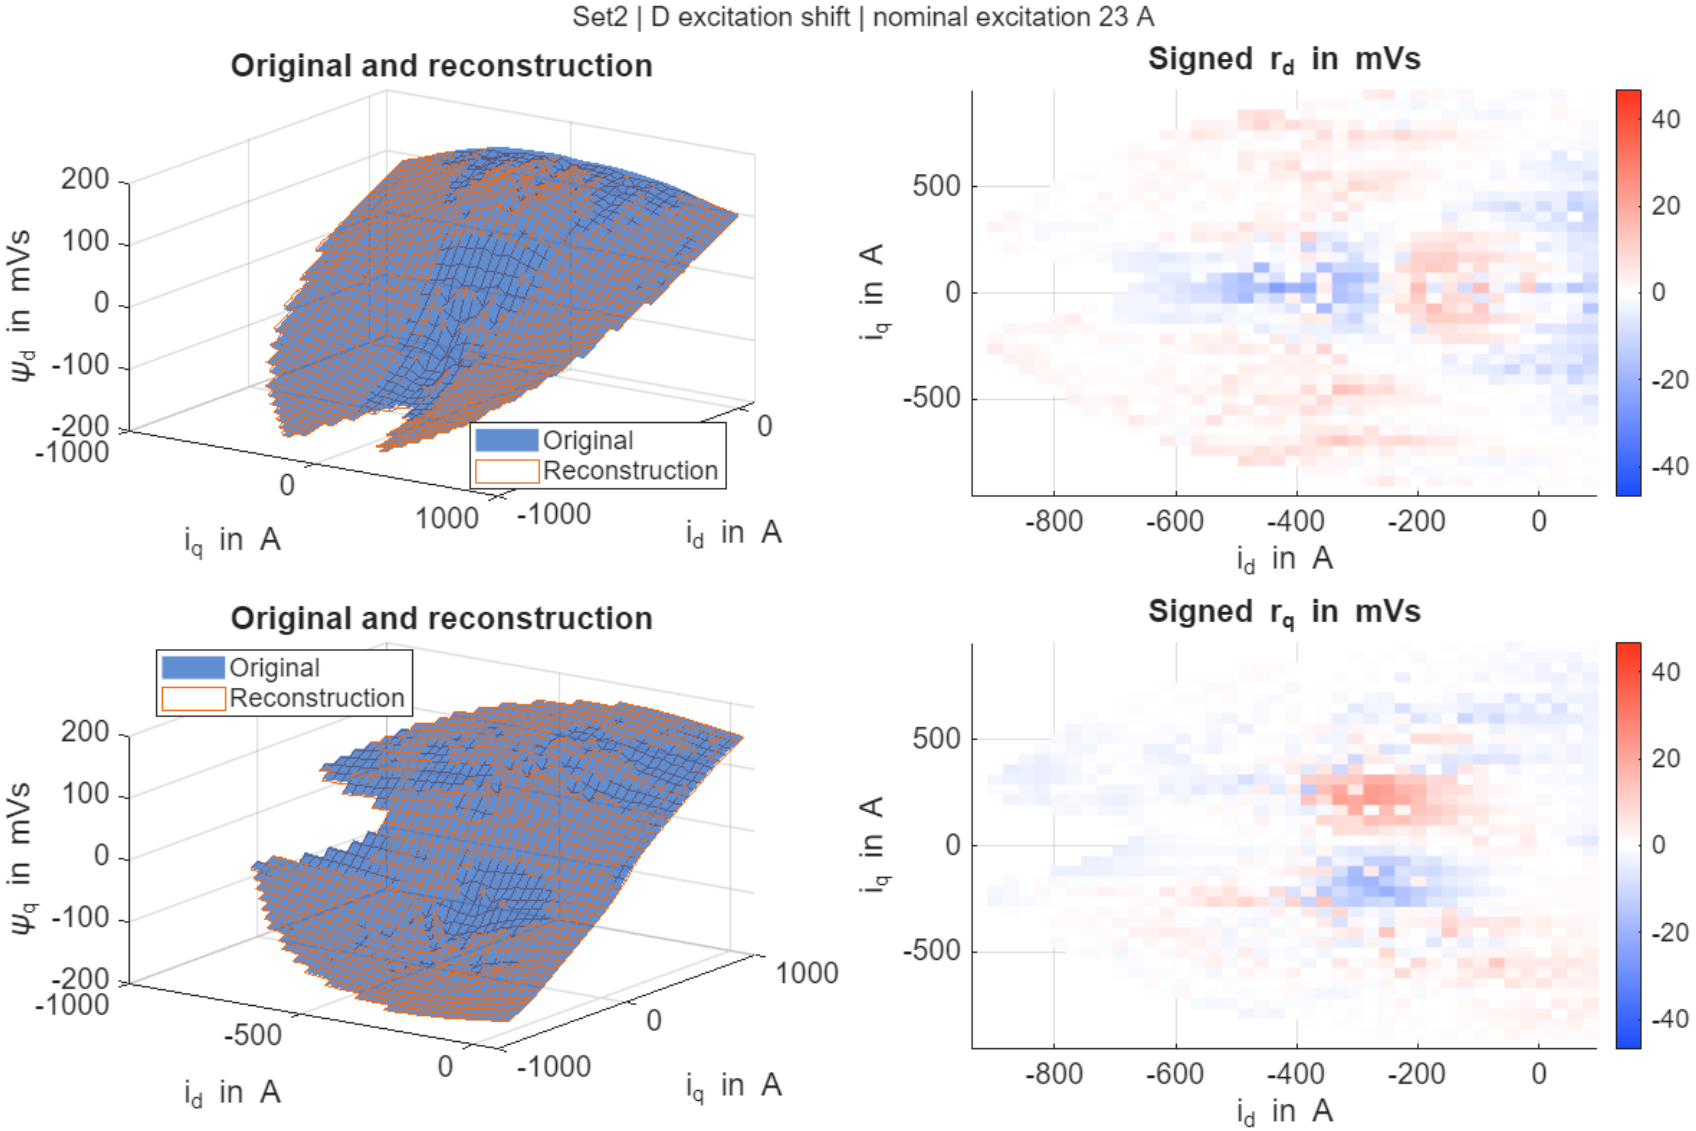

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method E, excitation 23 A

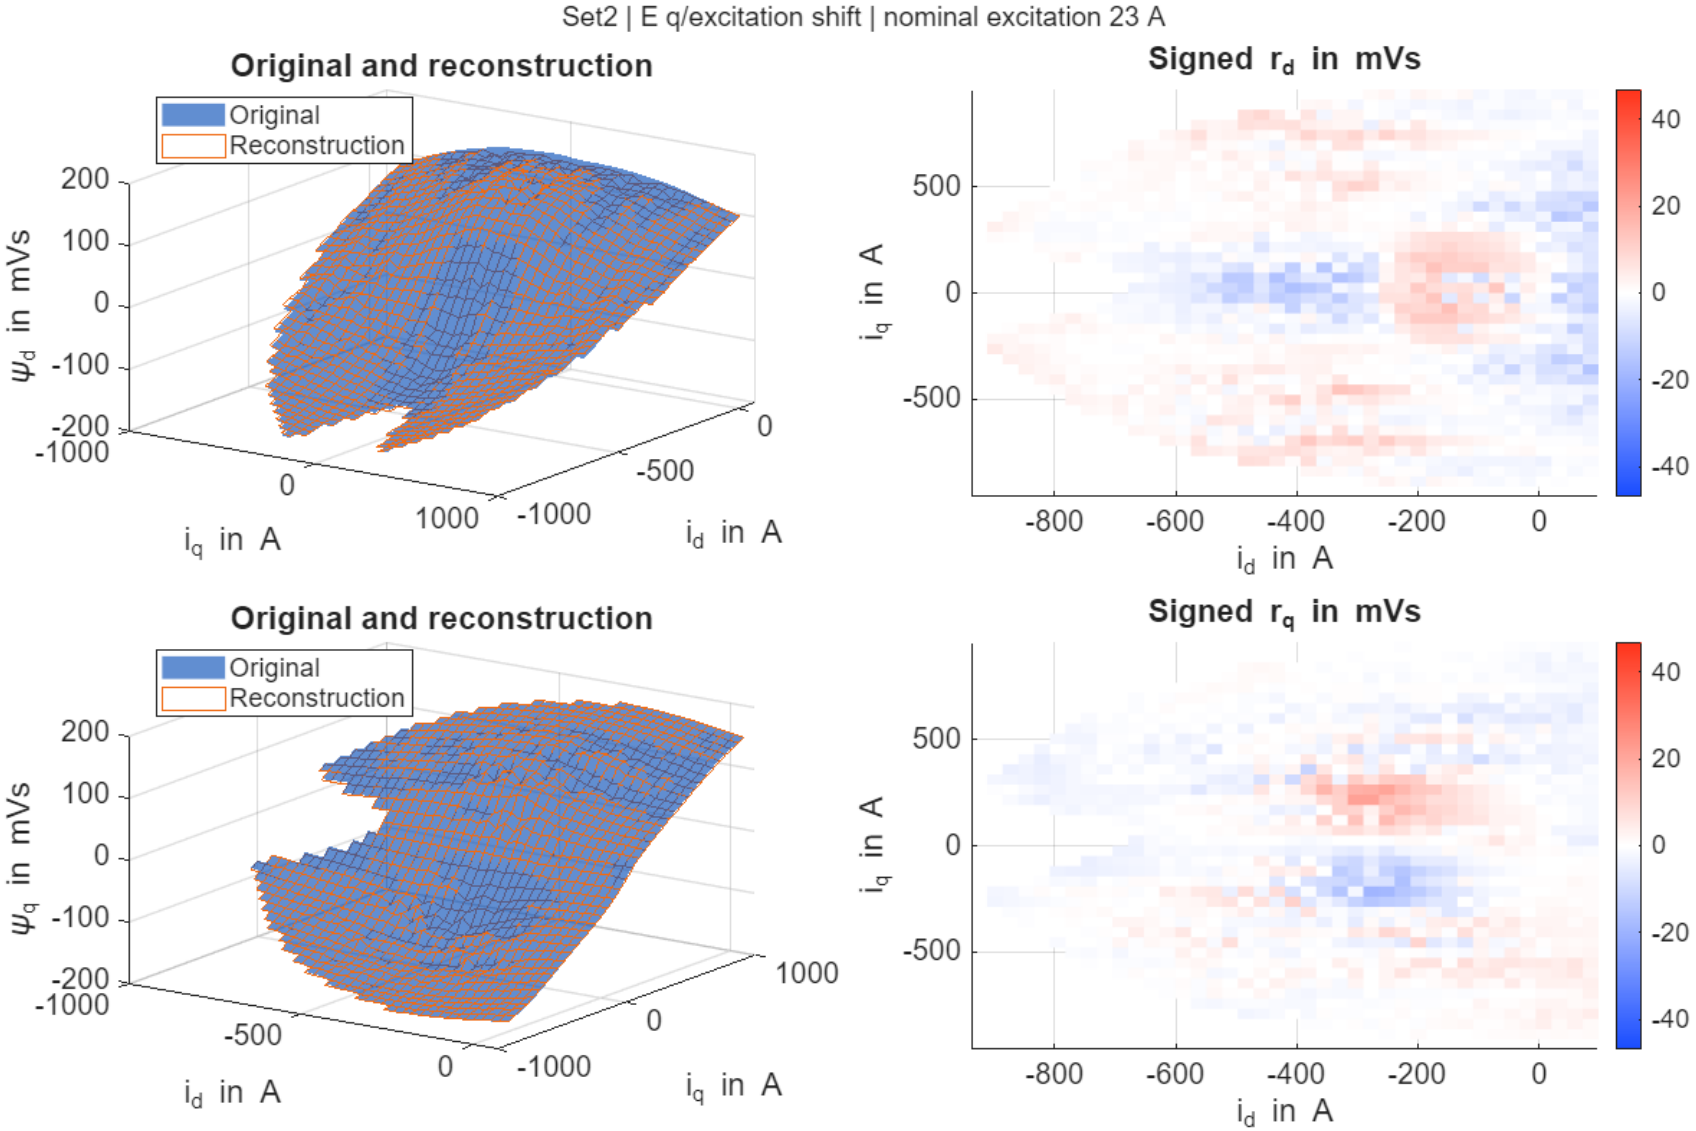

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method F, excitation 23 A

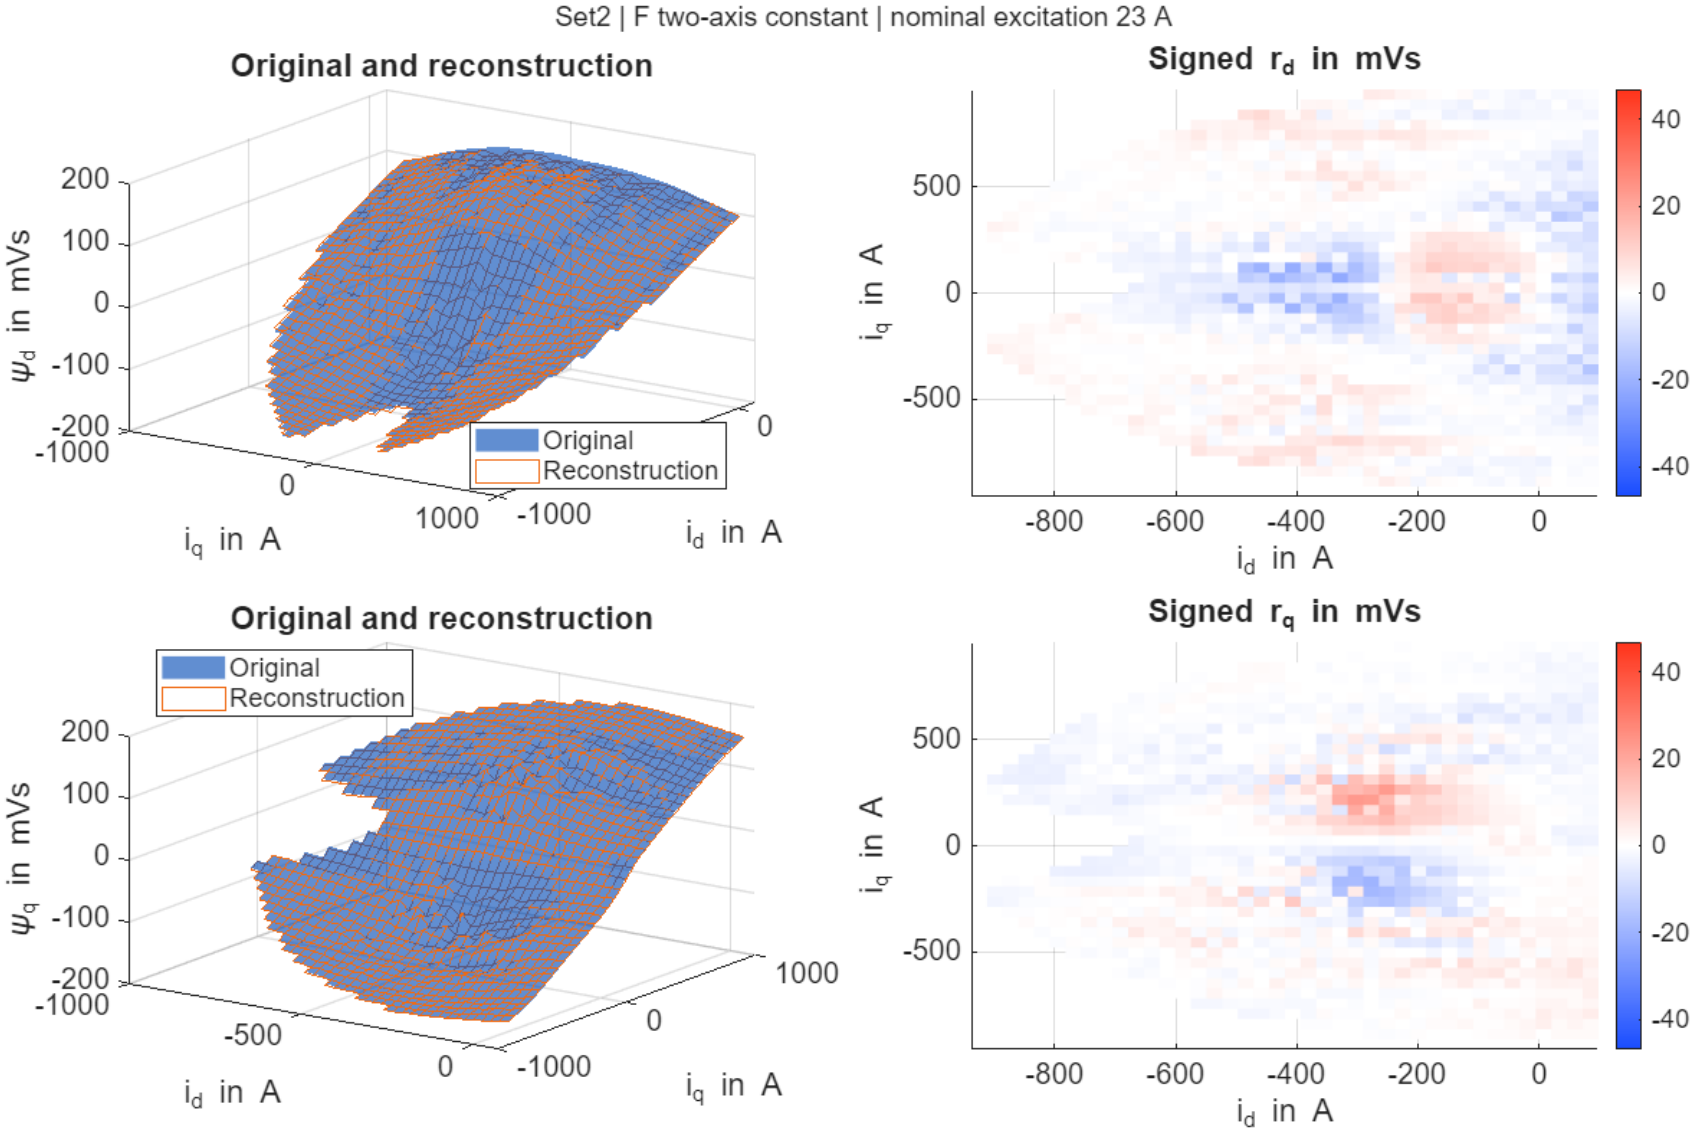

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method G, excitation 23 A

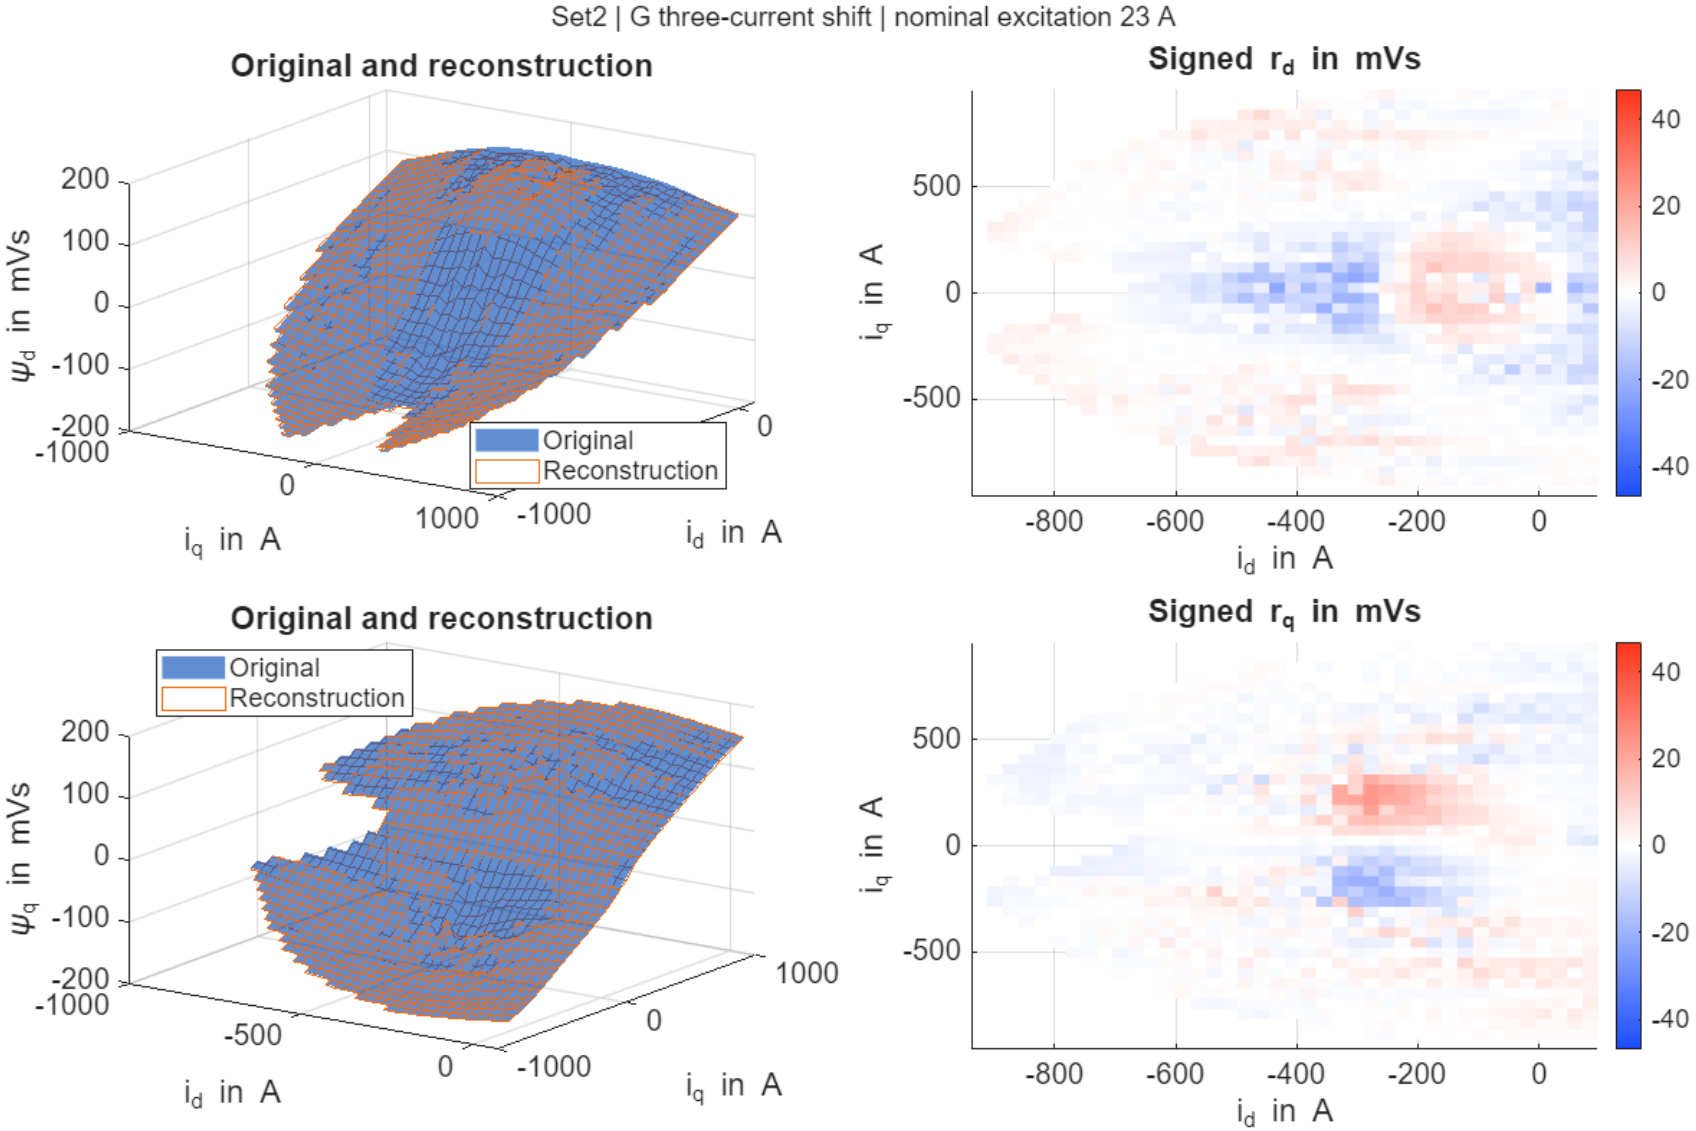

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method H, excitation 23 A

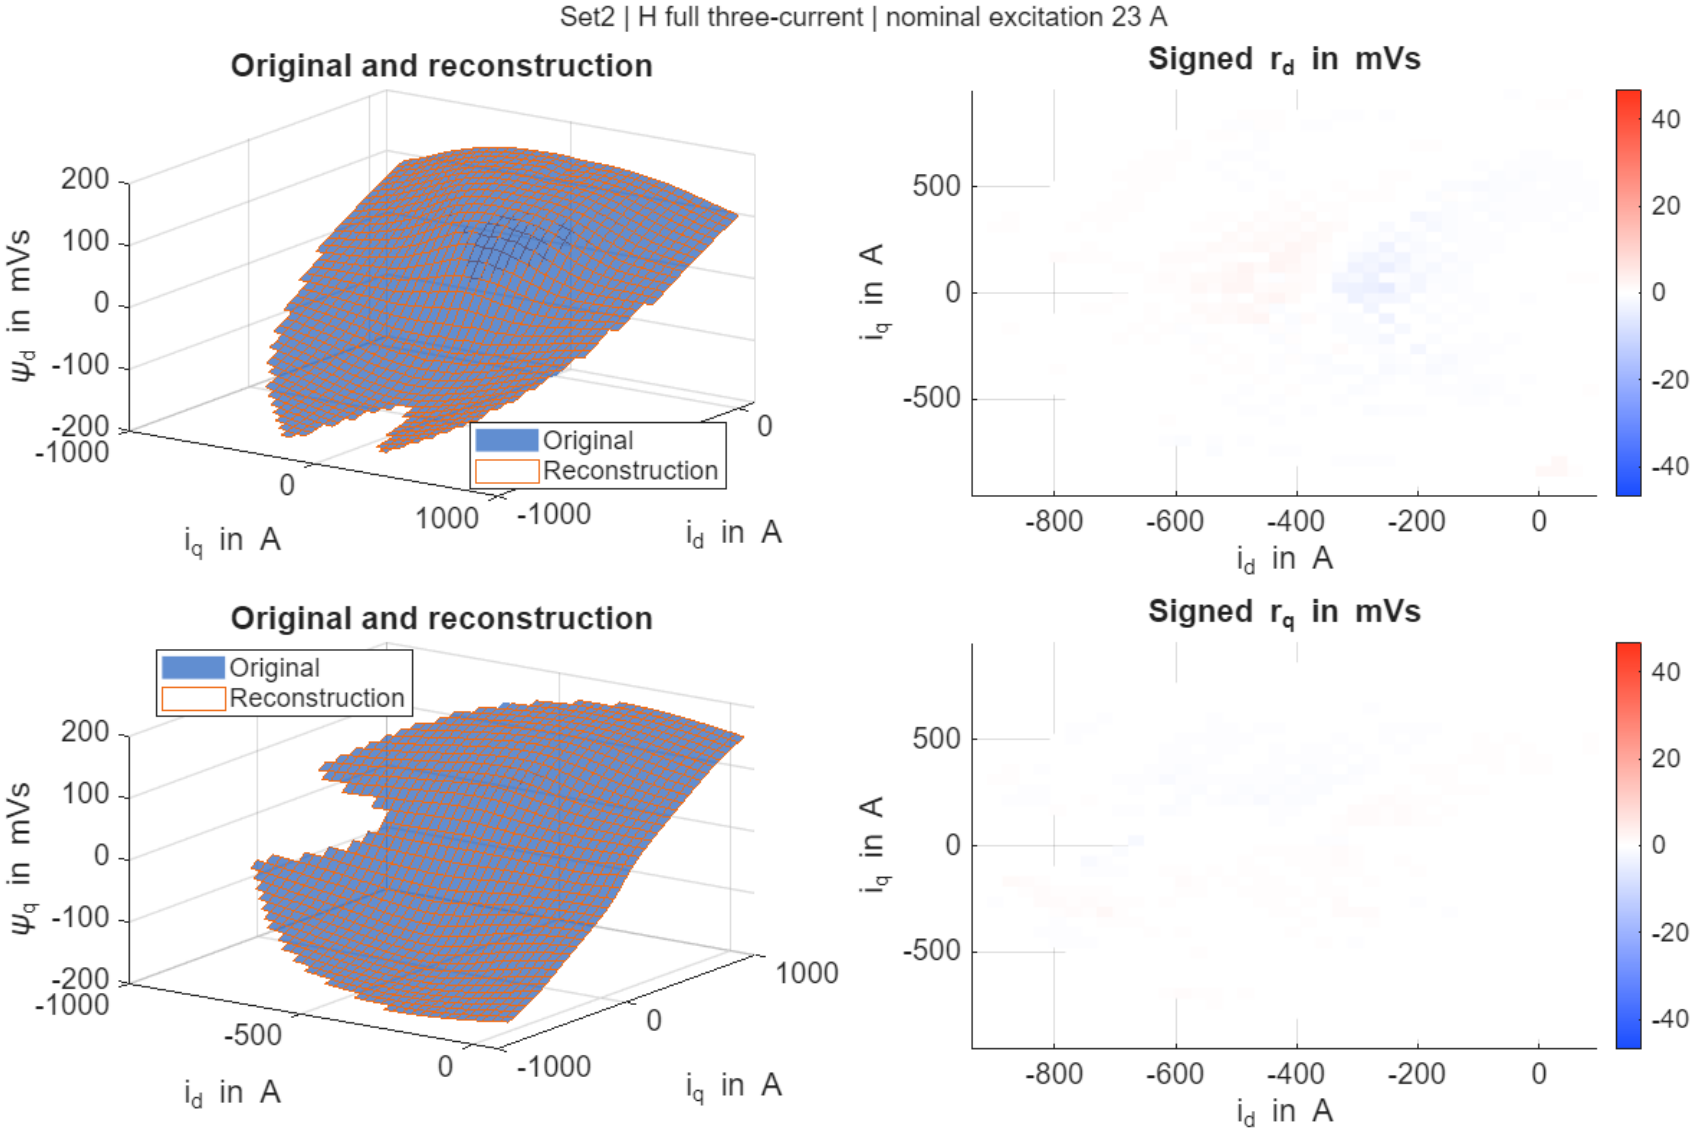

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method A, excitation 26 A

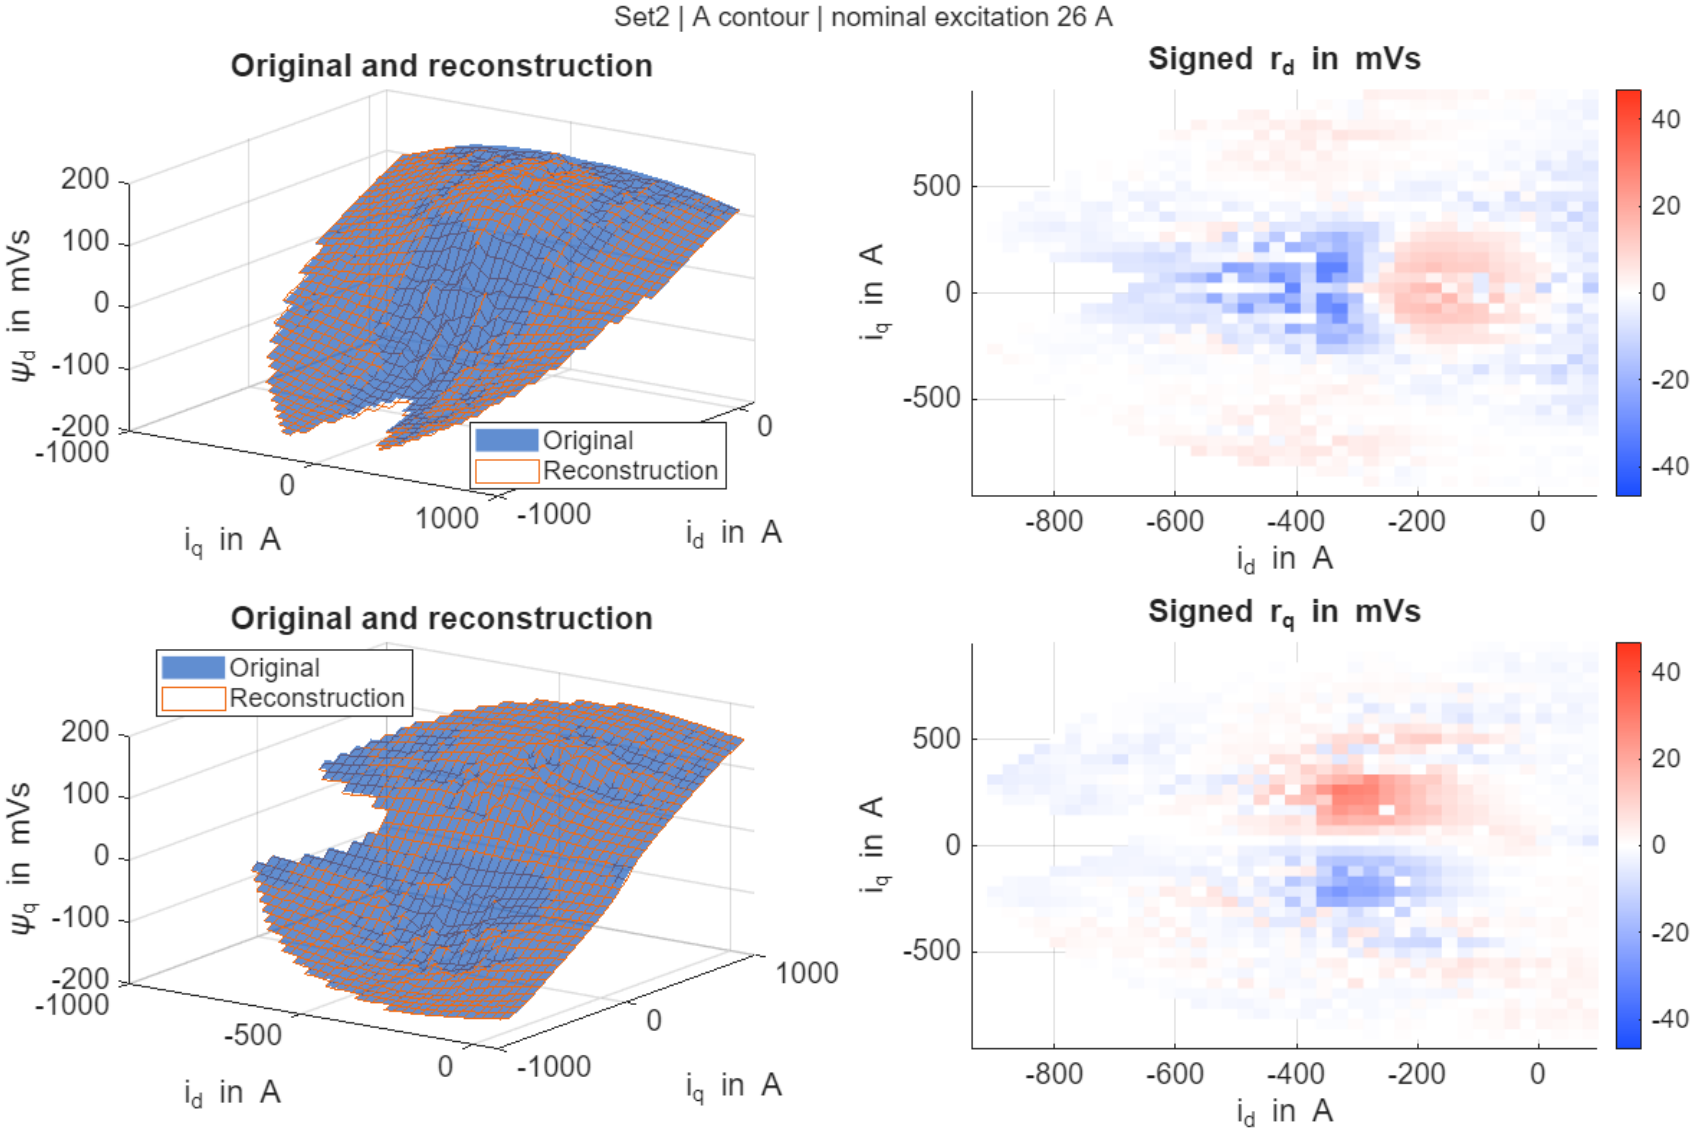

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method B, excitation 26 A

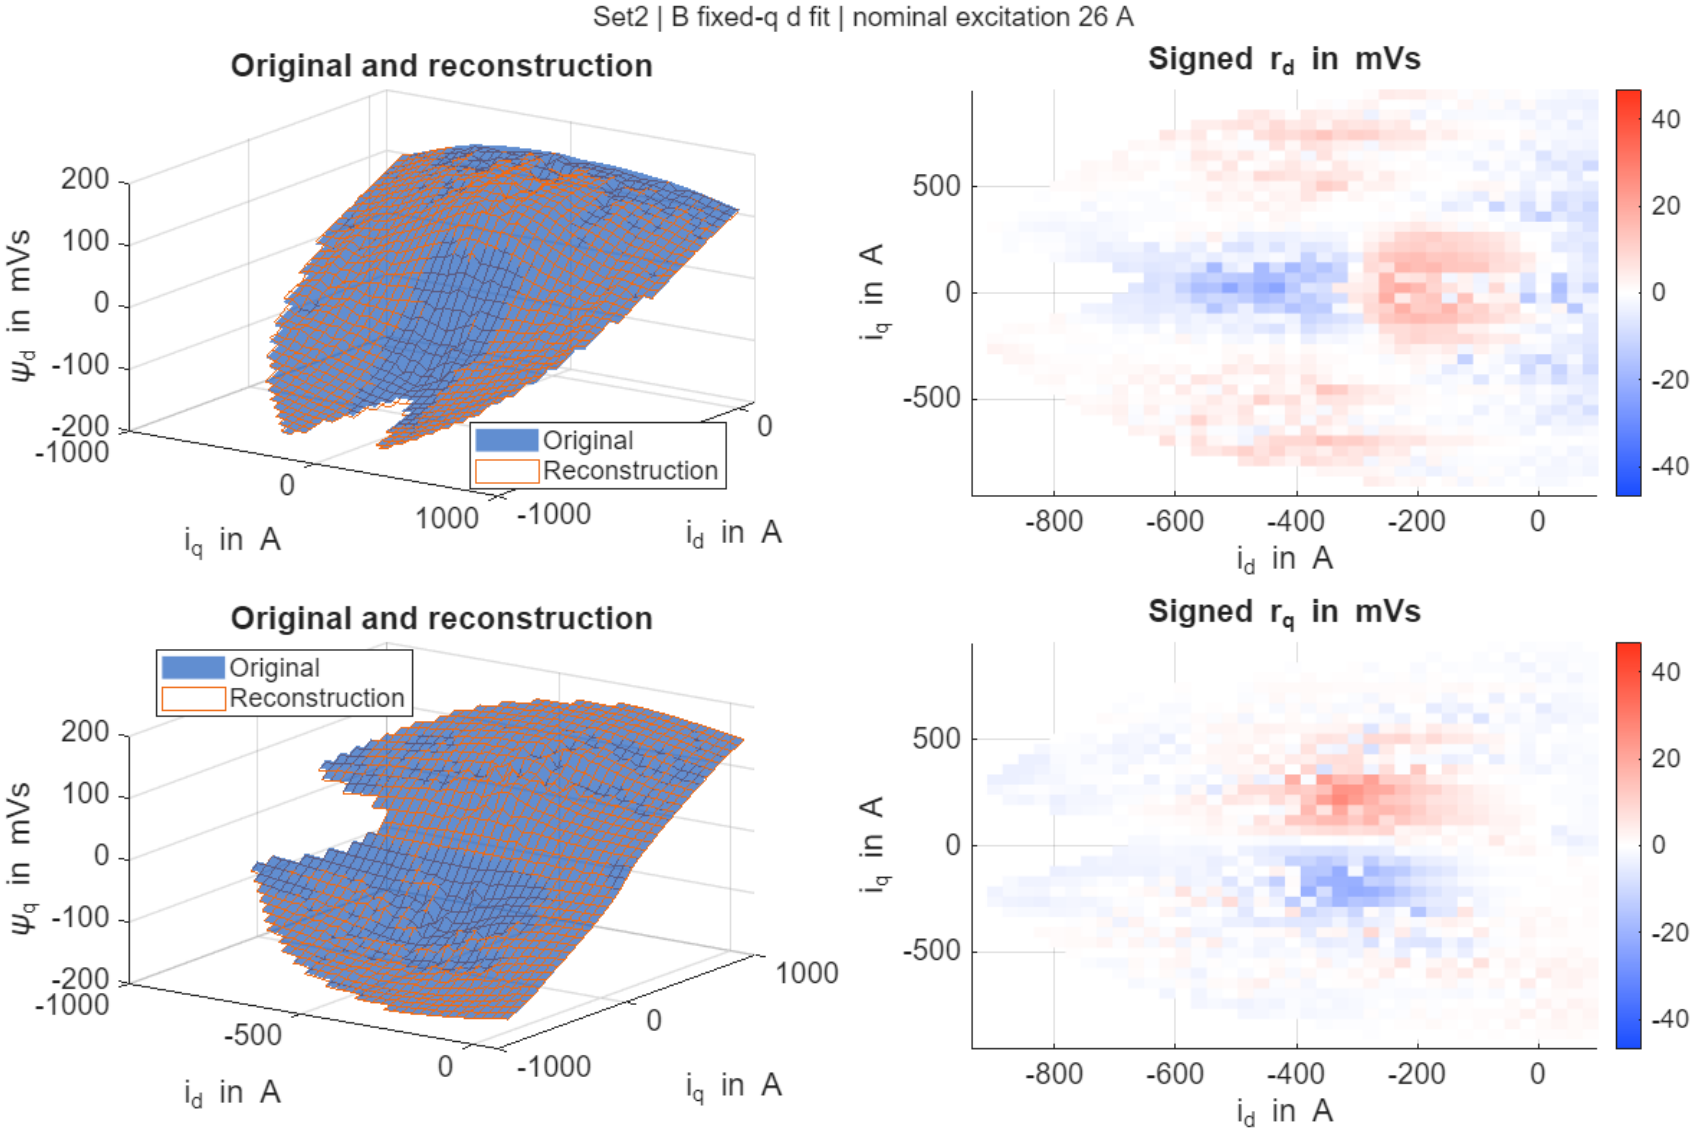

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method C, excitation 26 A

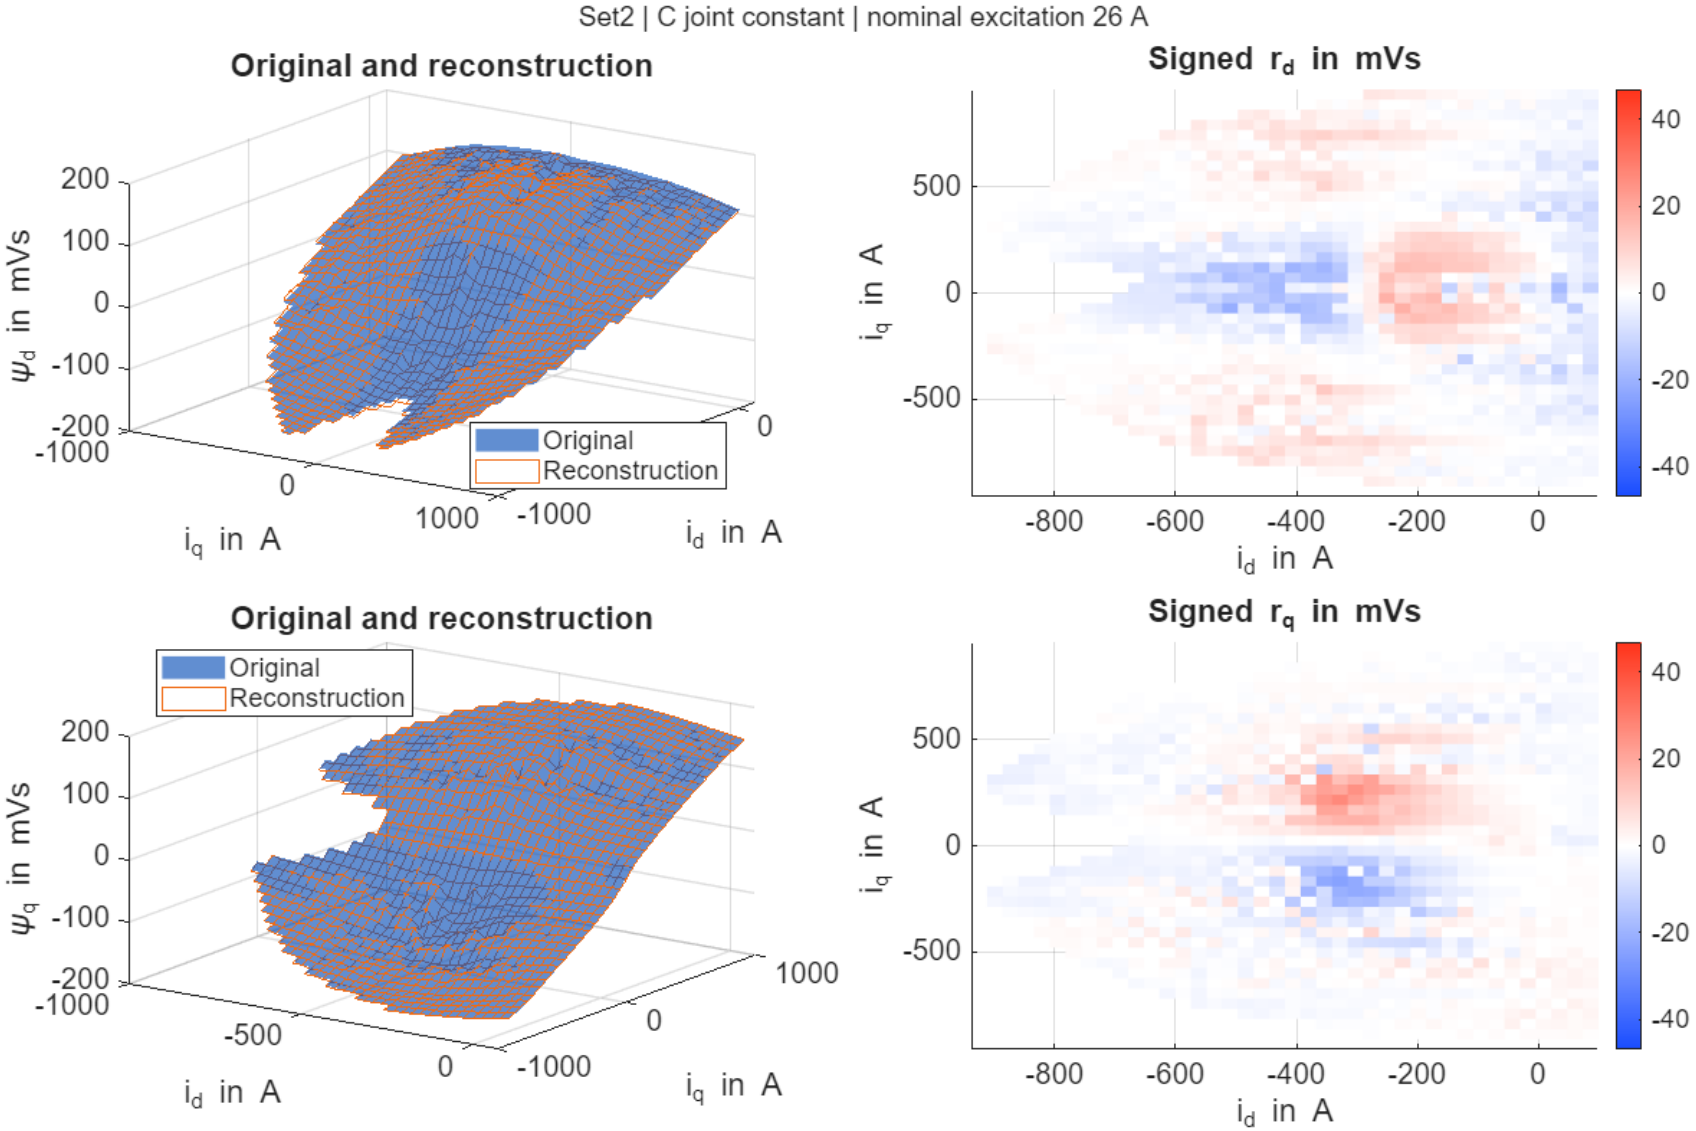

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method D, excitation 26 A

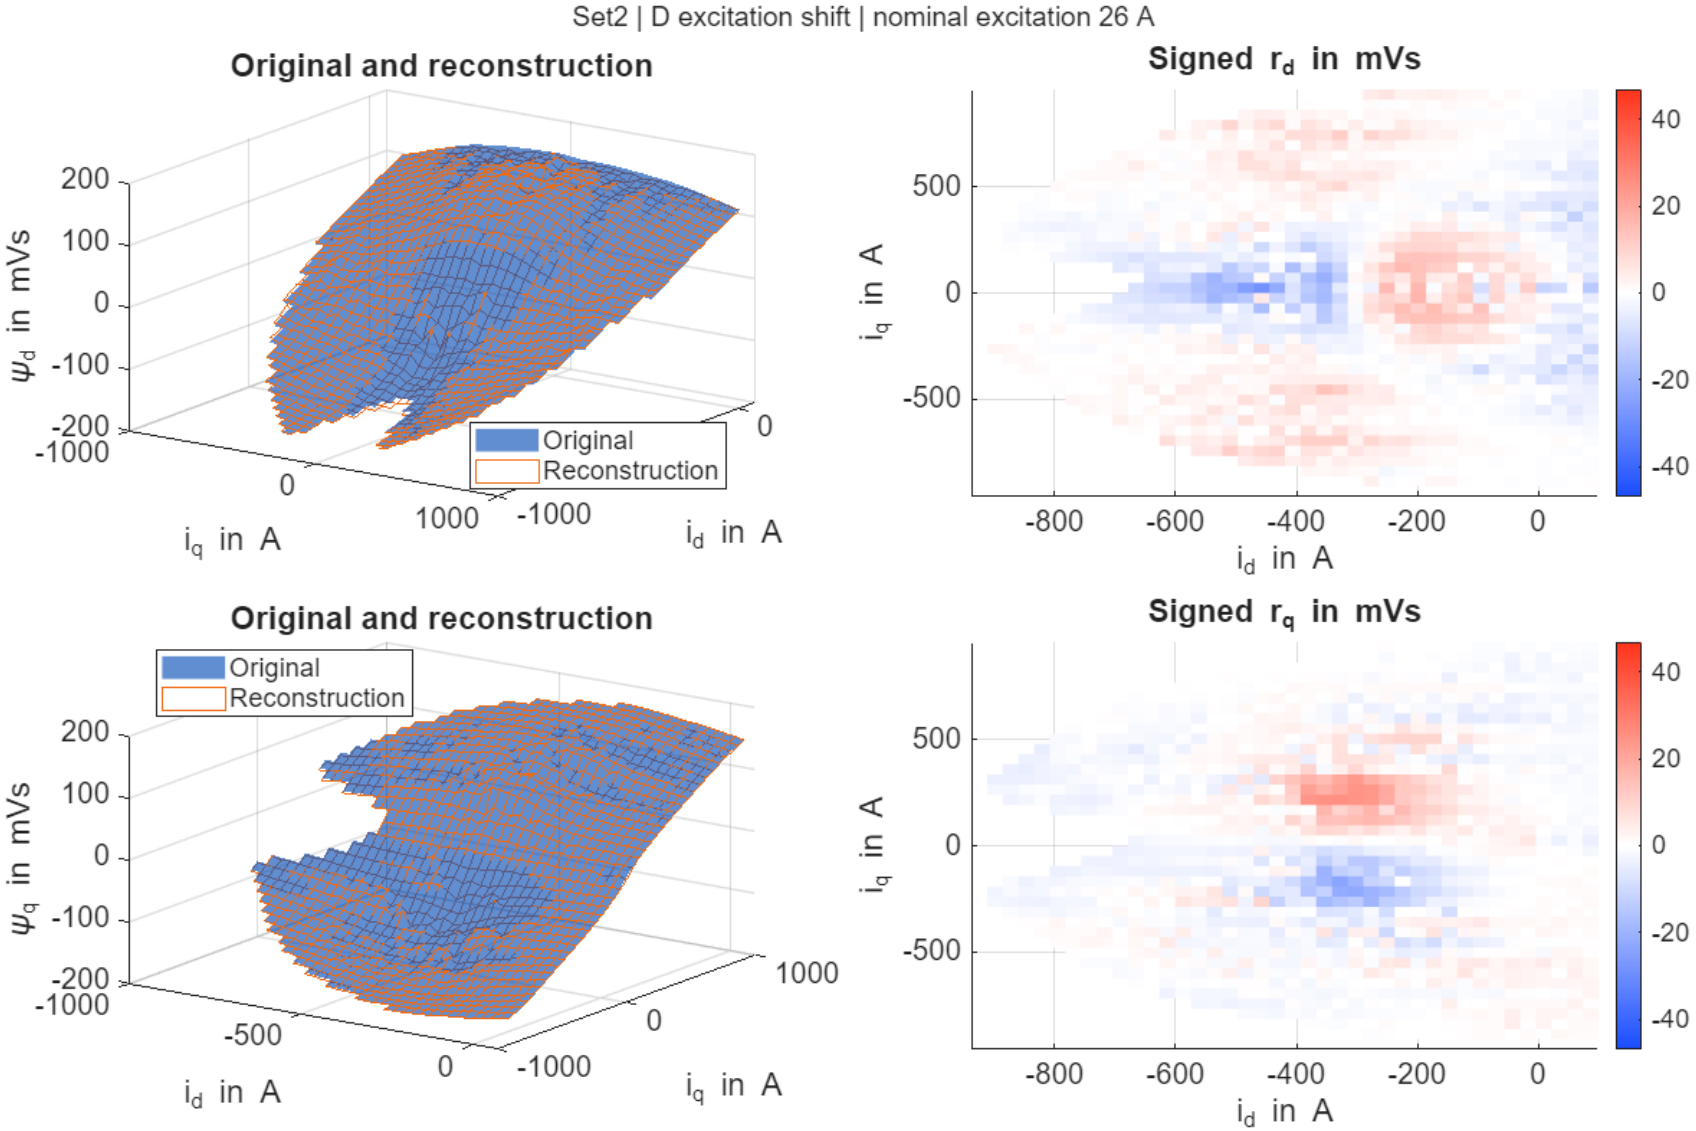

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method E, excitation 26 A

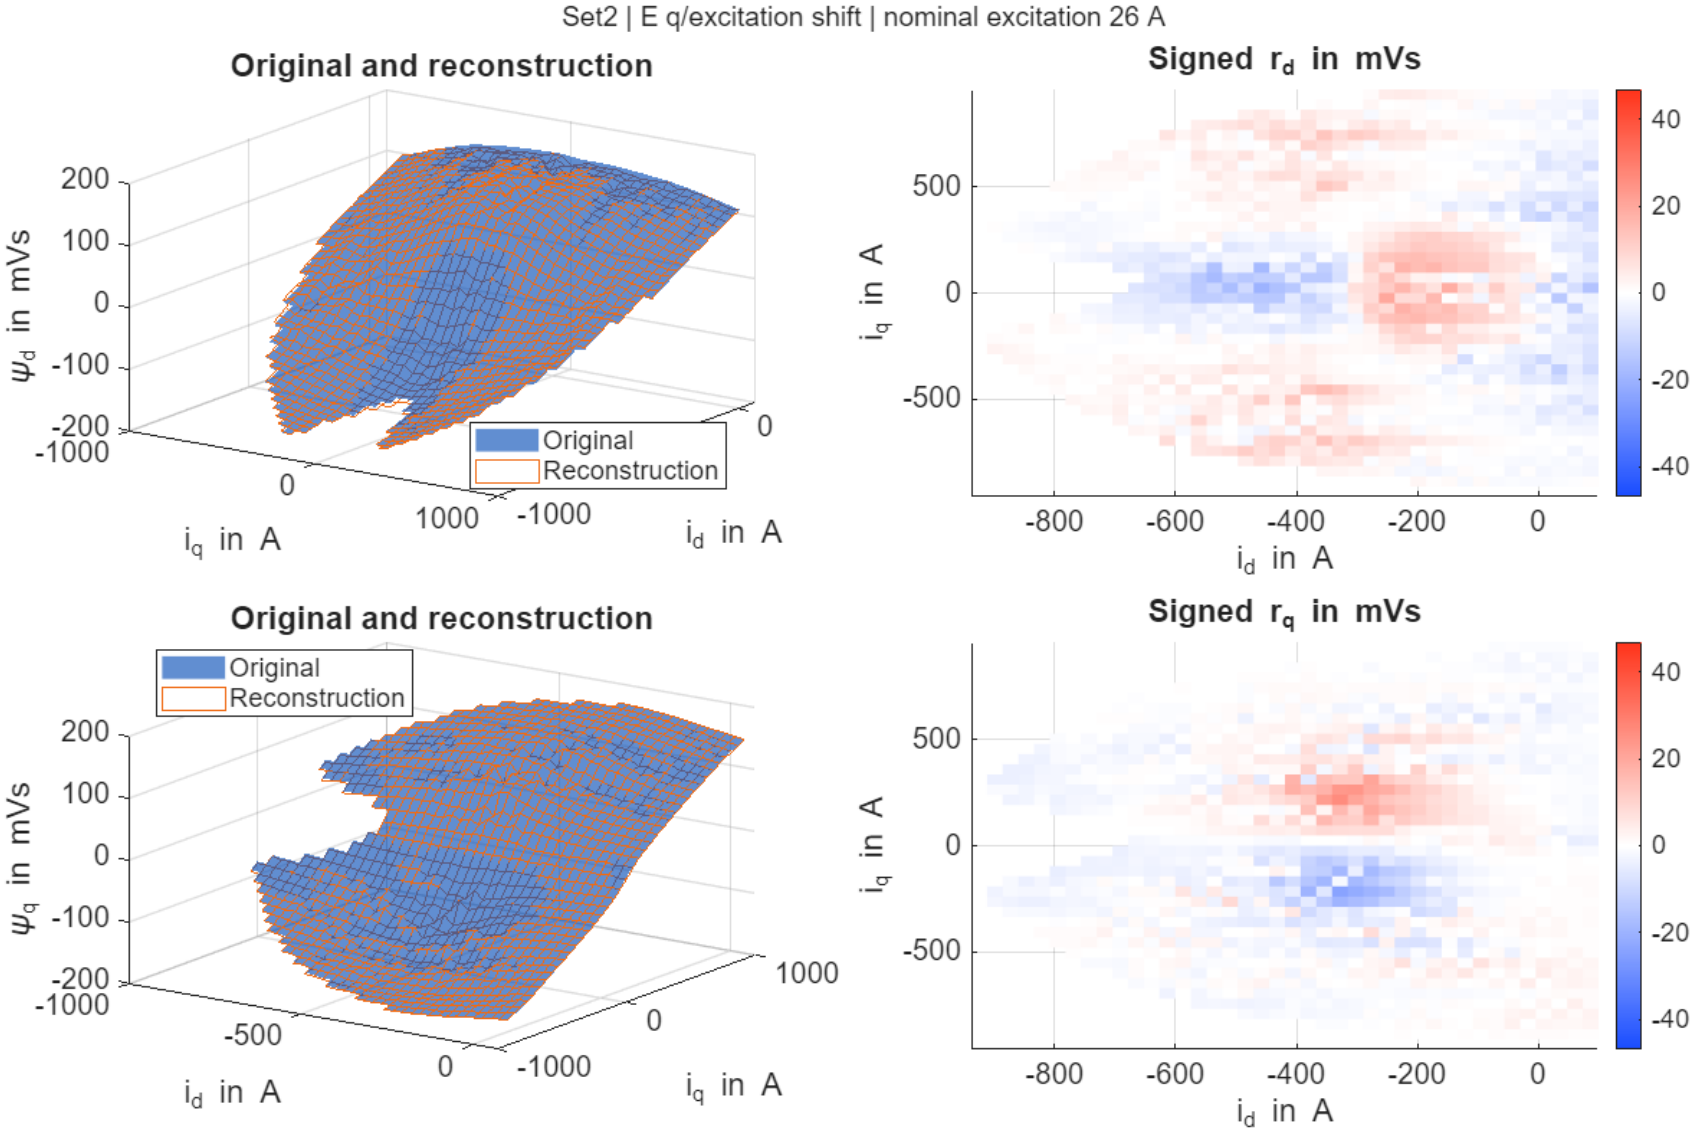

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method F, excitation 26 A

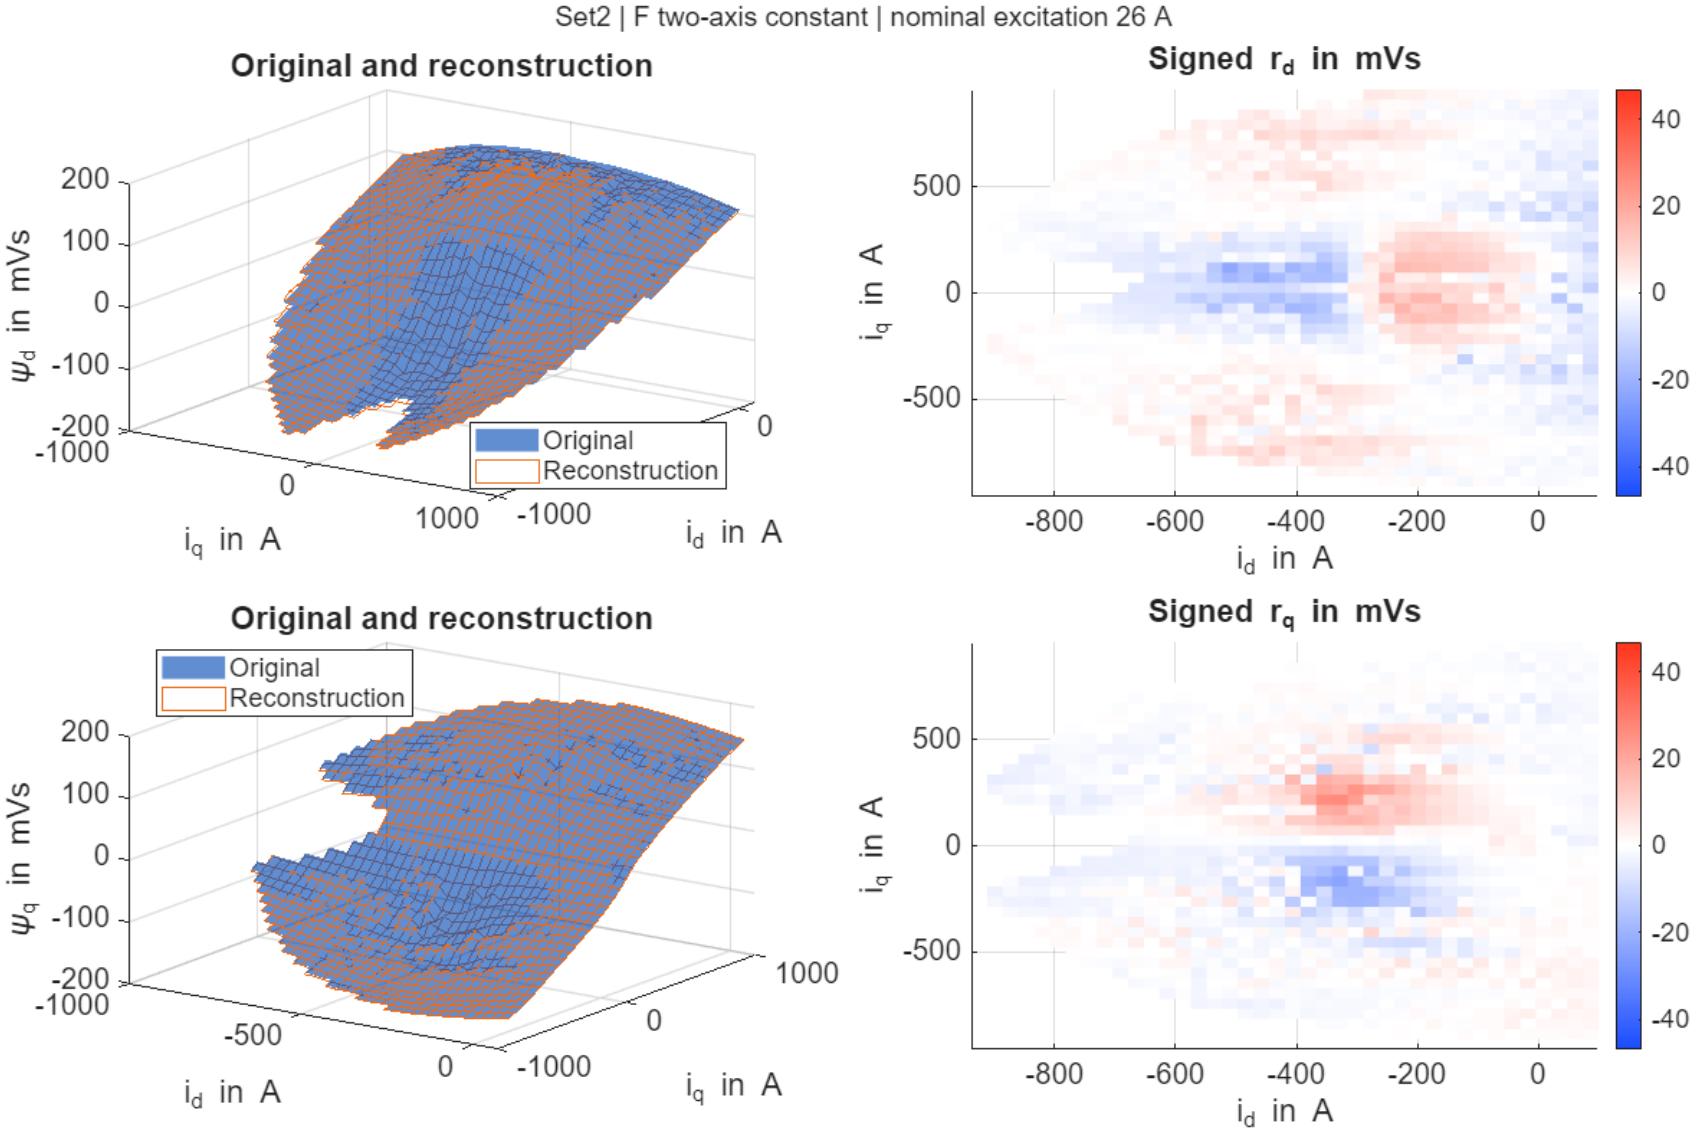

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method G, excitation 26 A

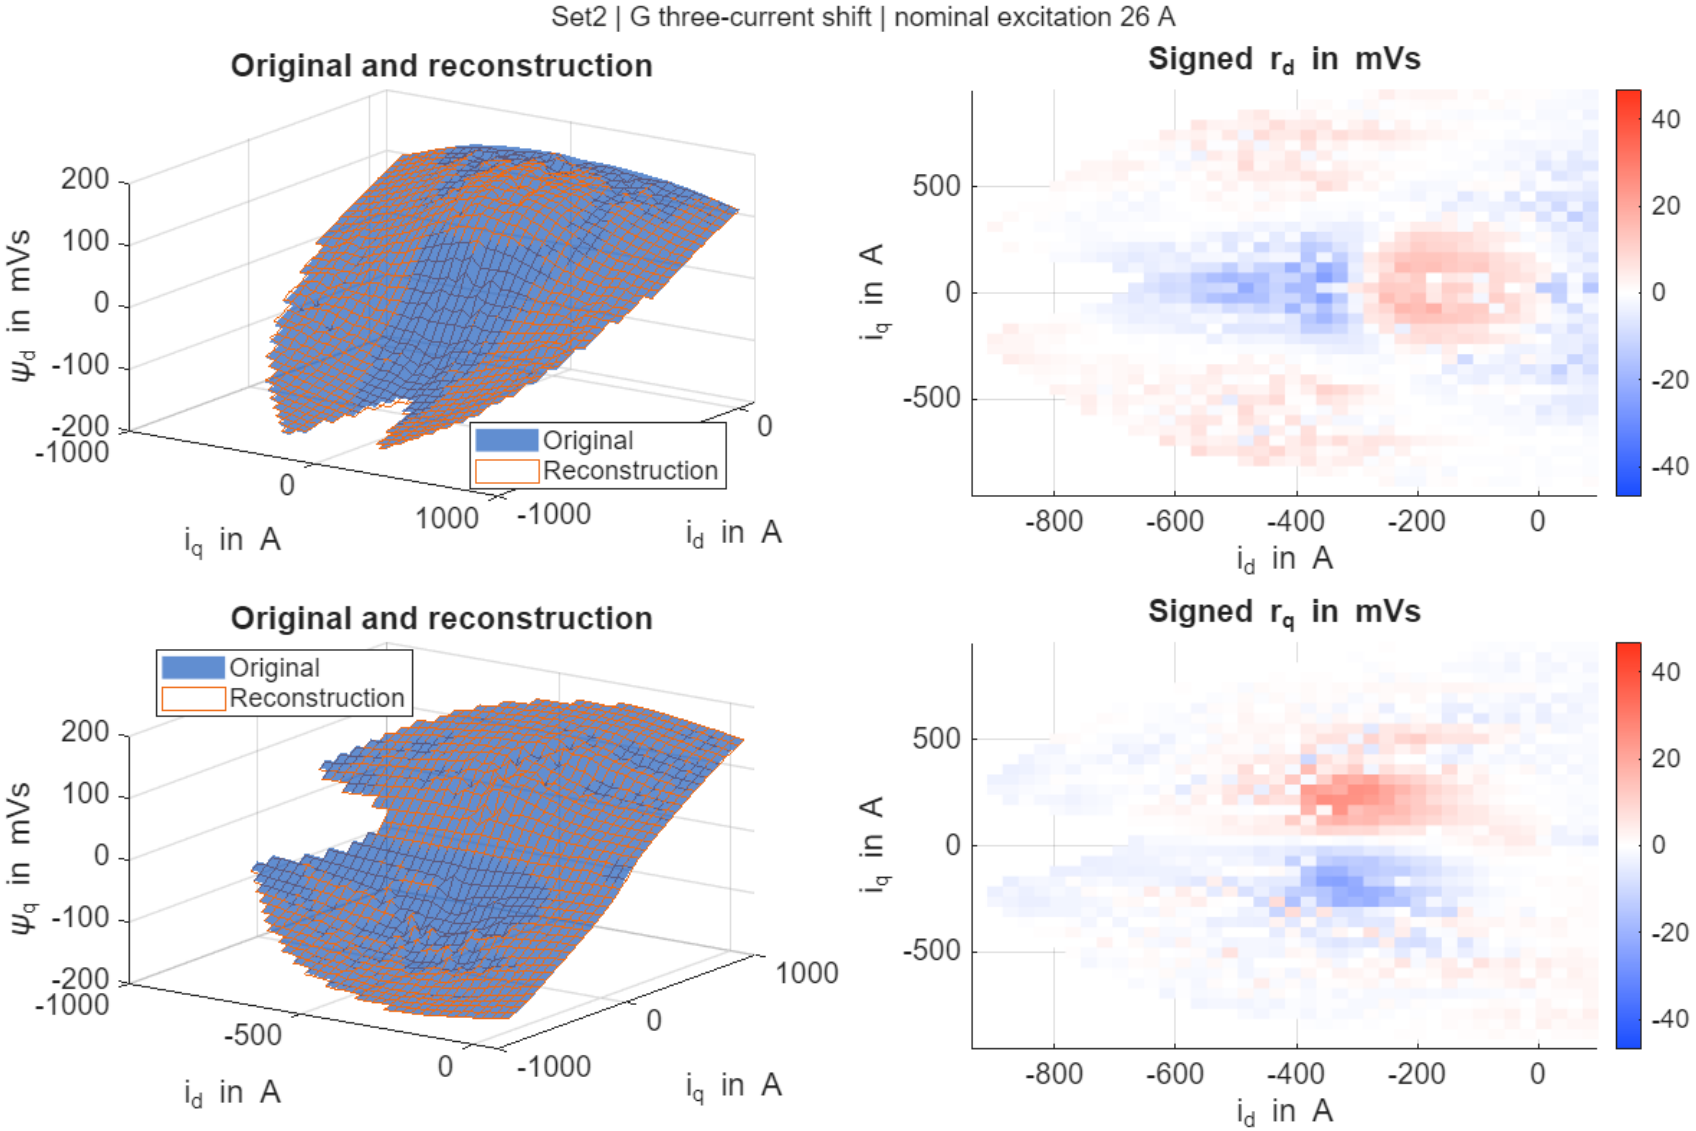

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method H, excitation 26 A

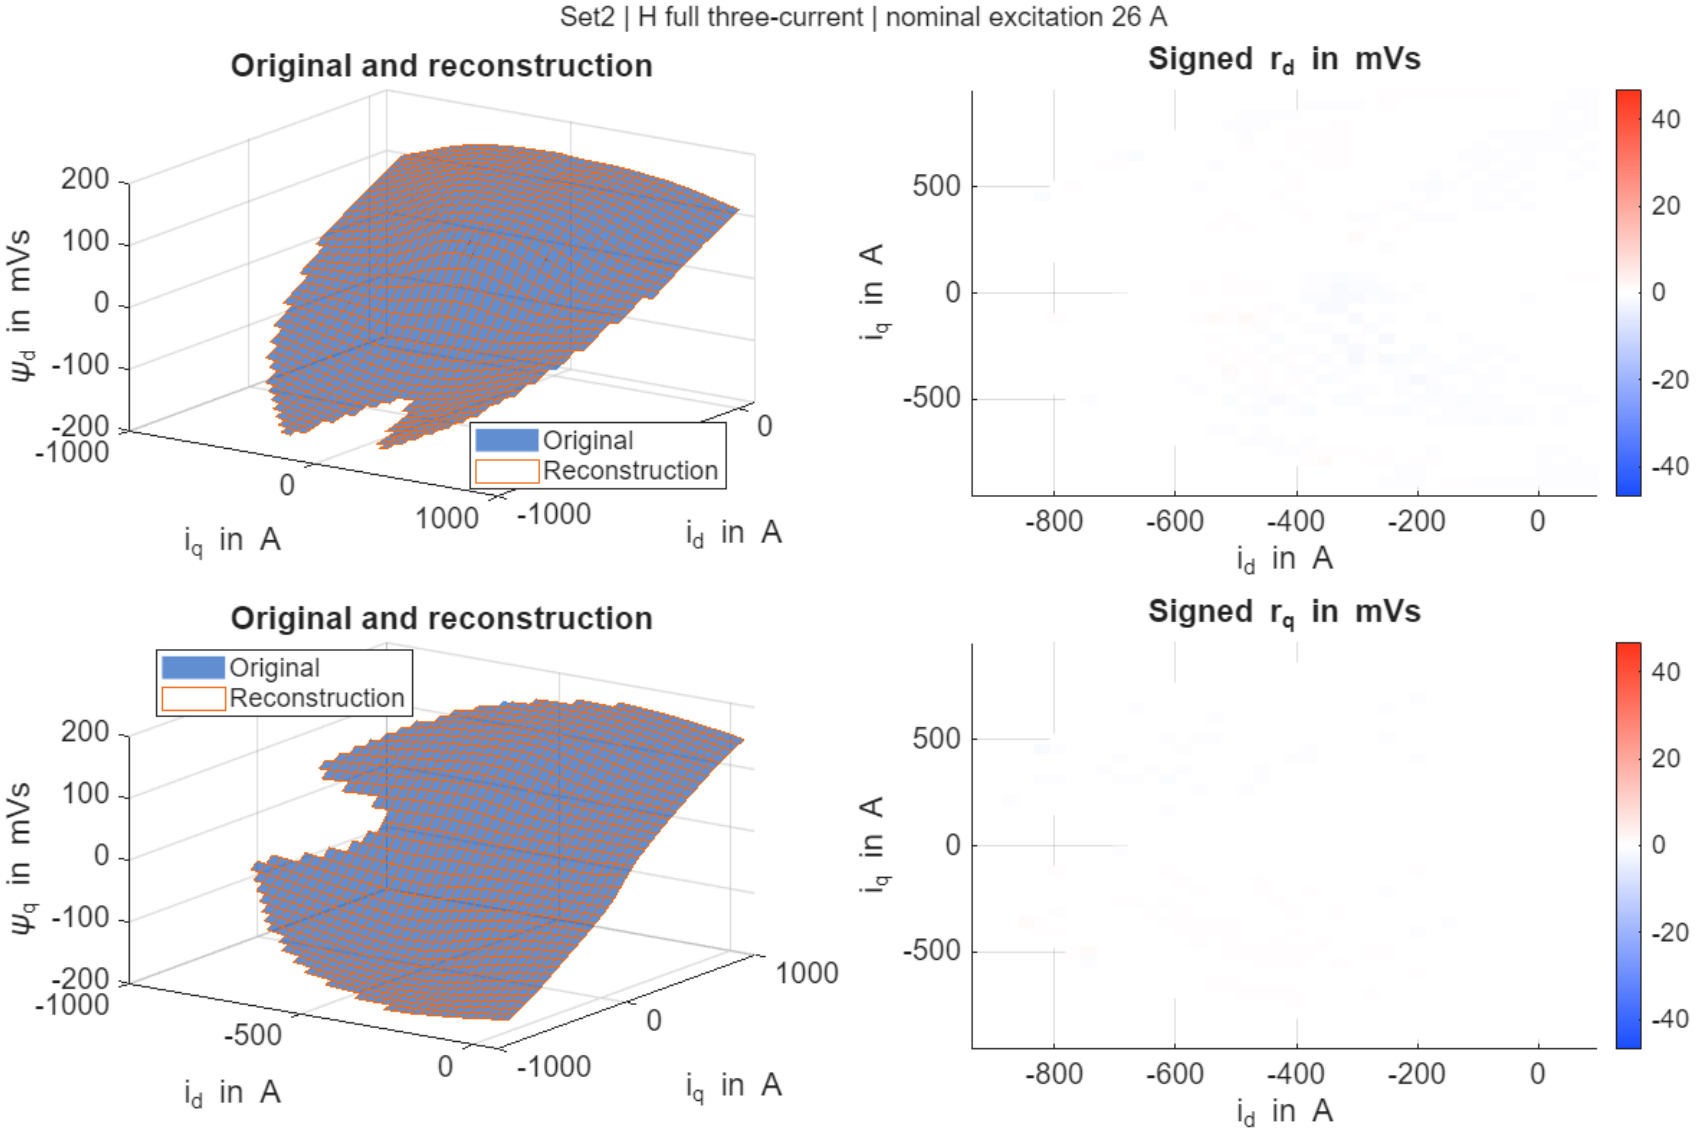

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method A, excitation 29 A

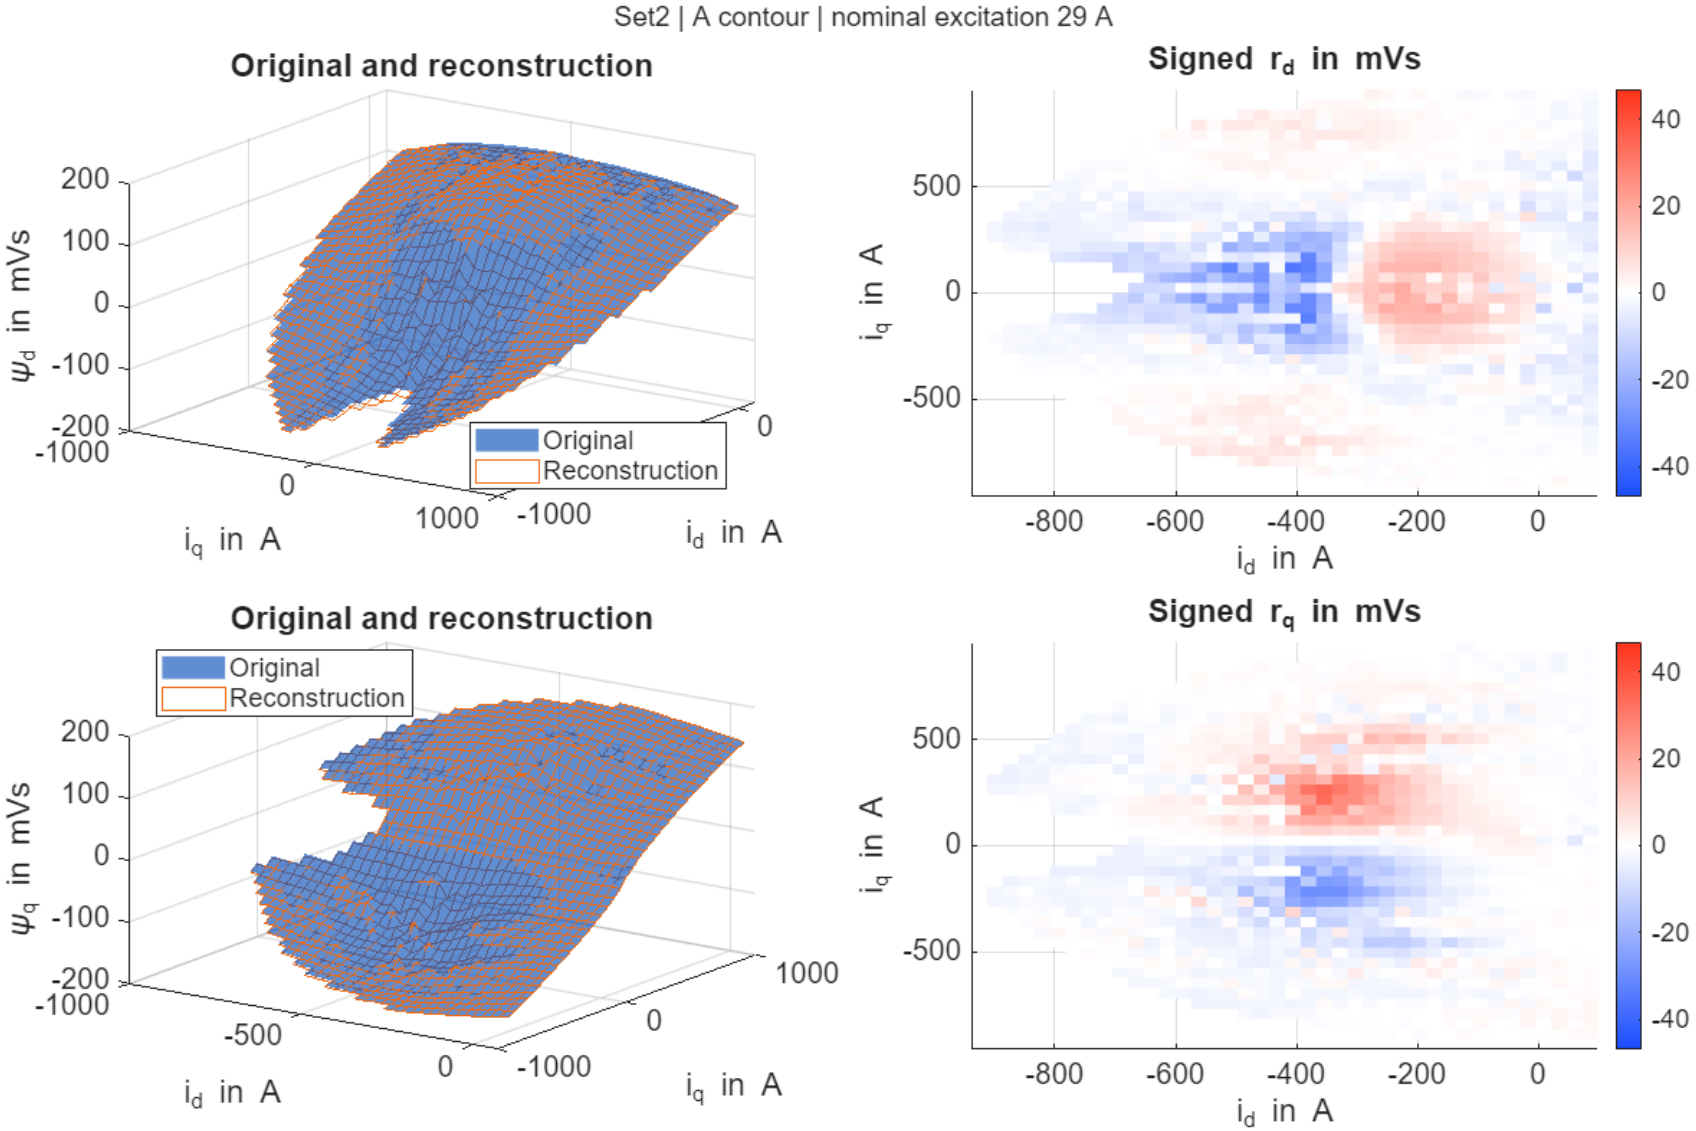

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method B, excitation 29 A

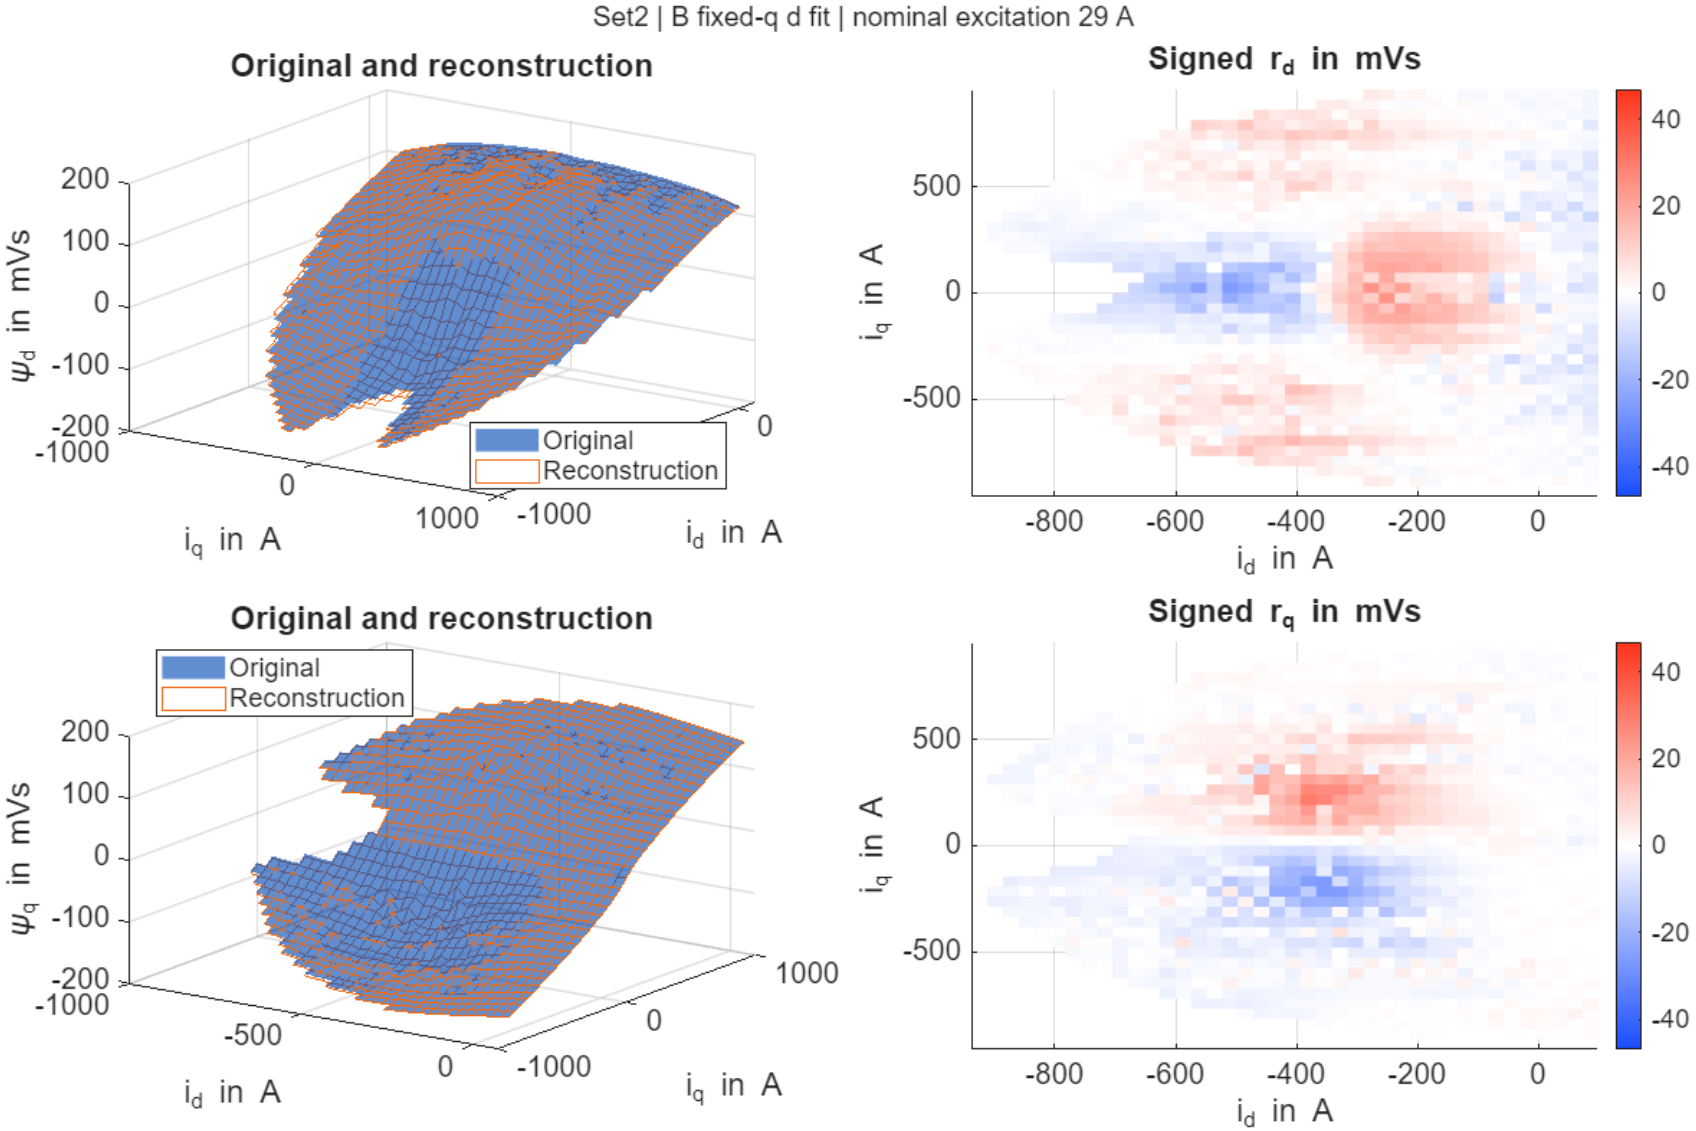

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method C, excitation 29 A

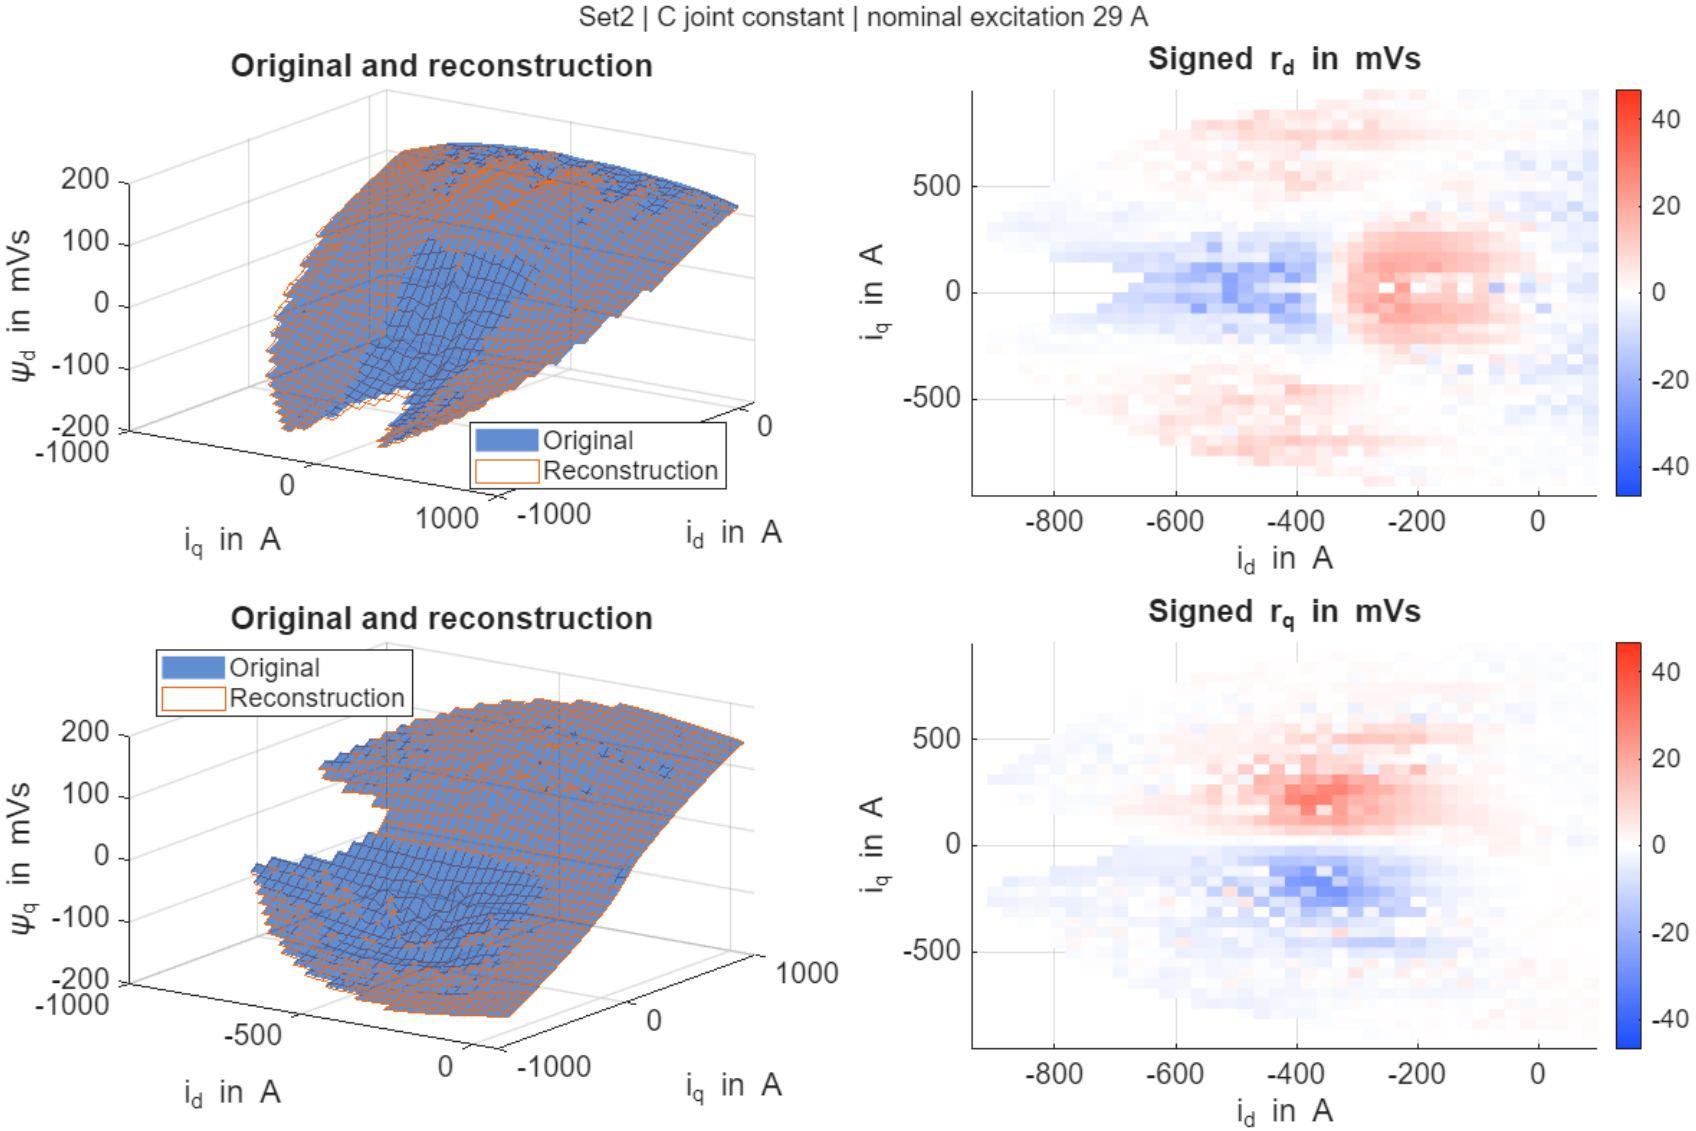

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method D, excitation 29 A

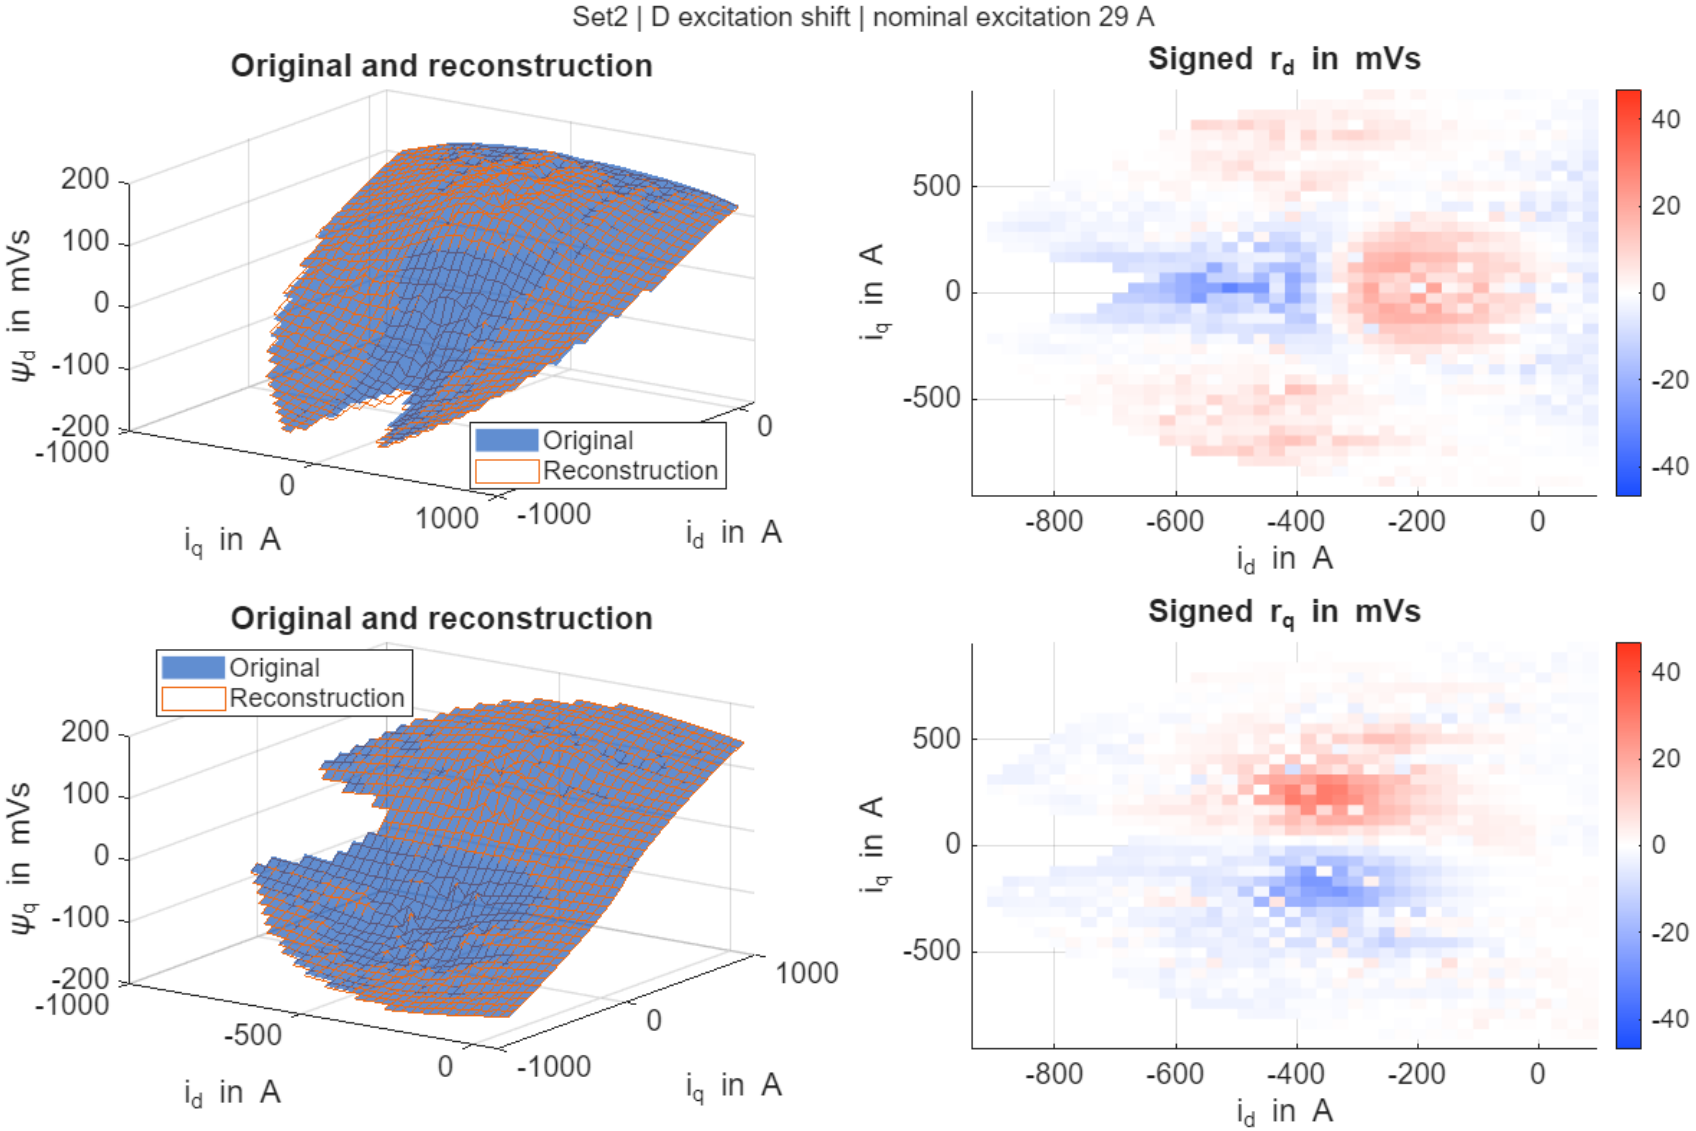

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method E, excitation 29 A

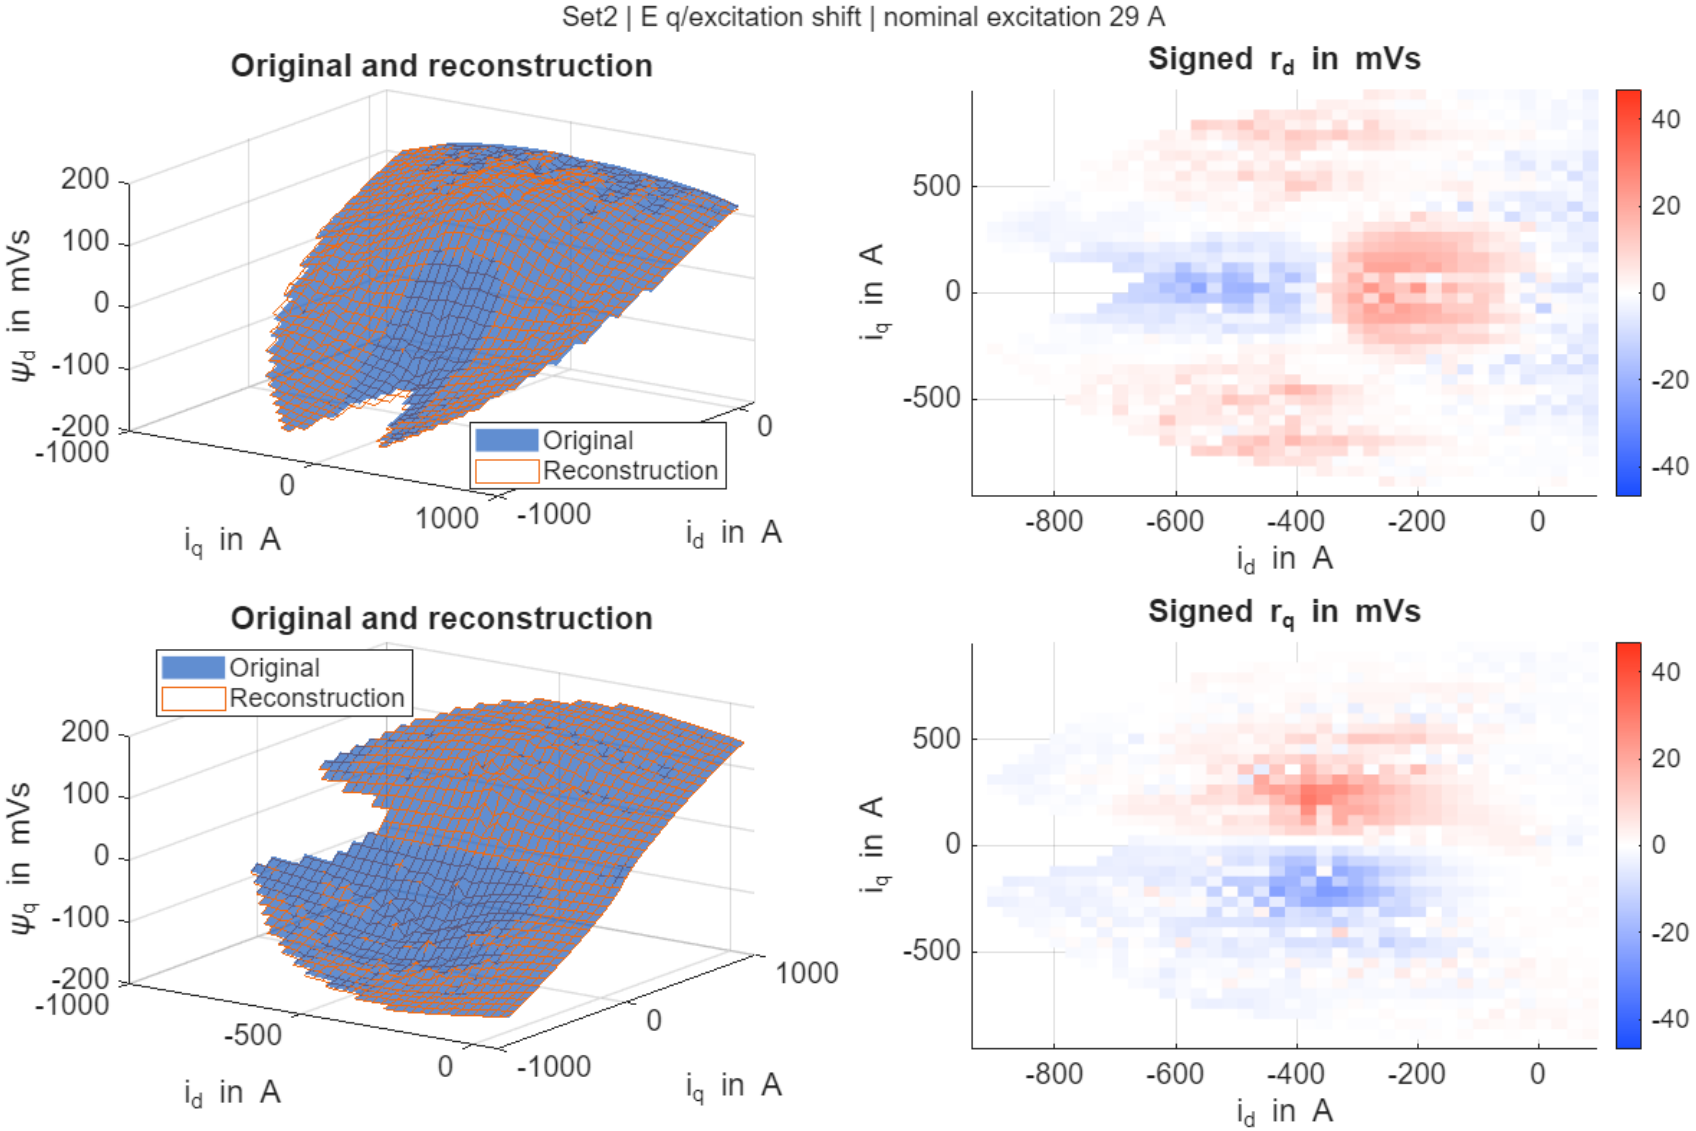

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method F, excitation 29 A

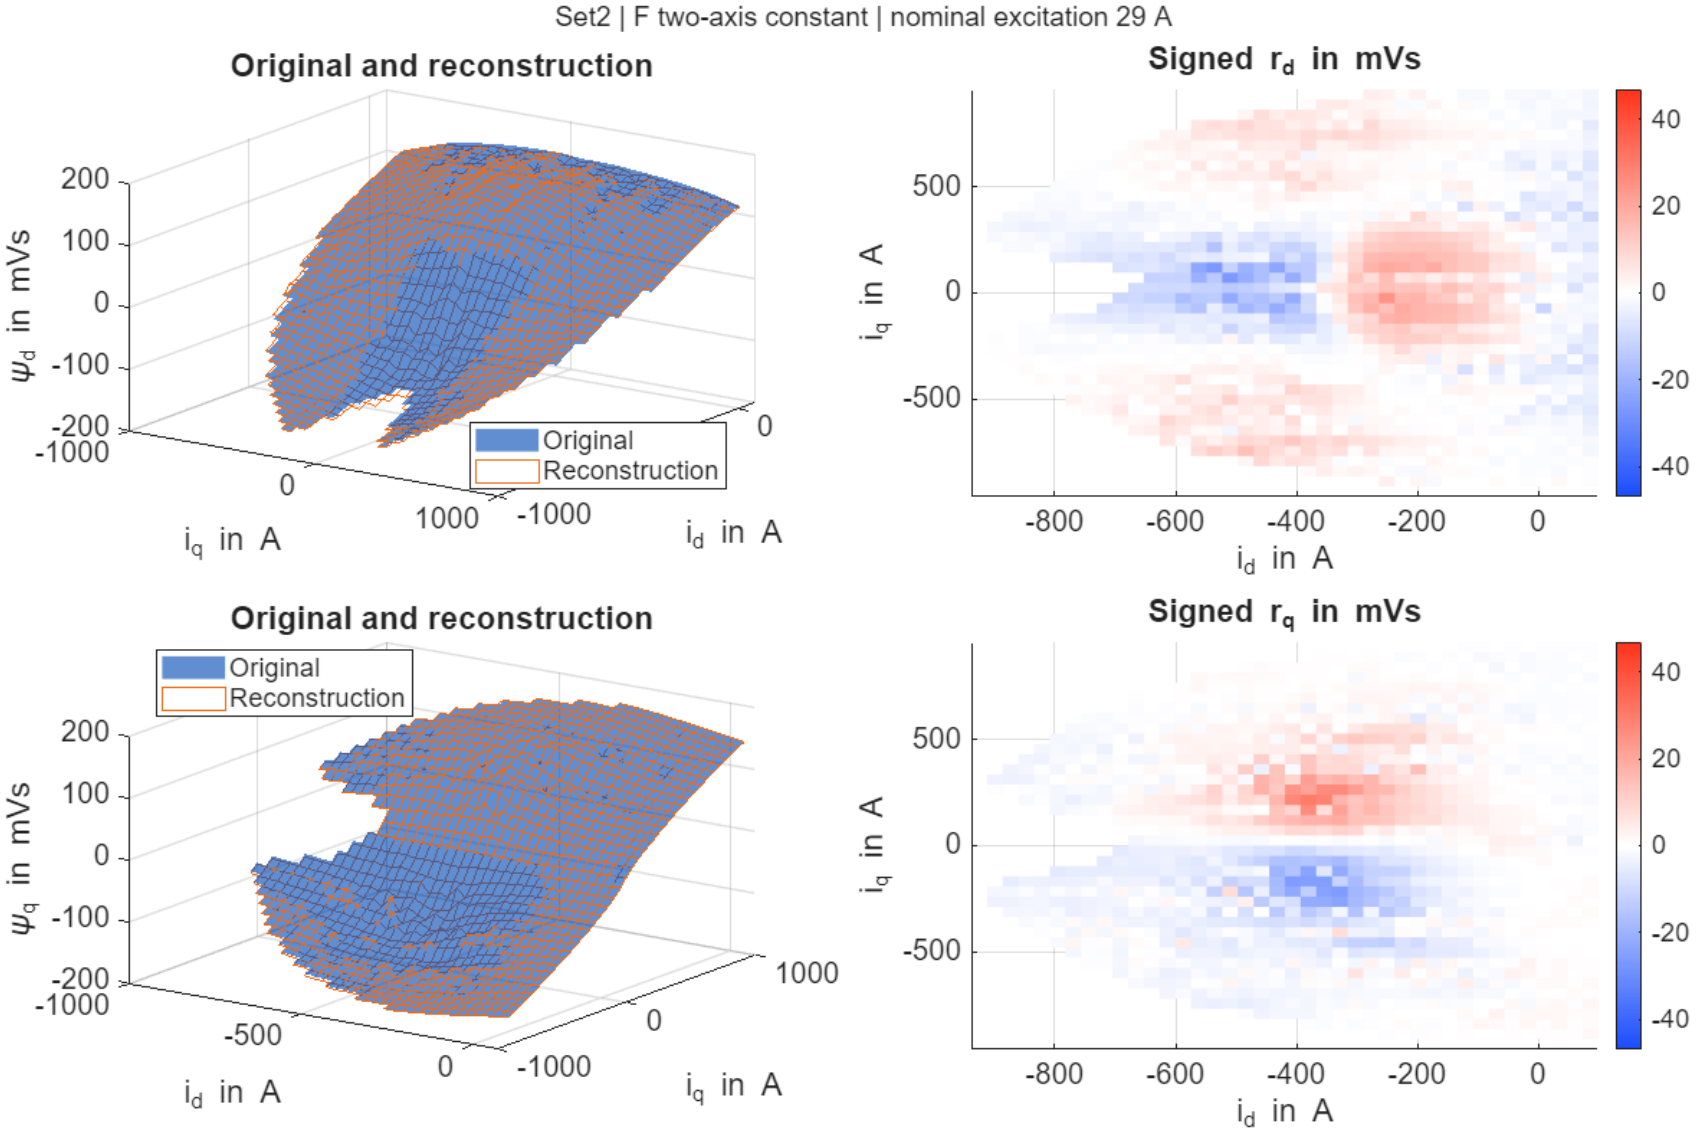

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method G, excitation 29 A

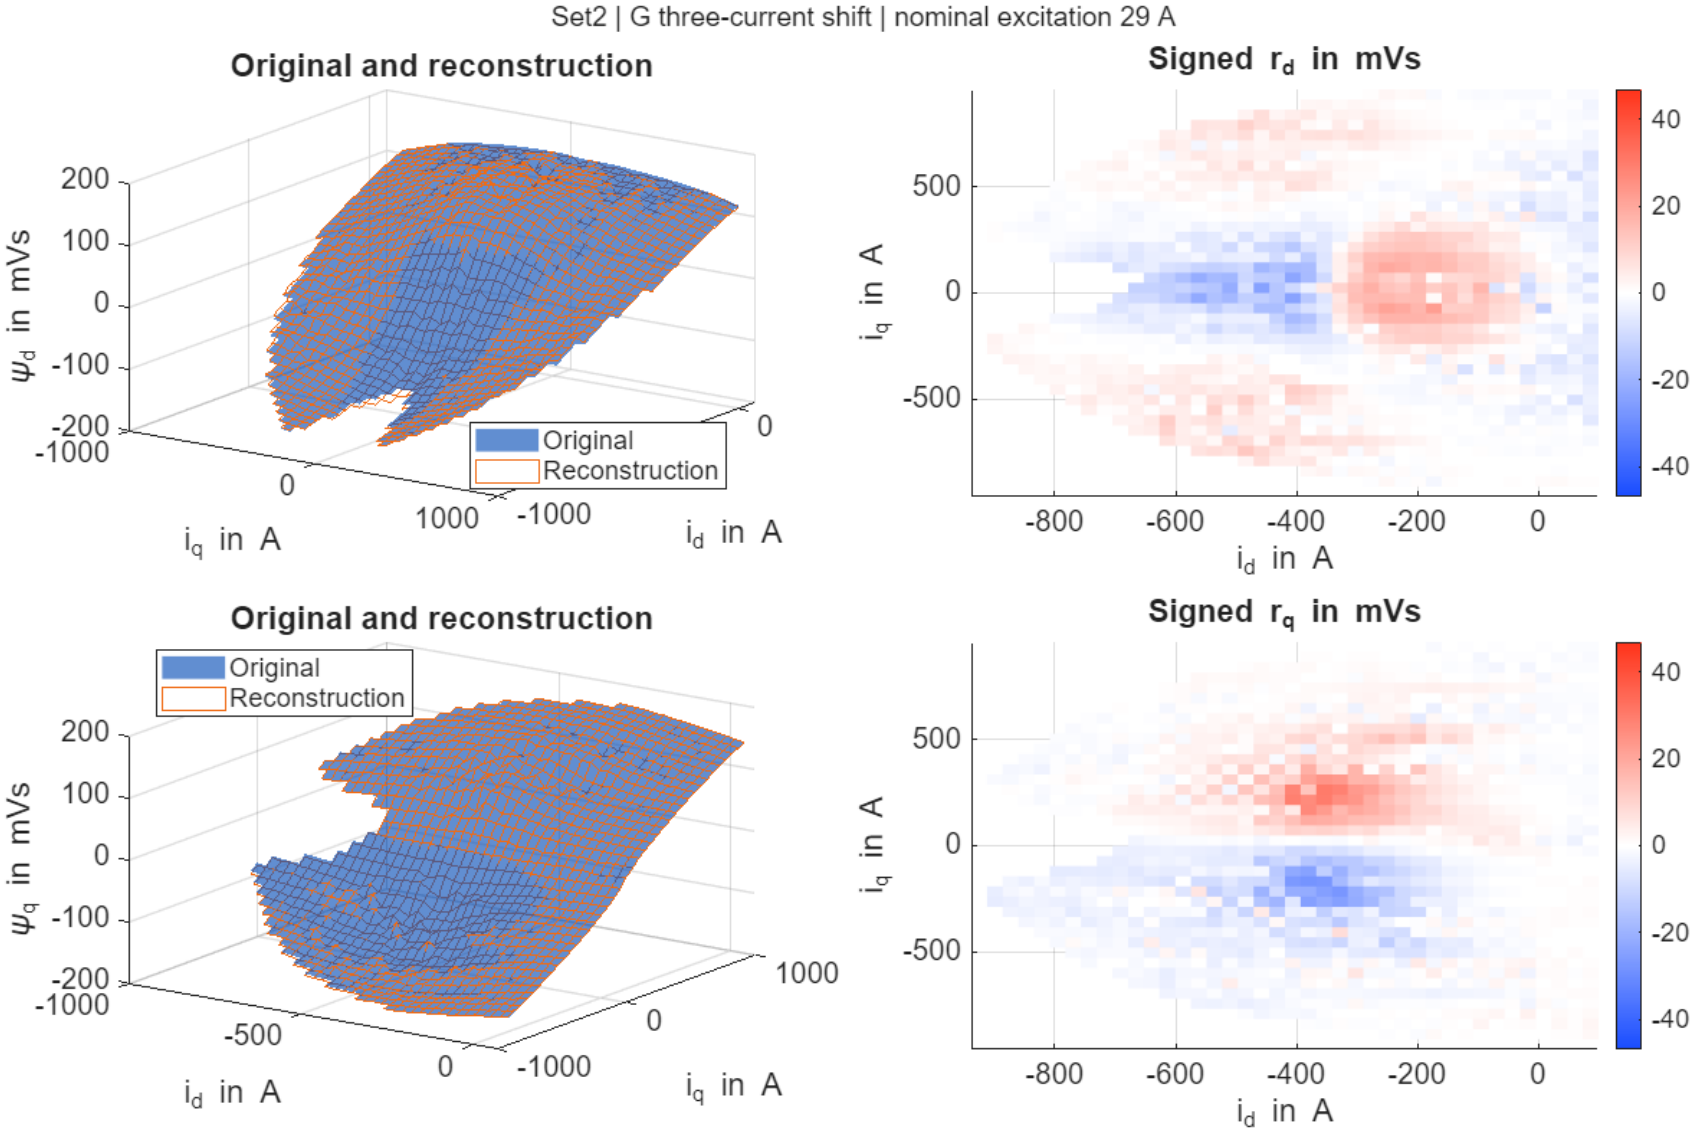

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method H, excitation 29 A

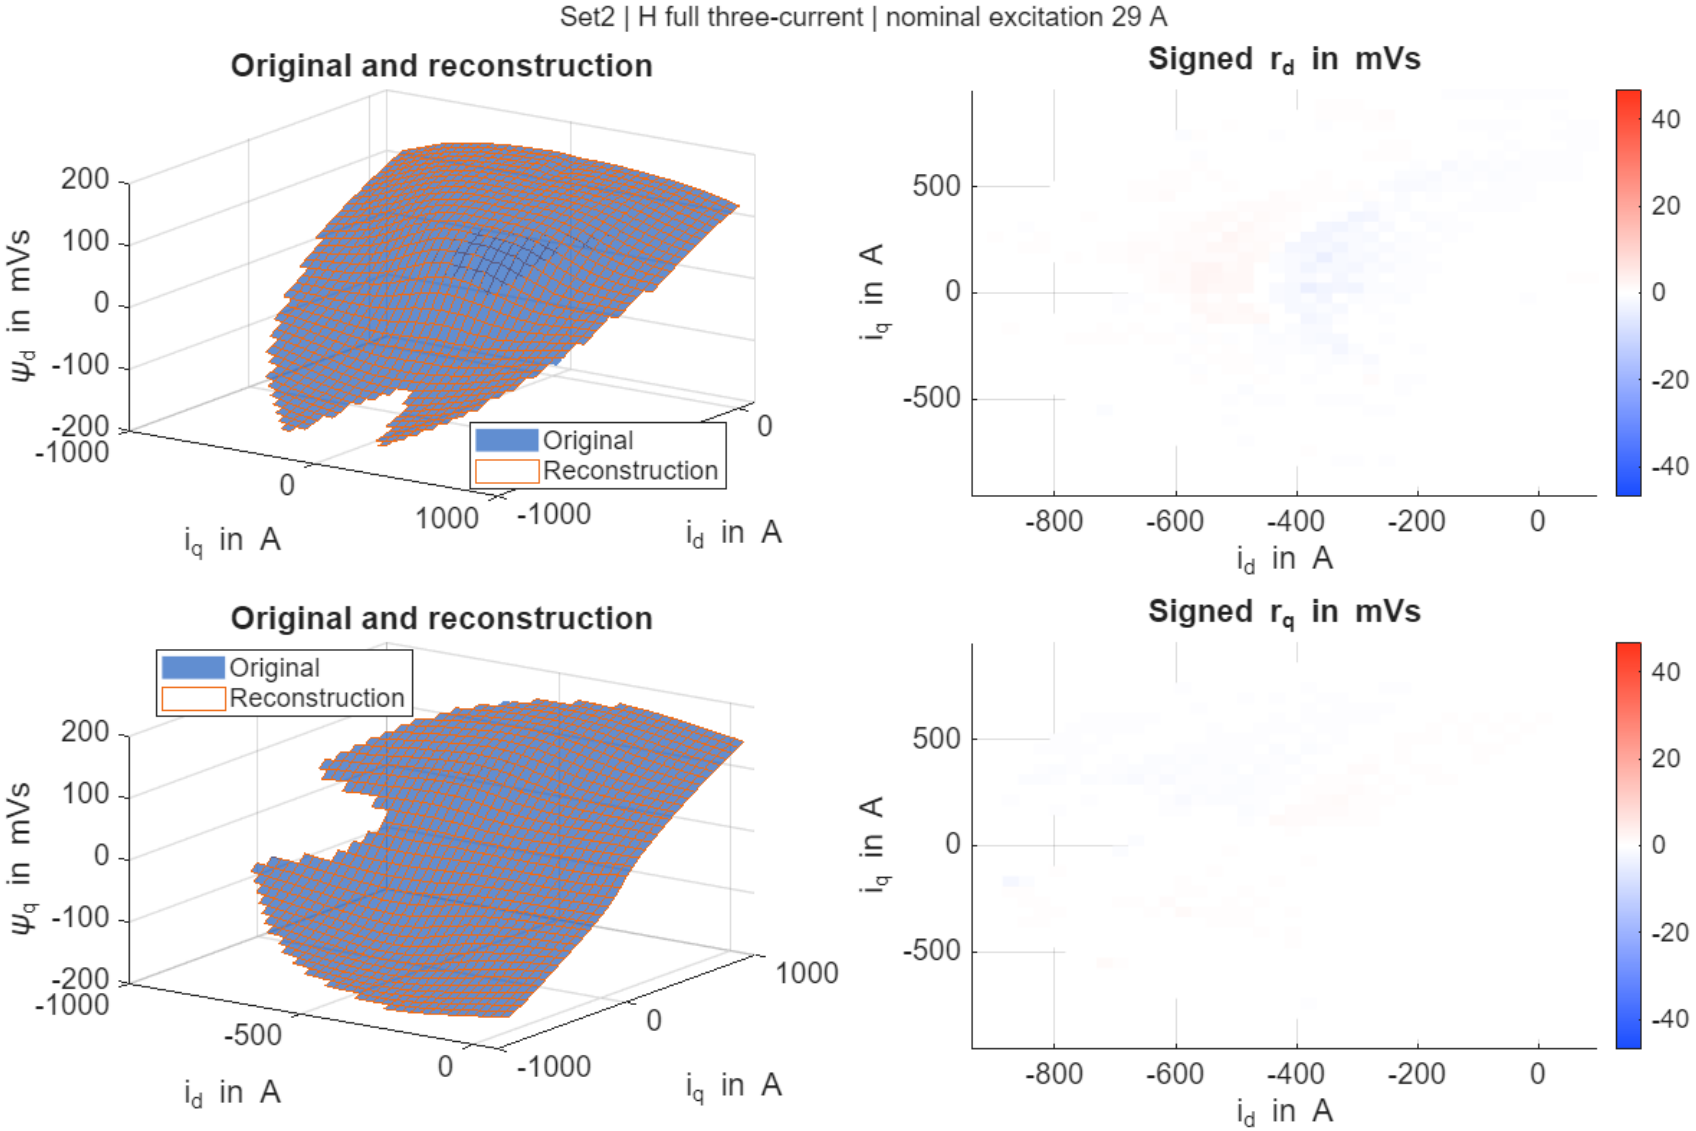

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method A, excitation 32 A

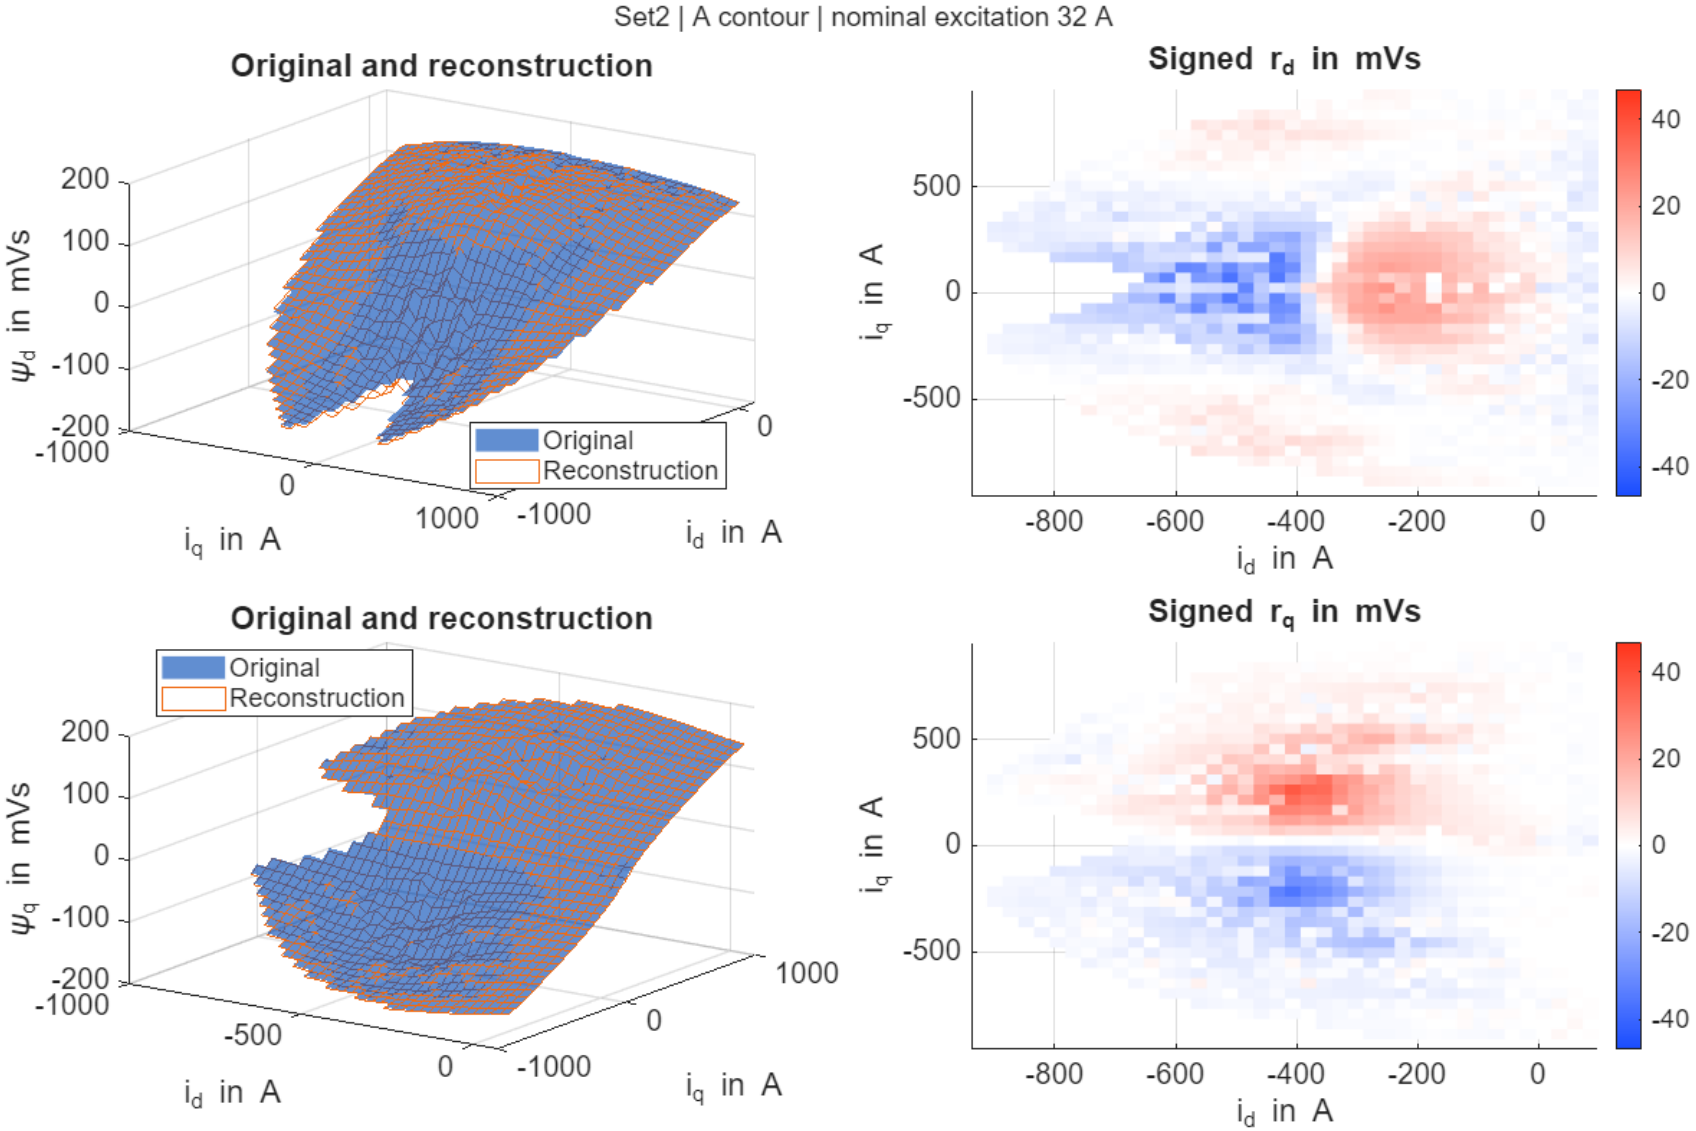

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method B, excitation 32 A

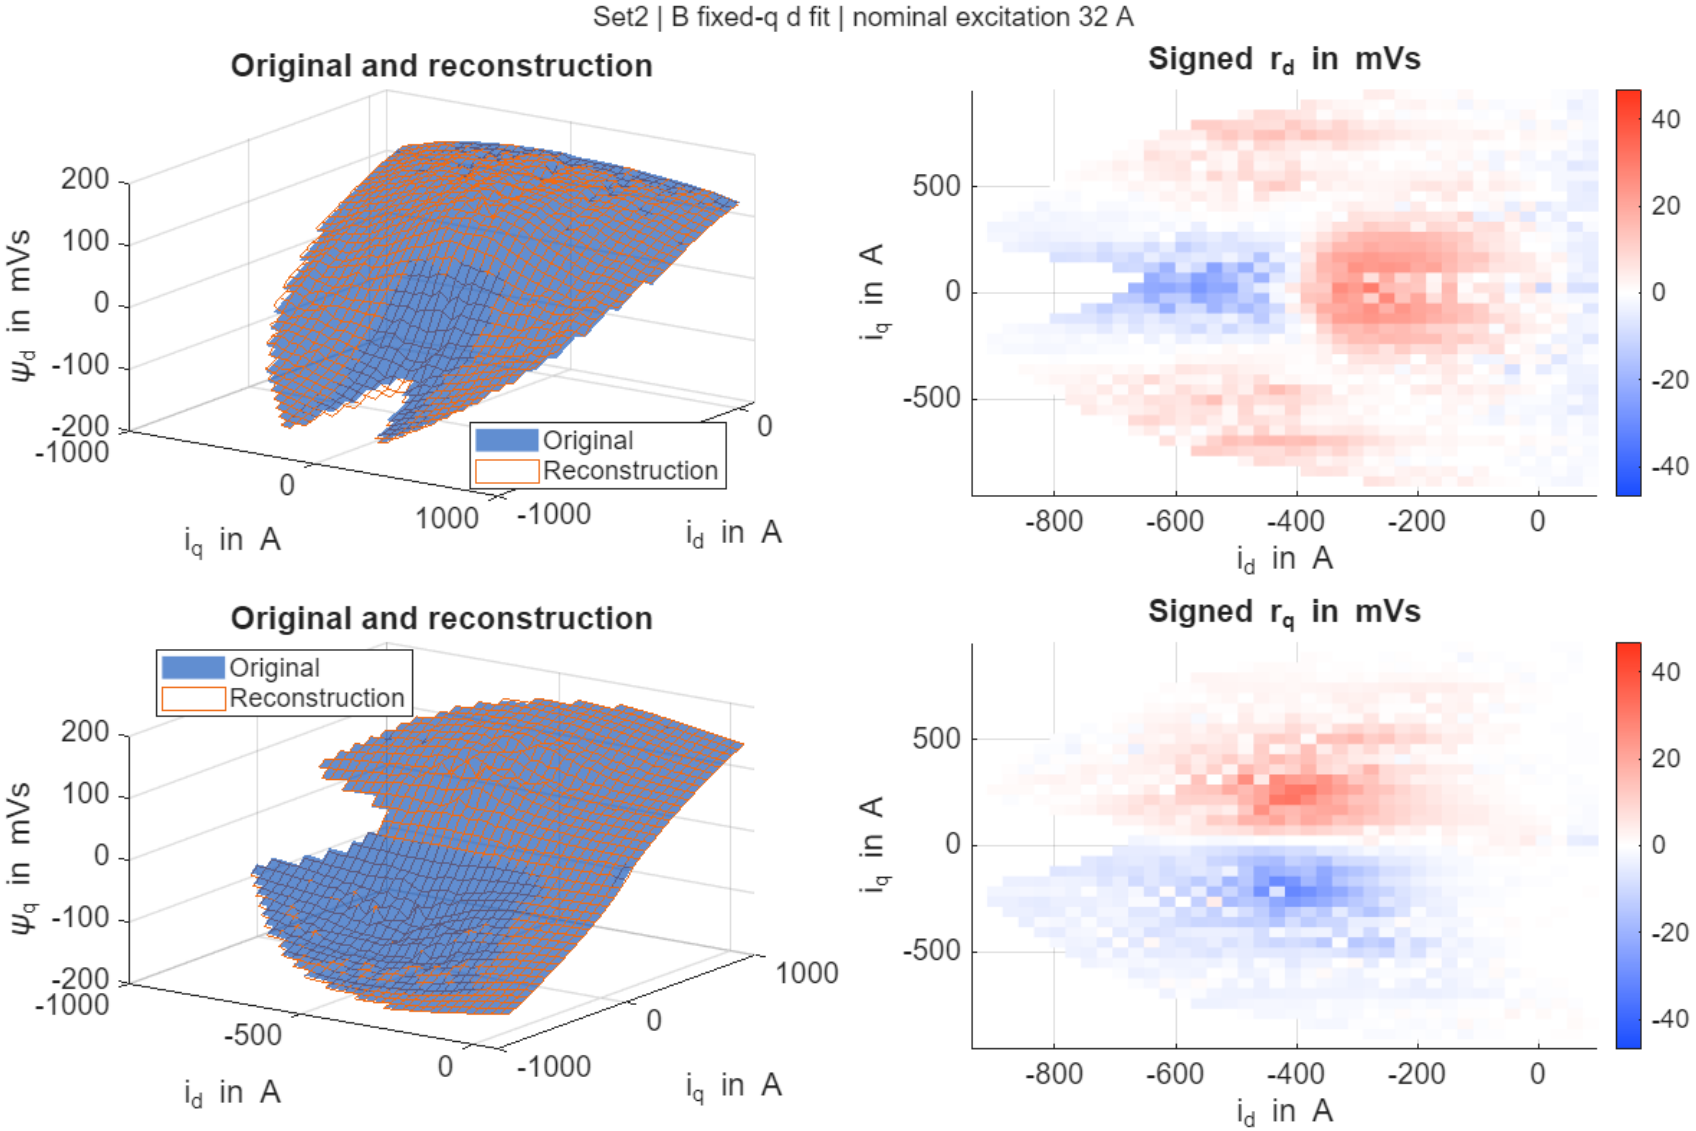

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method C, excitation 32 A

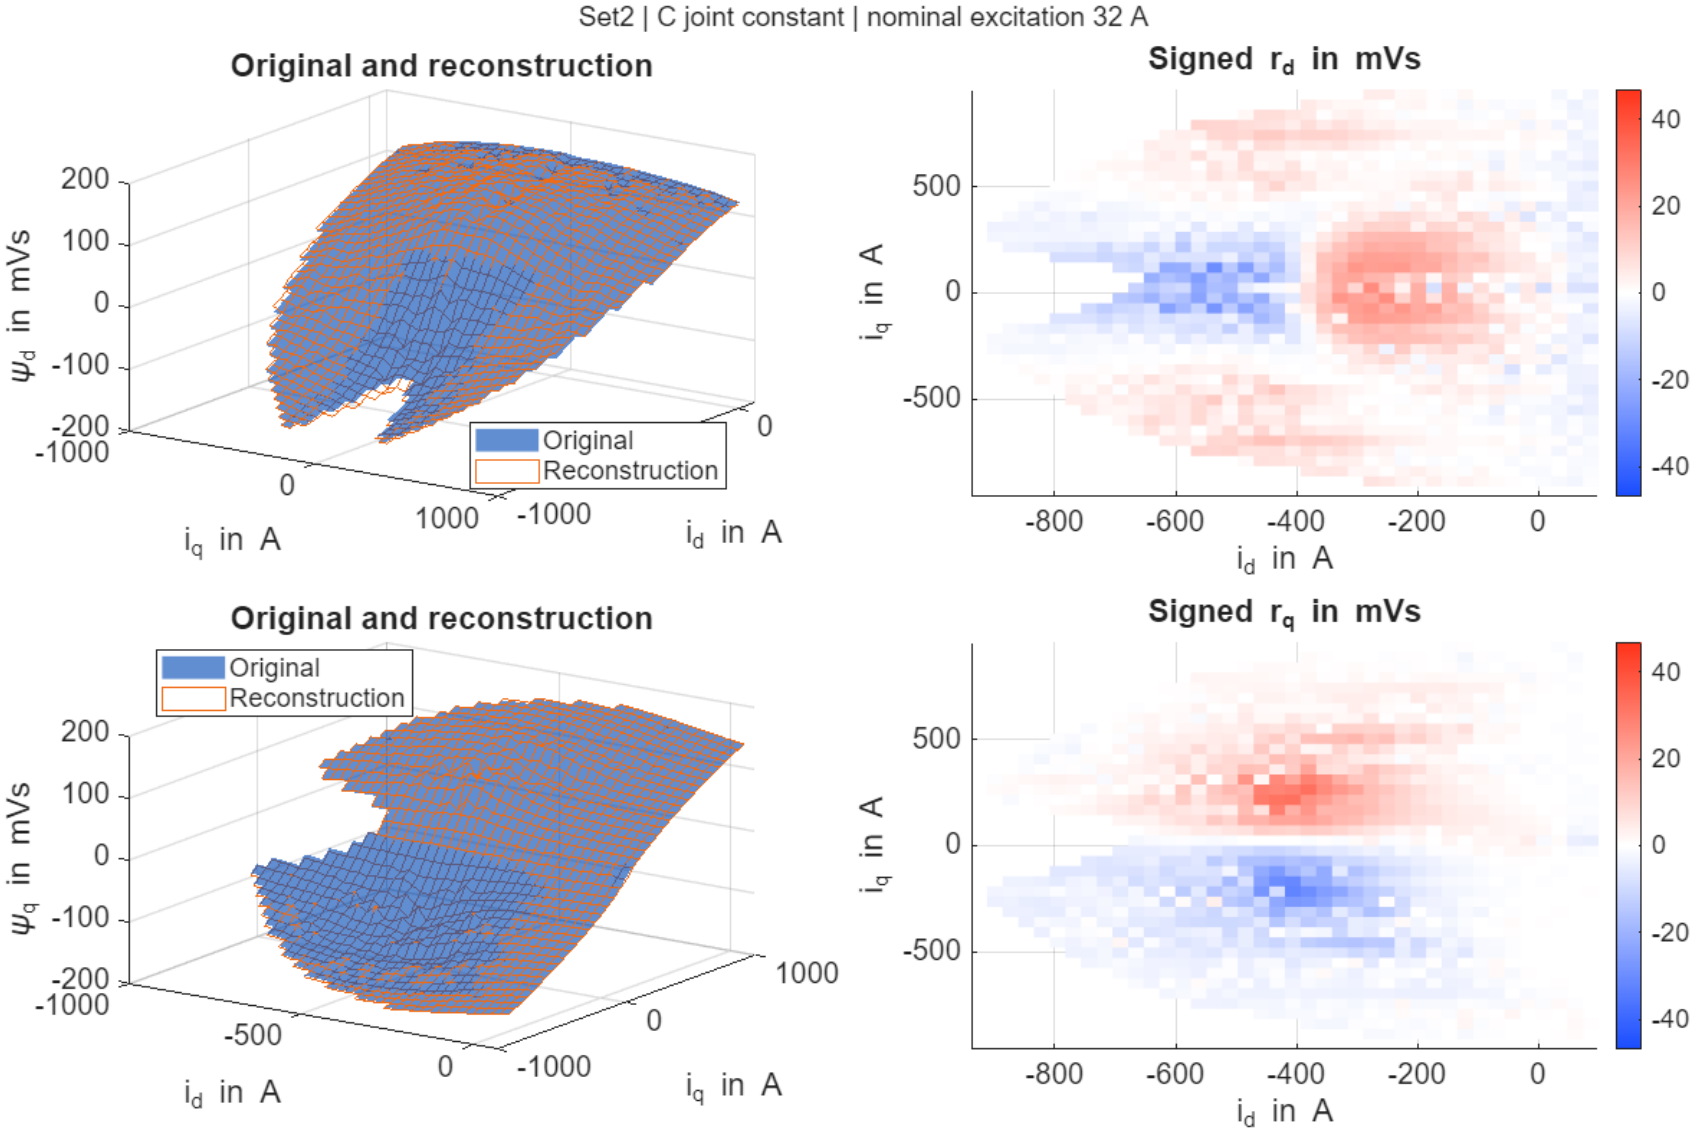

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method D, excitation 32 A

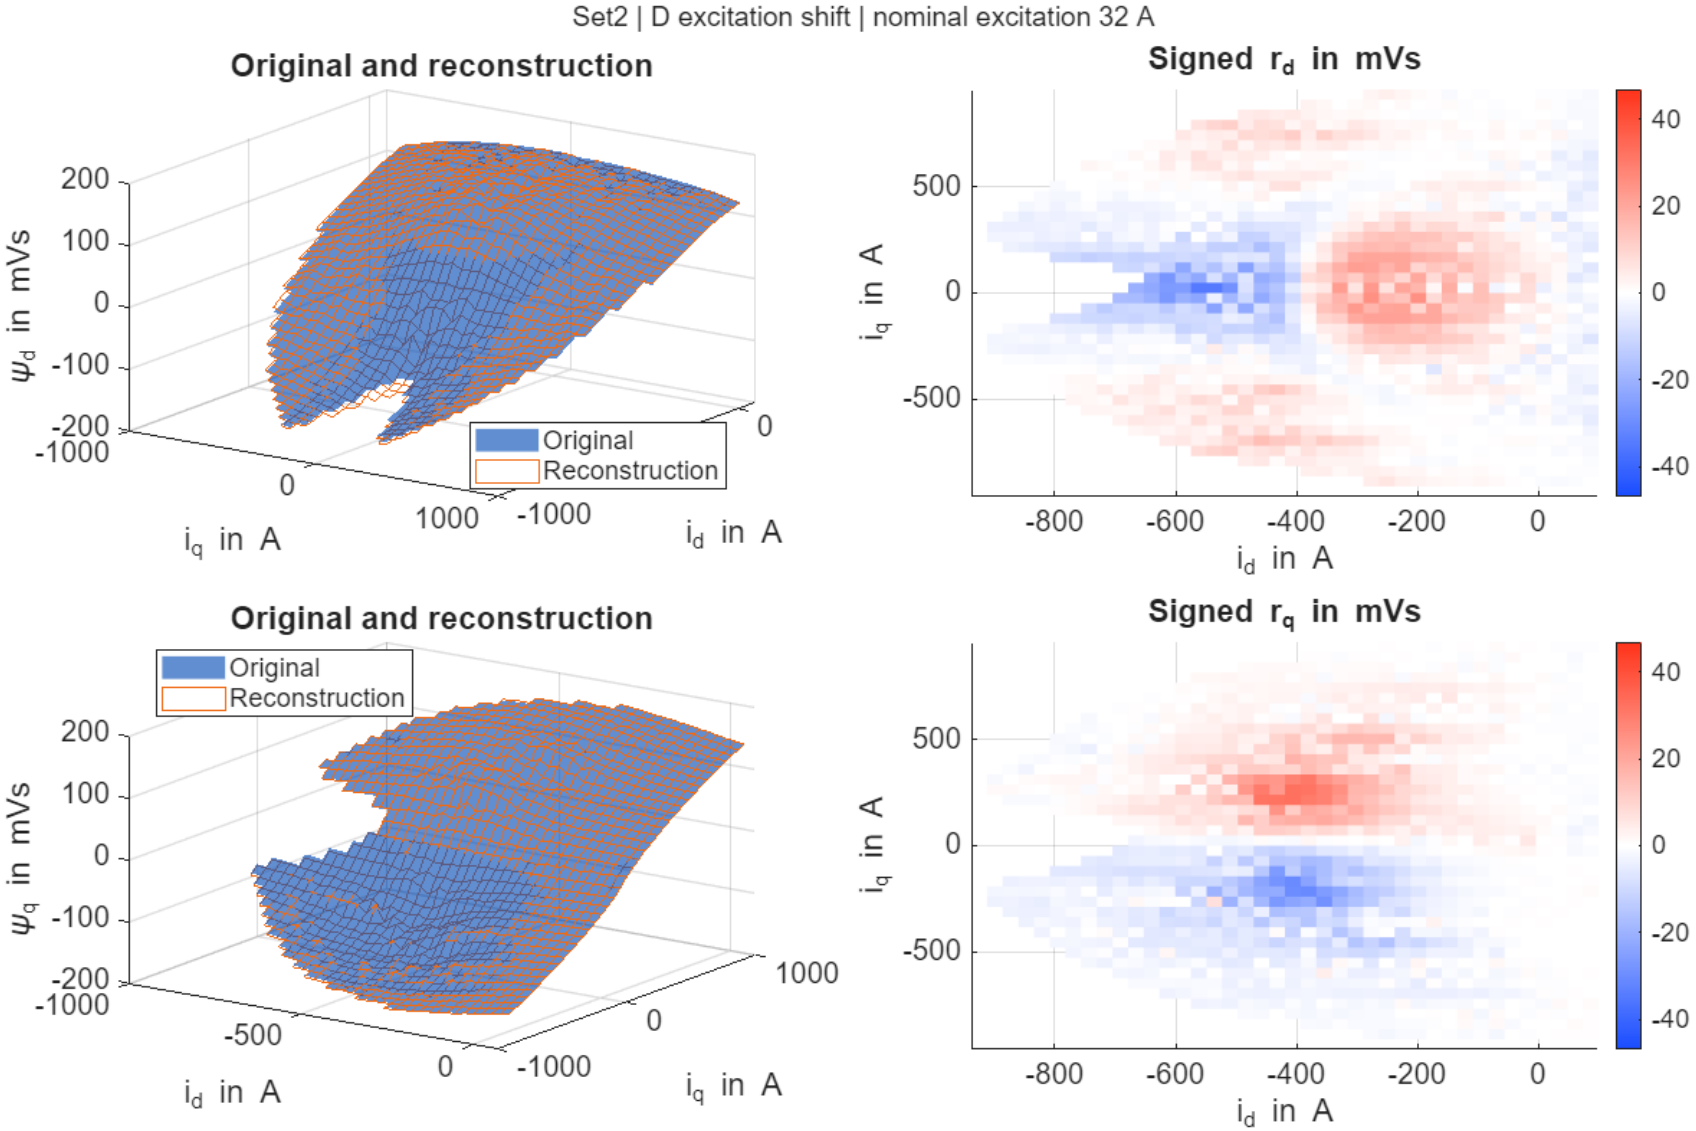

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method E, excitation 32 A

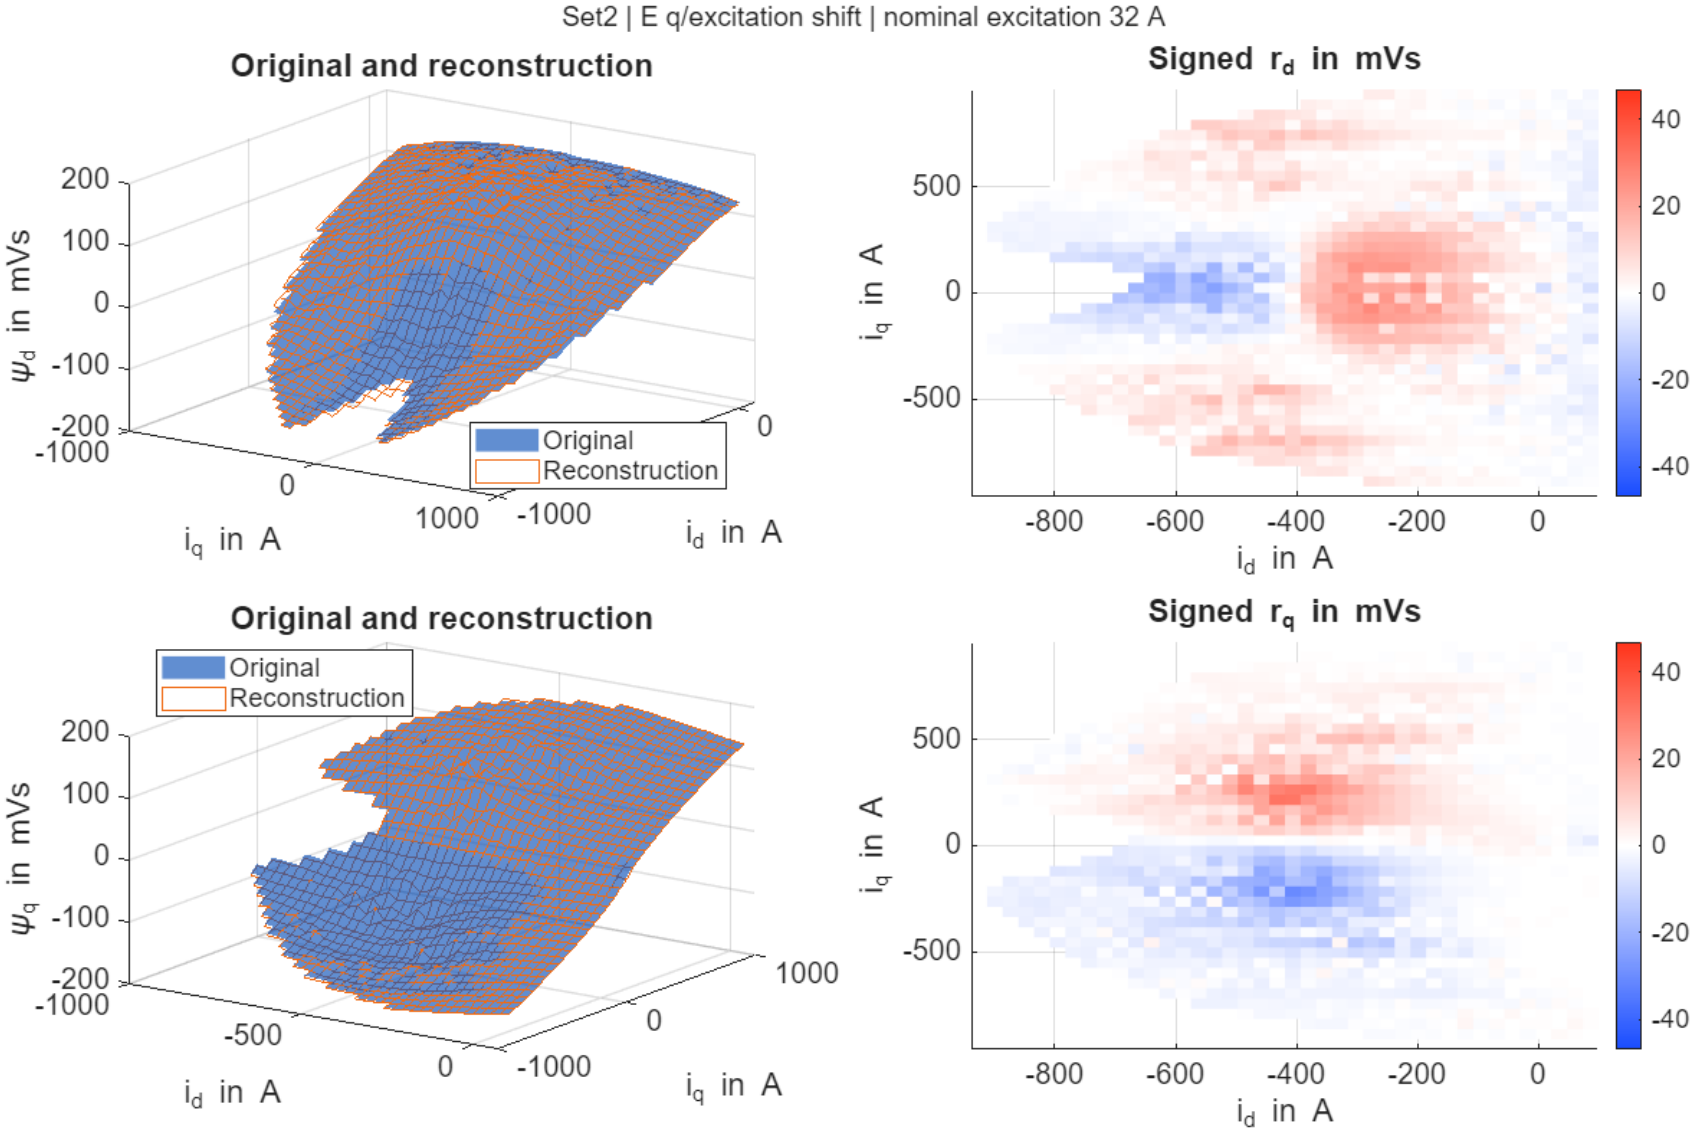

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method F, excitation 32 A

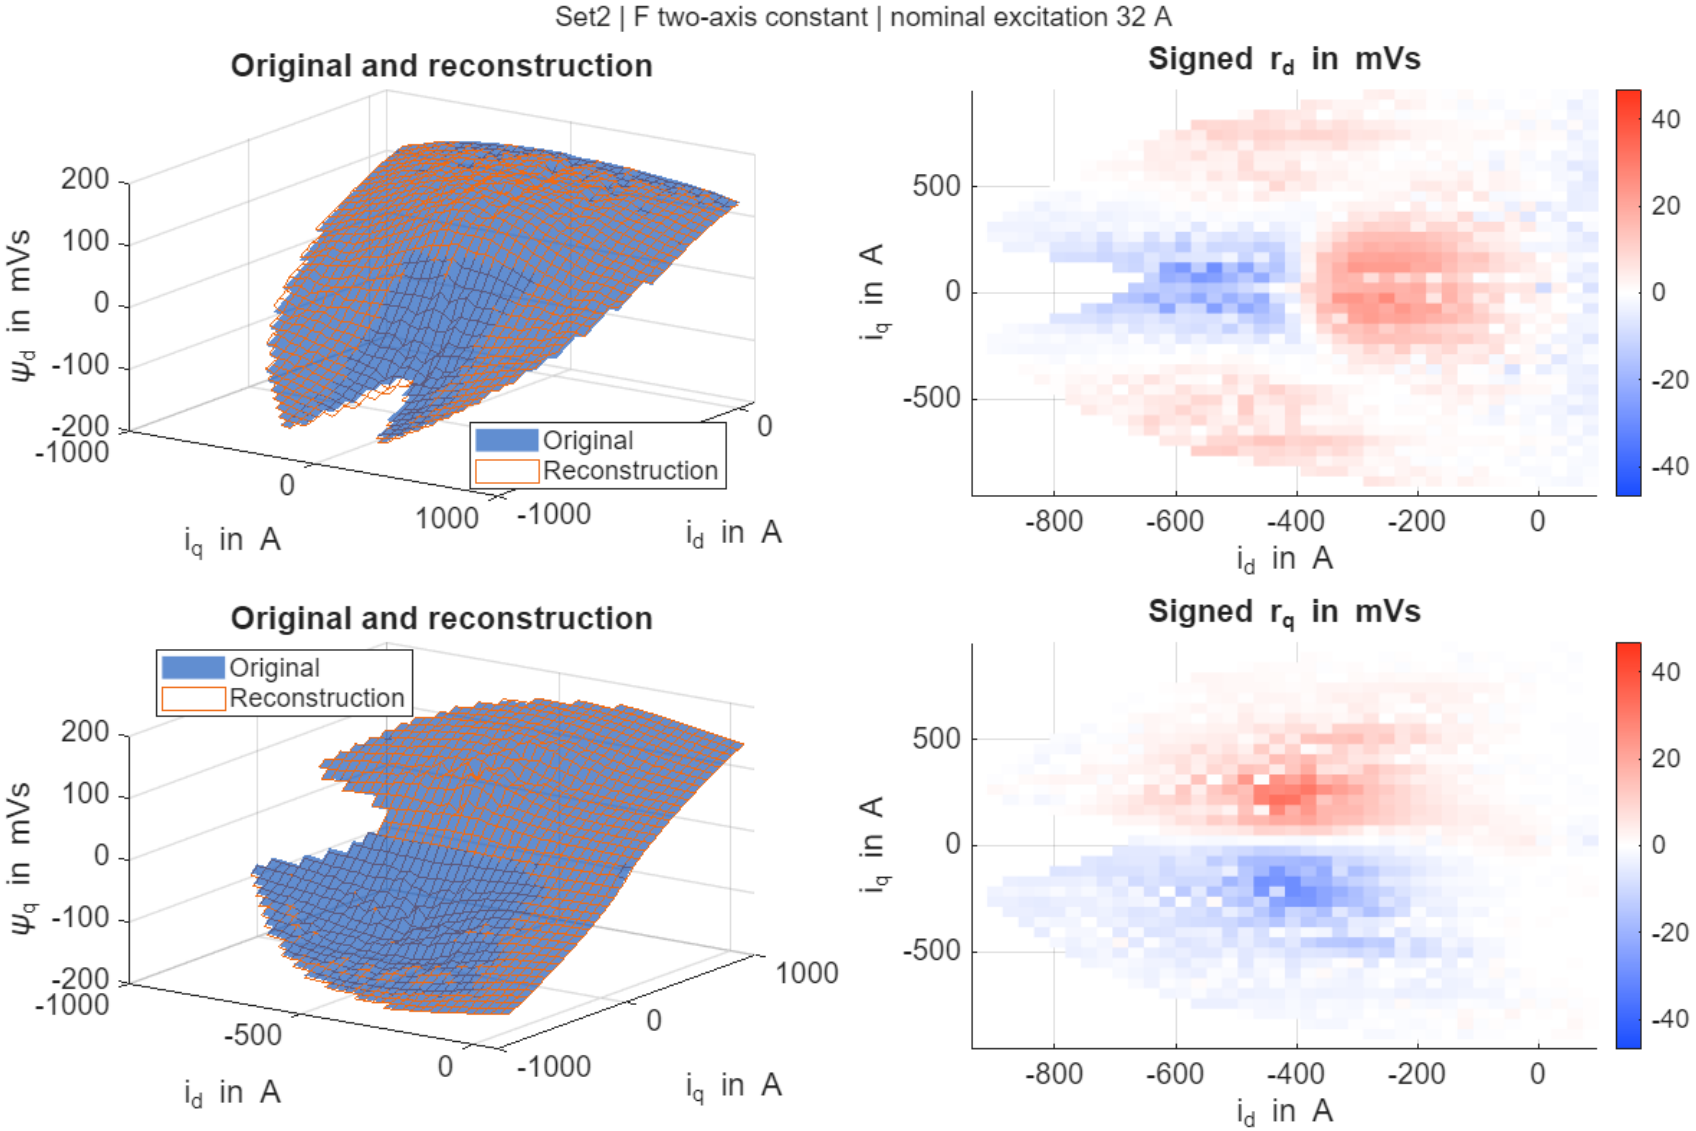

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method G, excitation 32 A

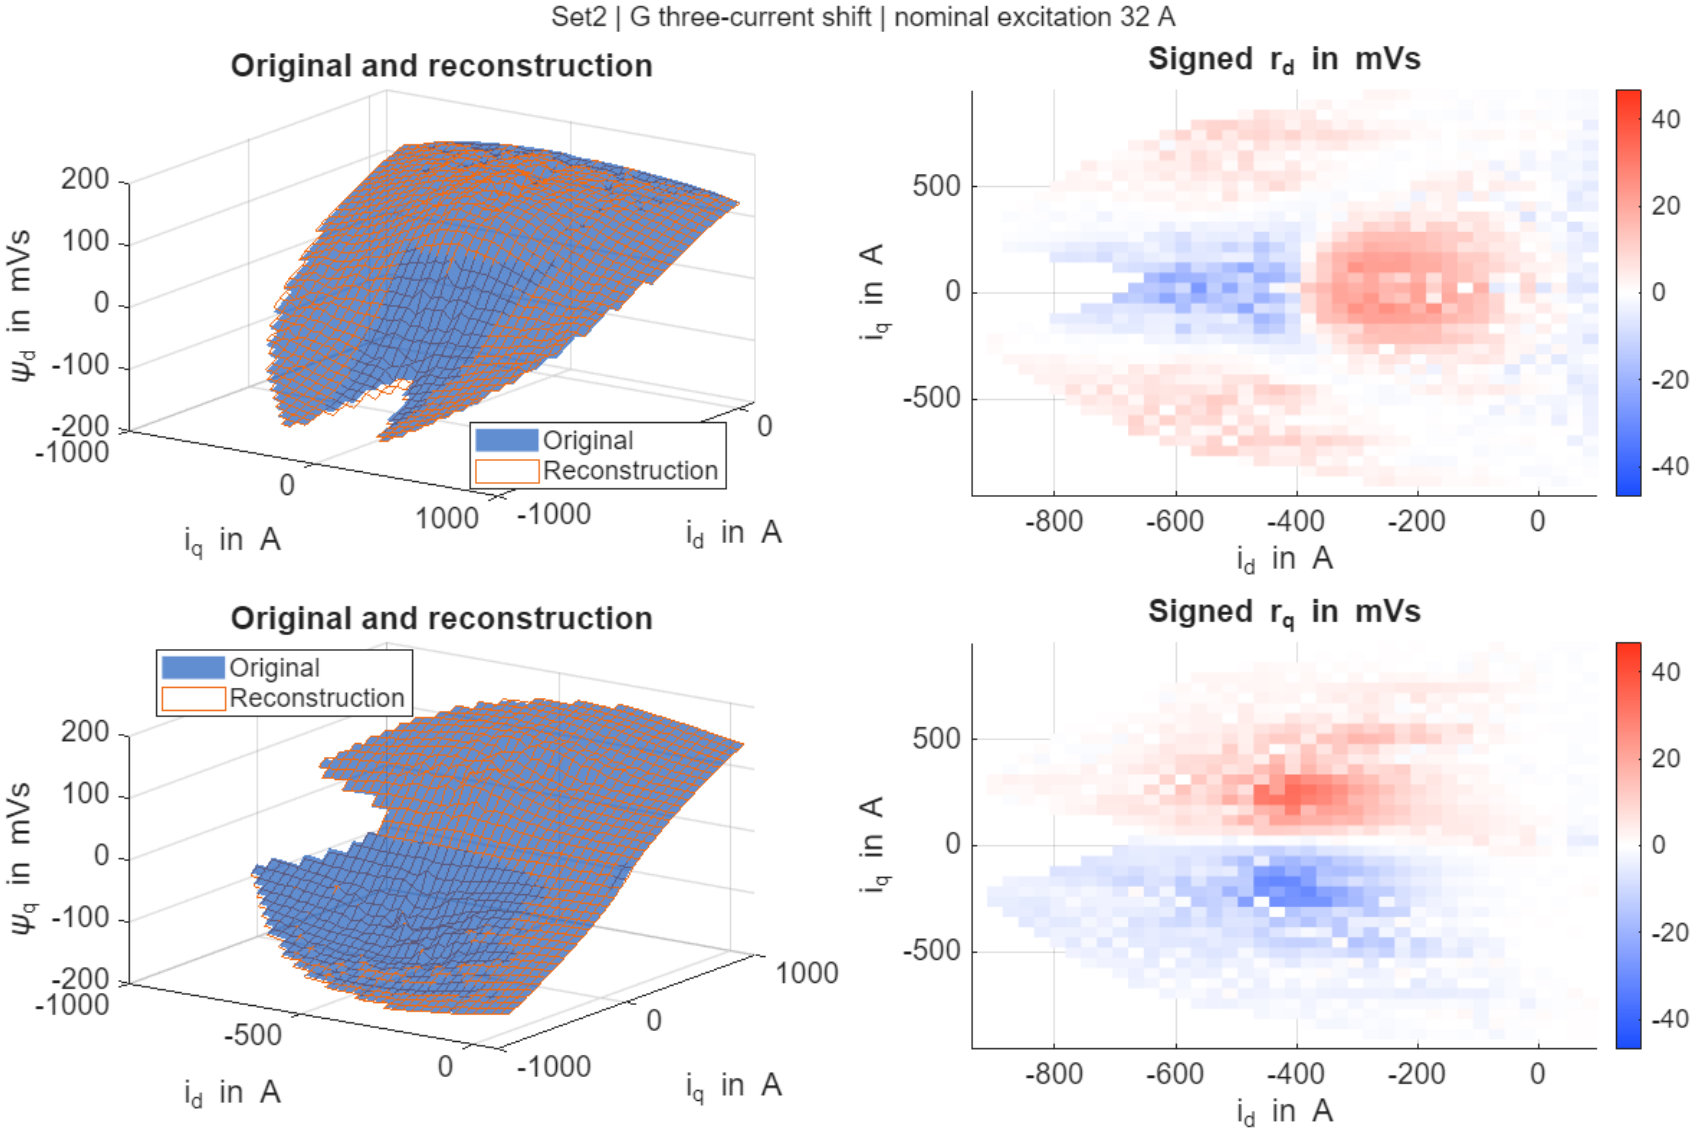

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method H, excitation 32 A

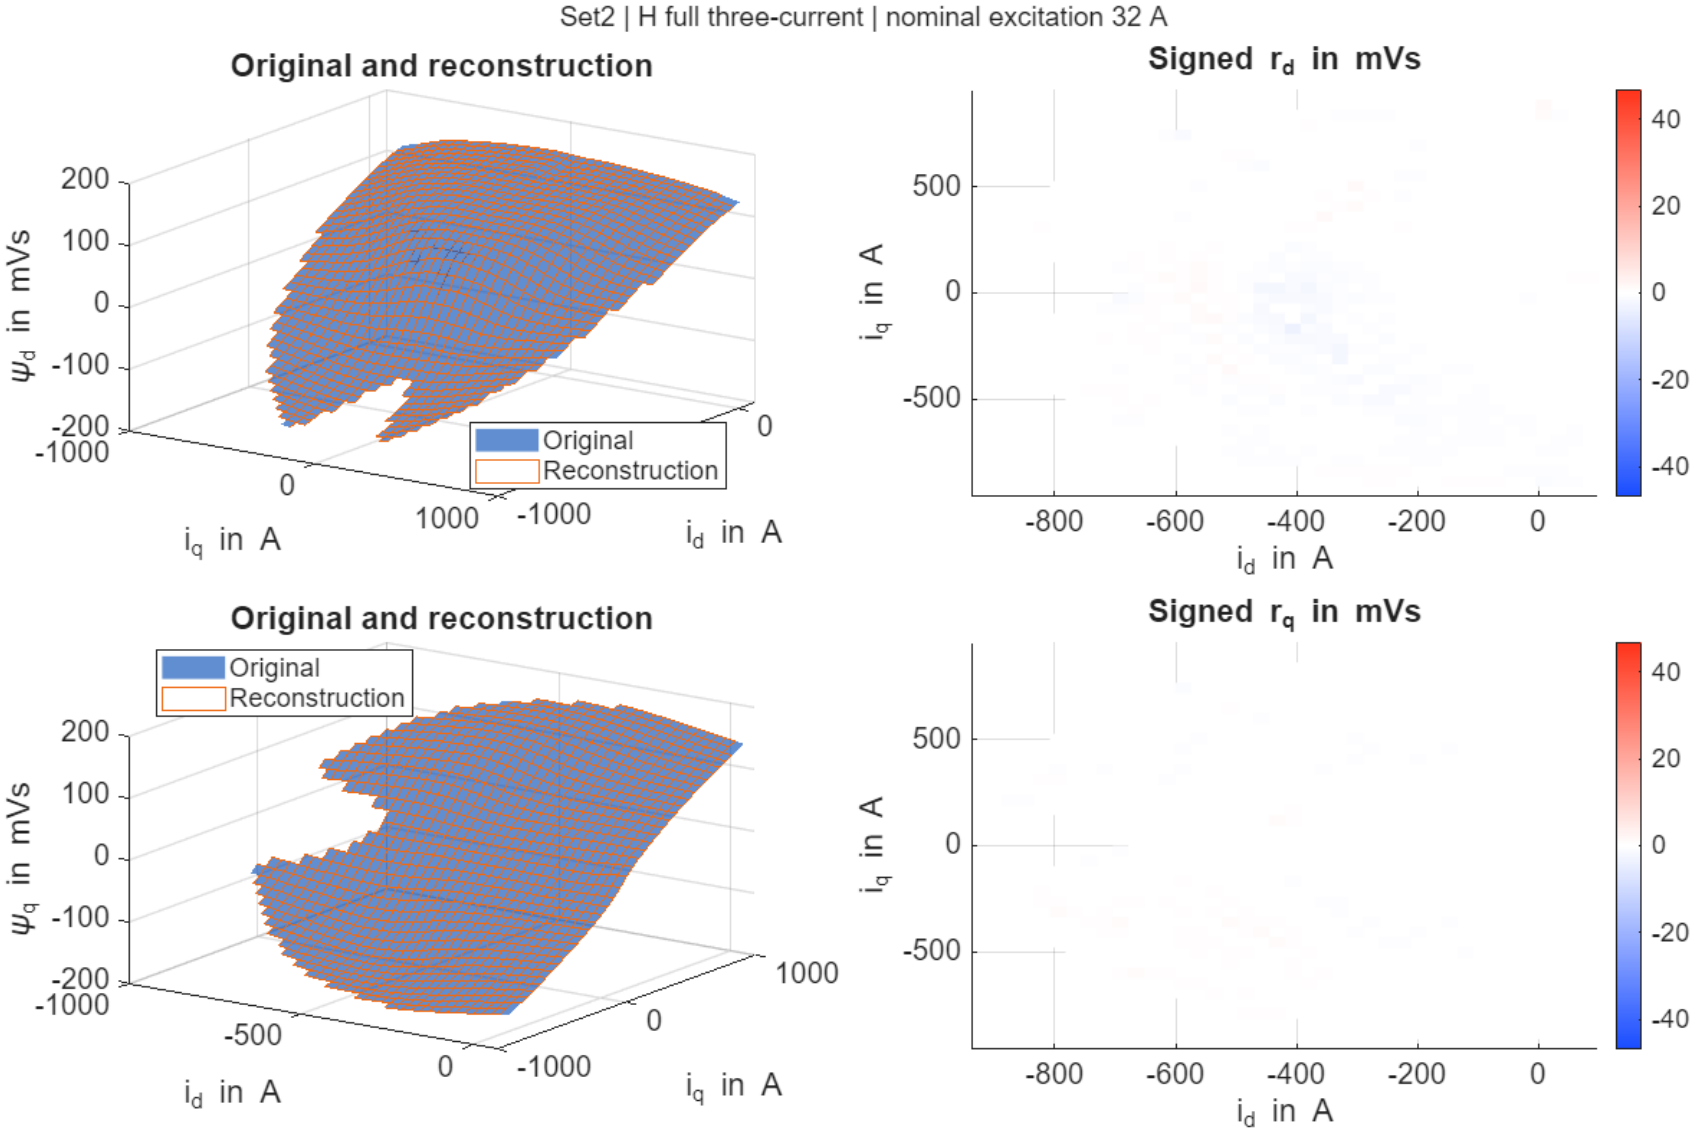

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method A, excitation 36 A

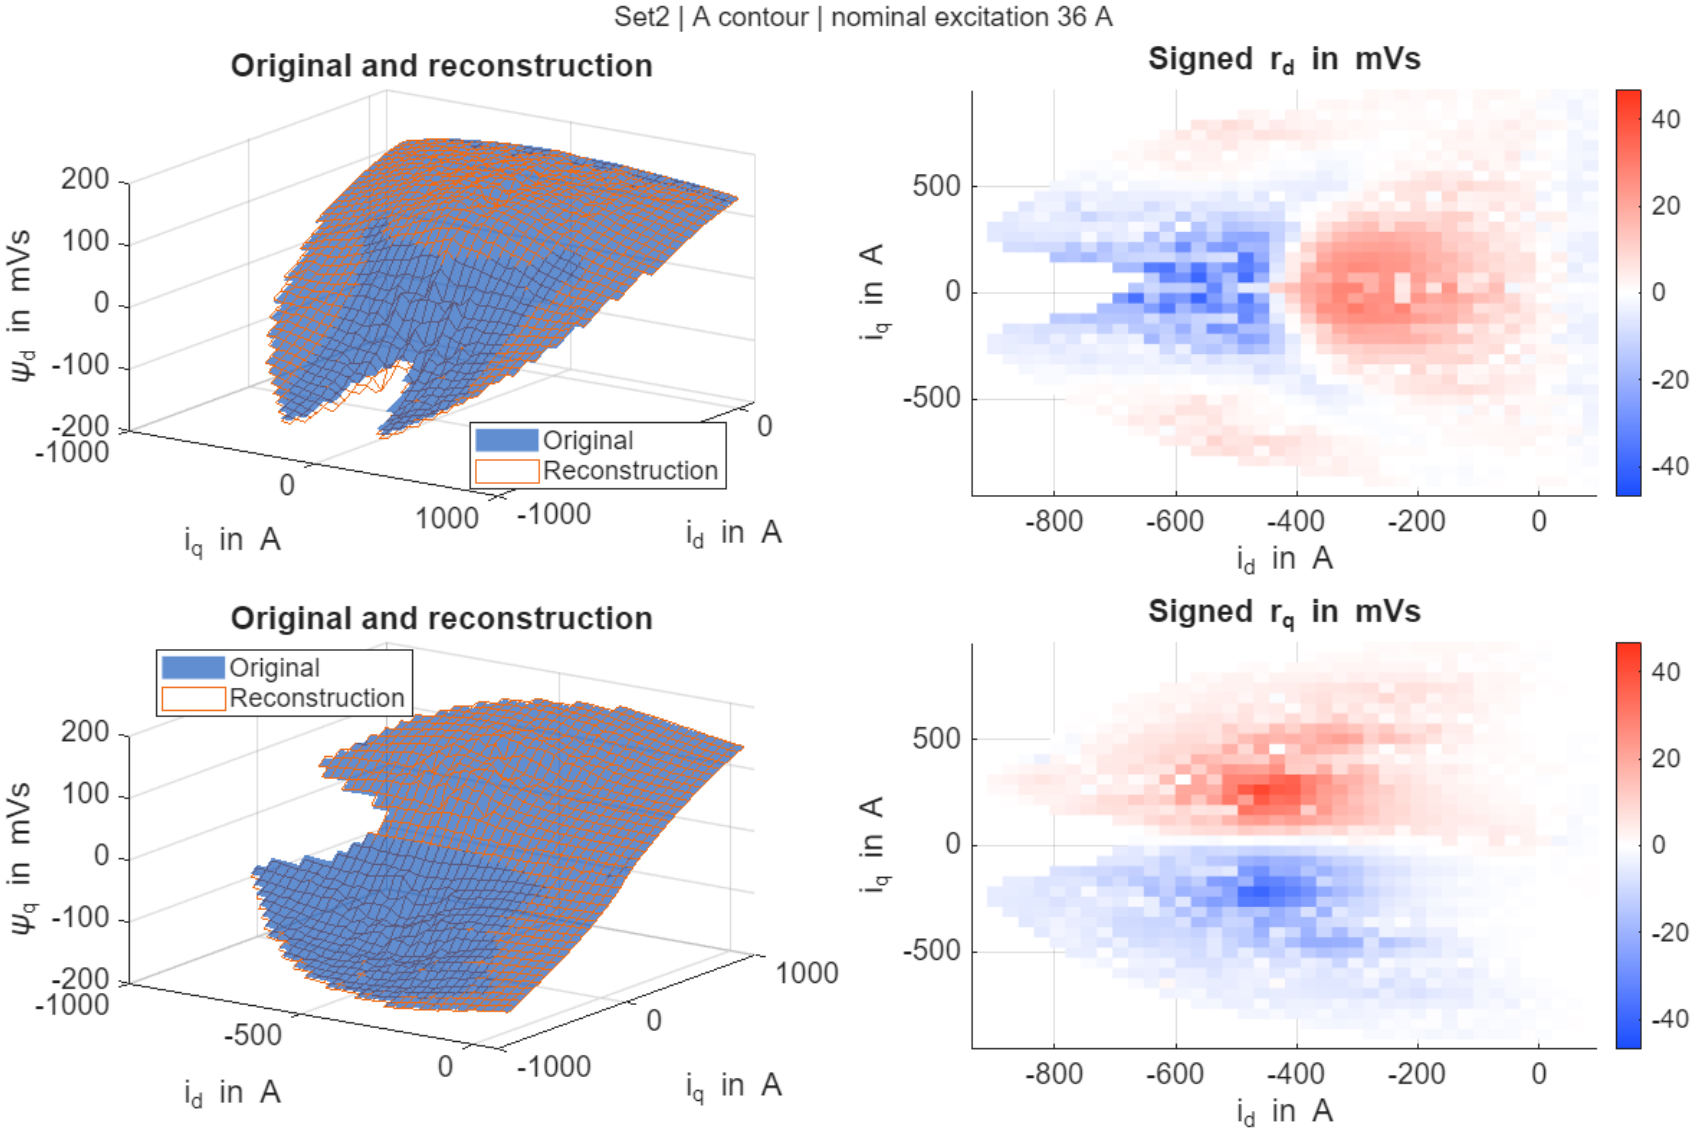

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method B, excitation 36 A

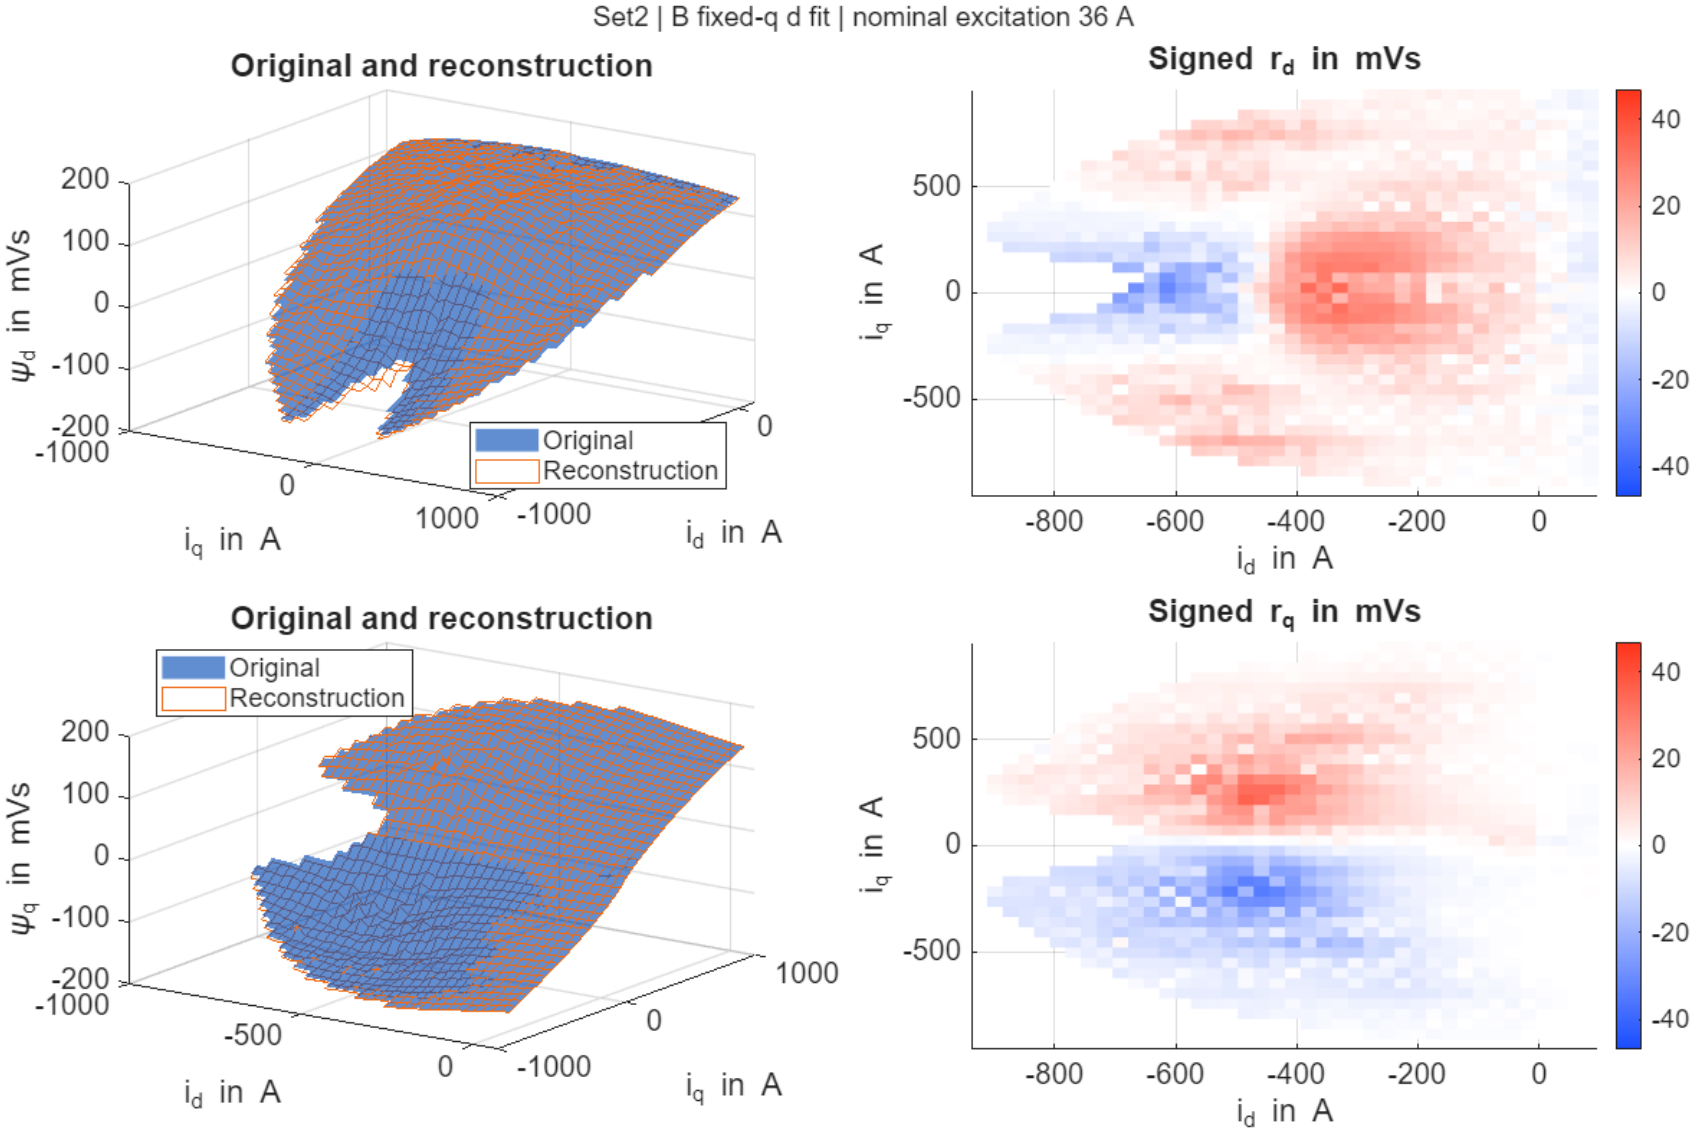

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method C, excitation 36 A

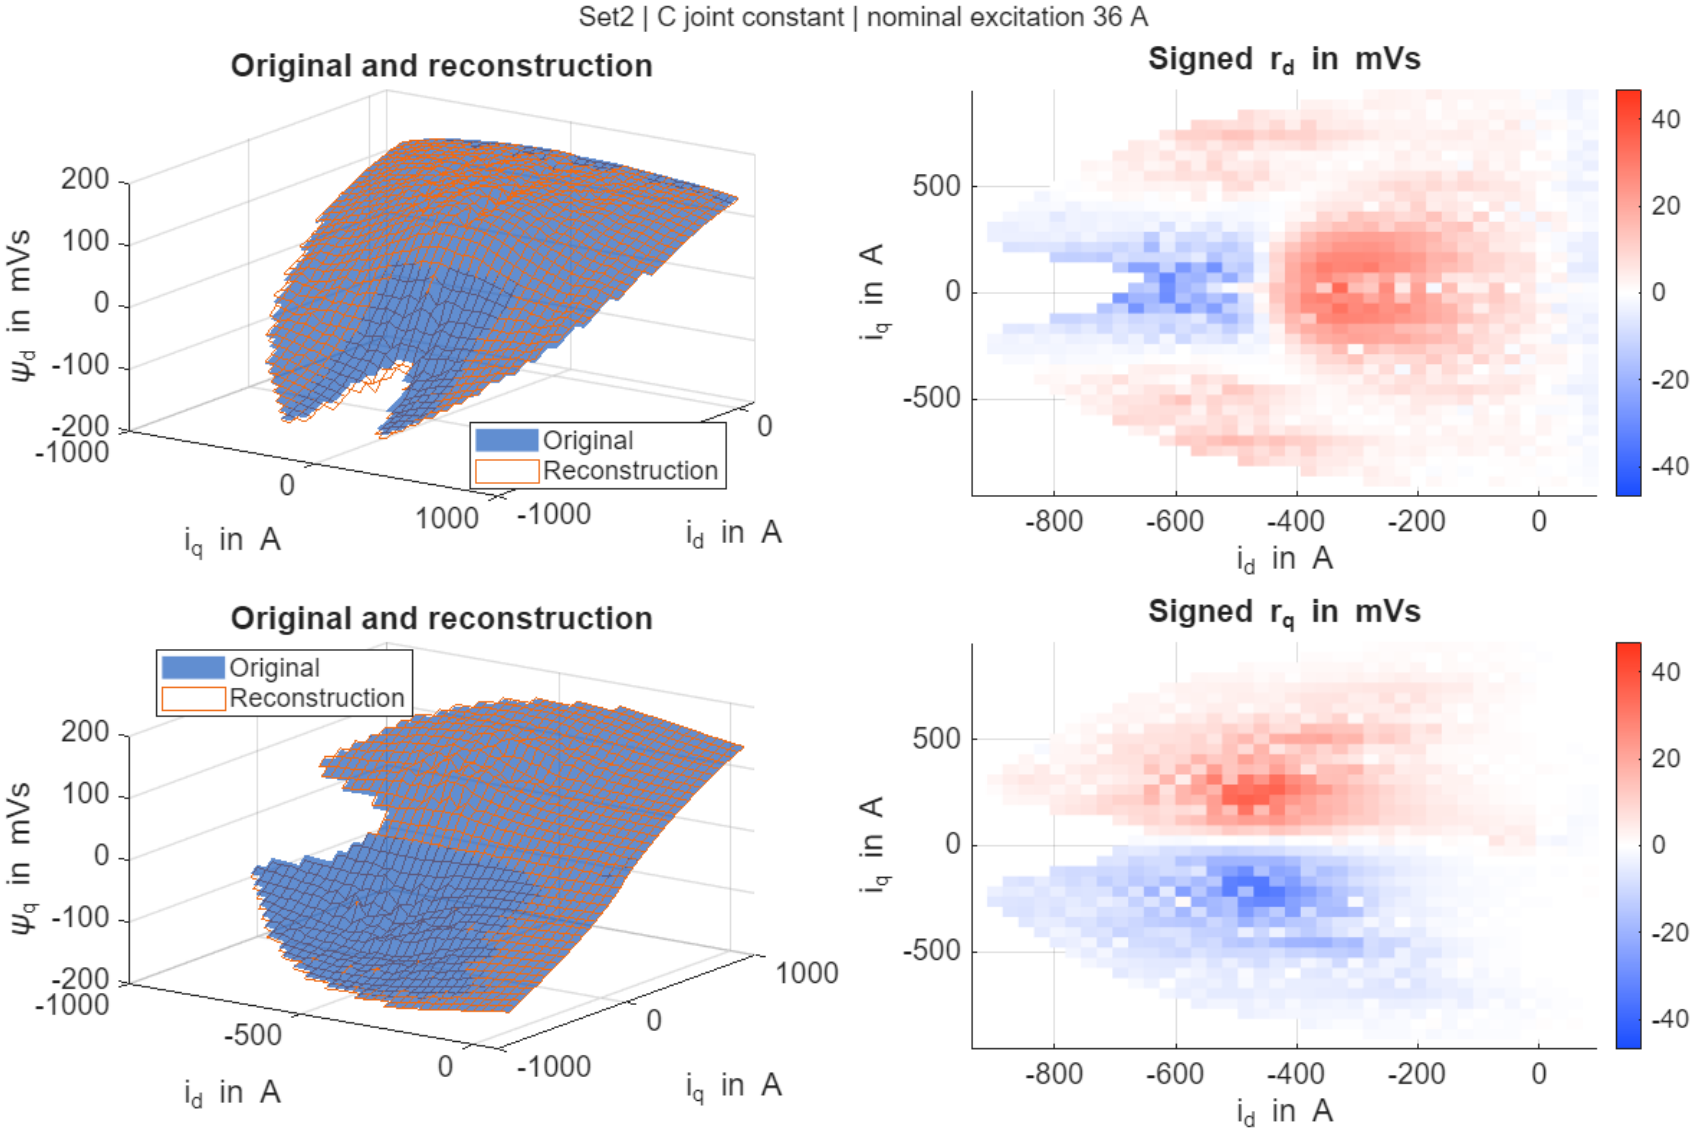

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method D, excitation 36 A

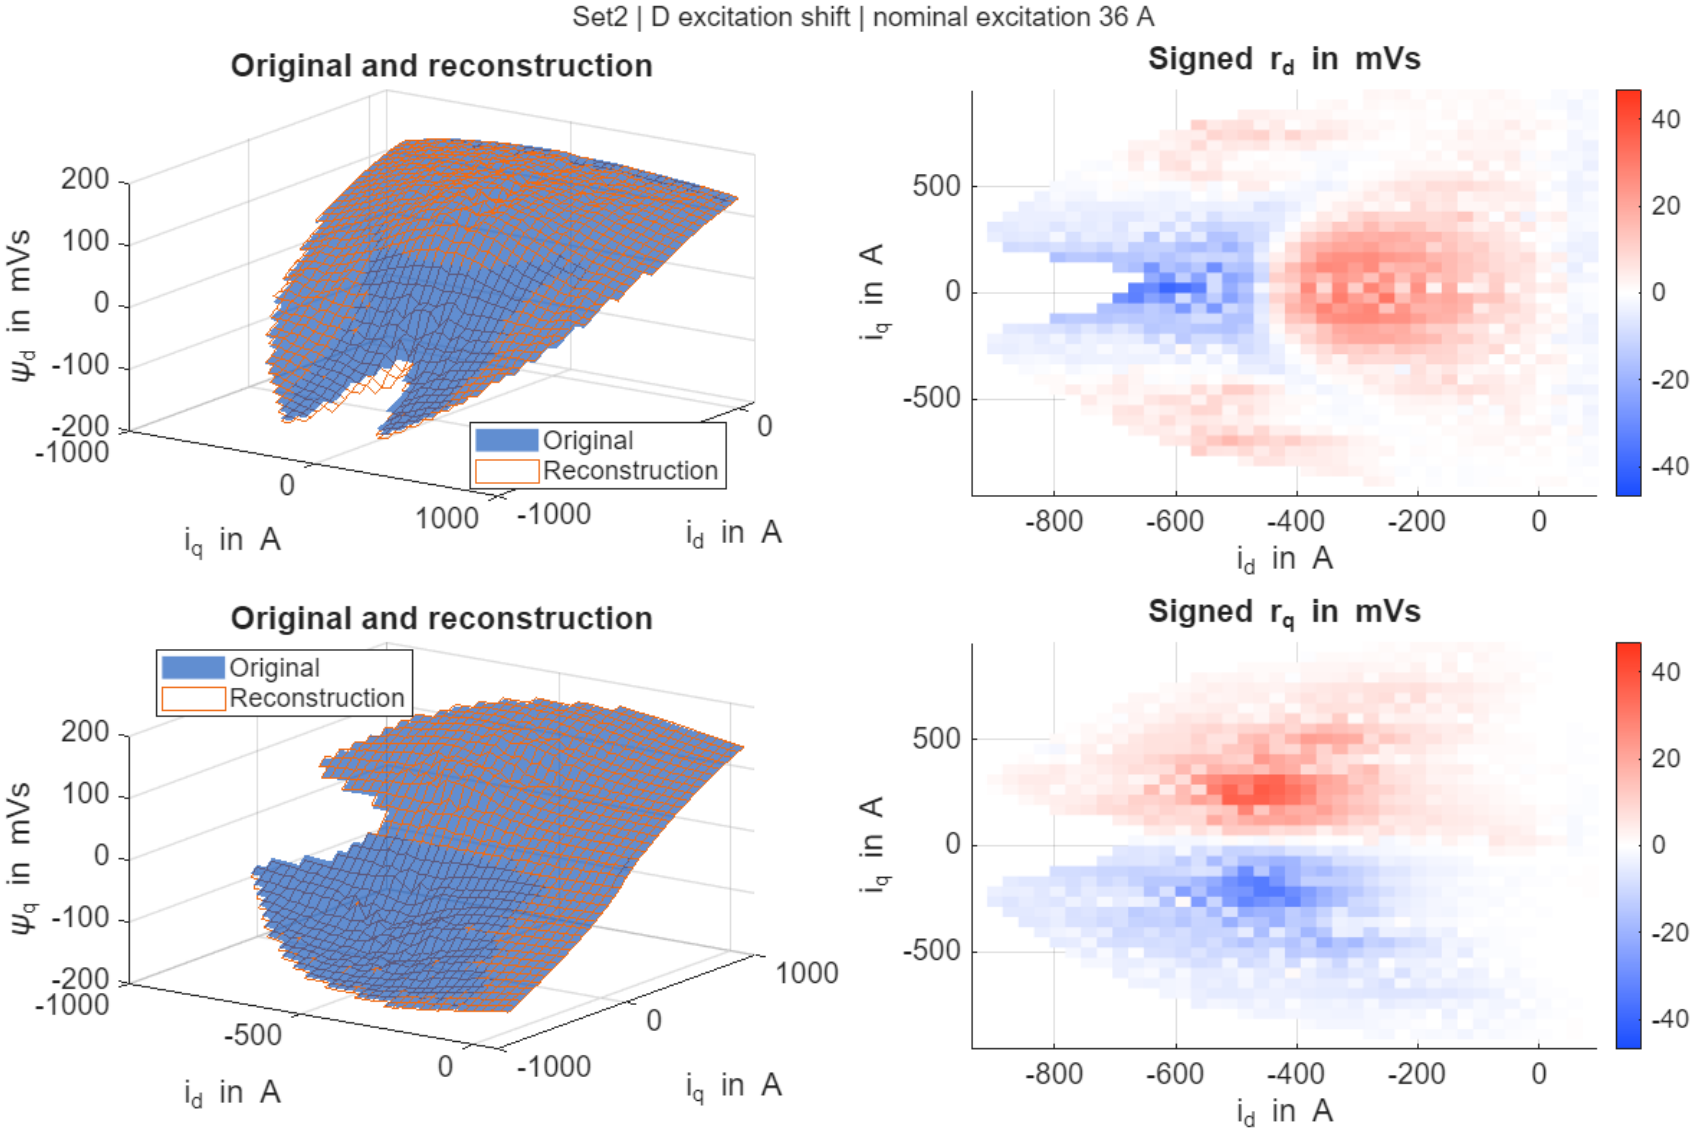

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method E, excitation 36 A

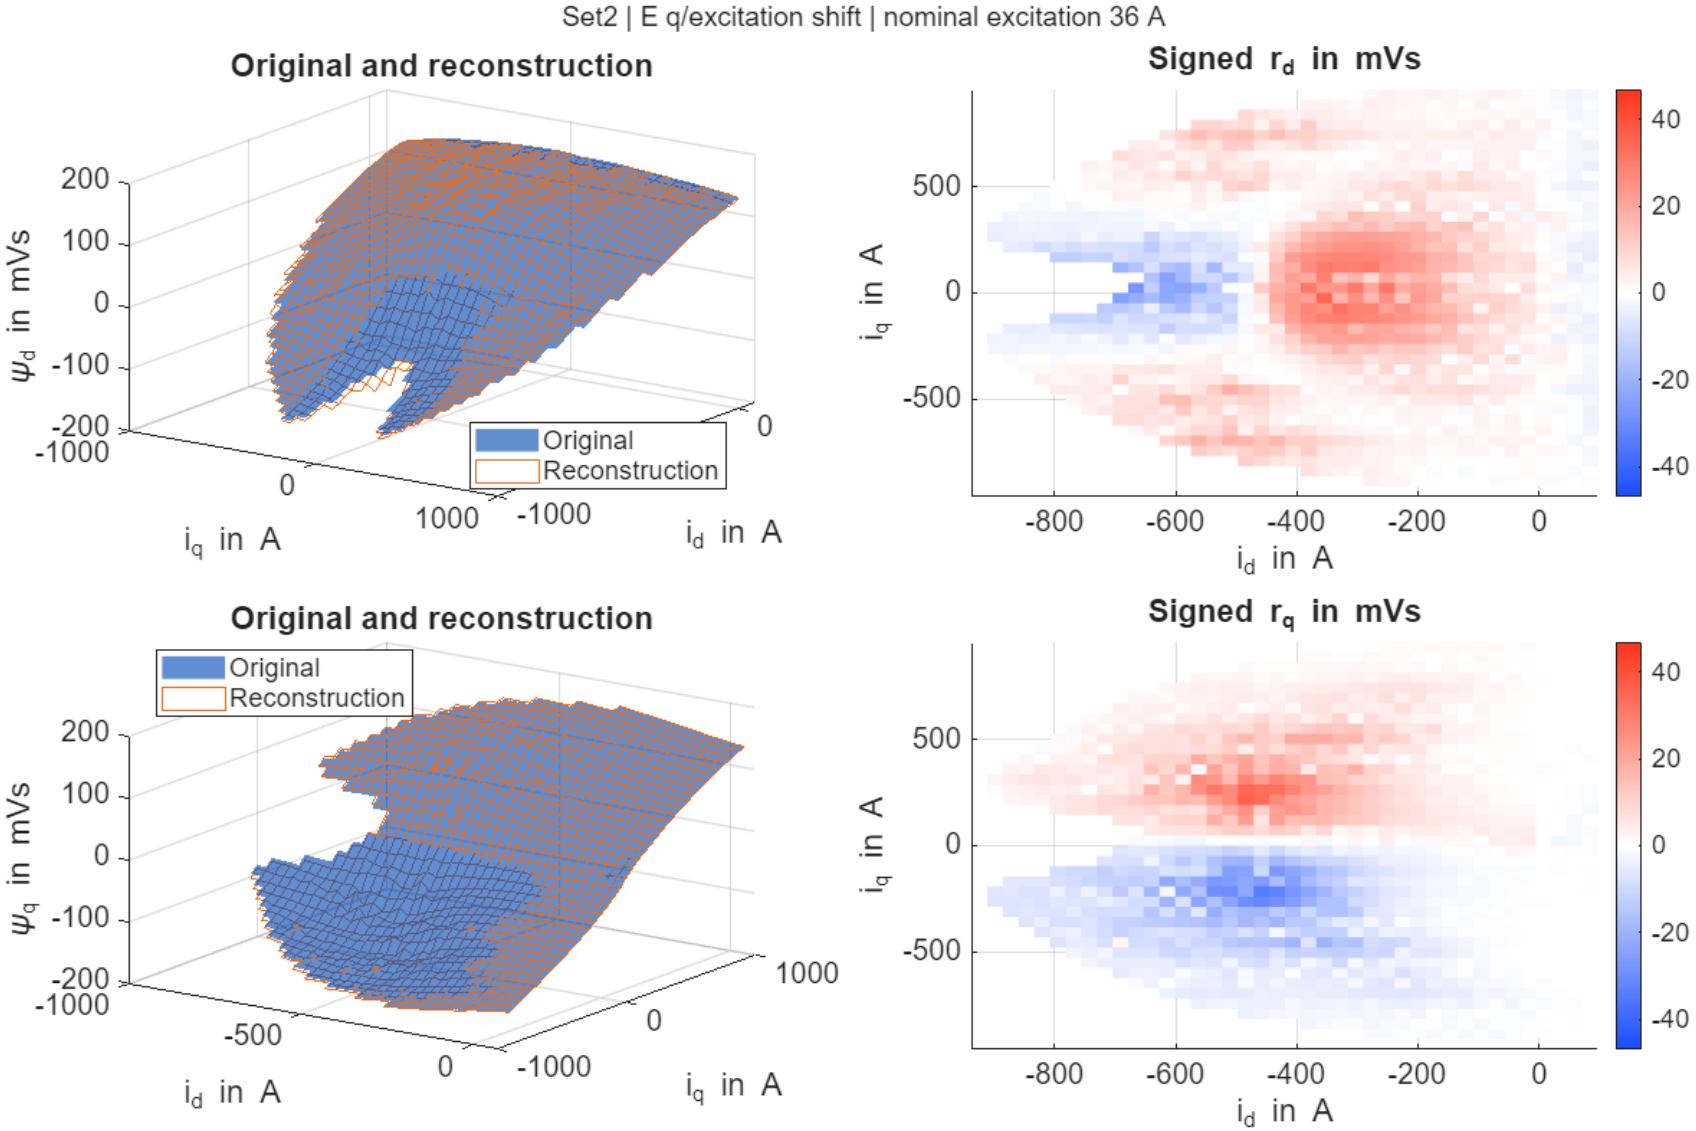

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method F, excitation 36 A

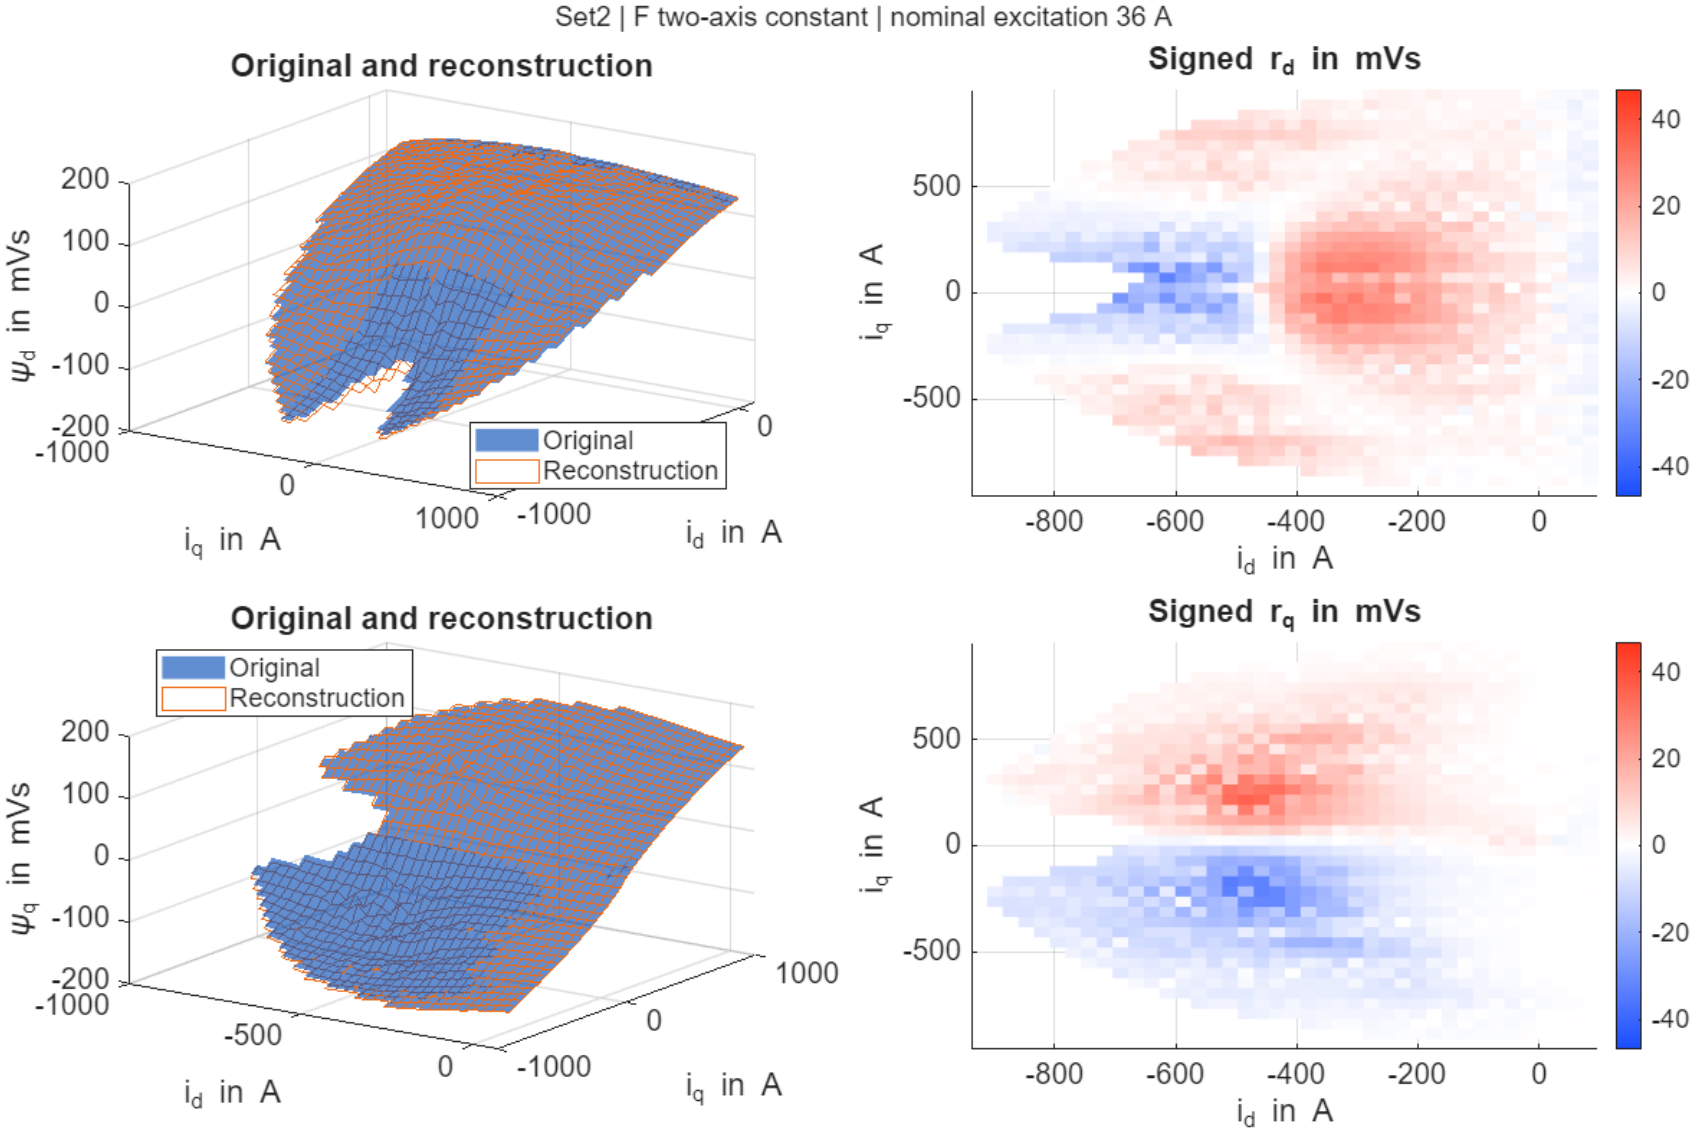

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method G, excitation 36 A

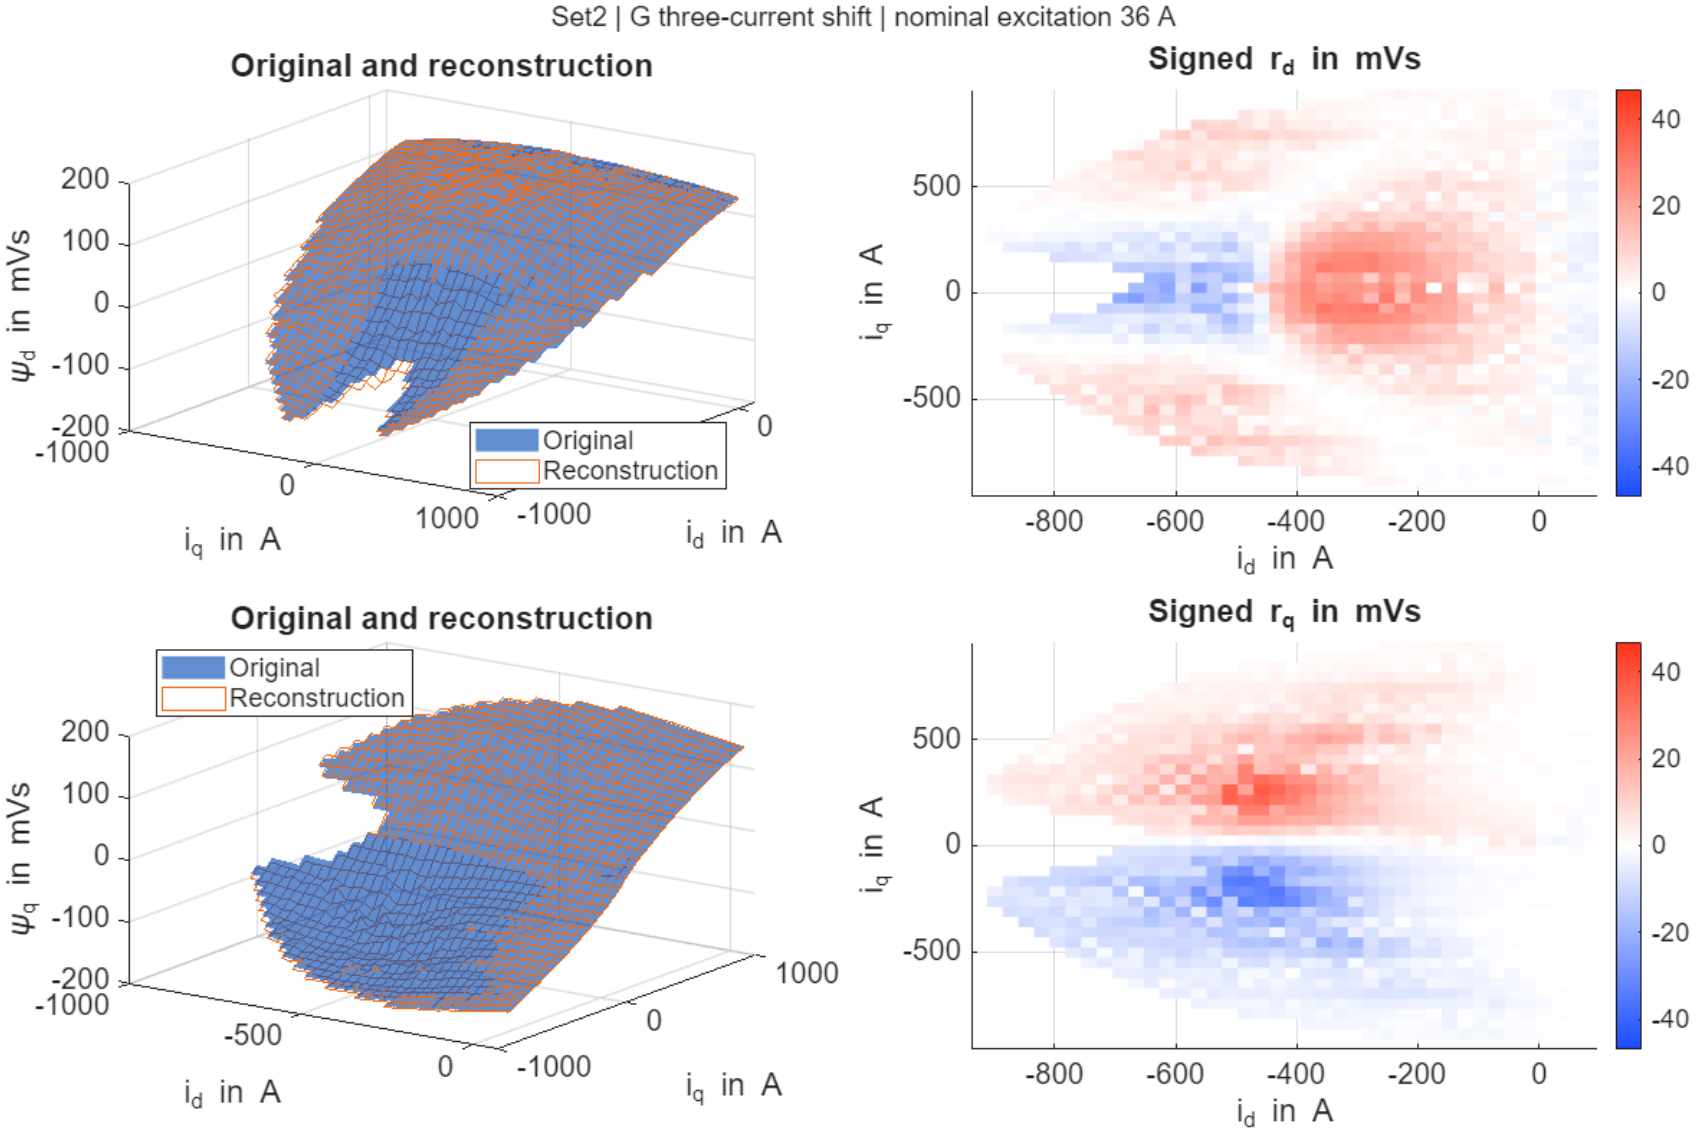

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method H, excitation 36 A

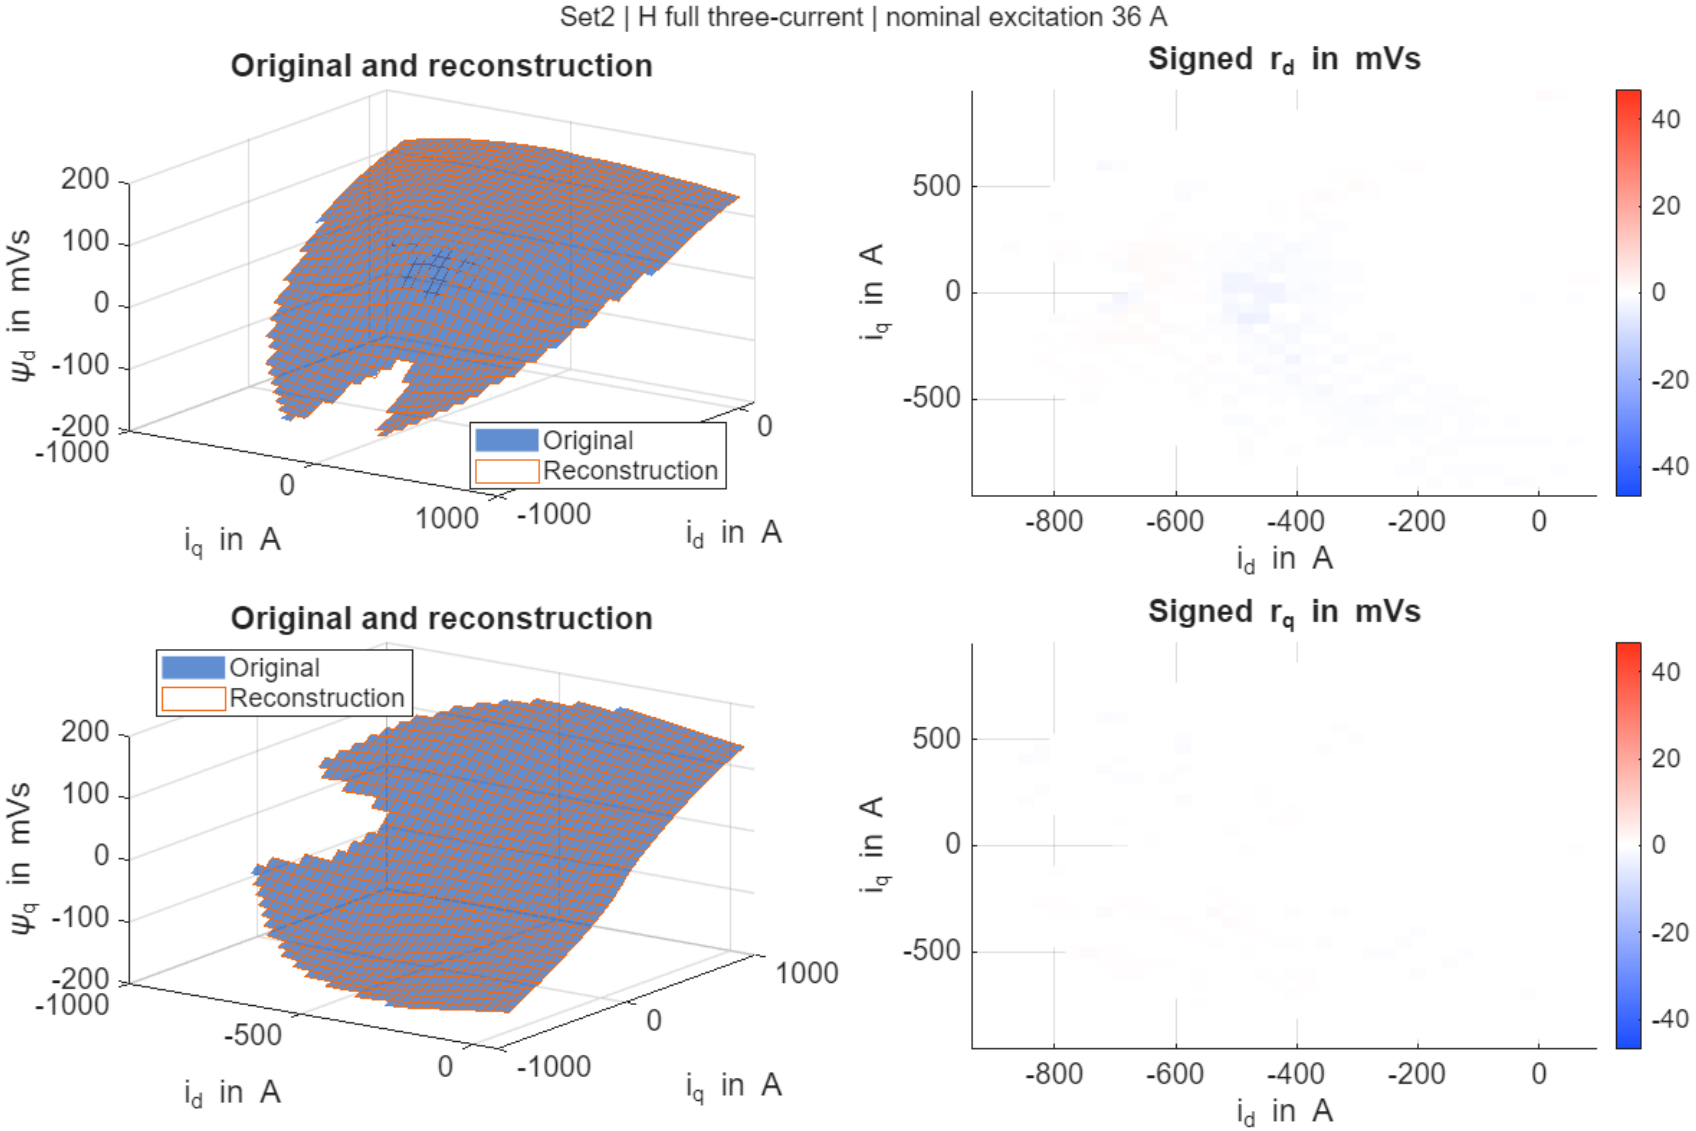

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method A, excitation 40 A

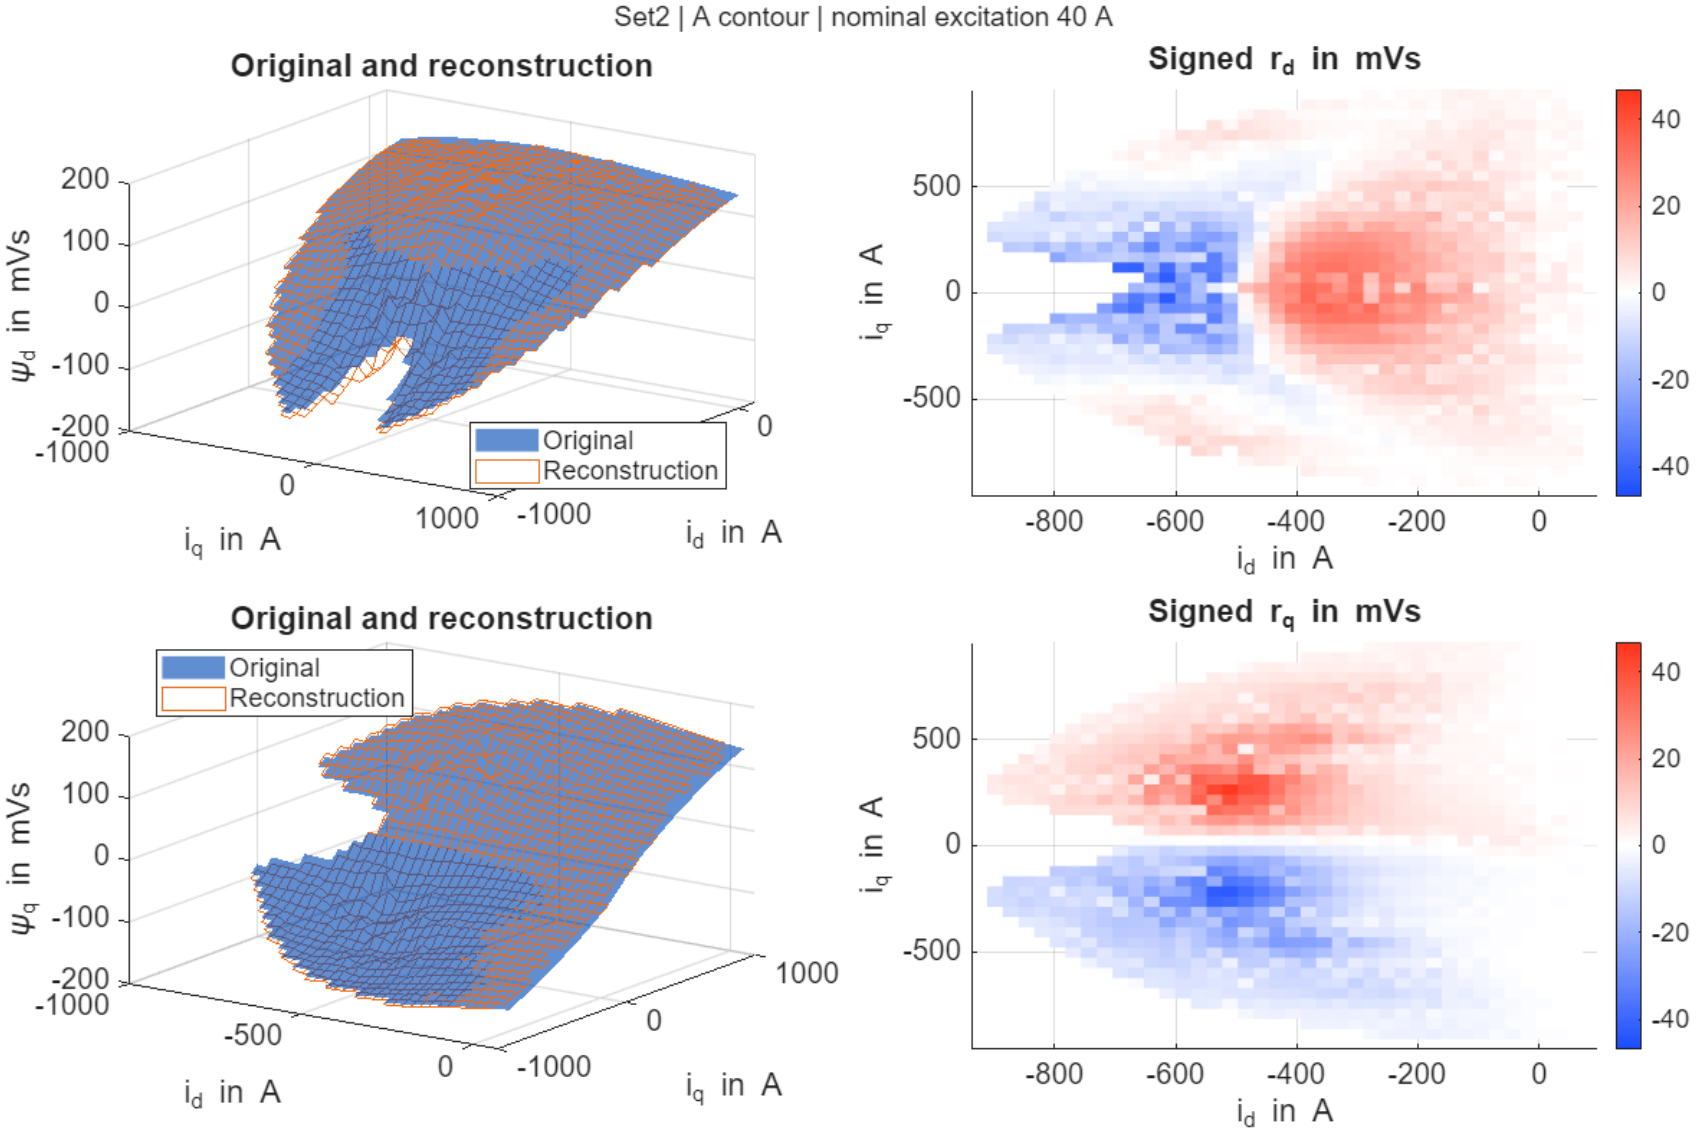

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method B, excitation 40 A

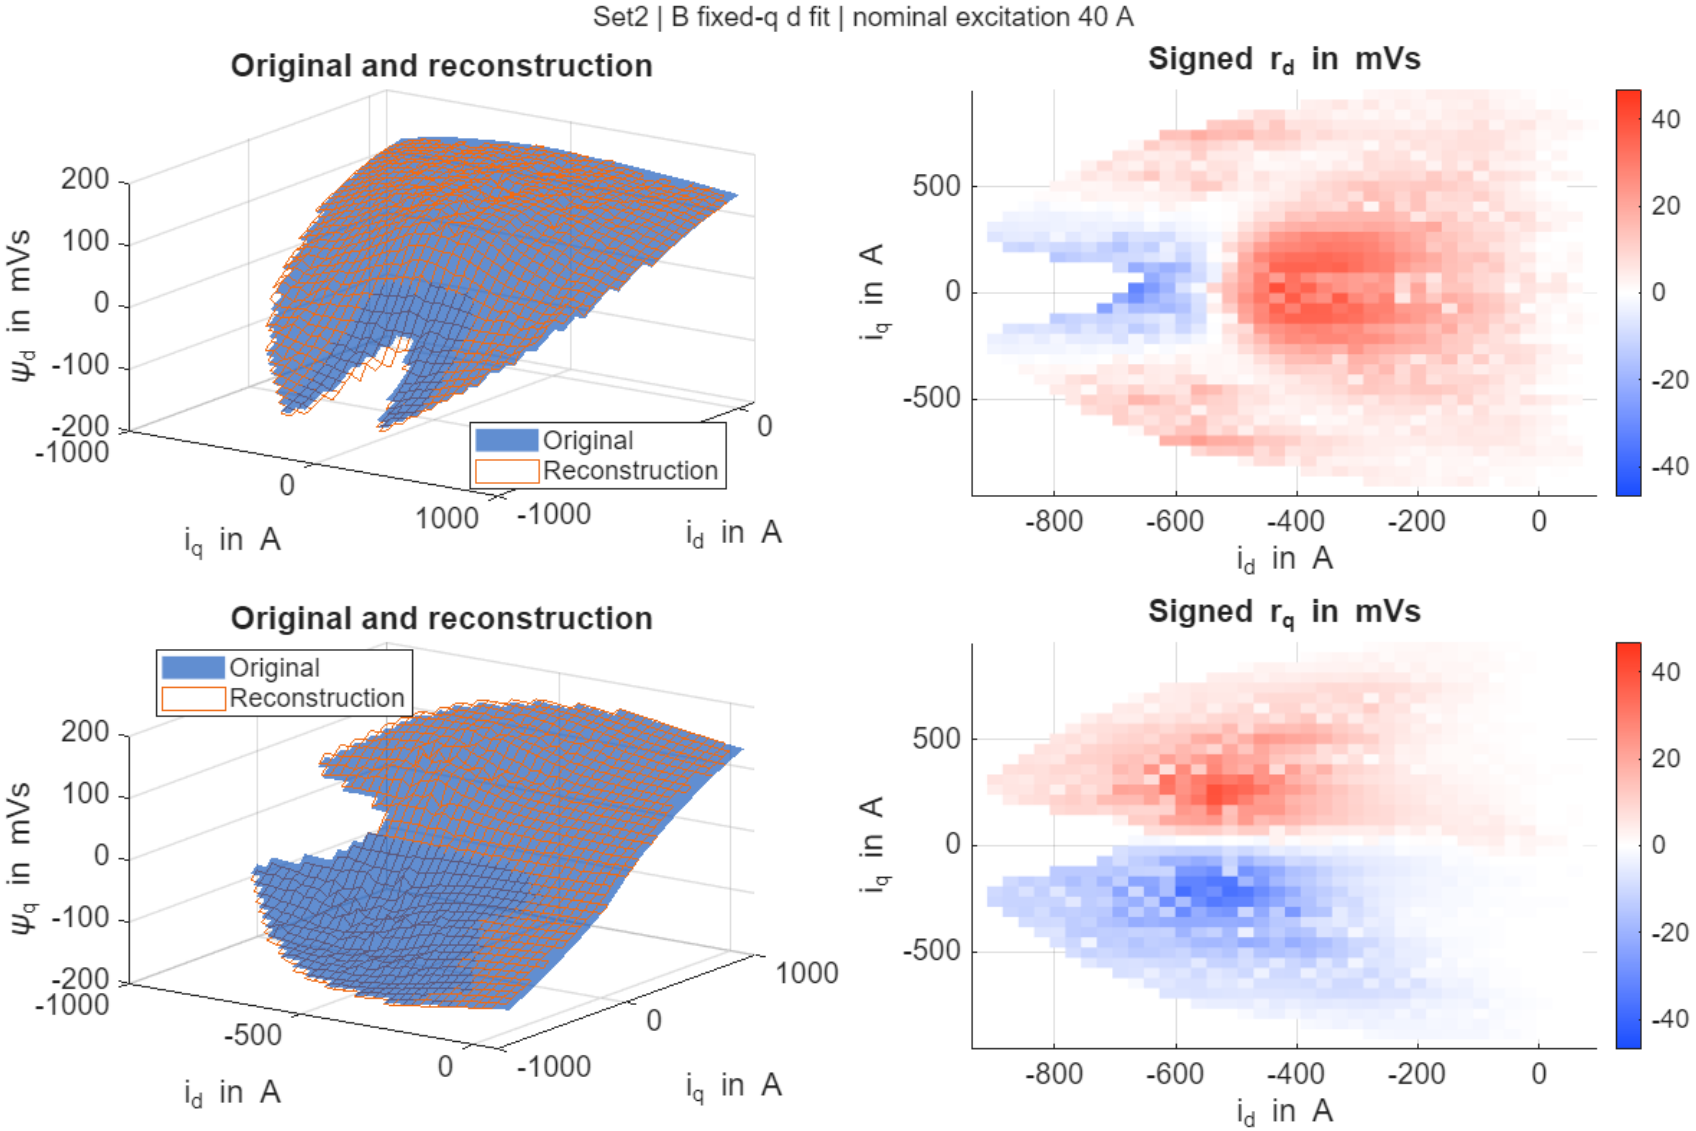

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method C, excitation 40 A

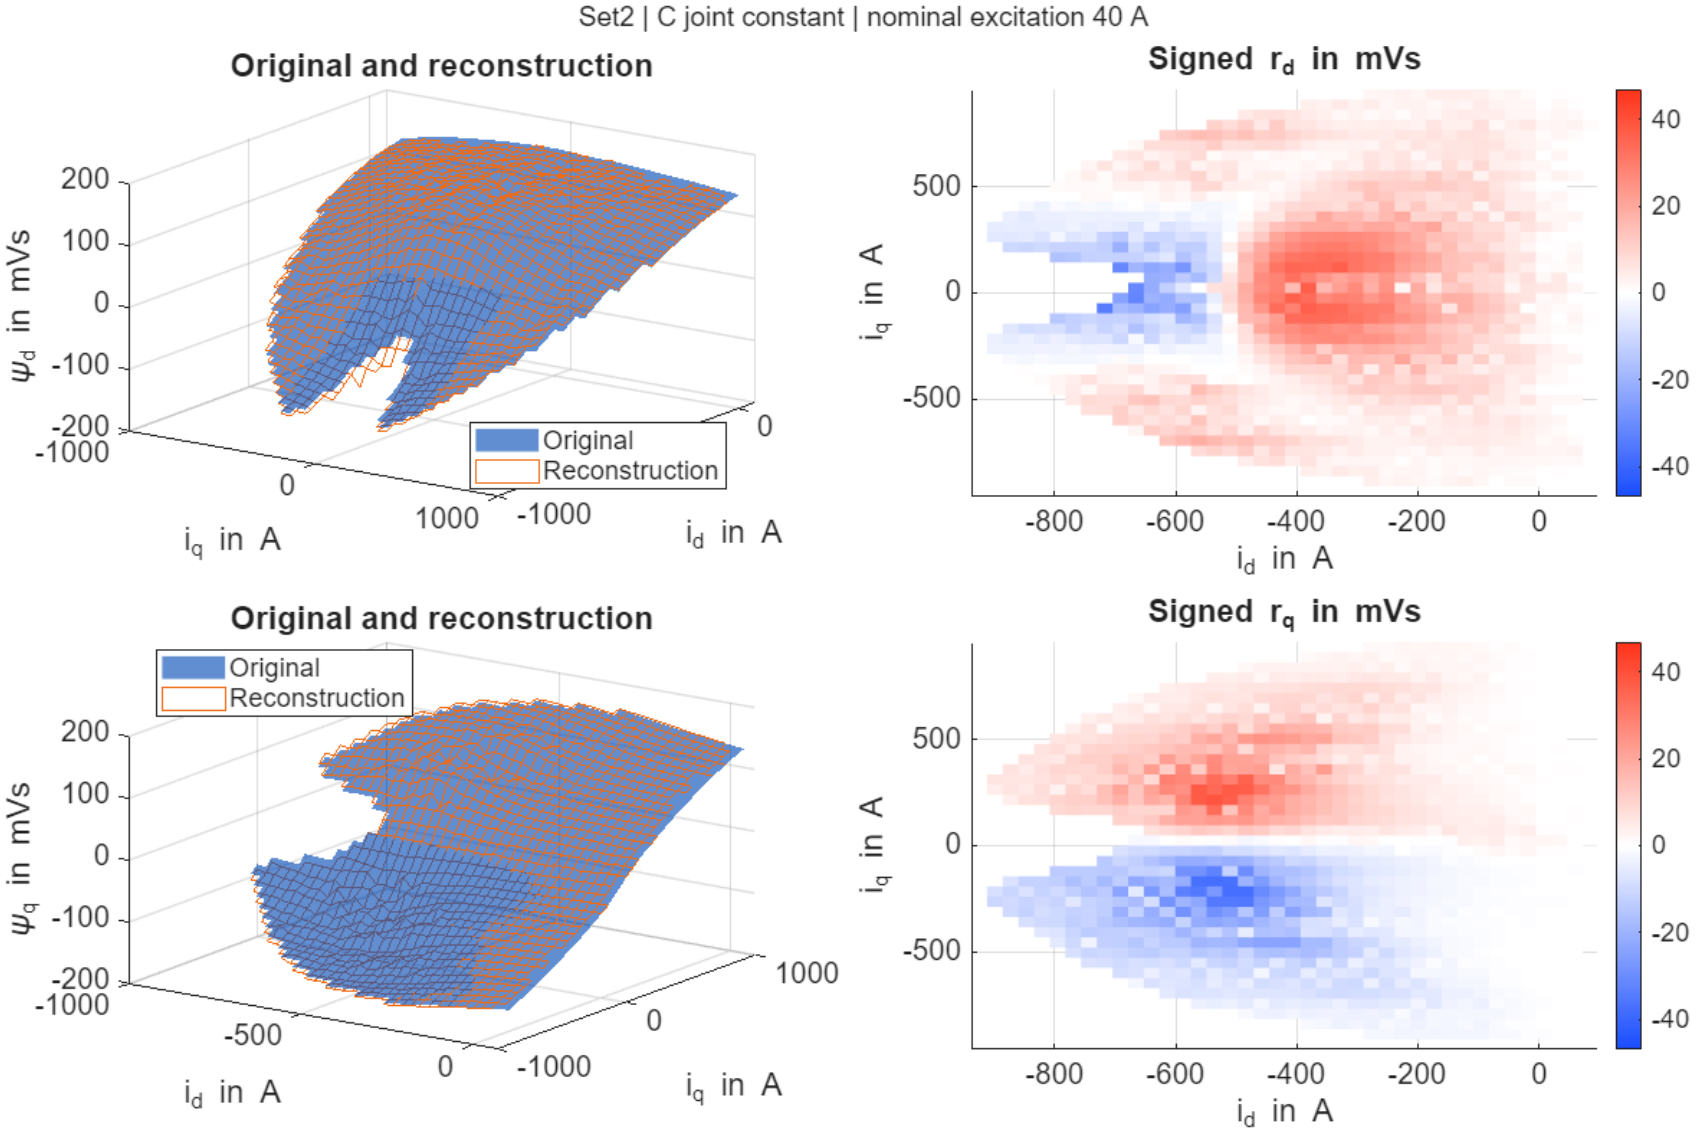

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method D, excitation 40 A

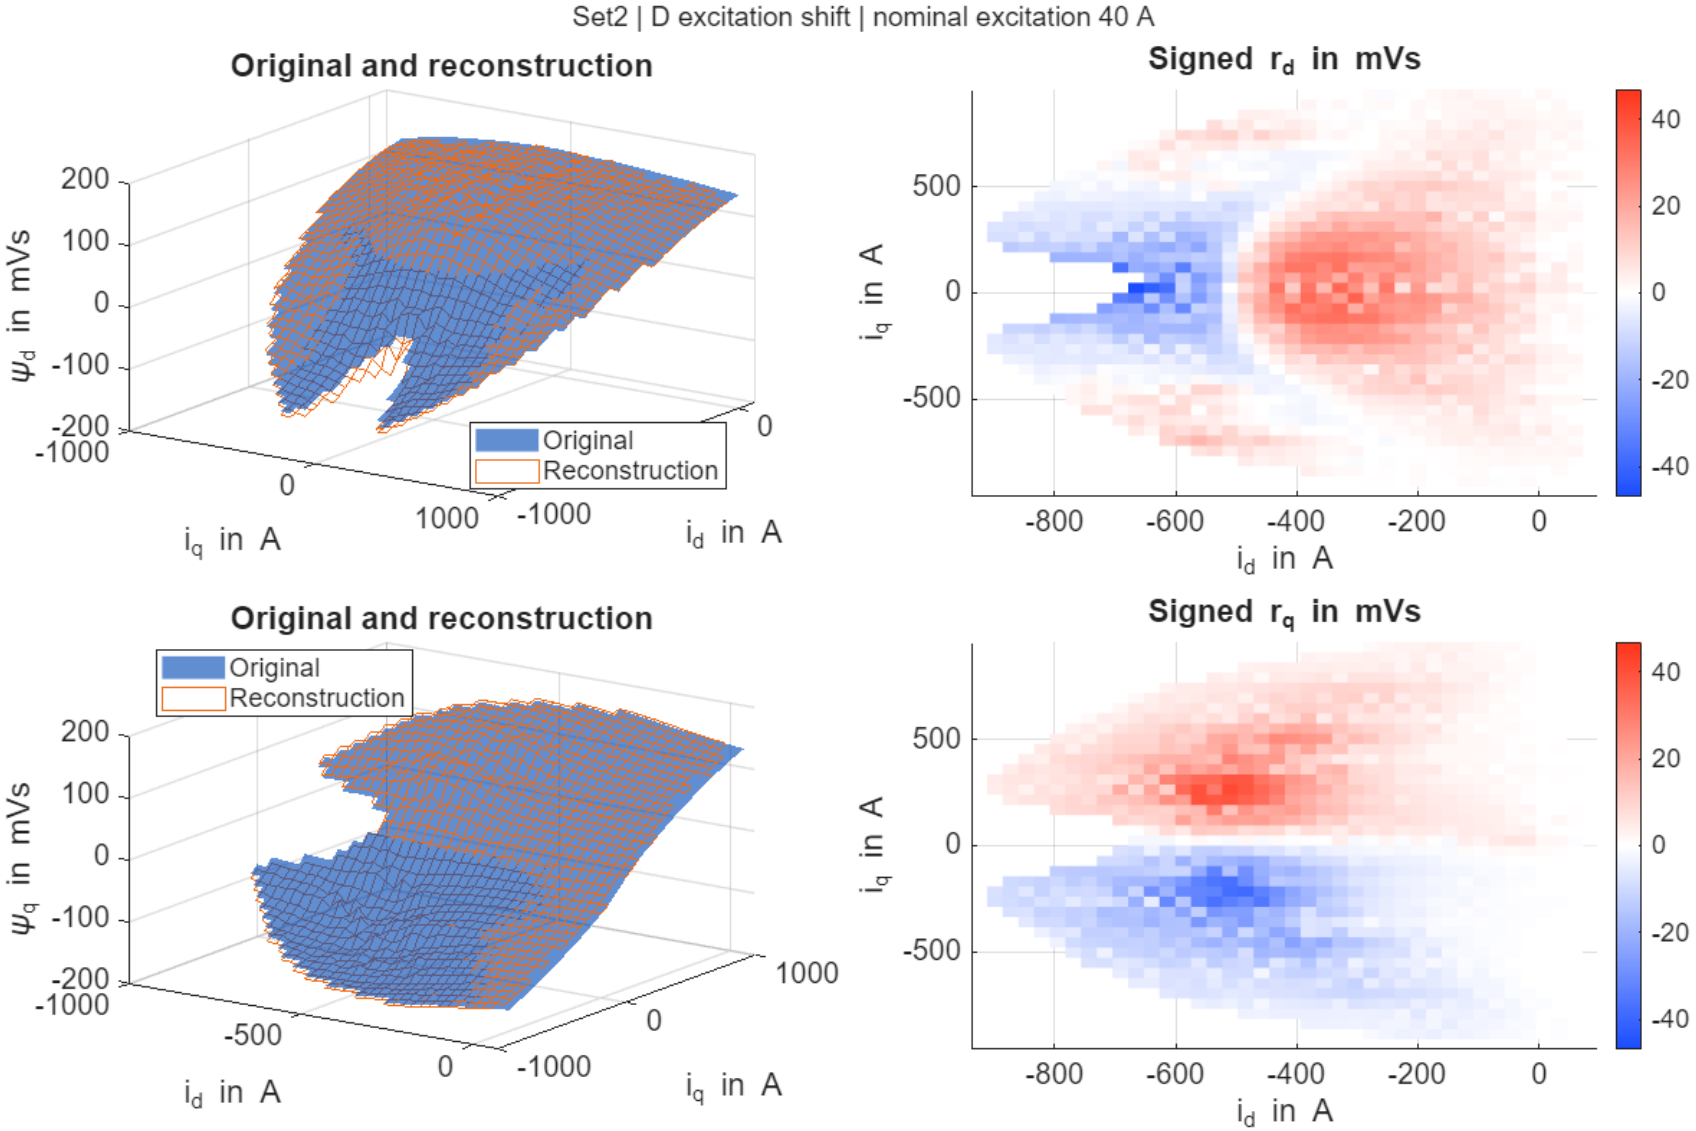

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method E, excitation 40 A

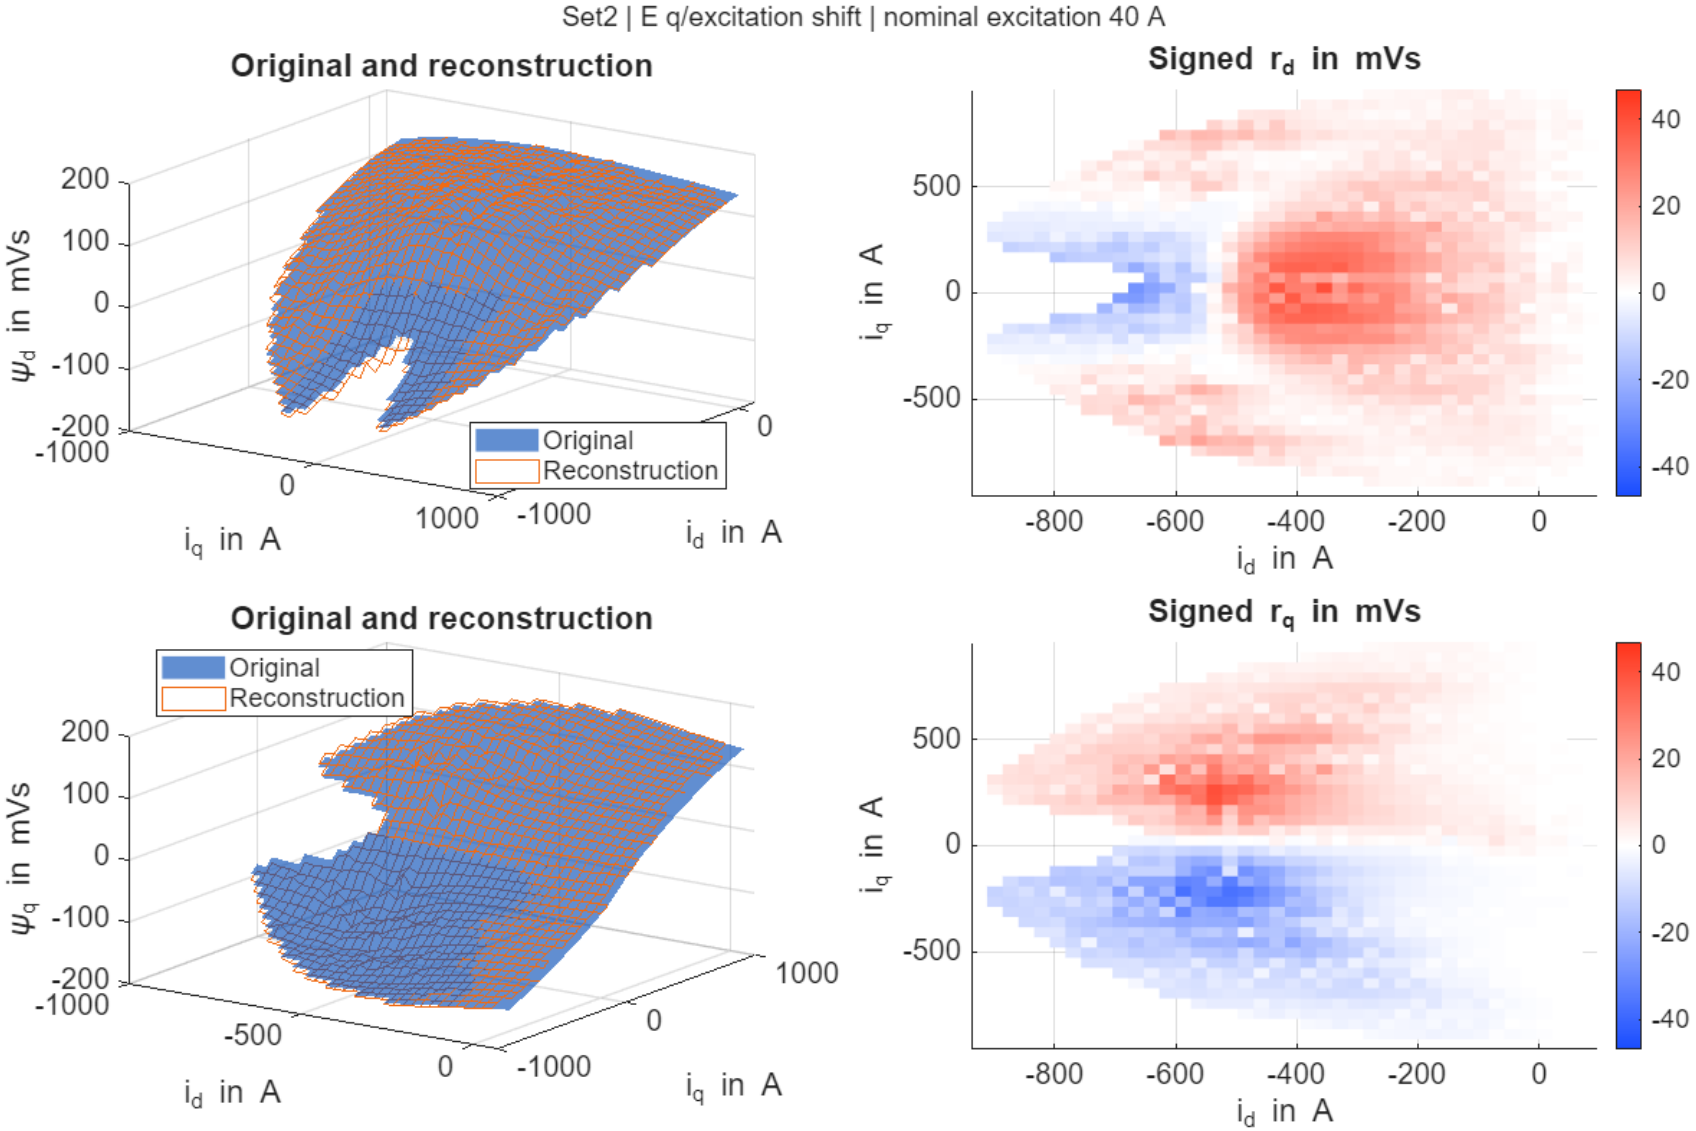

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method F, excitation 40 A

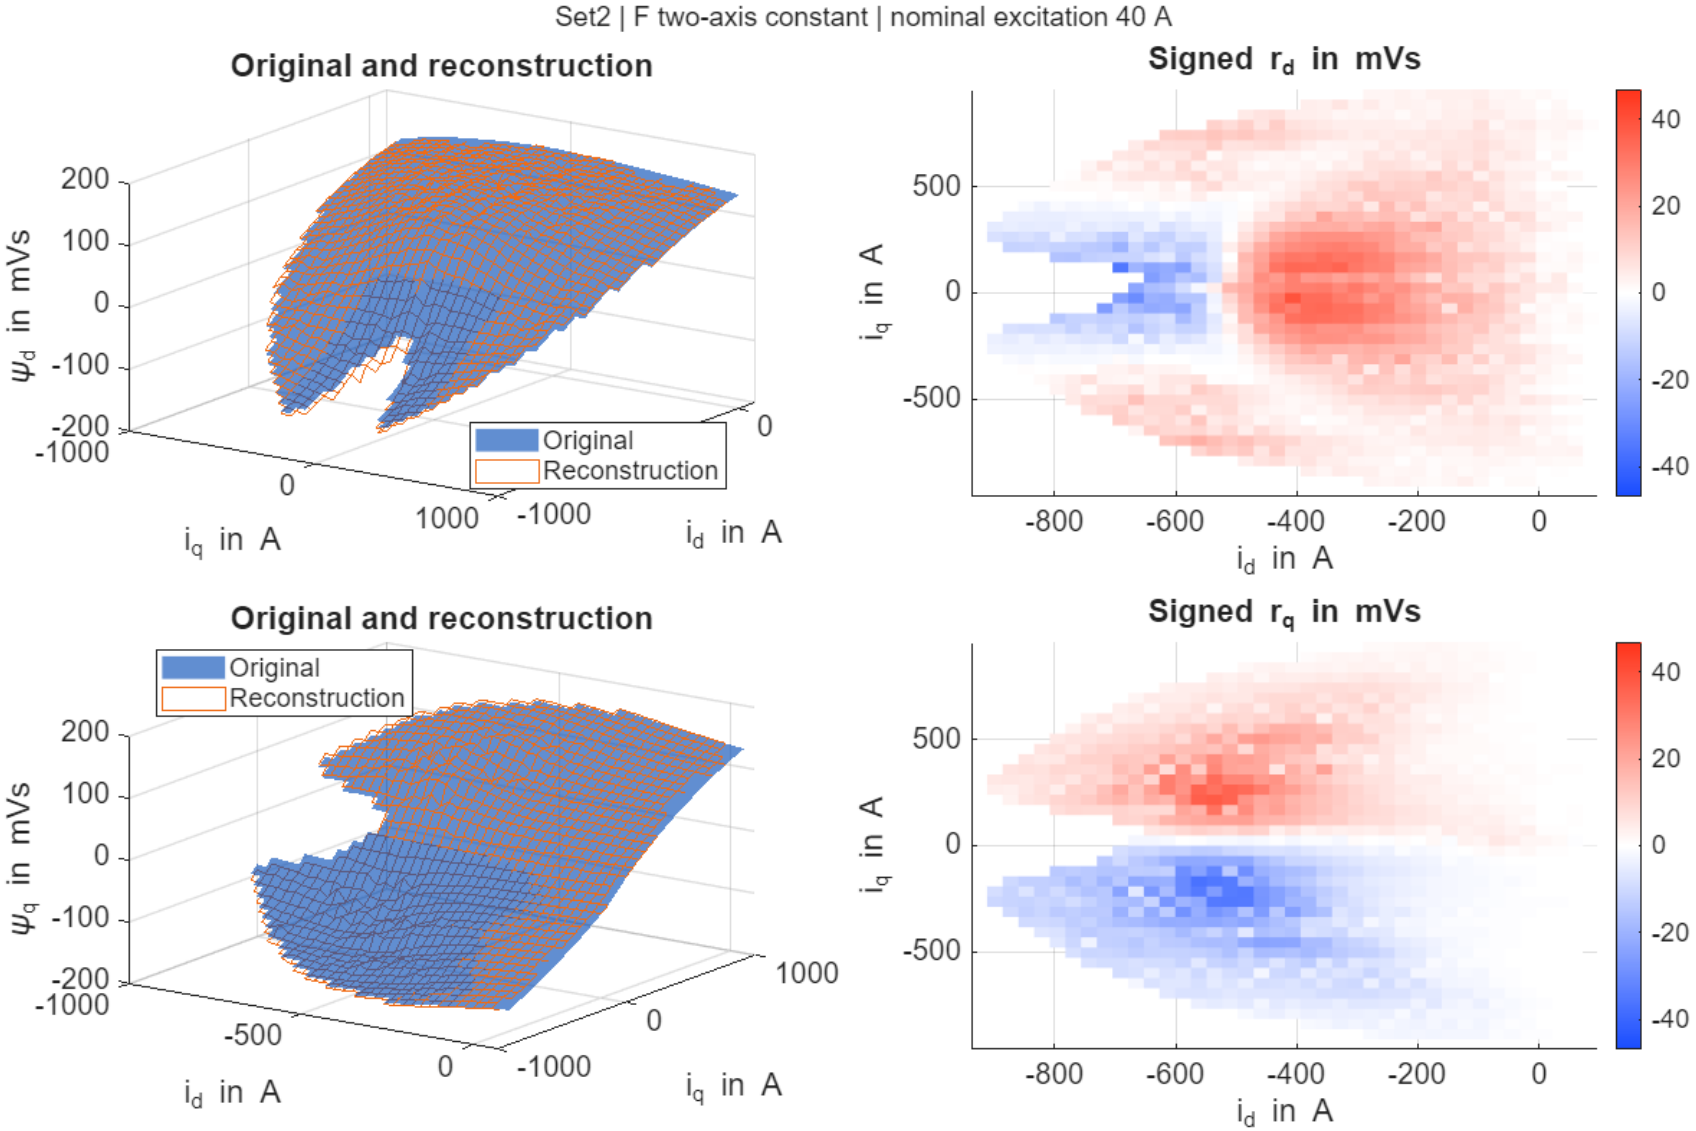

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method G, excitation 40 A

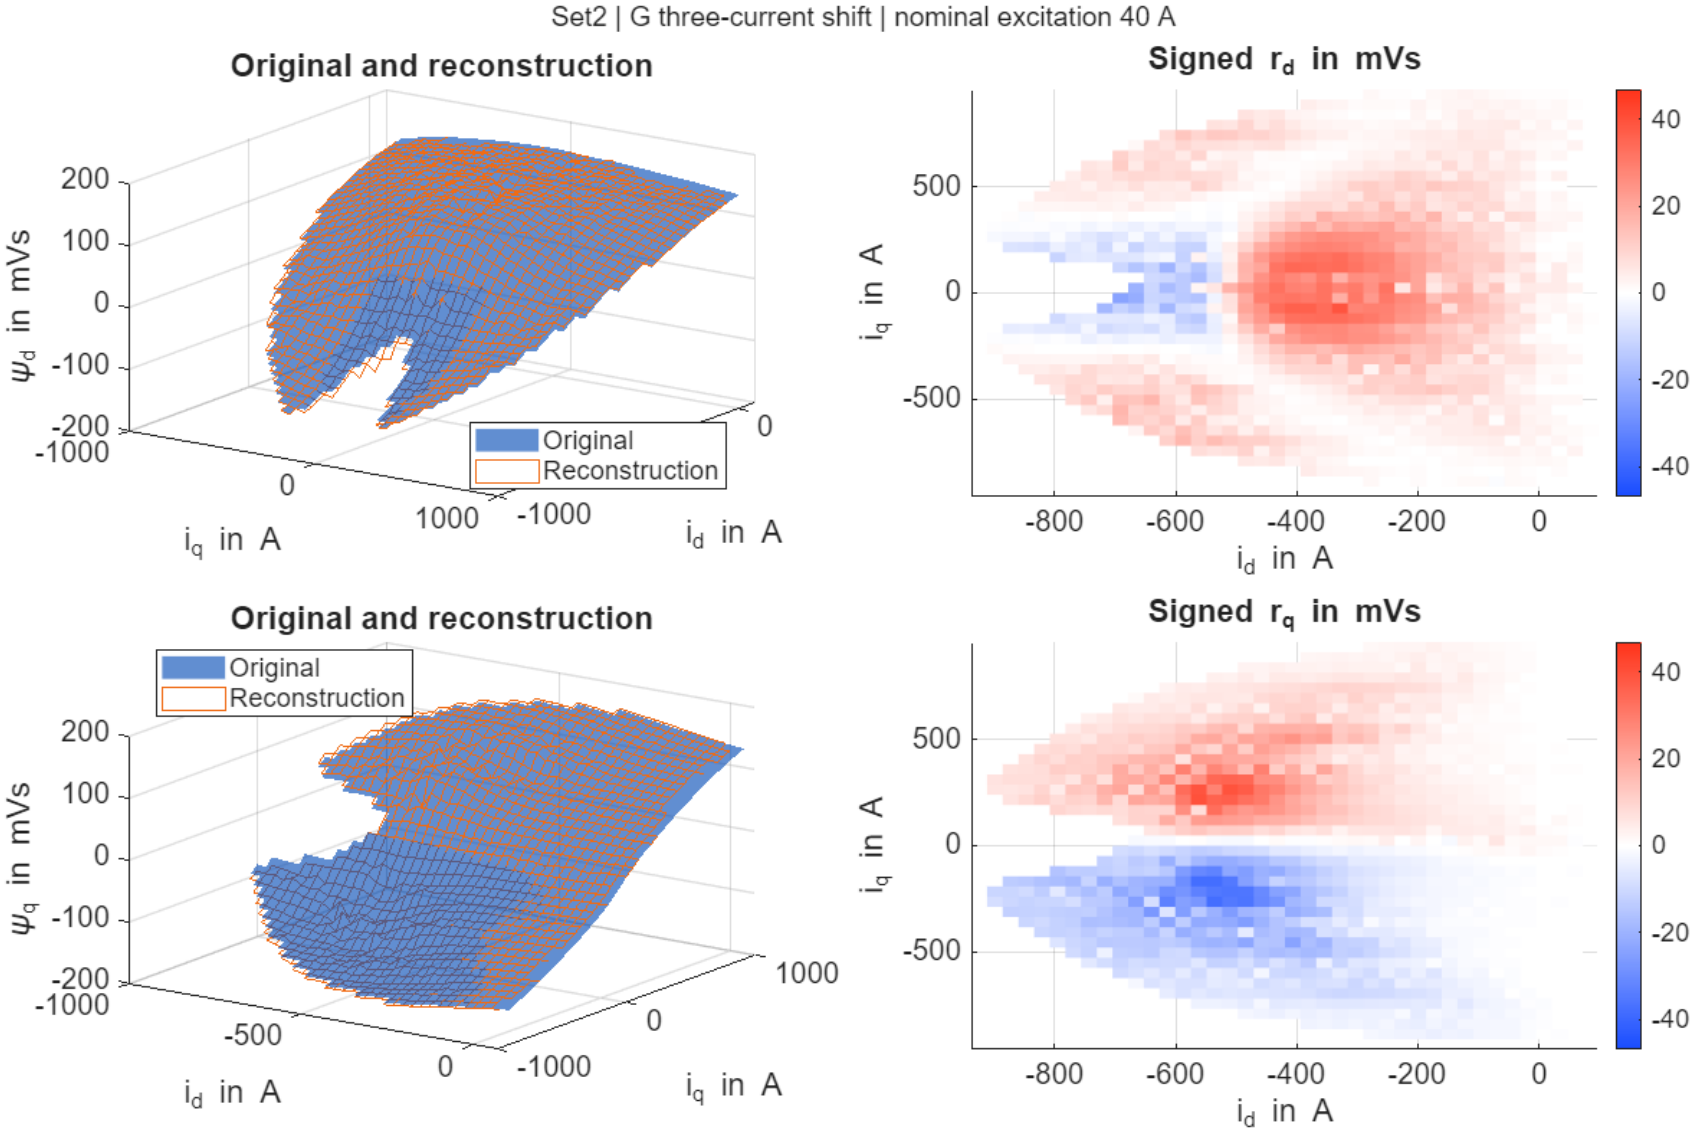

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 2, method H, excitation 40 A

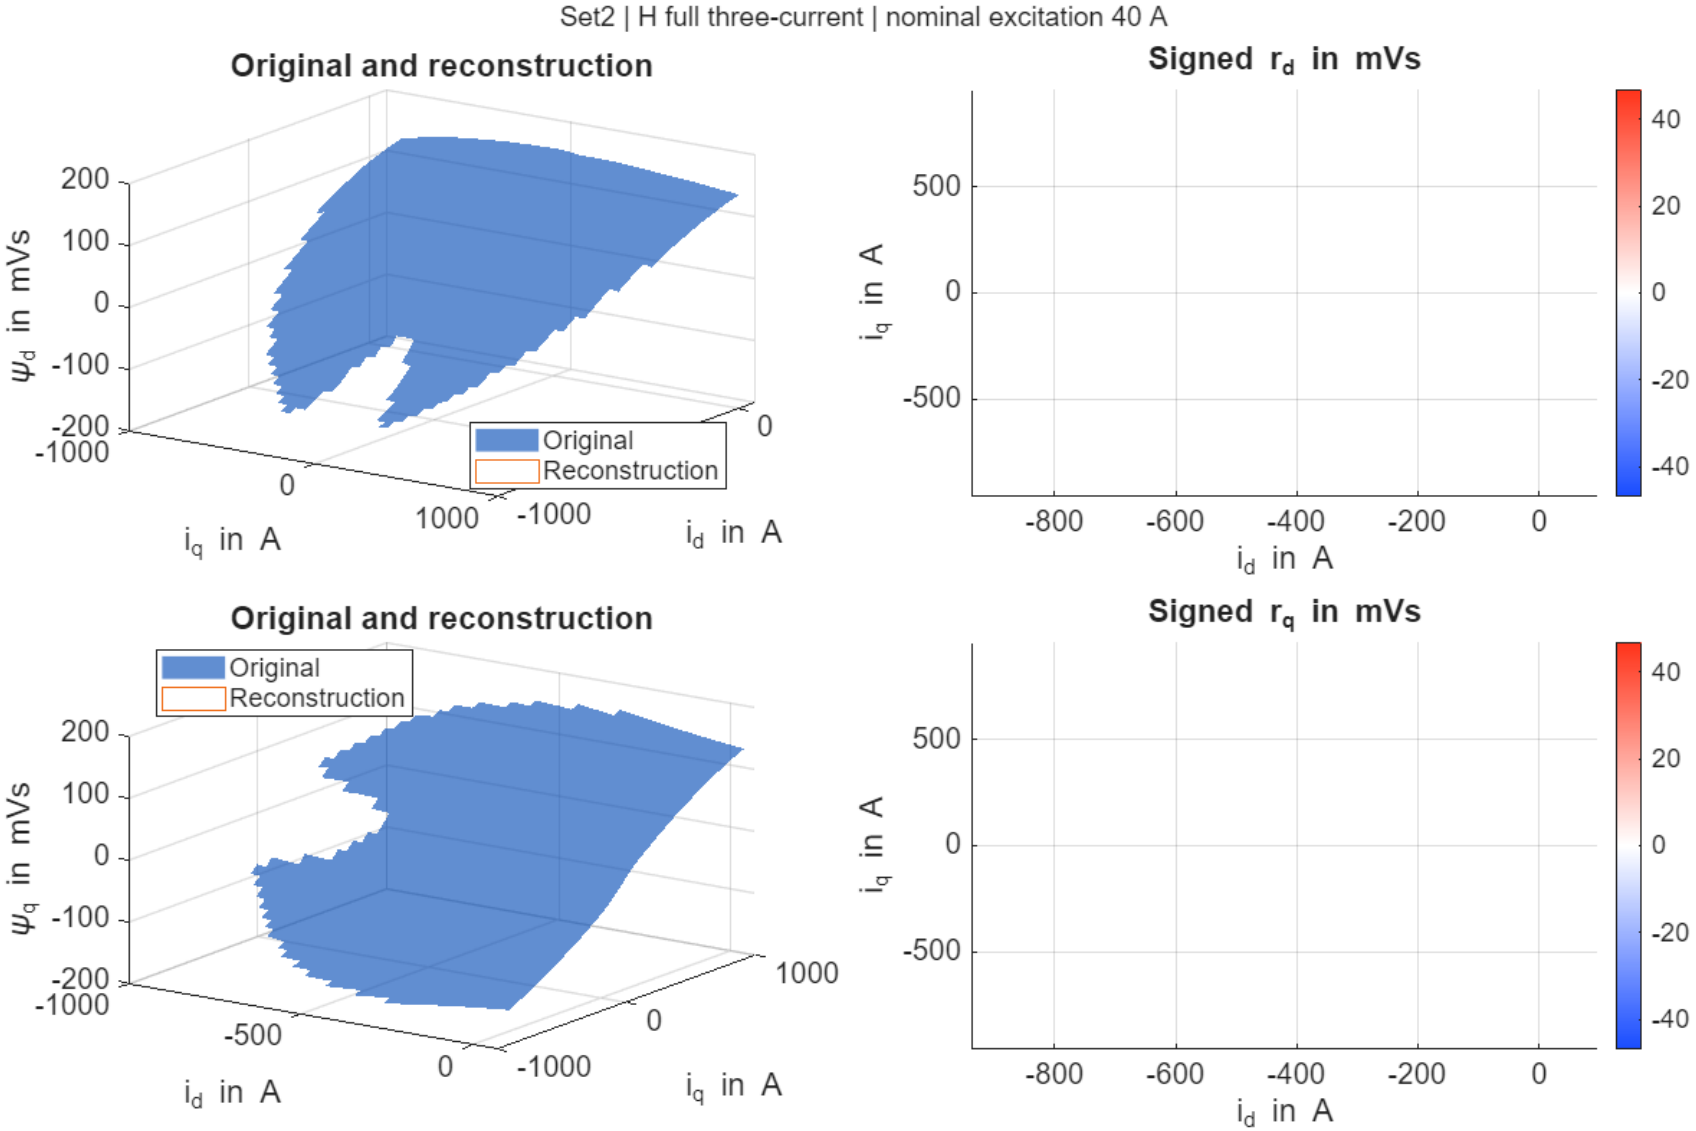

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method A, excitation 3 A

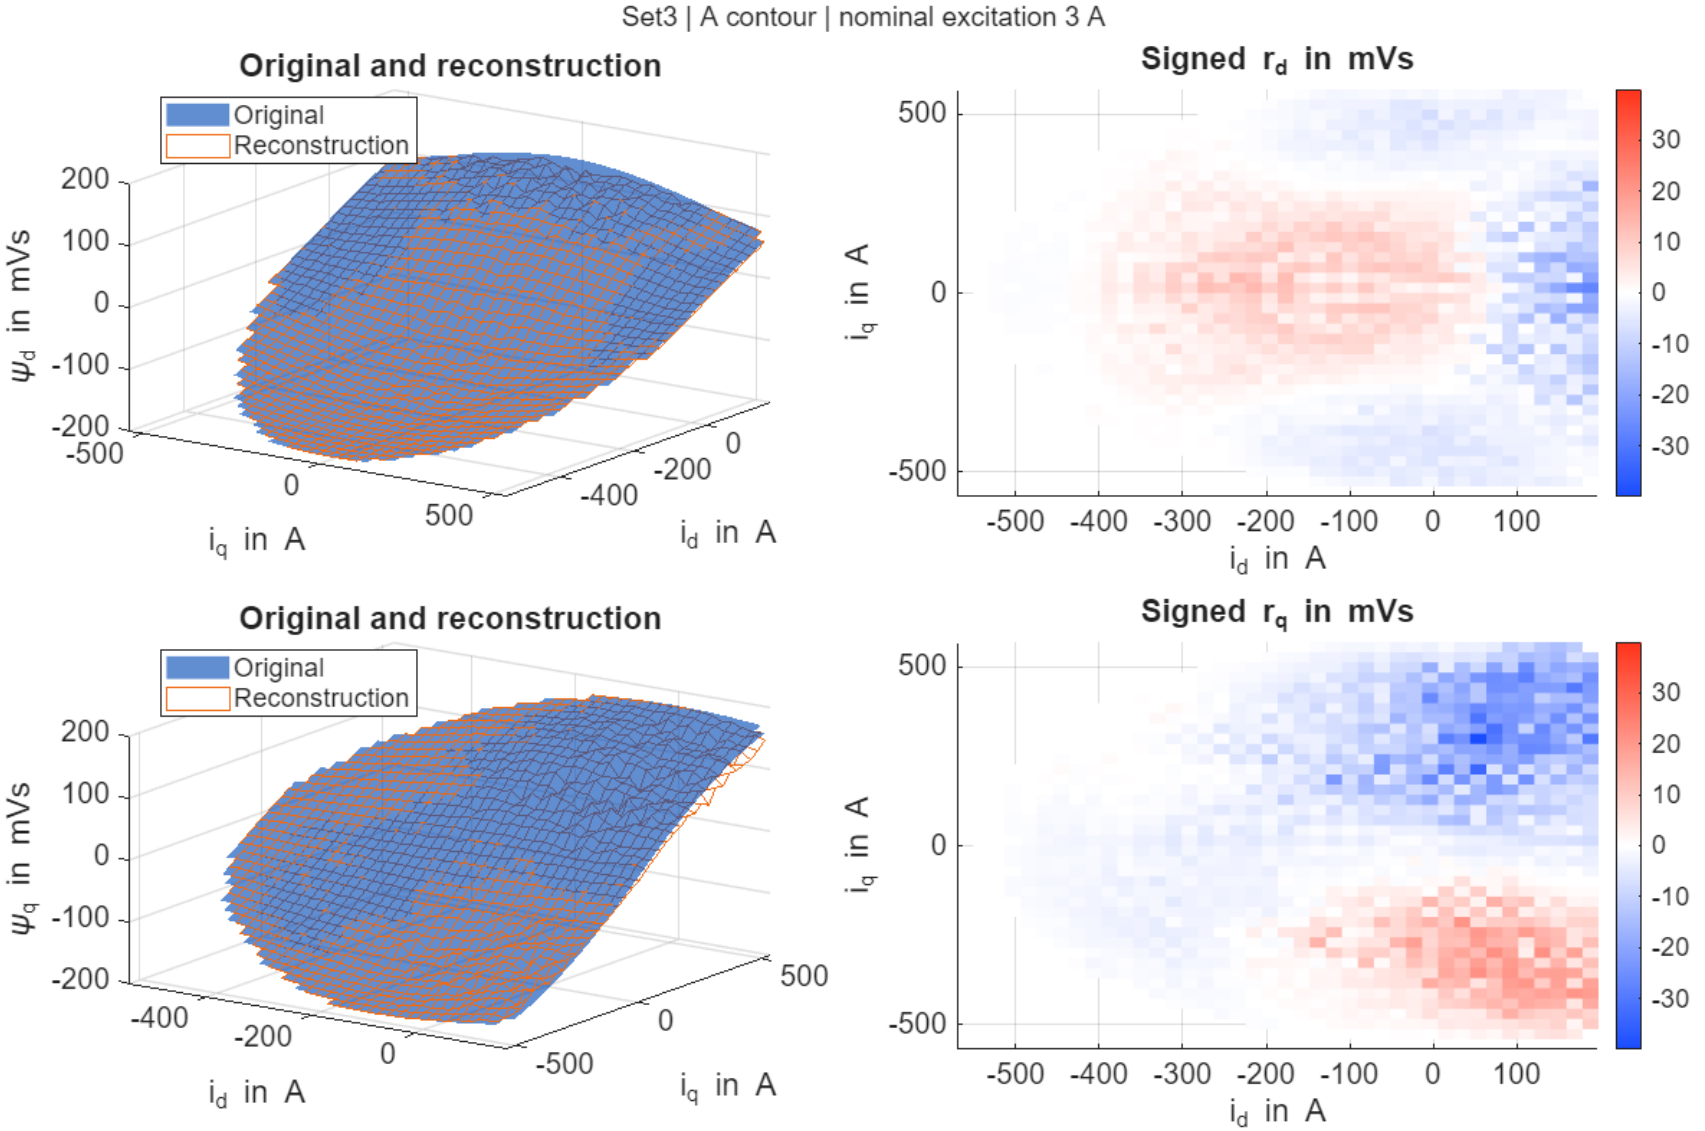

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method B, excitation 3 A

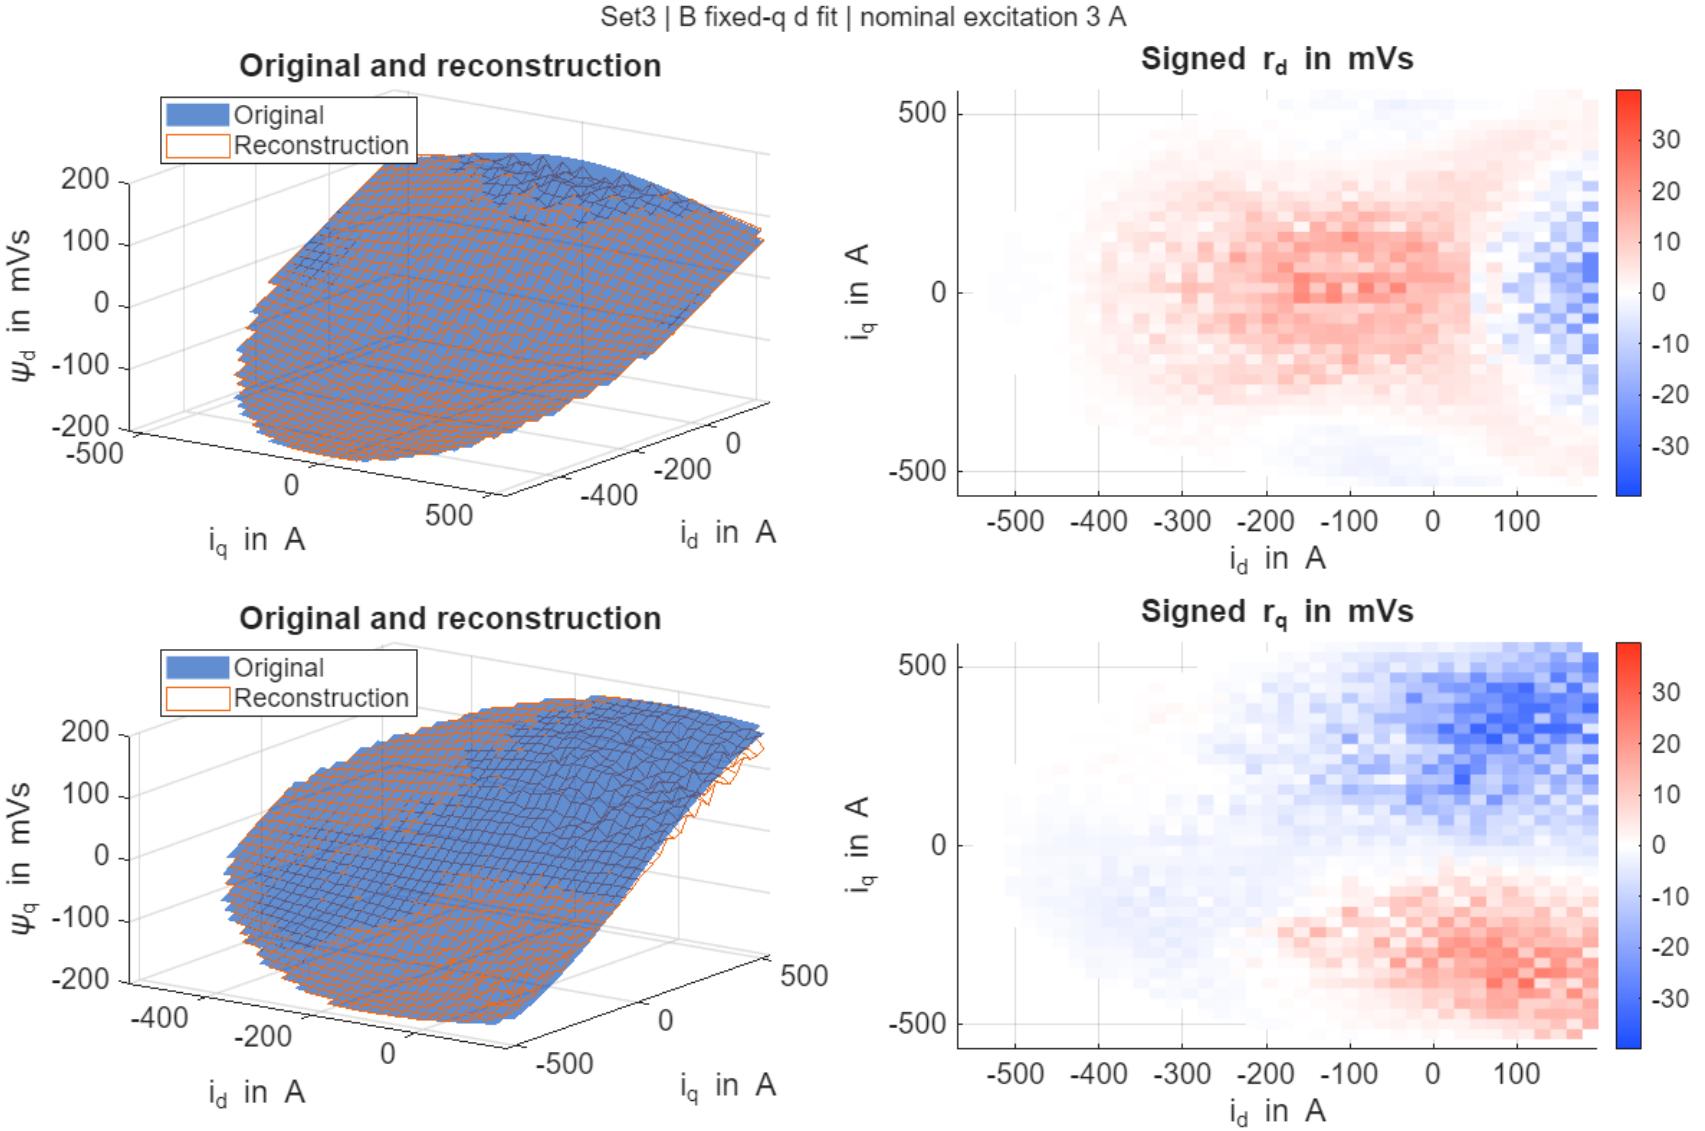

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method C, excitation 3 A

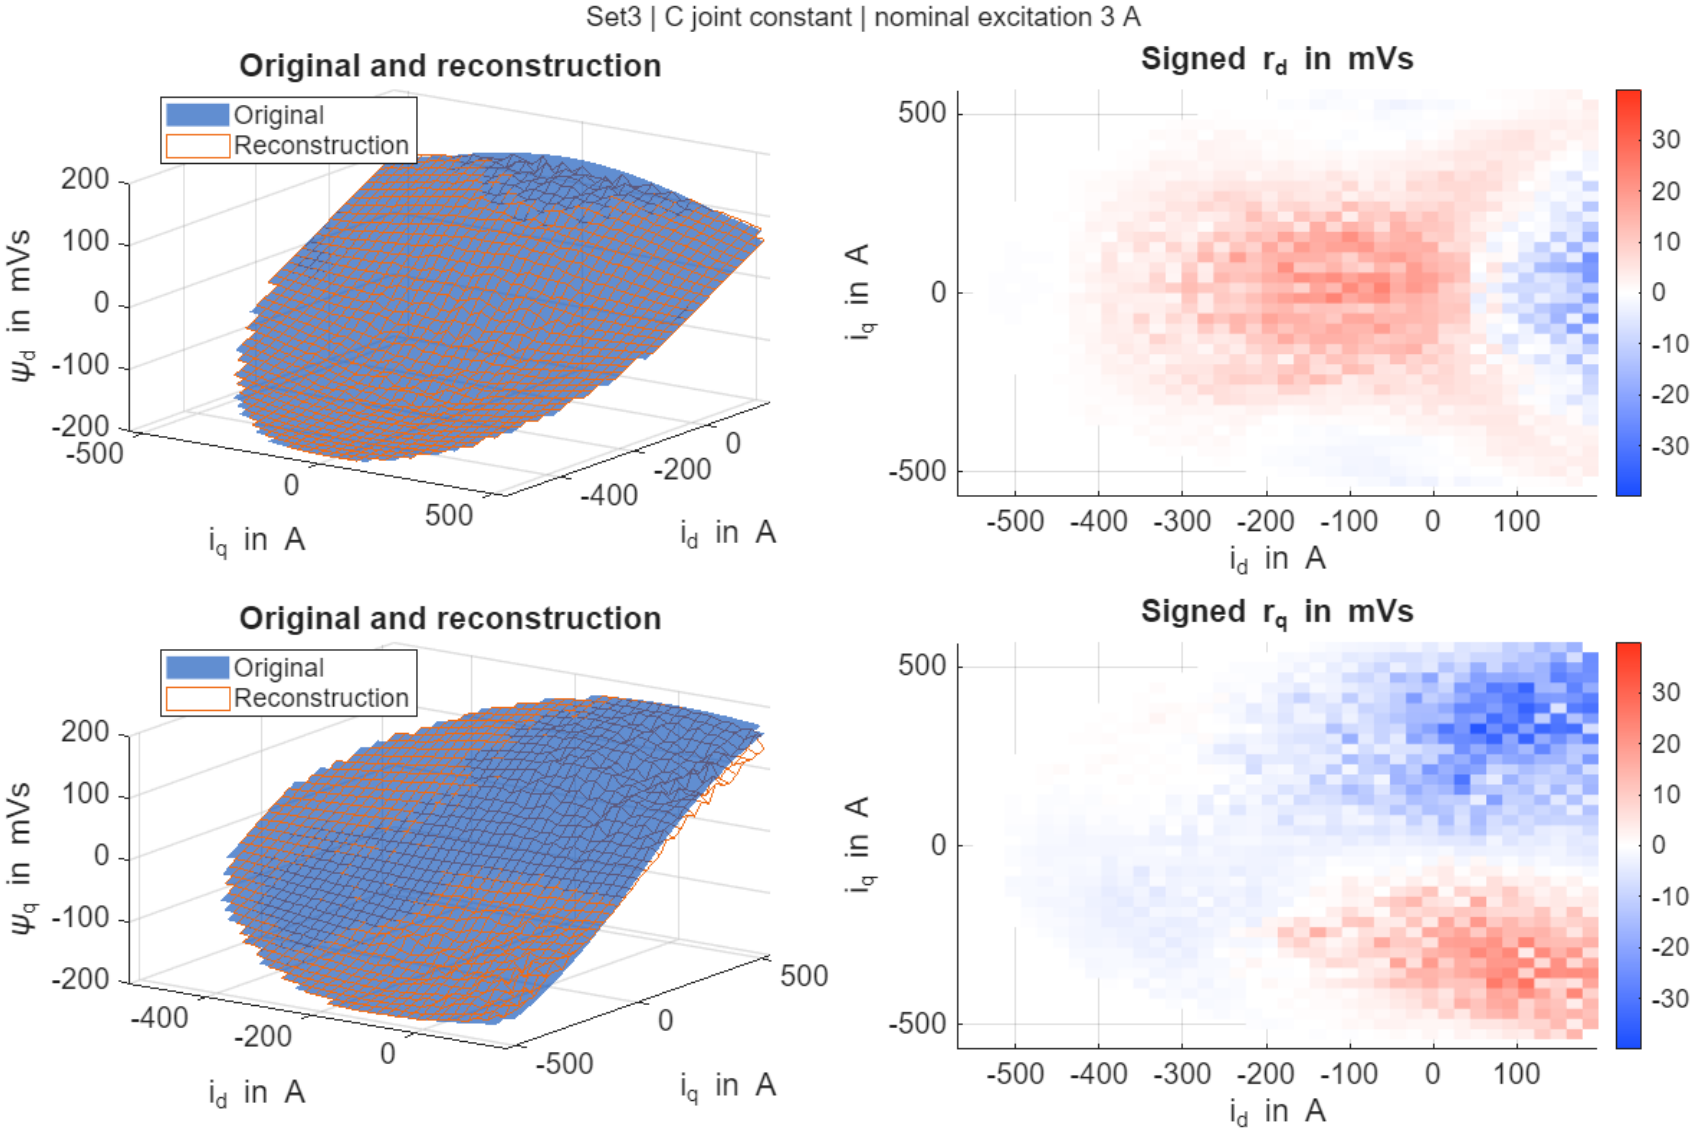

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method D, excitation 3 A

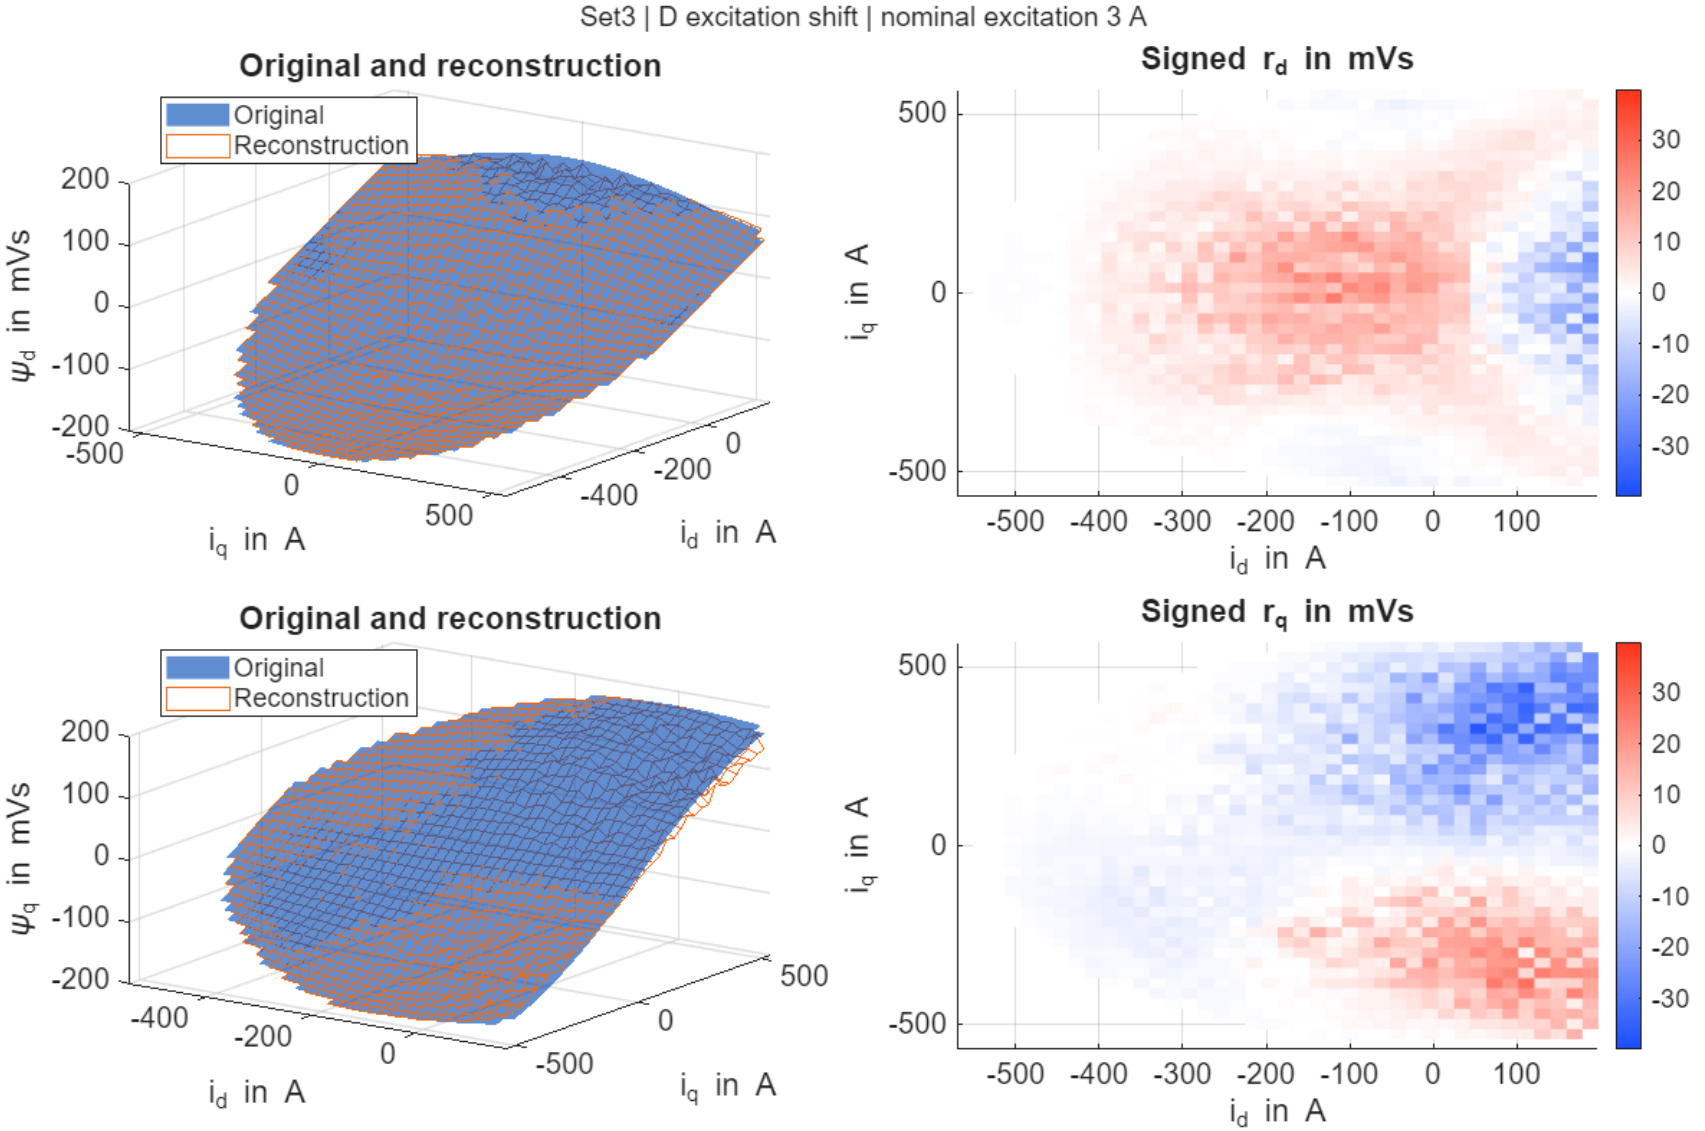

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method E, excitation 3 A

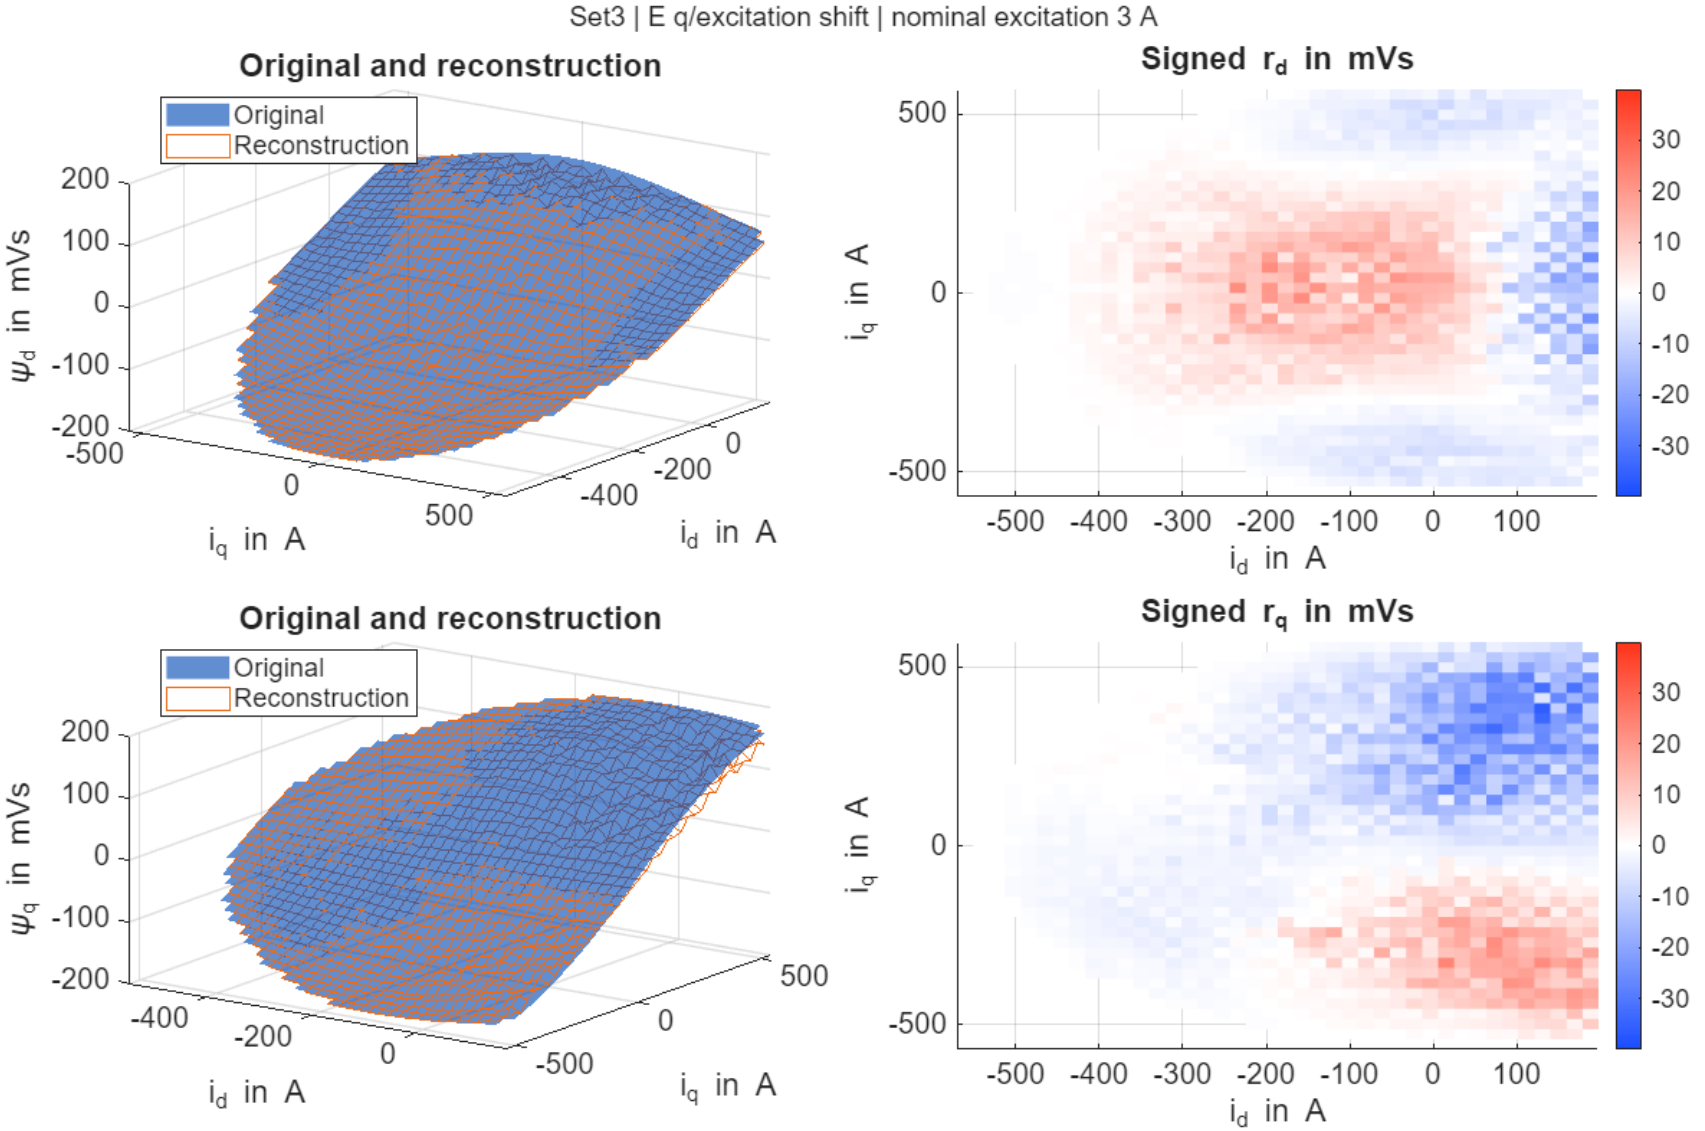

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method F, excitation 3 A

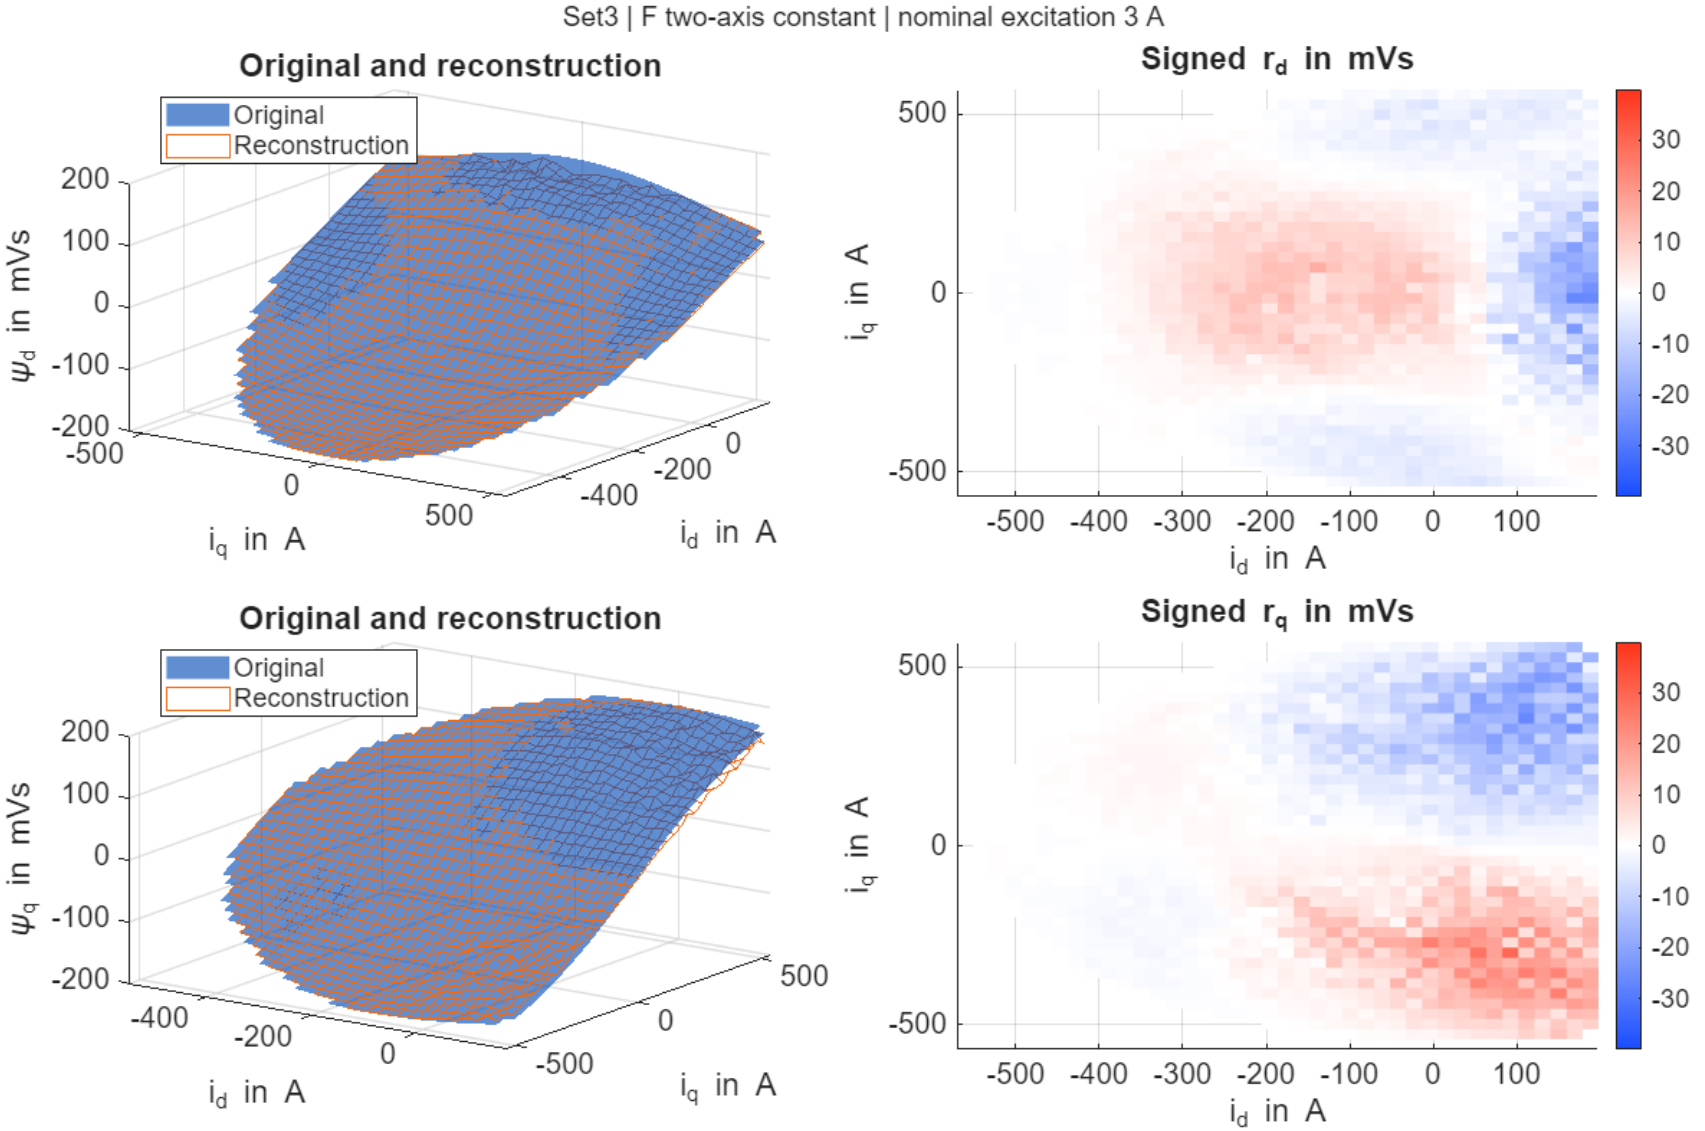

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method G, excitation 3 A

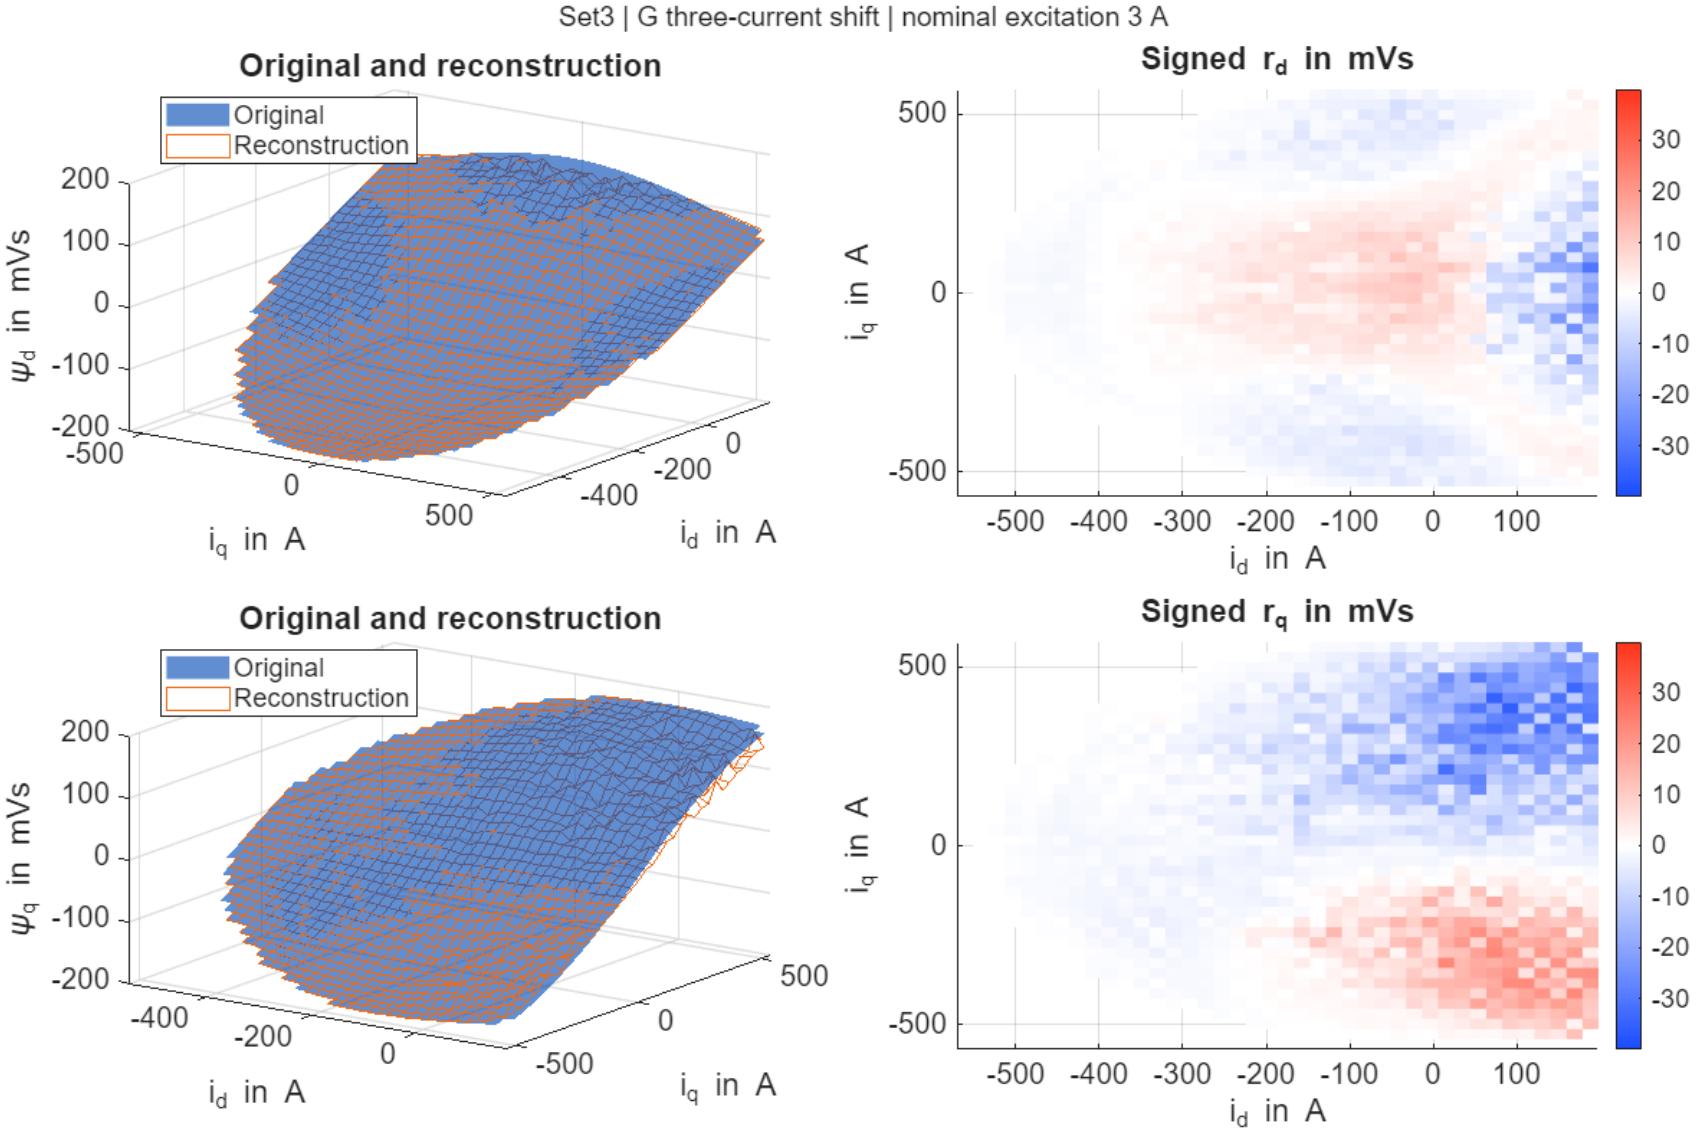

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method H, excitation 3 A

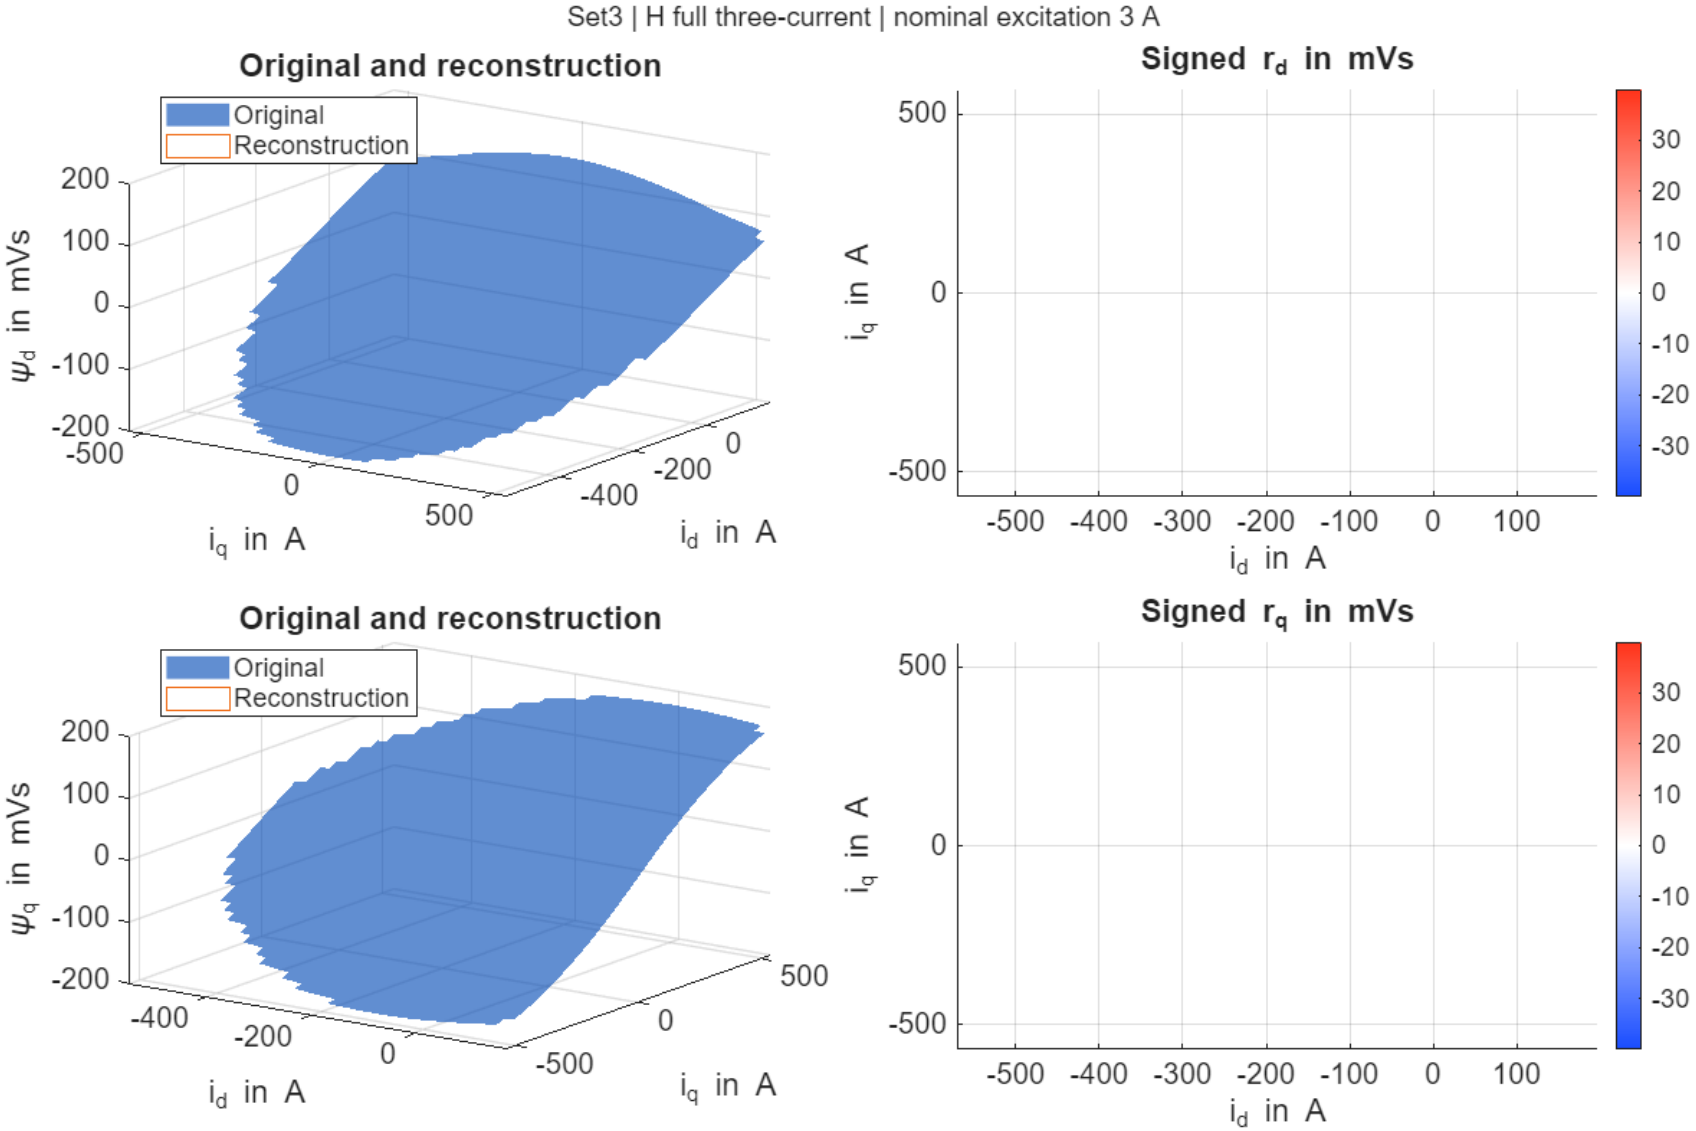

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method A, excitation 6 A

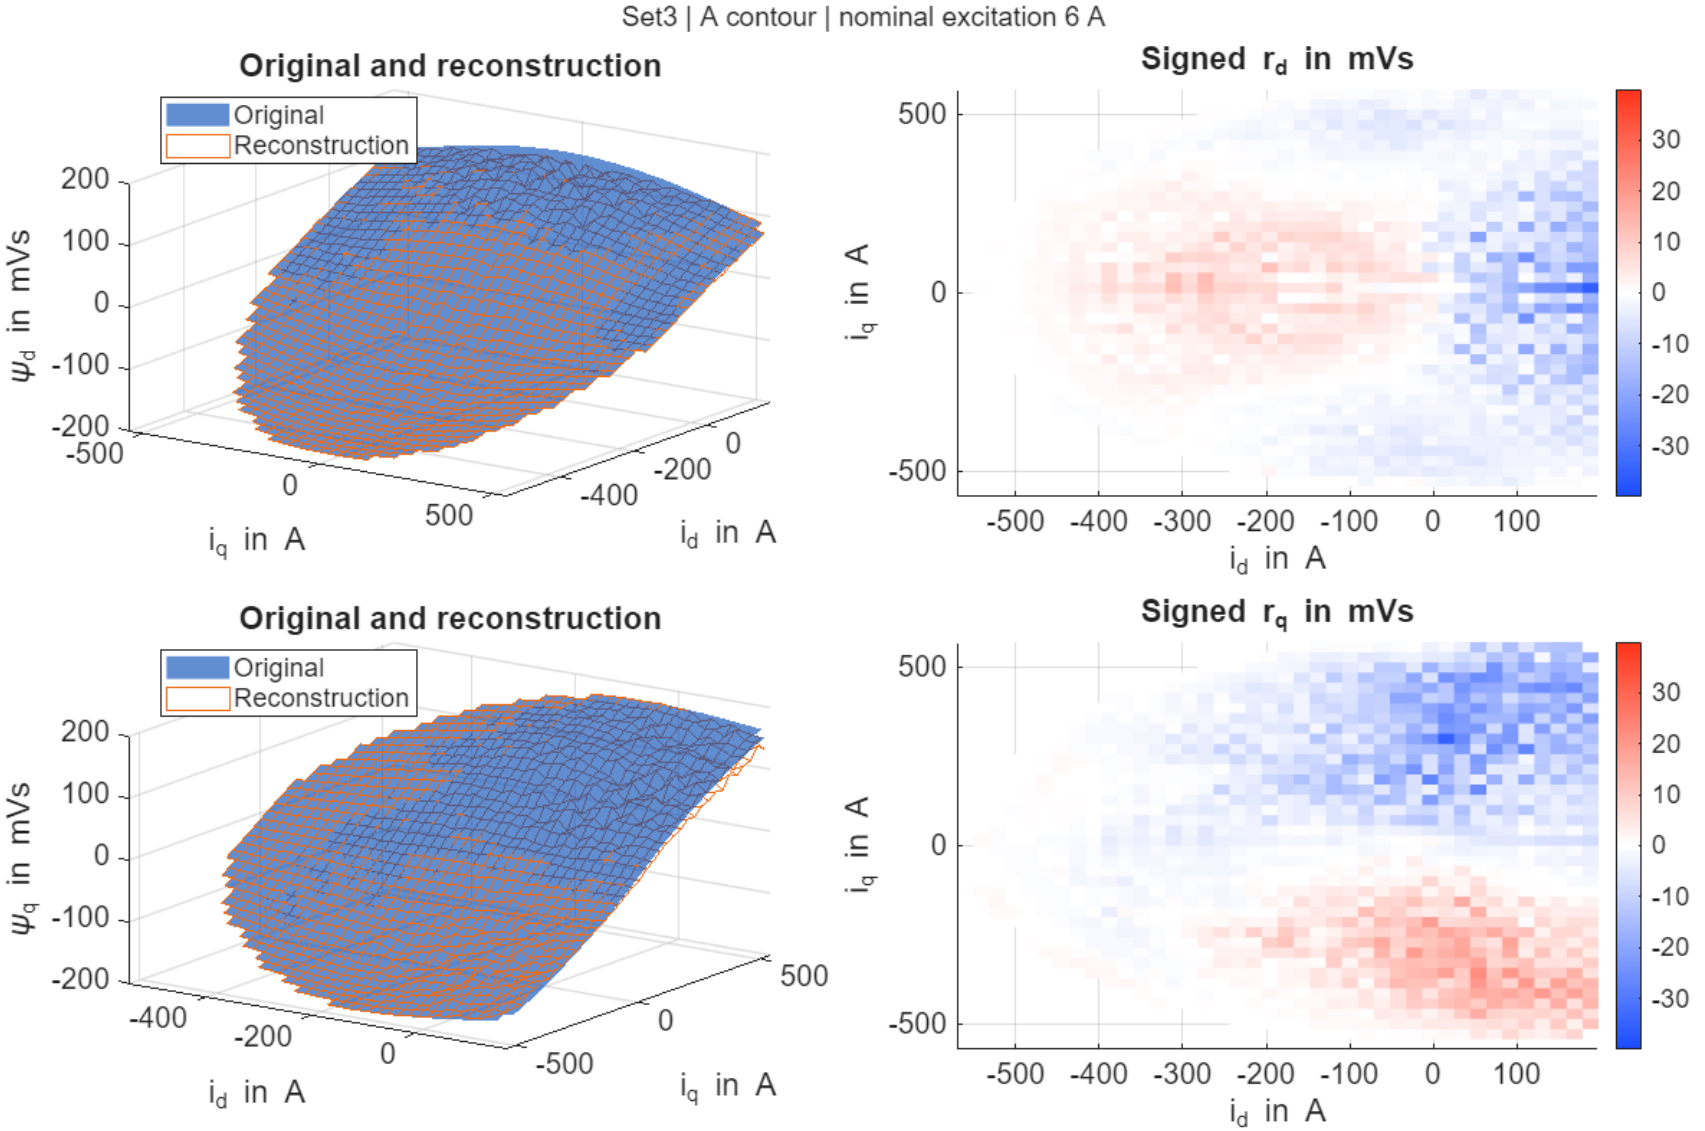

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method B, excitation 6 A

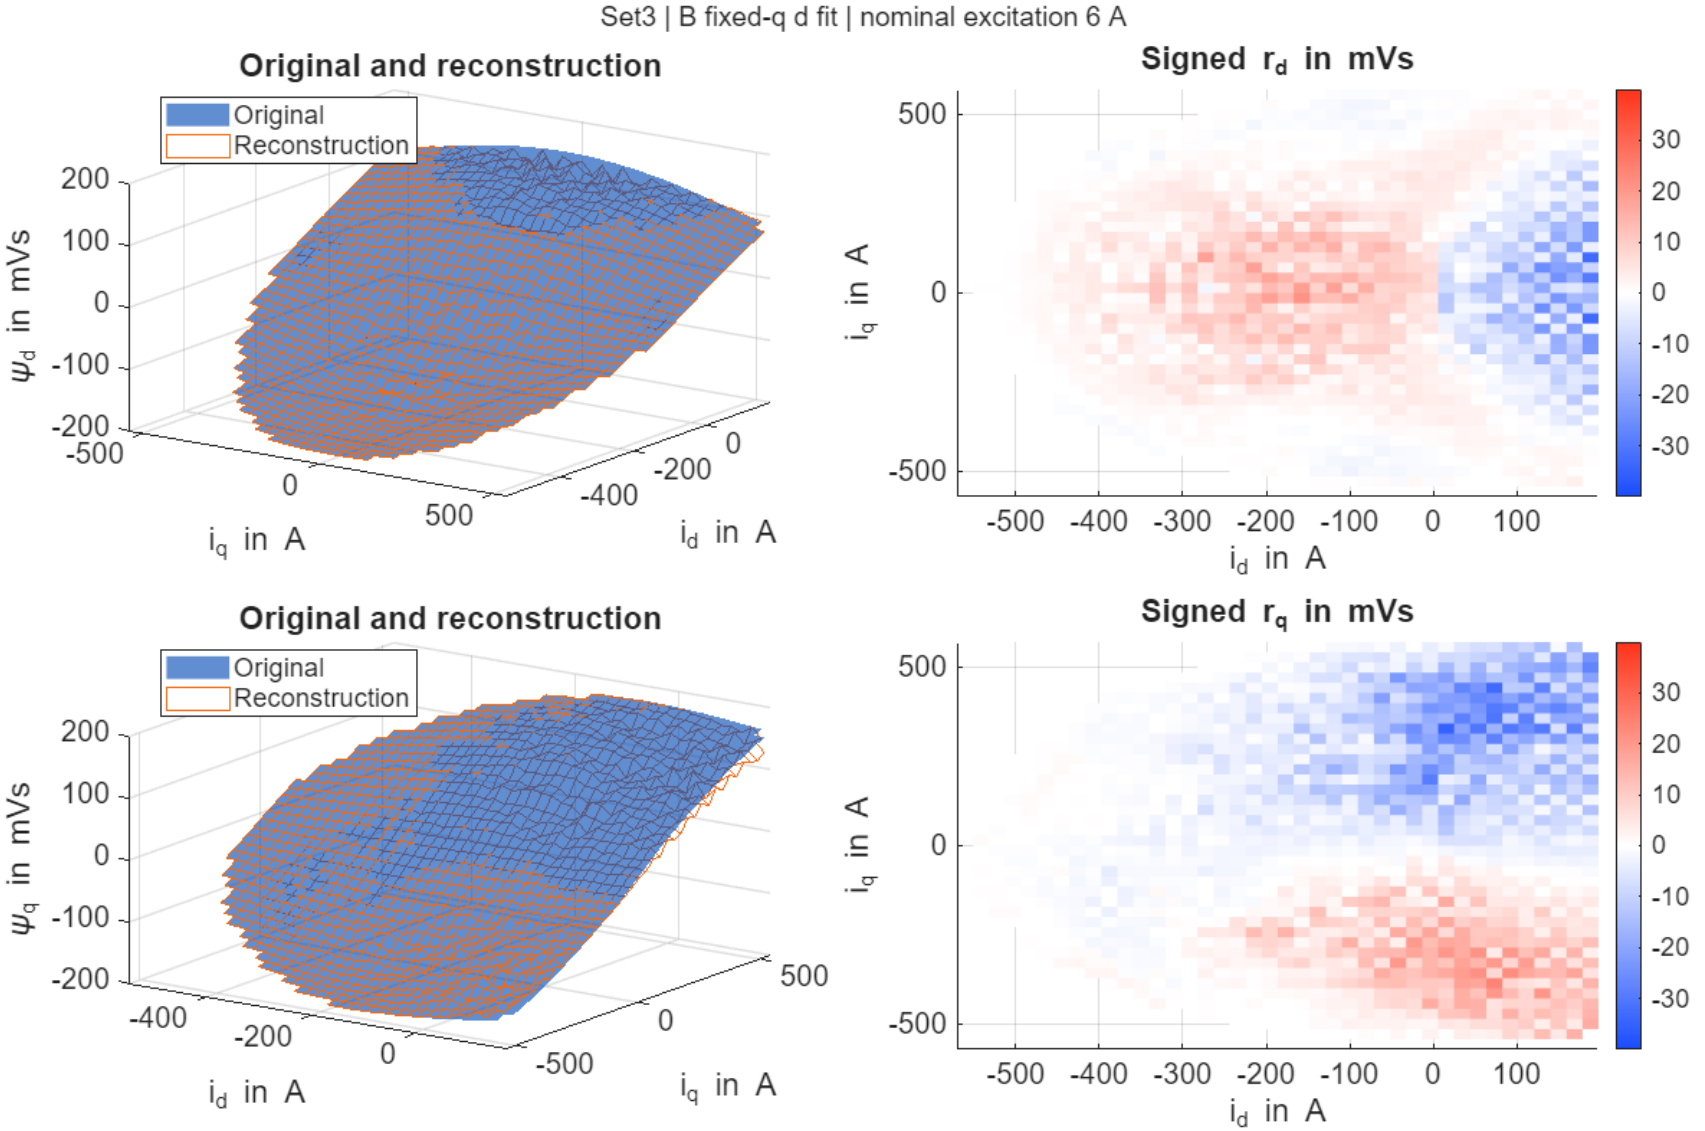

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method C, excitation 6 A

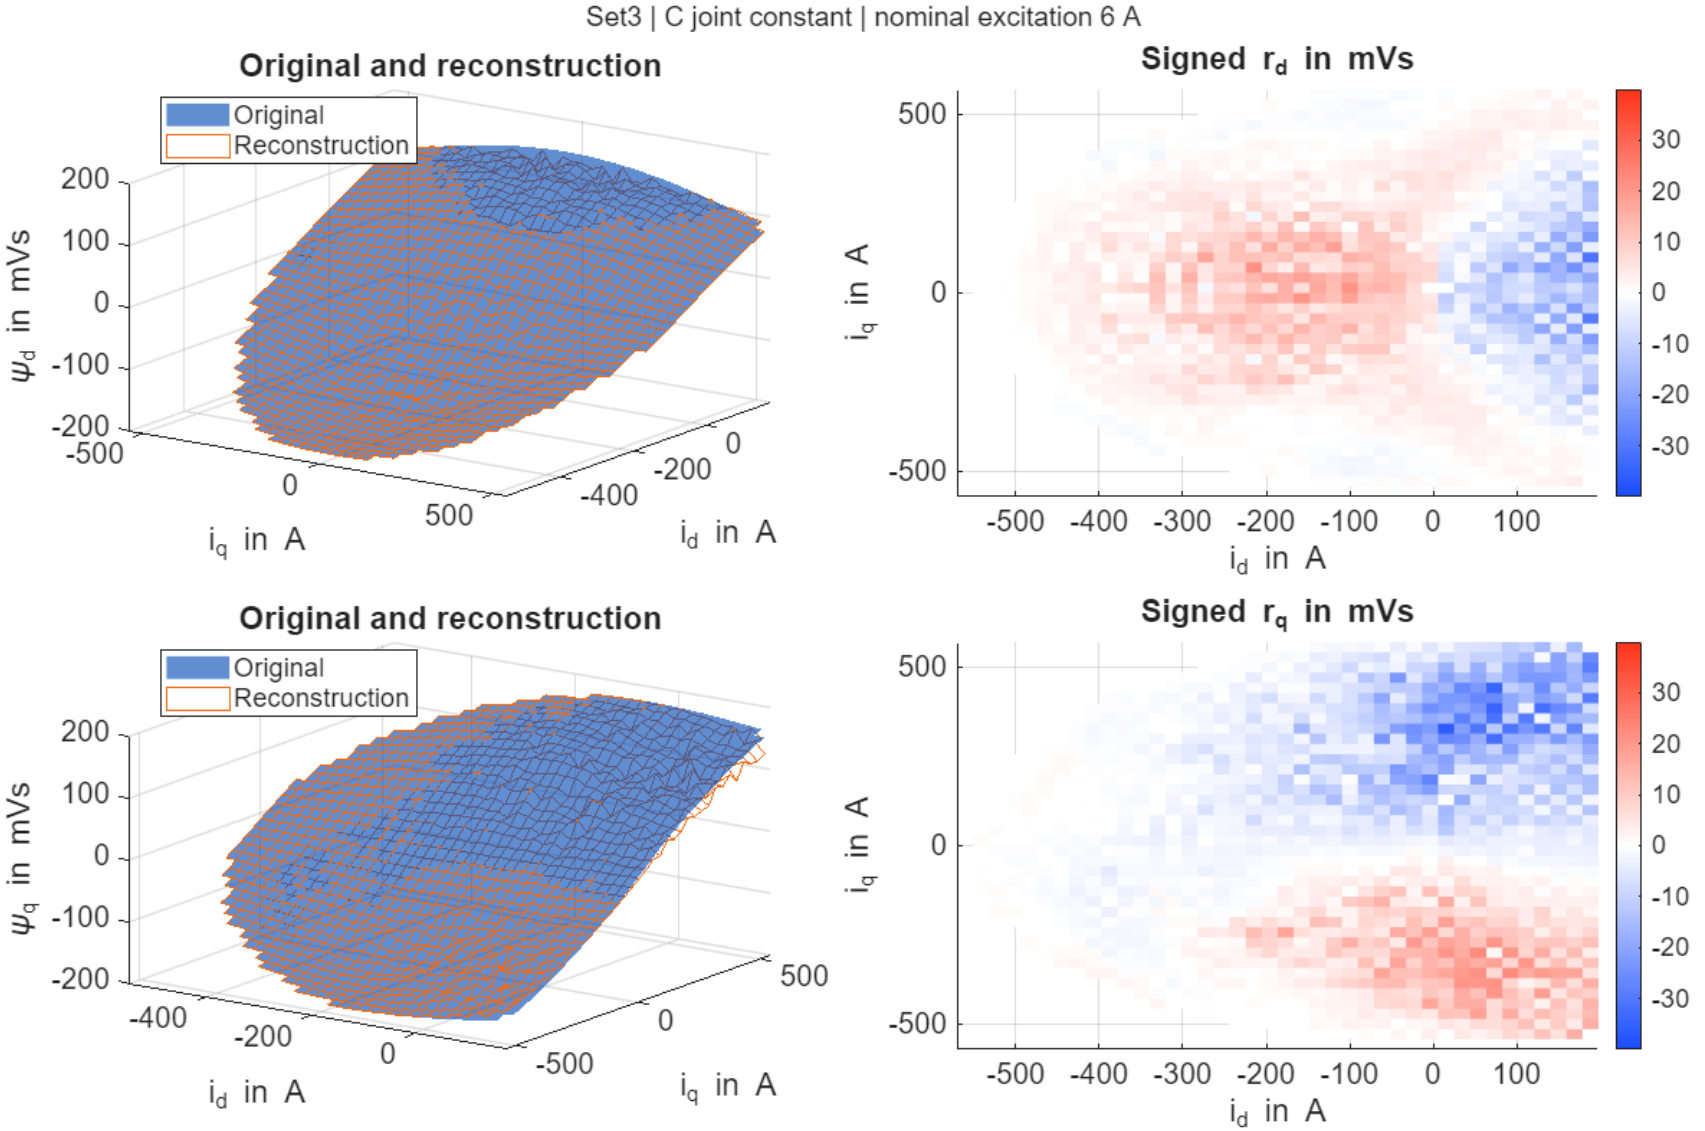

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method D, excitation 6 A

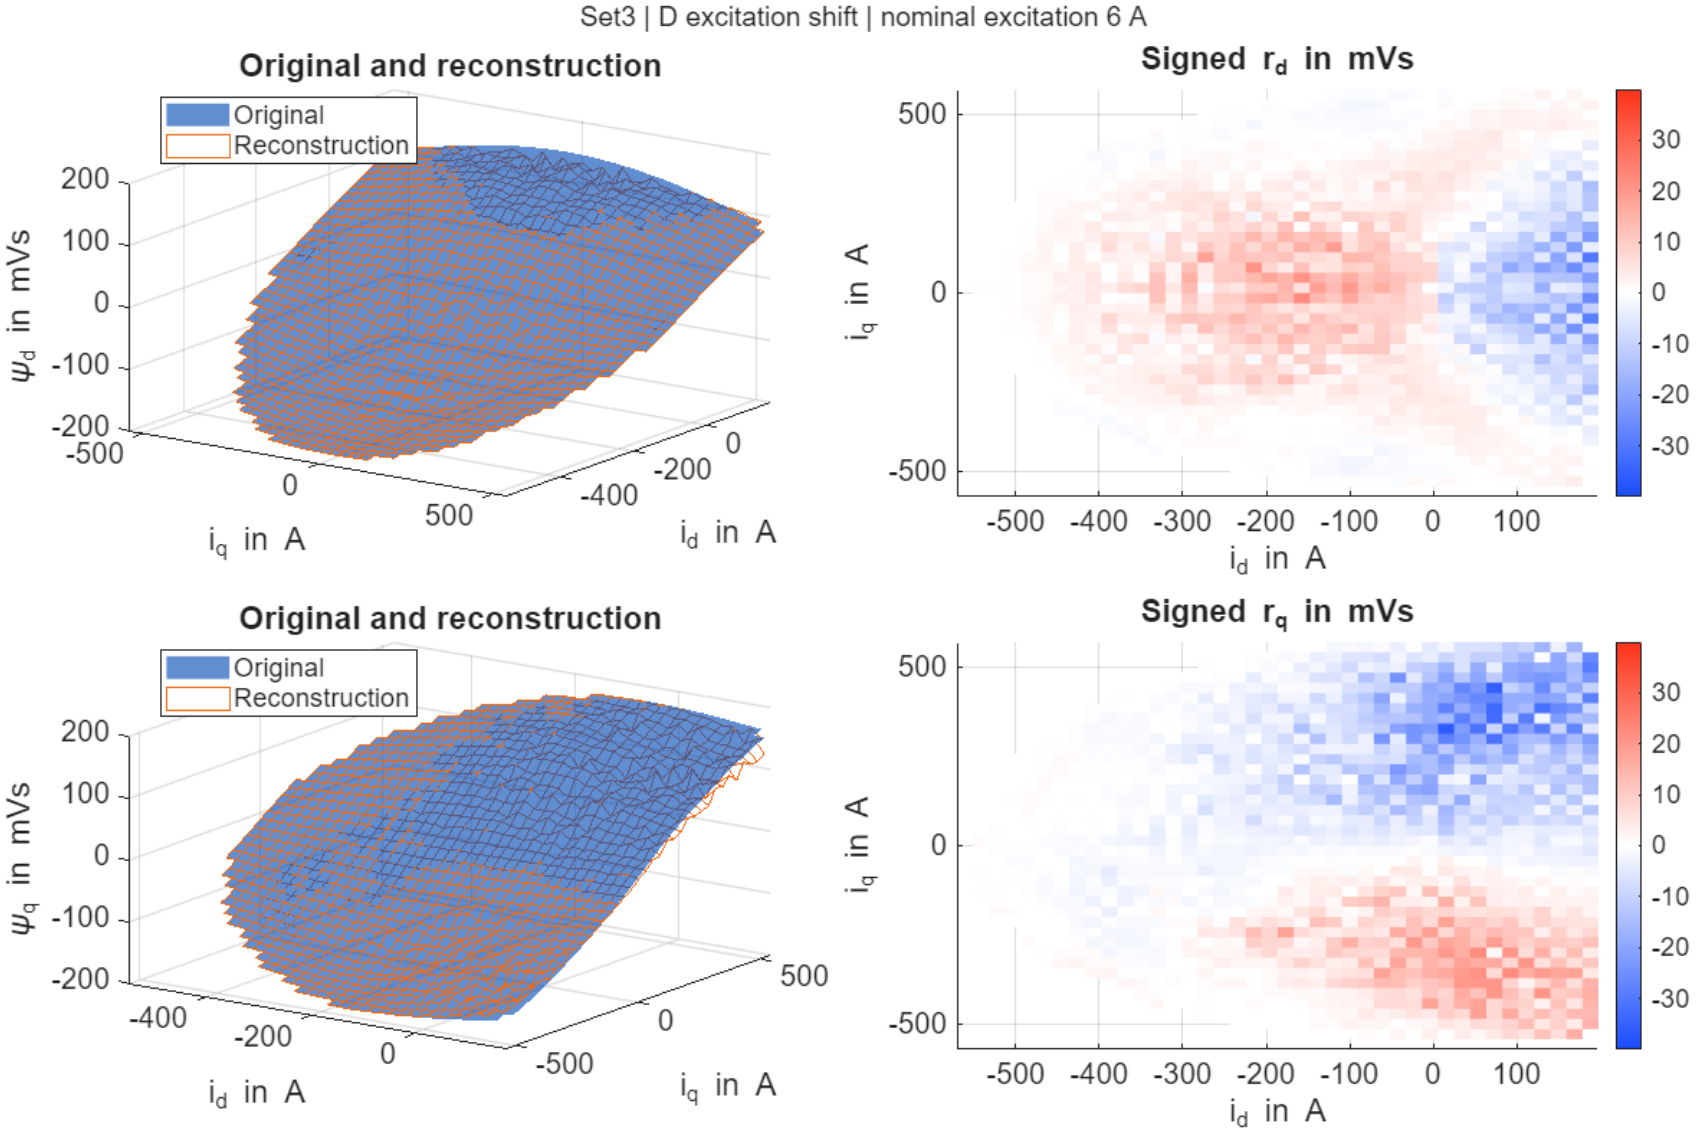

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method E, excitation 6 A

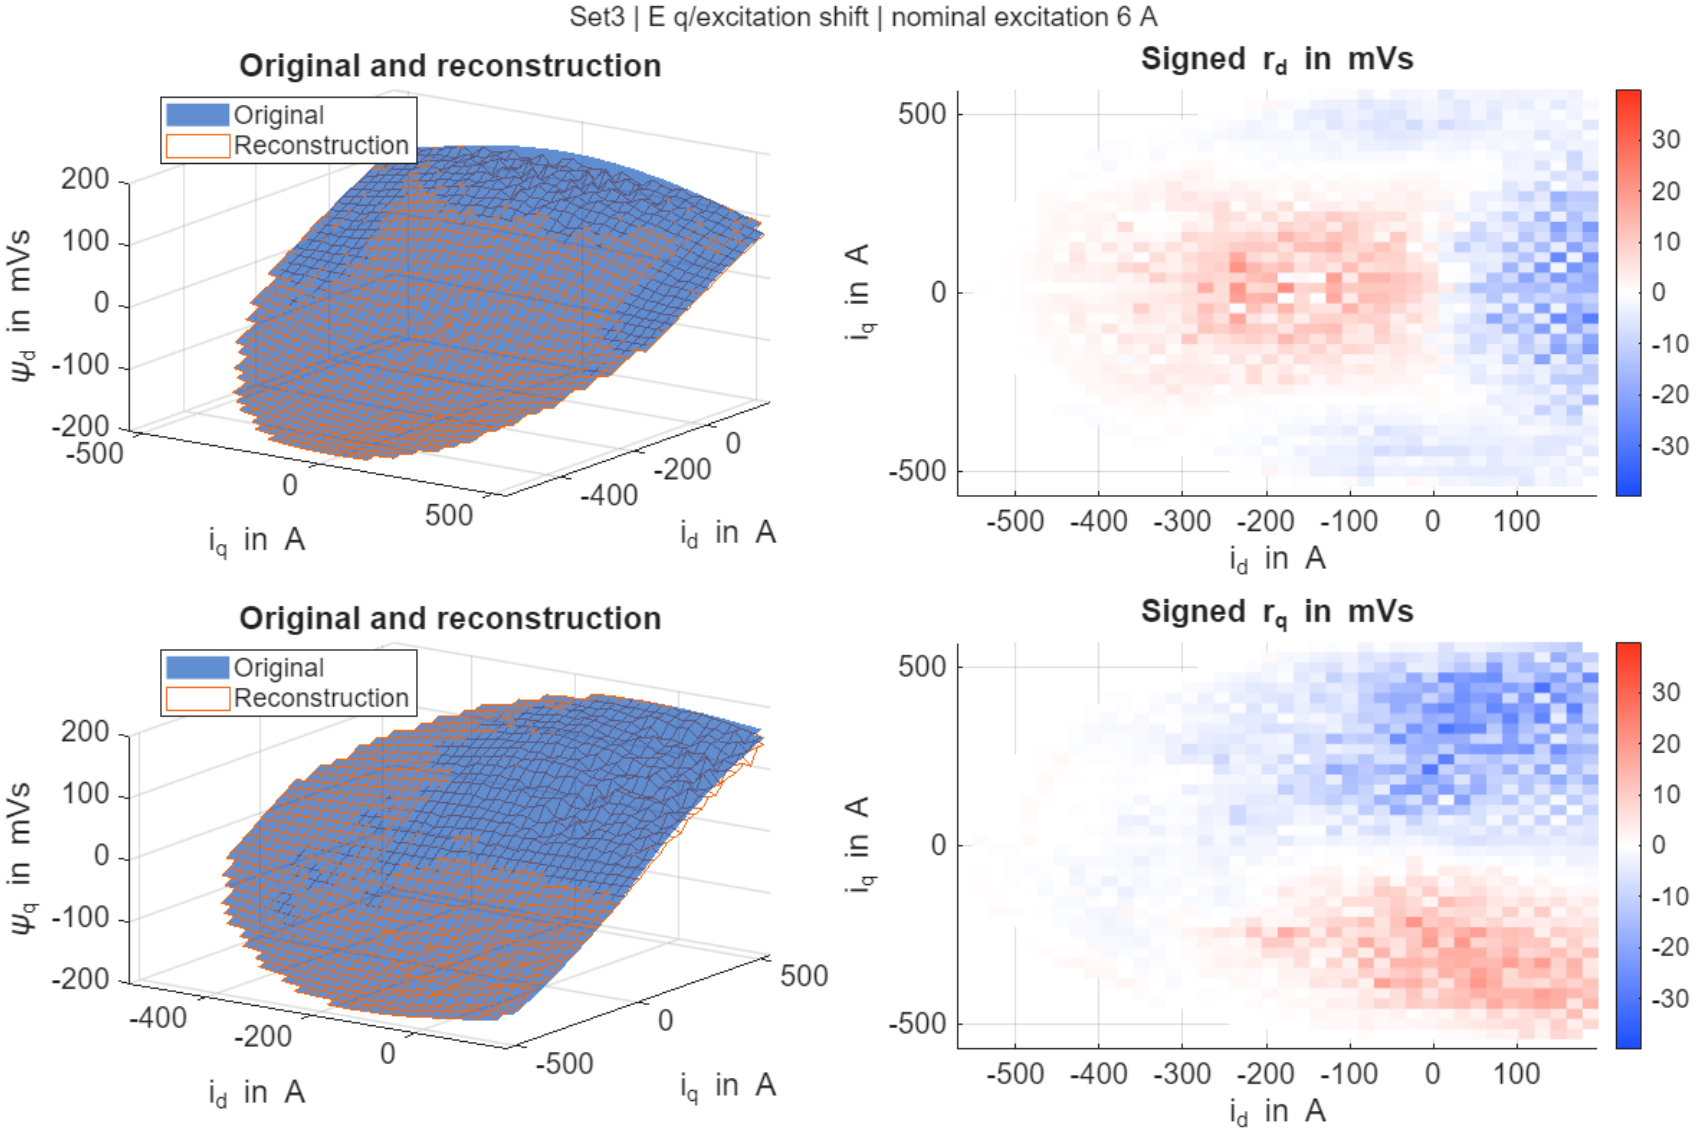

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method F, excitation 6 A

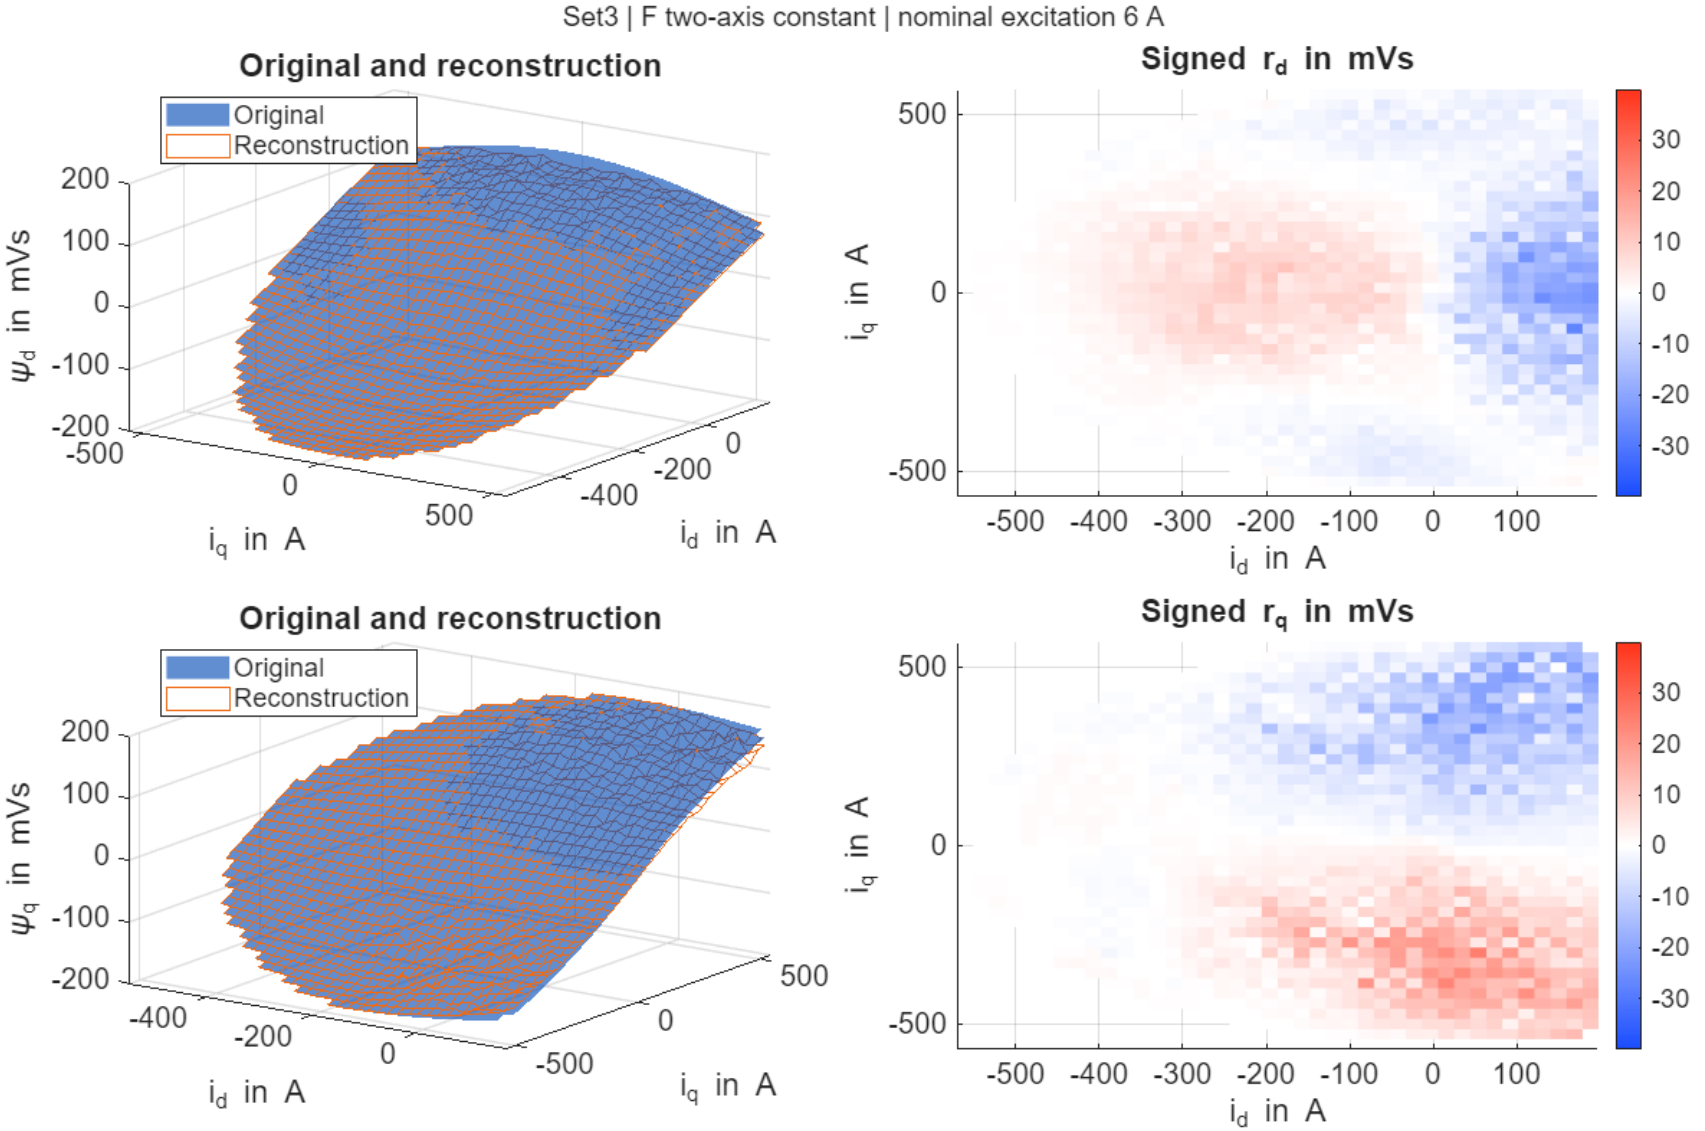

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method G, excitation 6 A

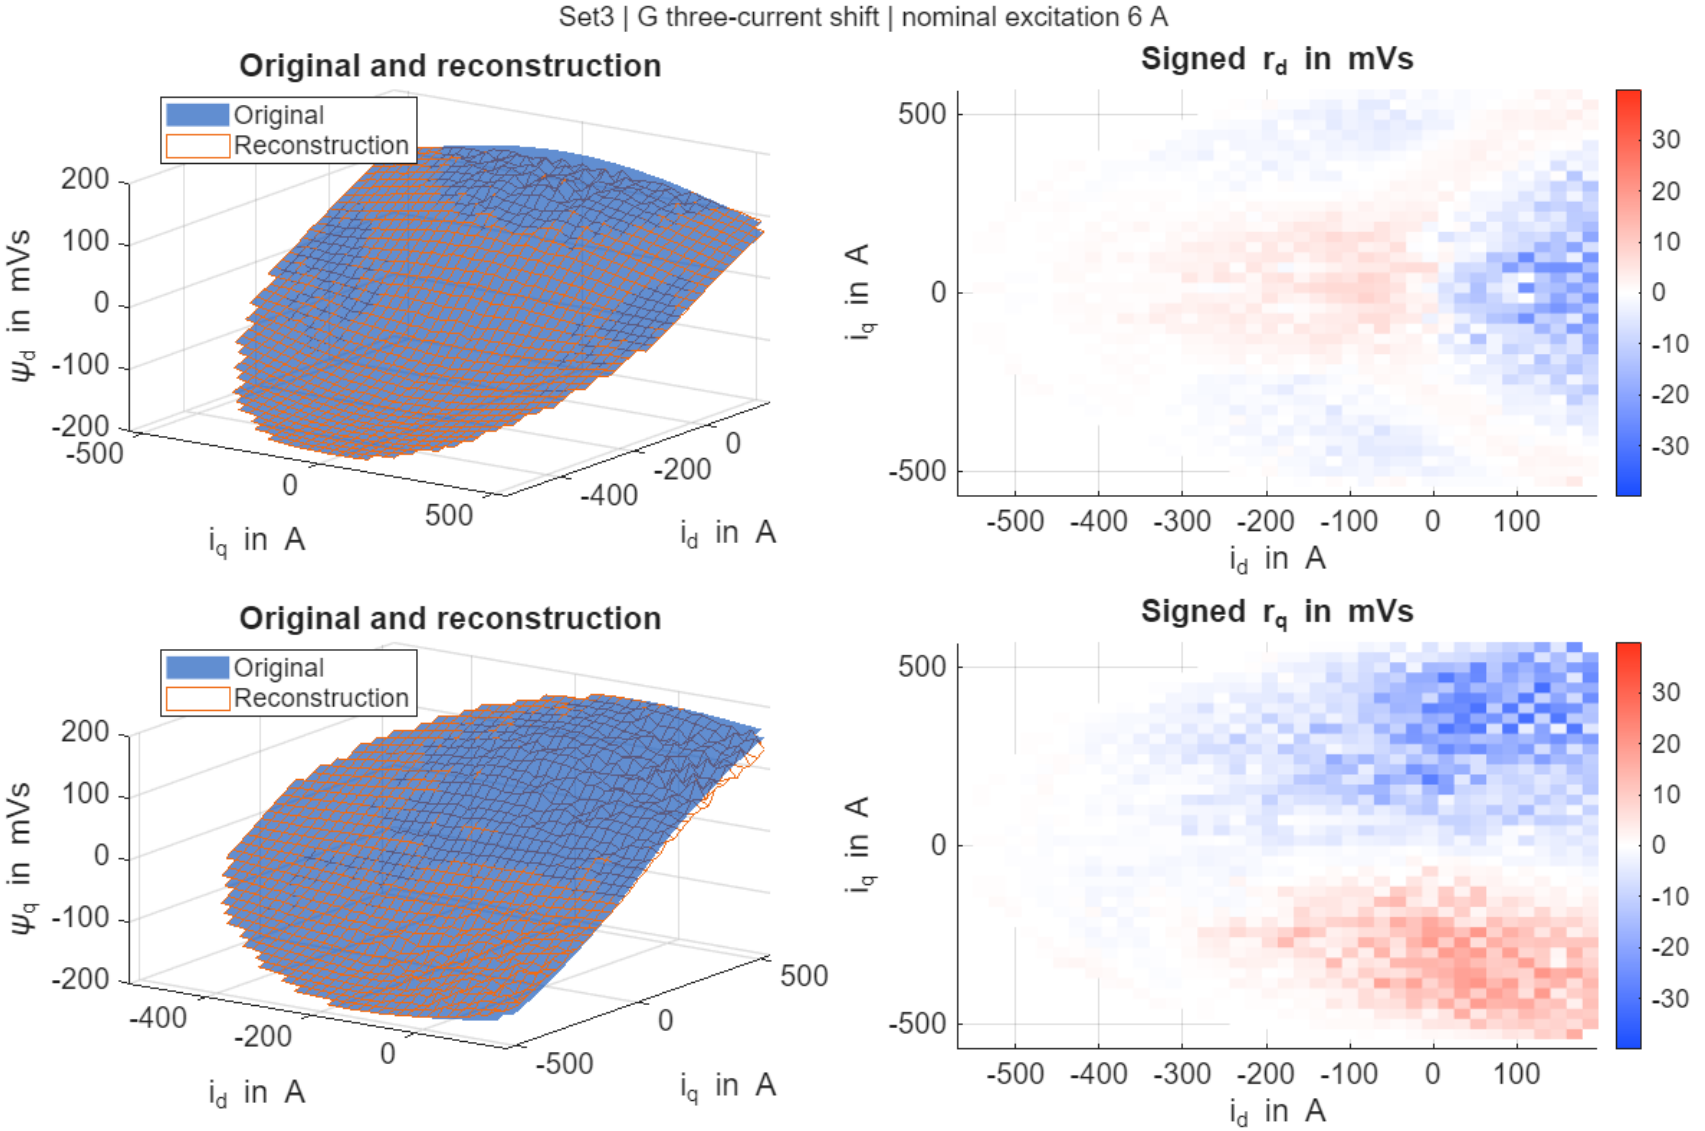

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method H, excitation 6 A

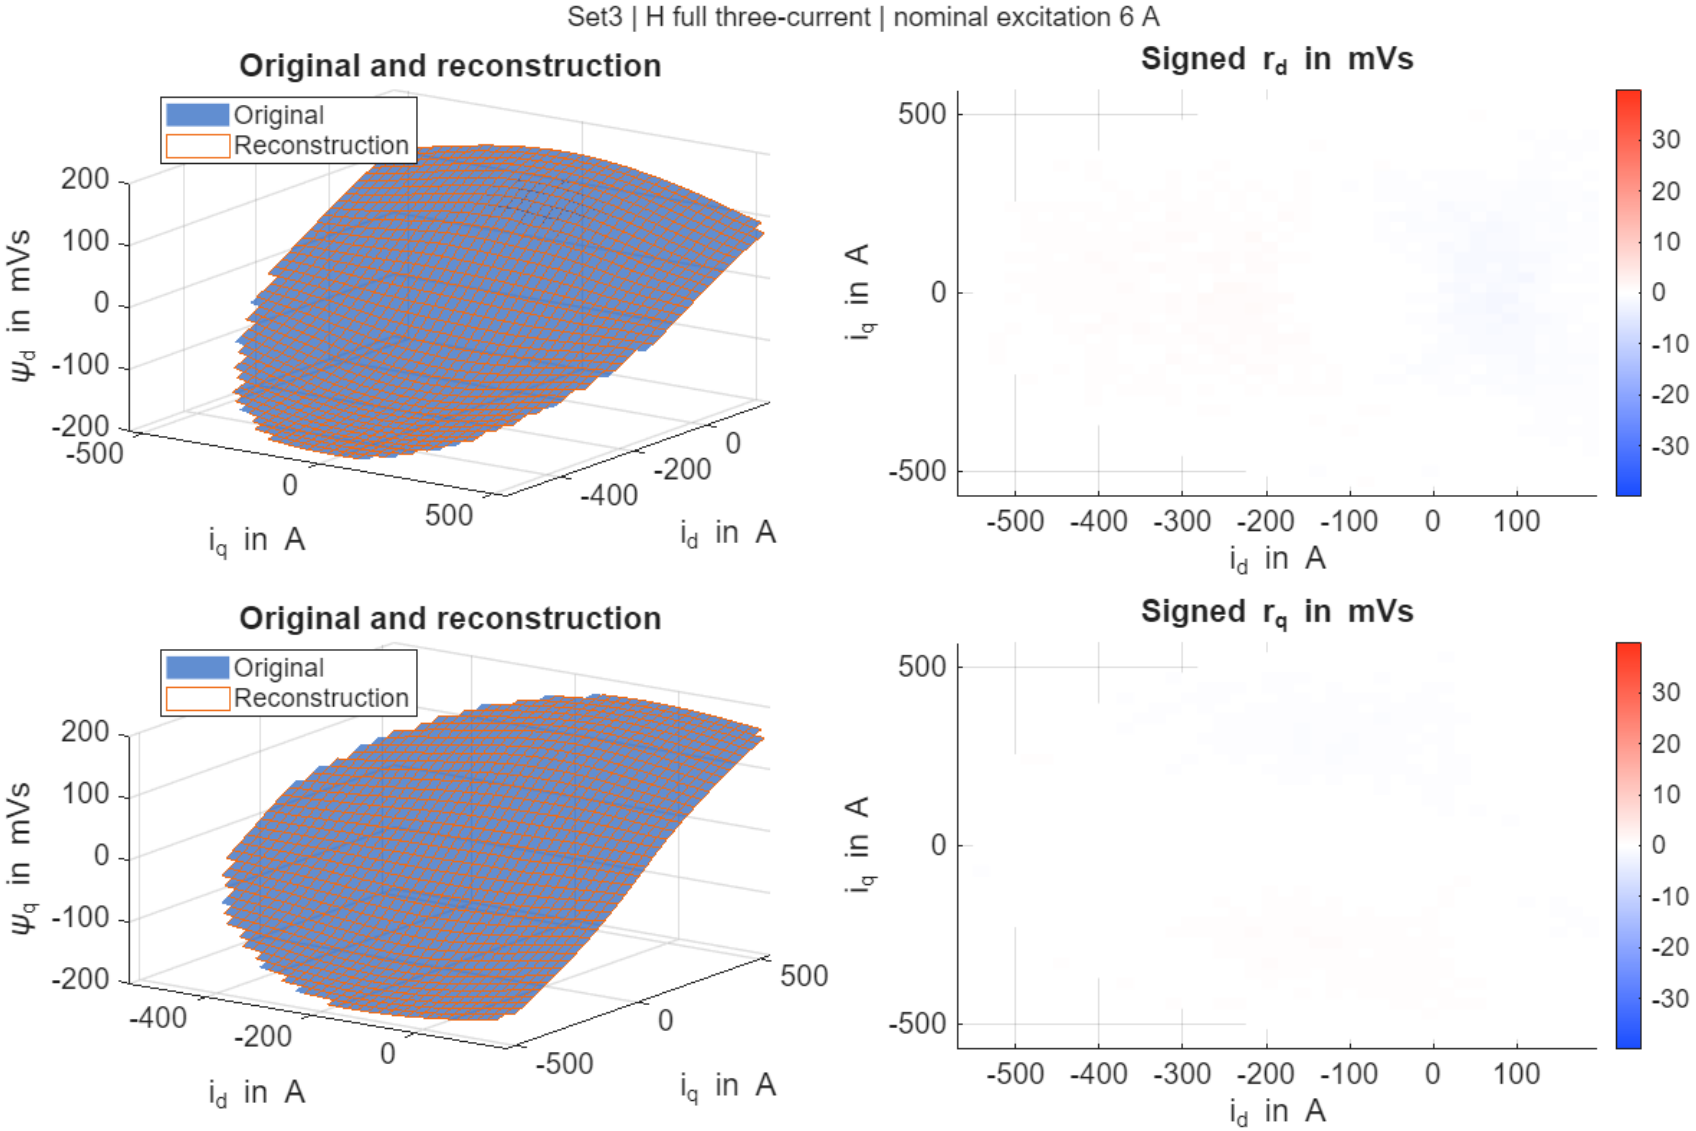

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method A, excitation 9 A

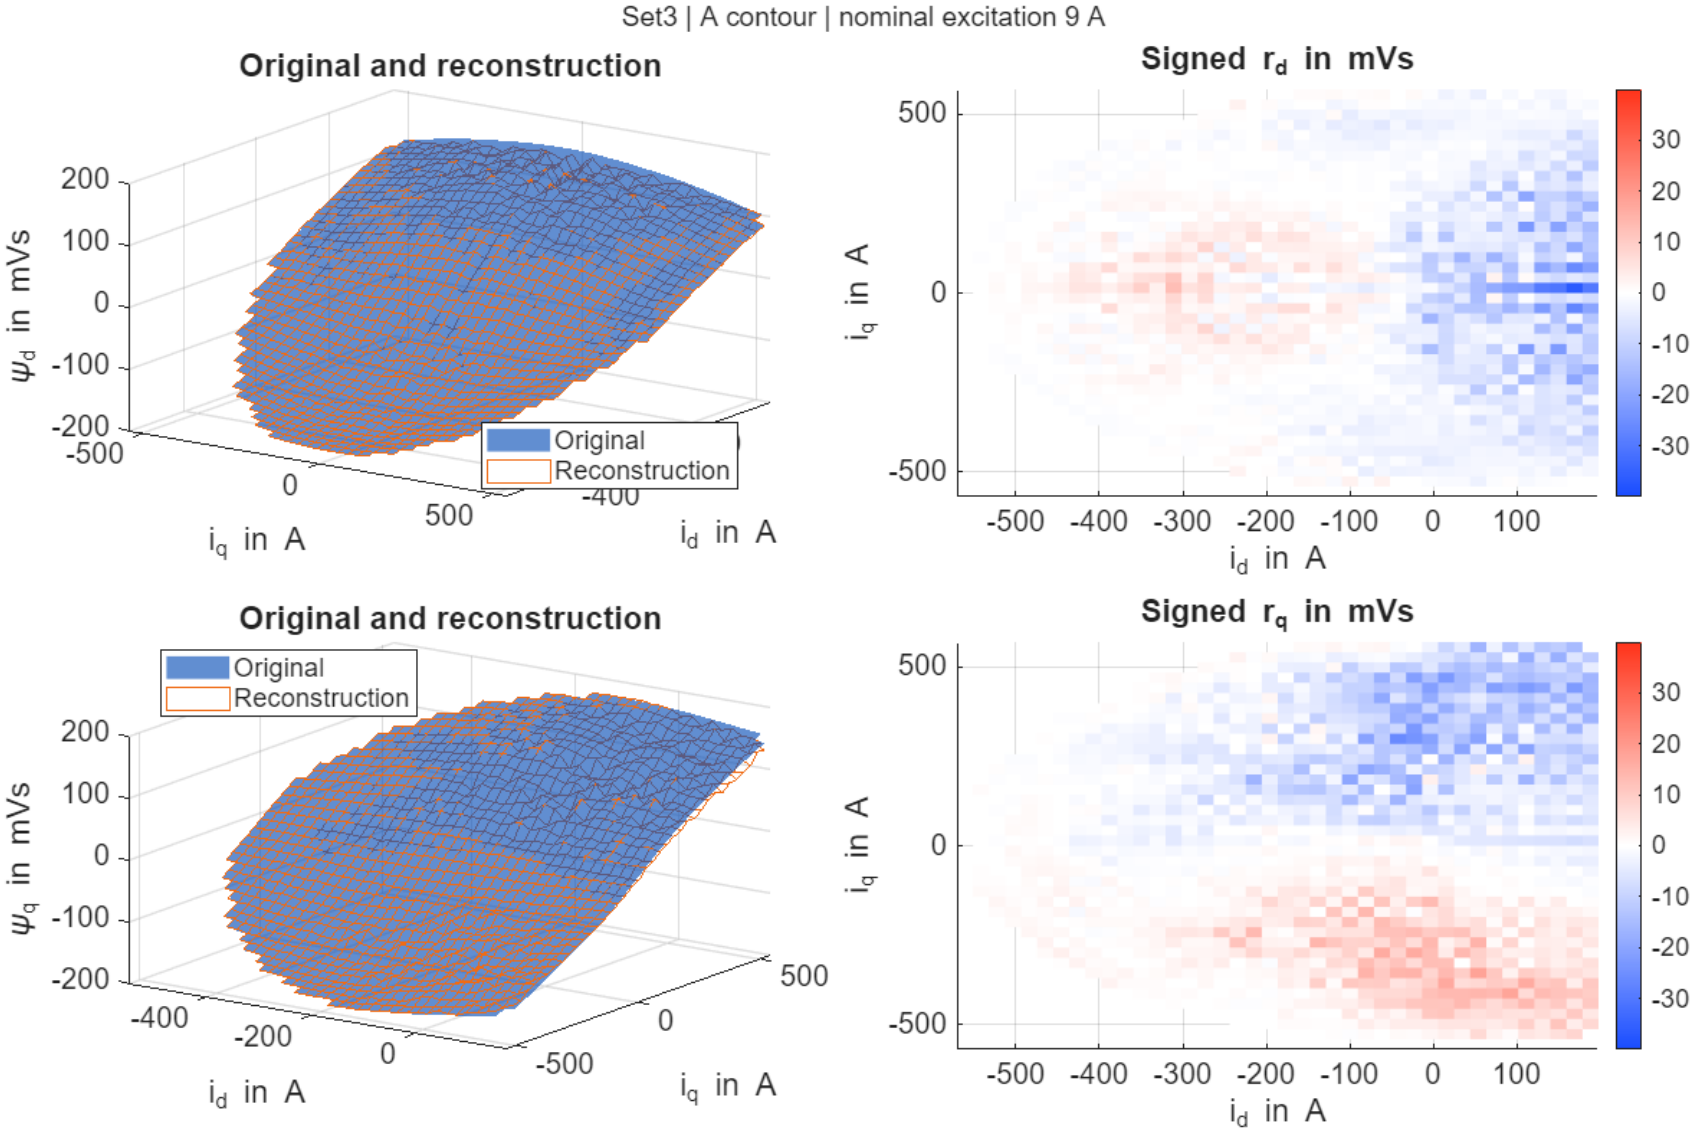

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method B, excitation 9 A

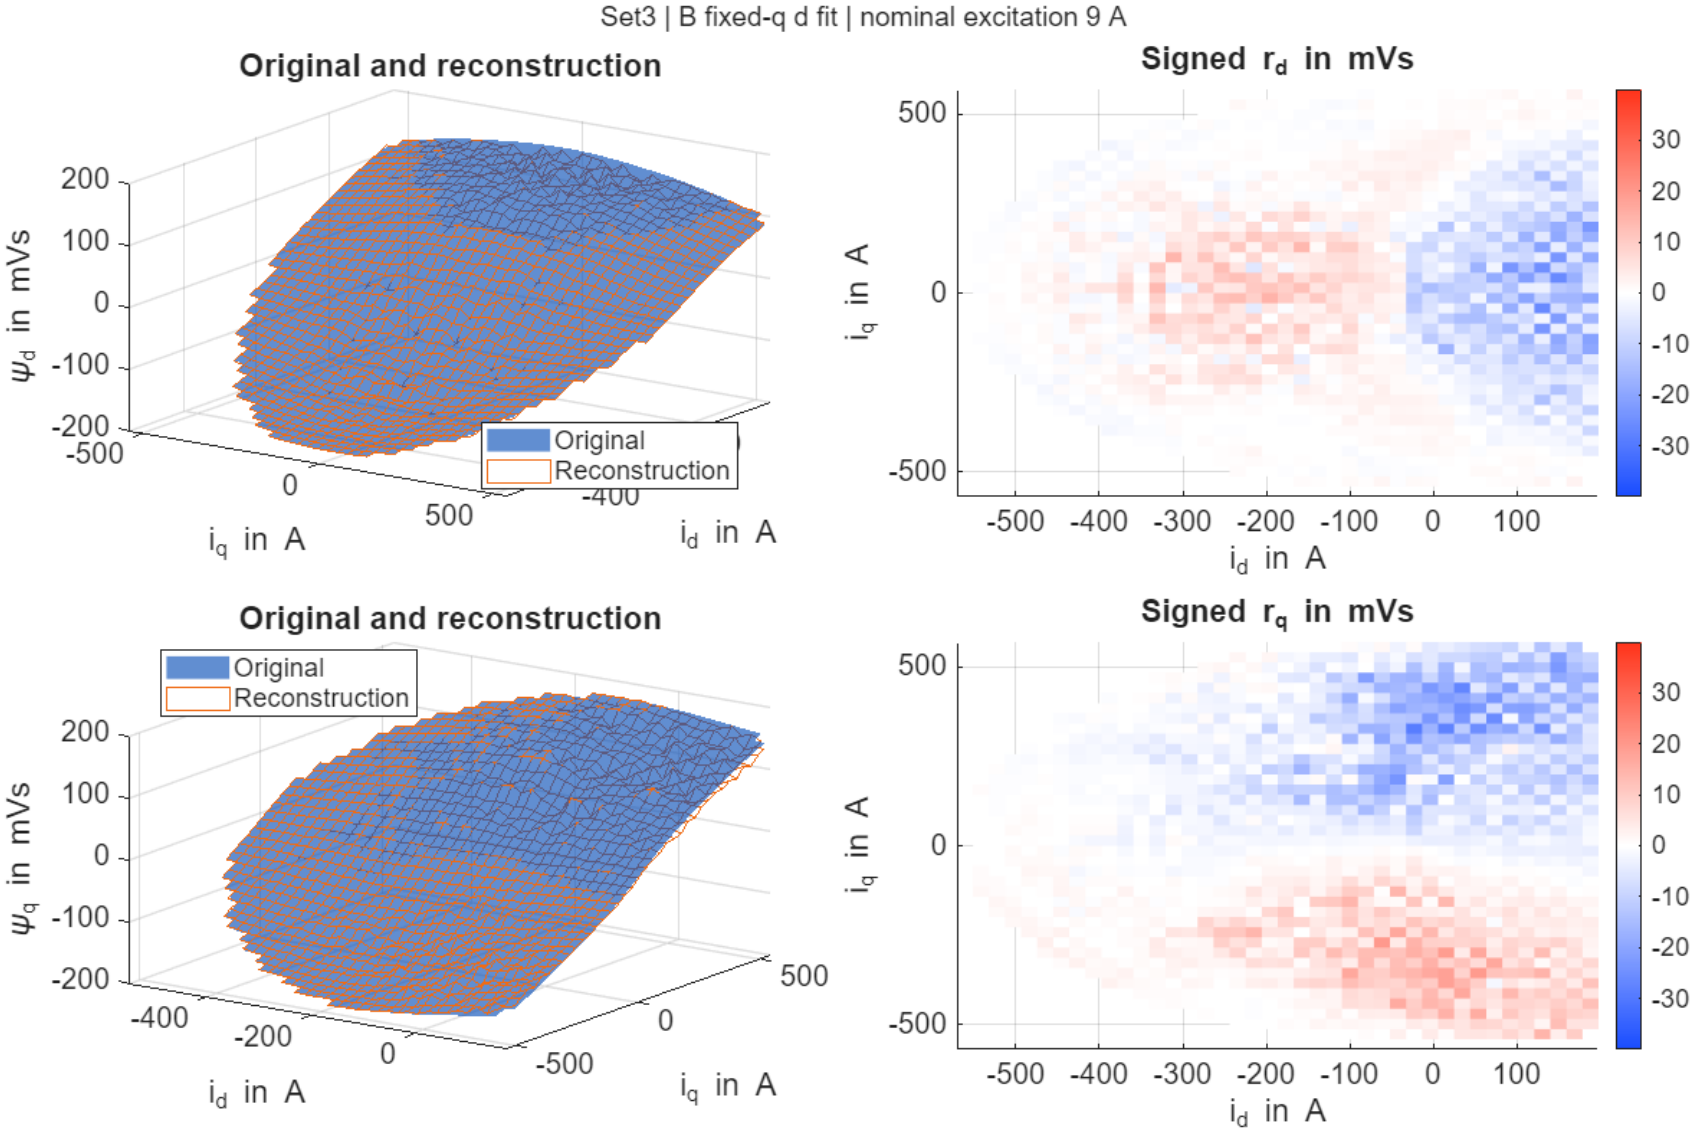

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method C, excitation 9 A

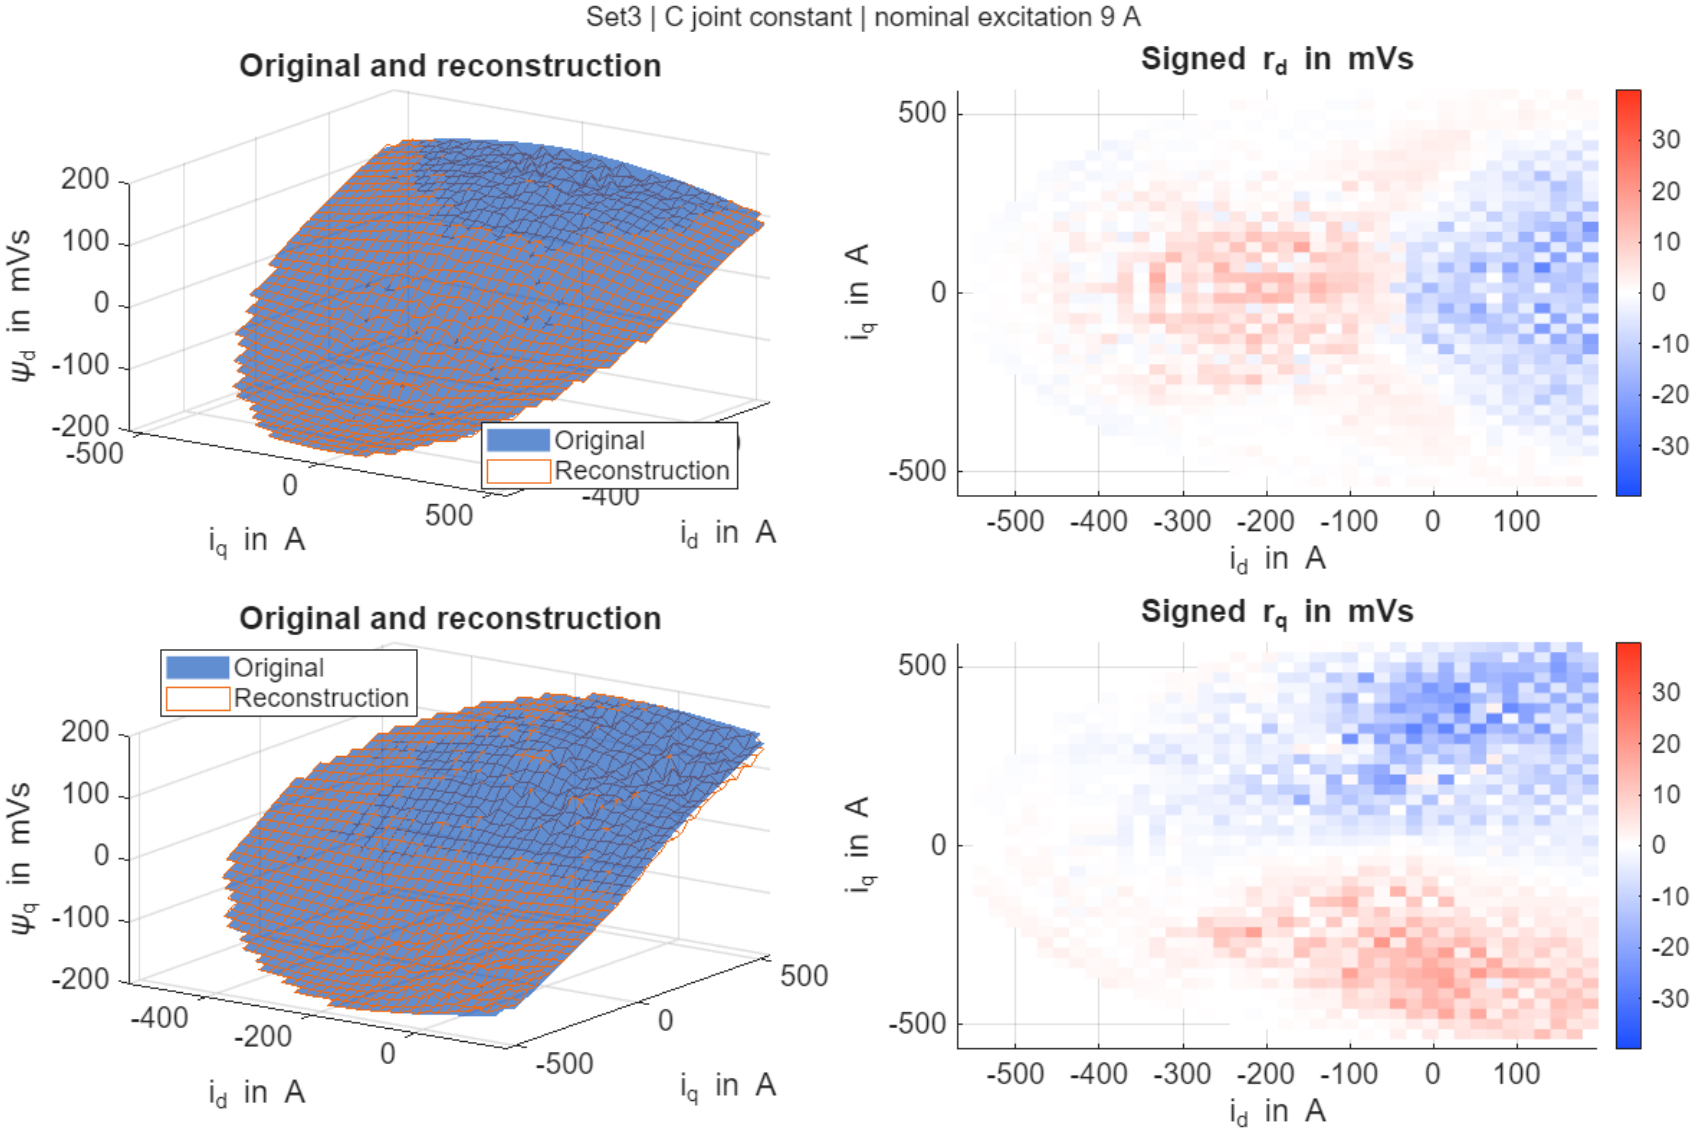

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method D, excitation 9 A

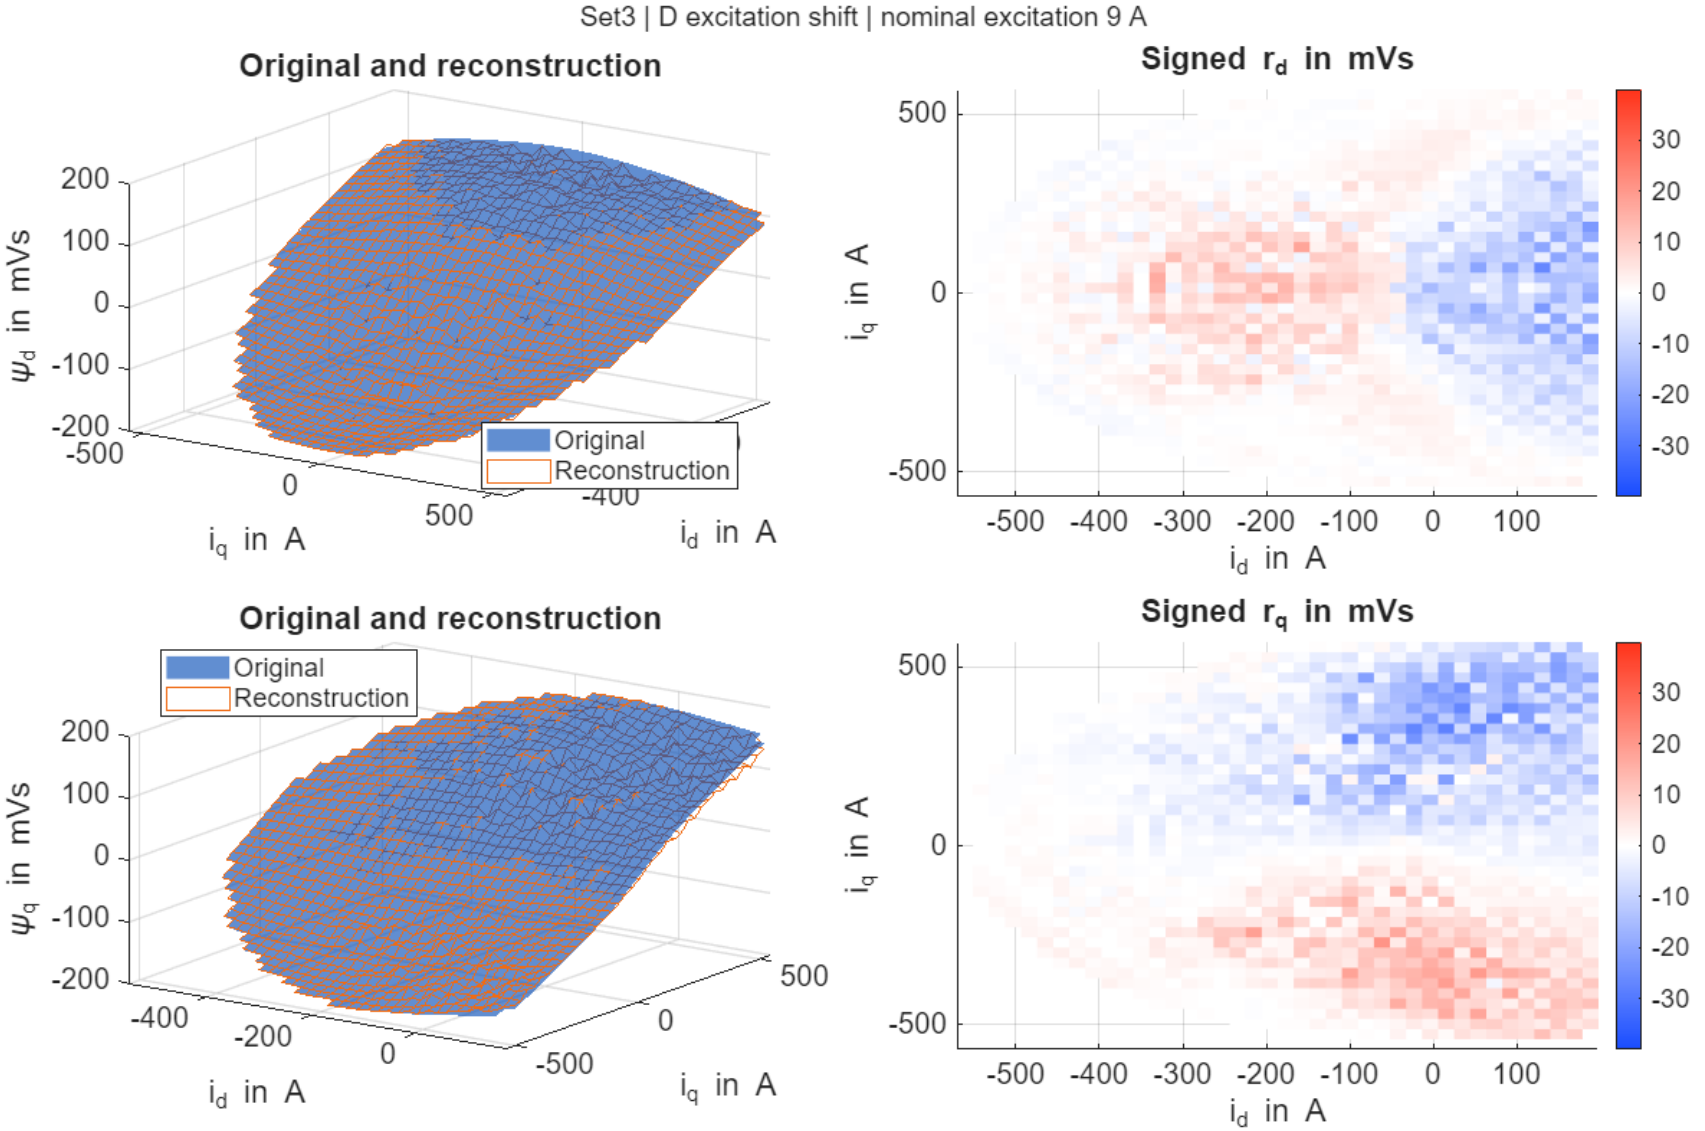

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method E, excitation 9 A

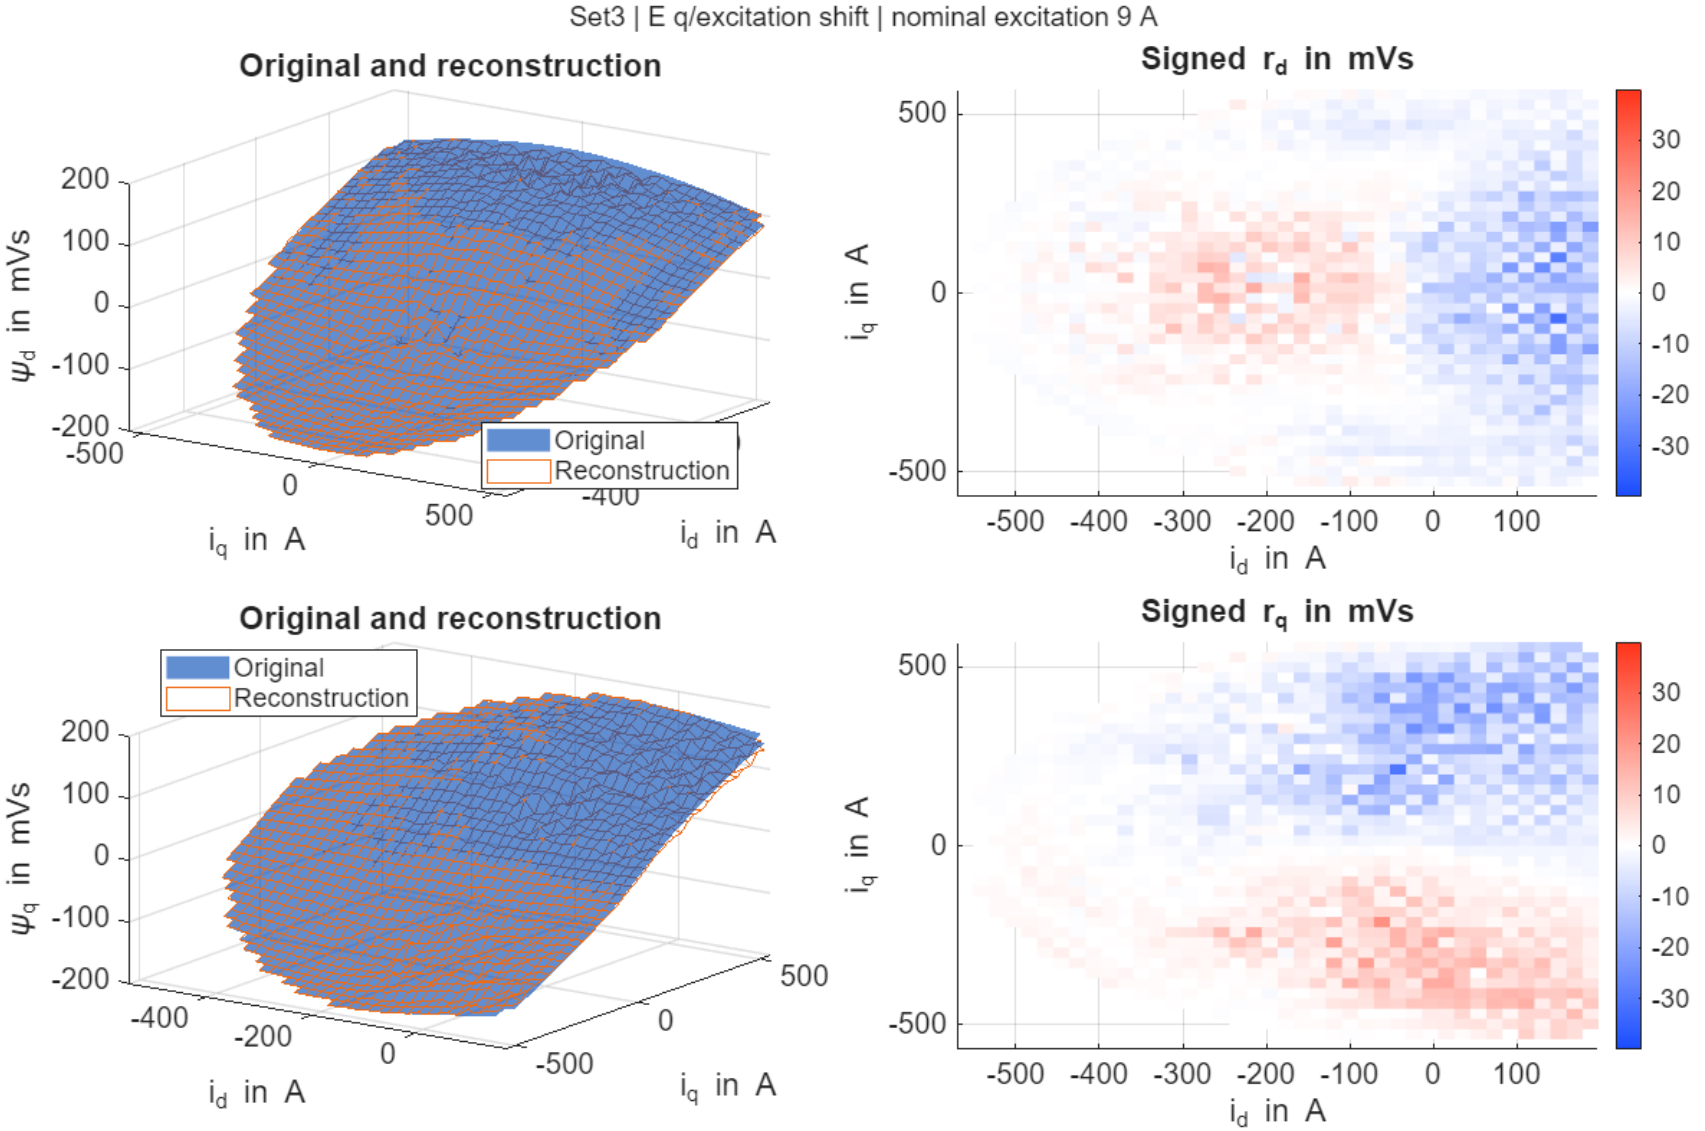

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method F, excitation 9 A

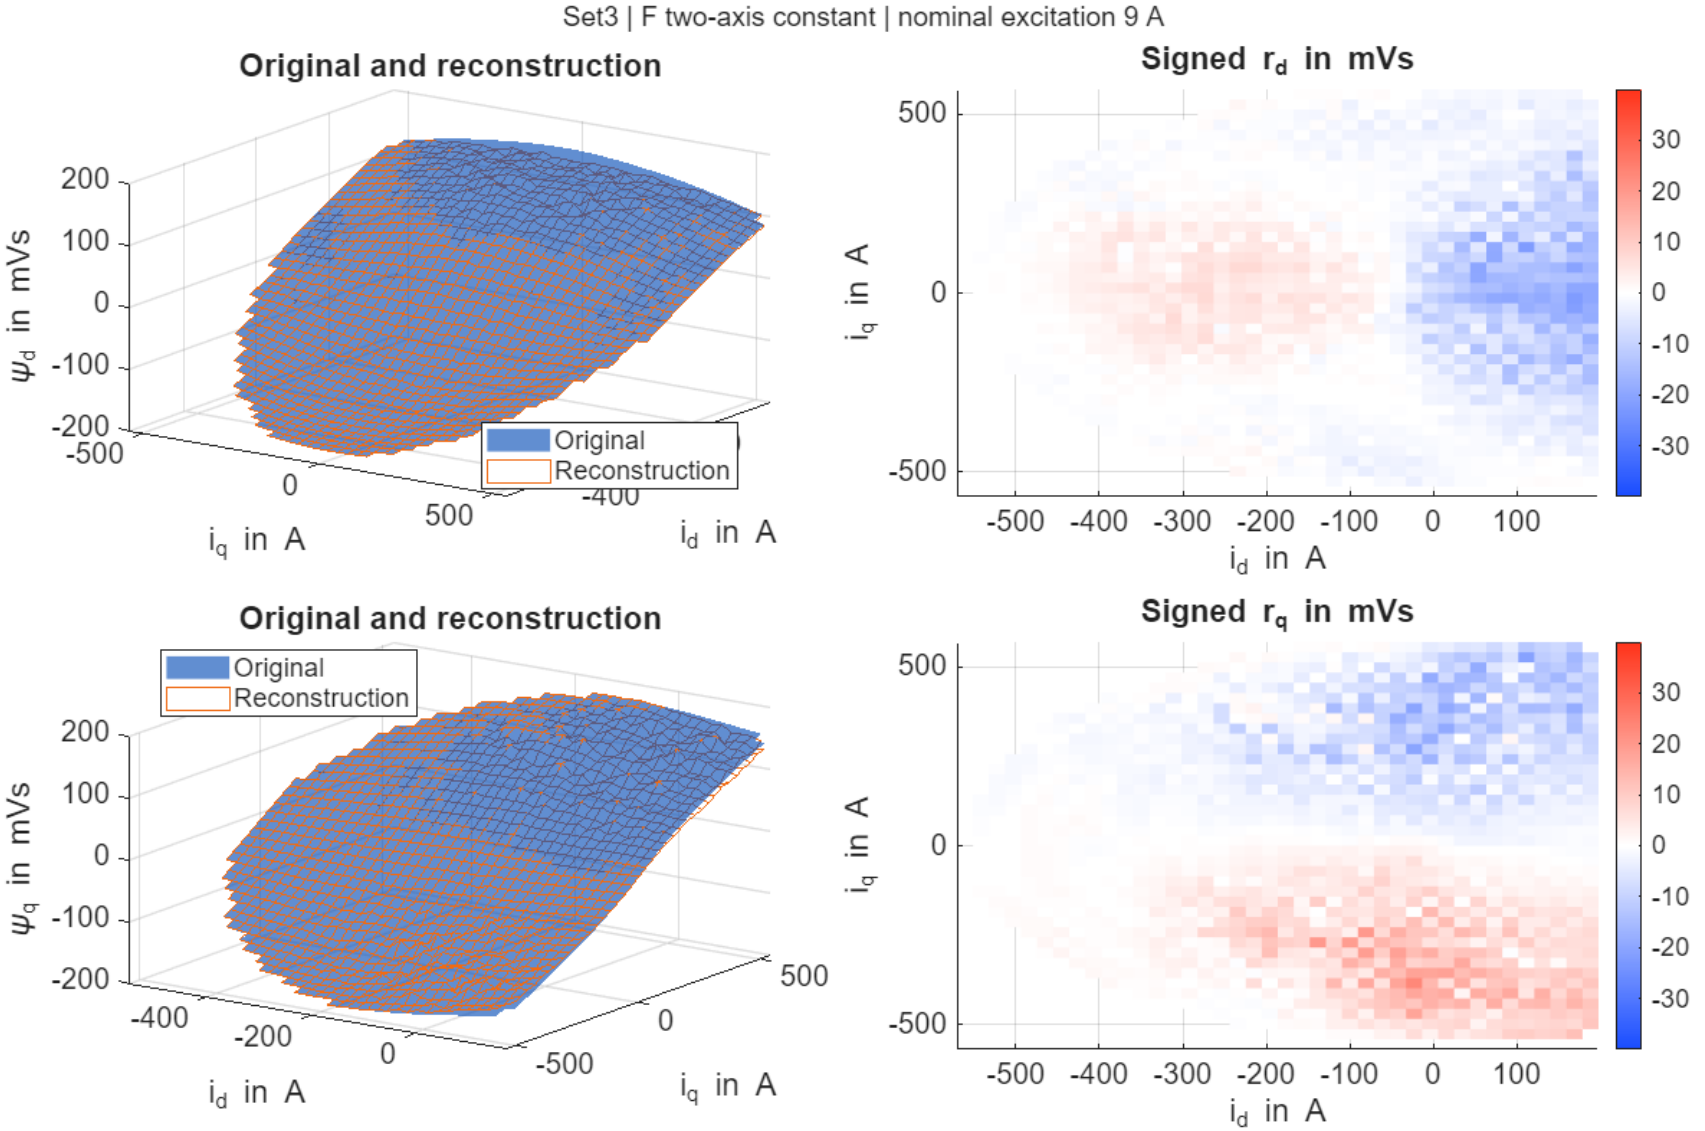

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method G, excitation 9 A

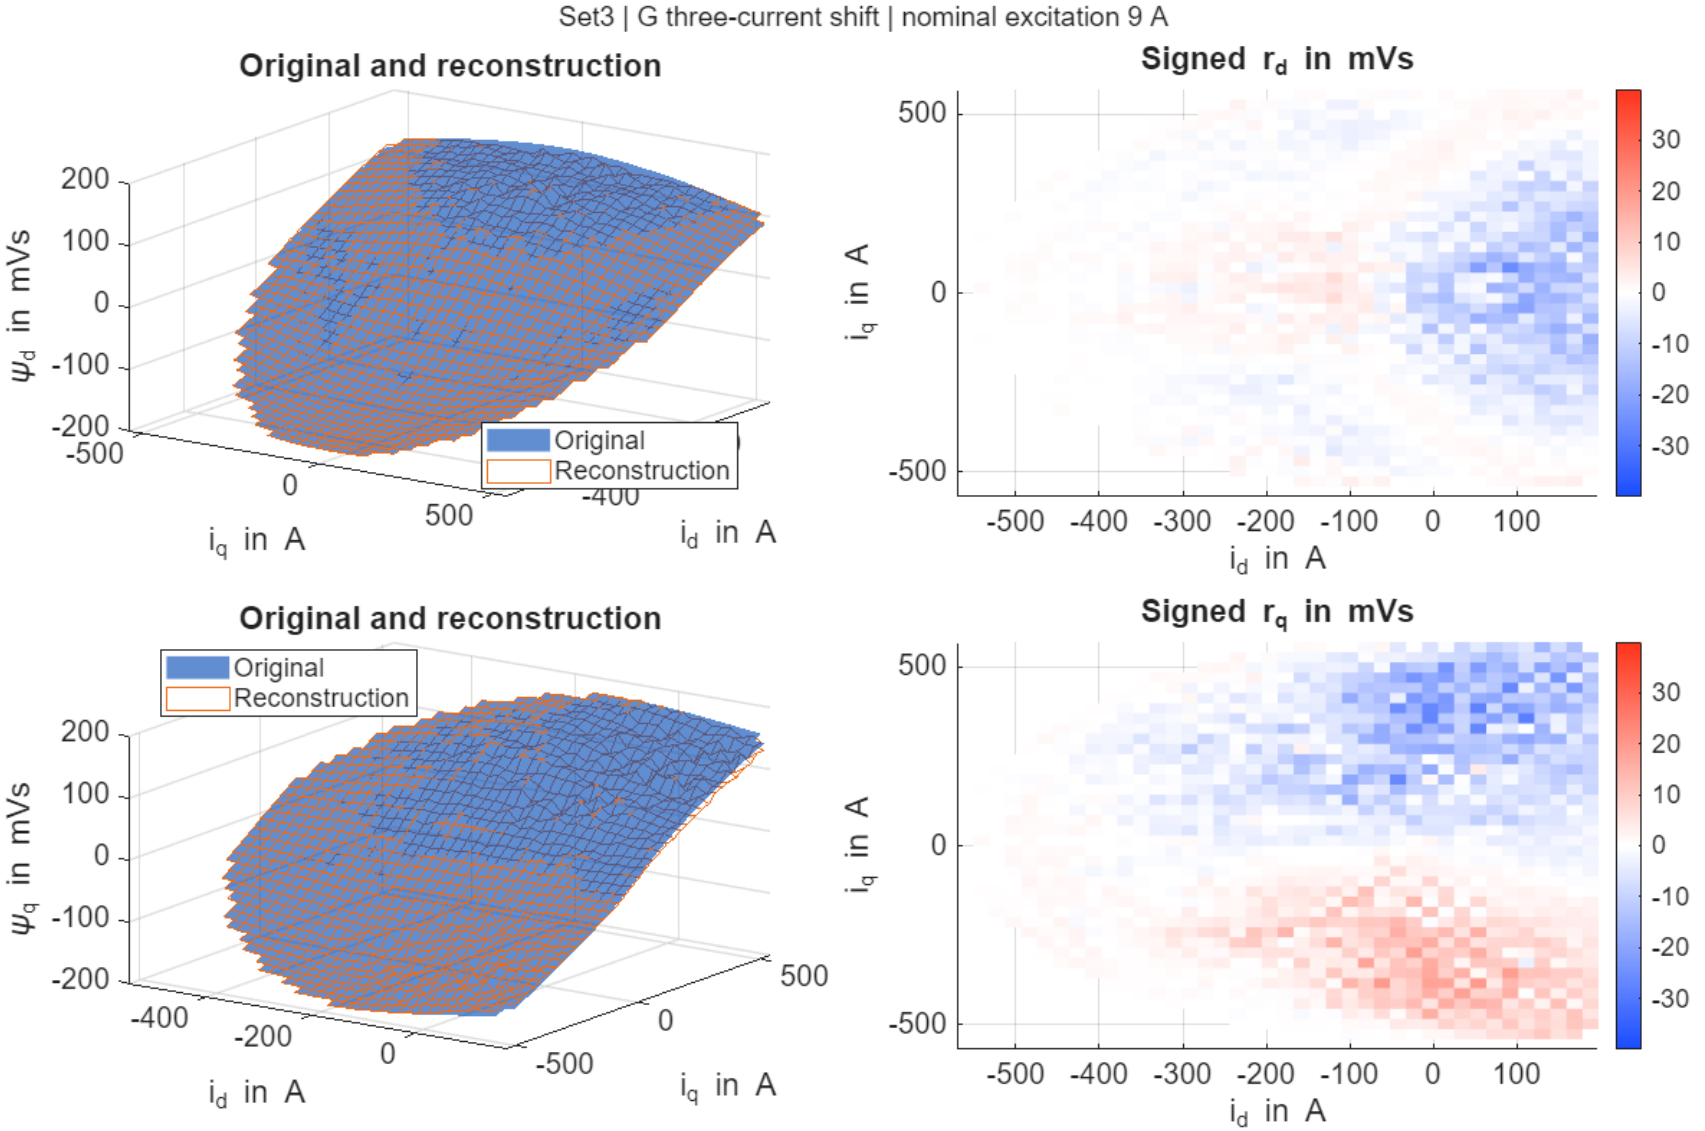

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method H, excitation 9 A

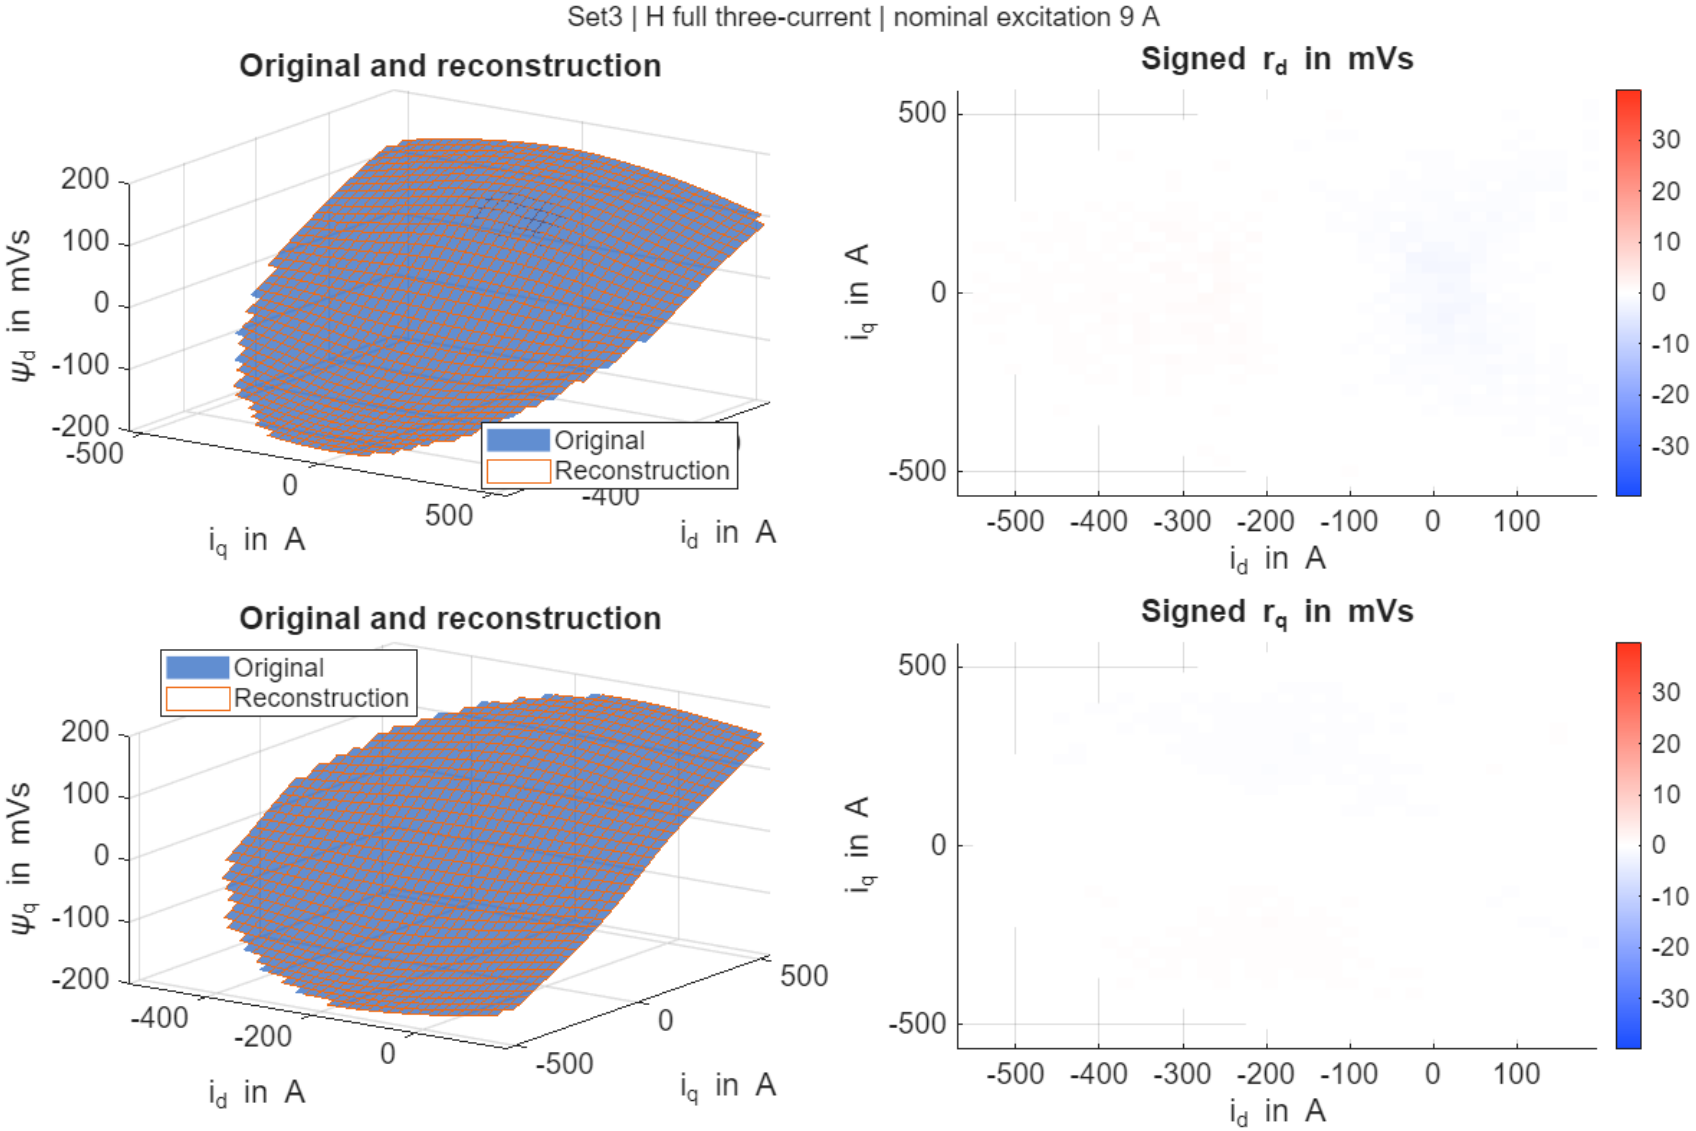

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method A, excitation 12 A

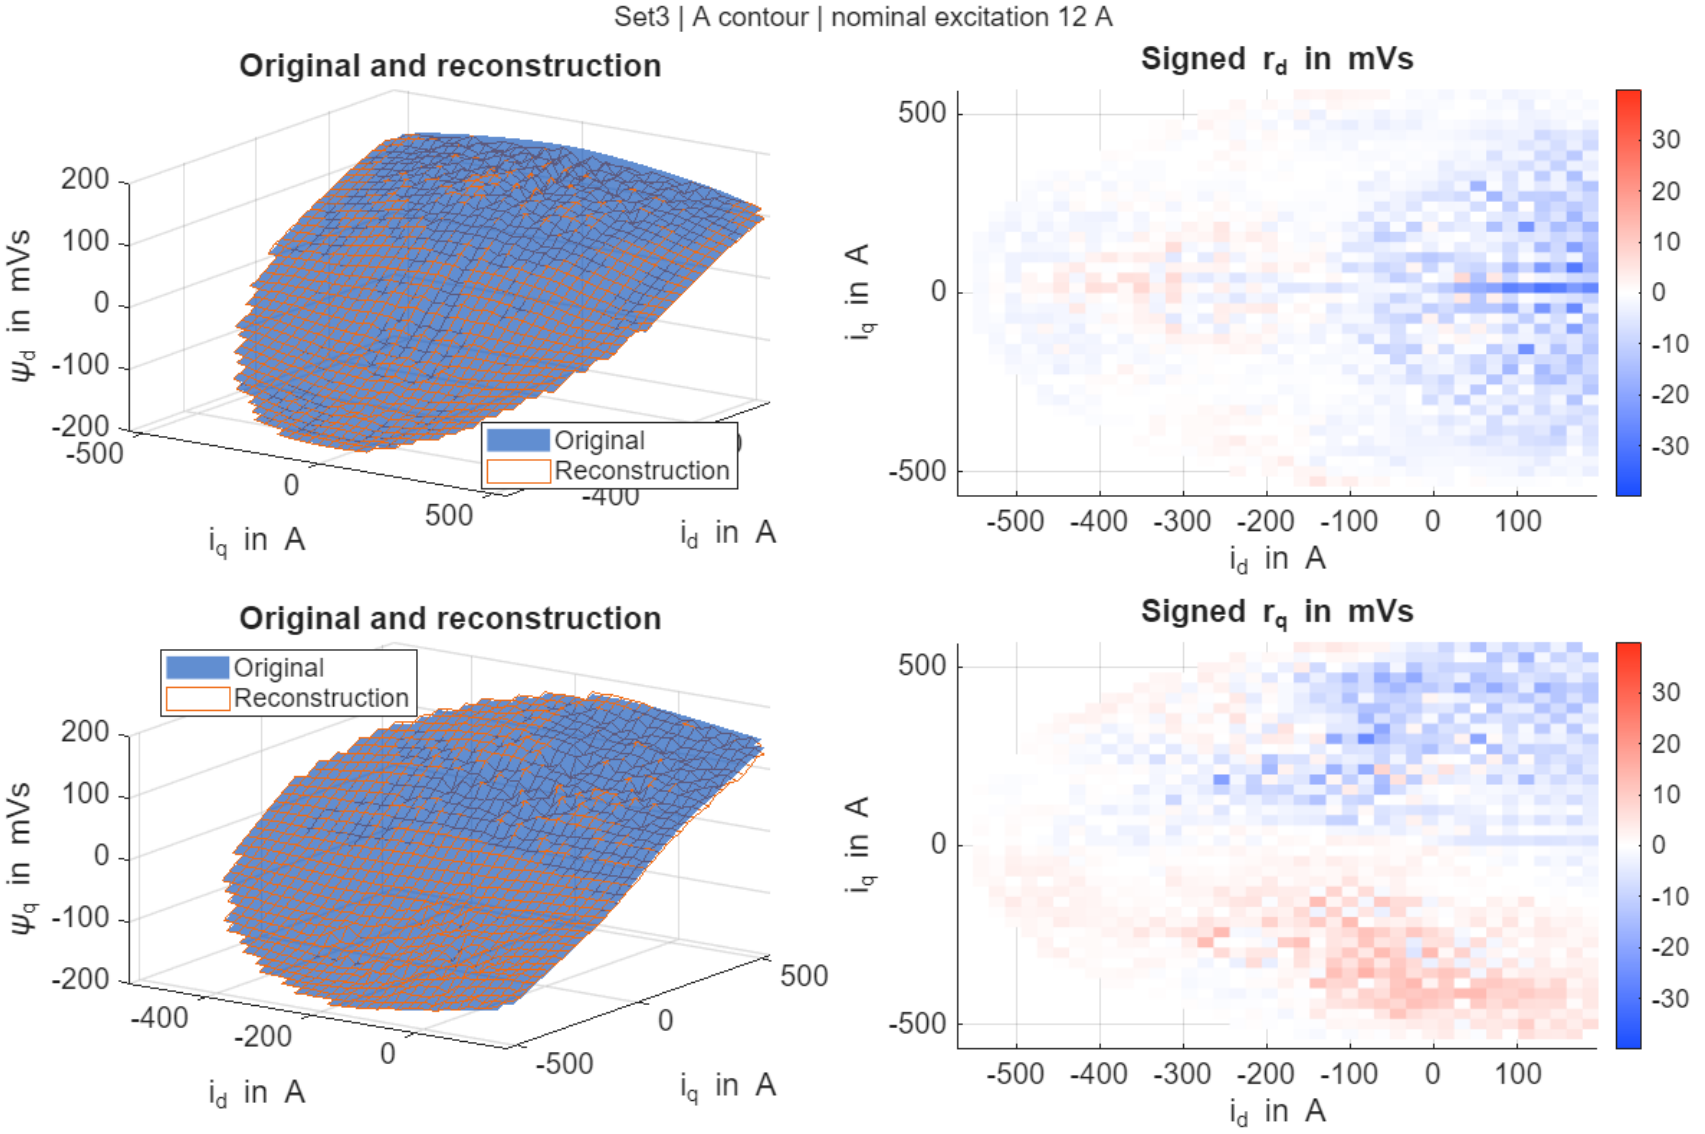

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method B, excitation 12 A

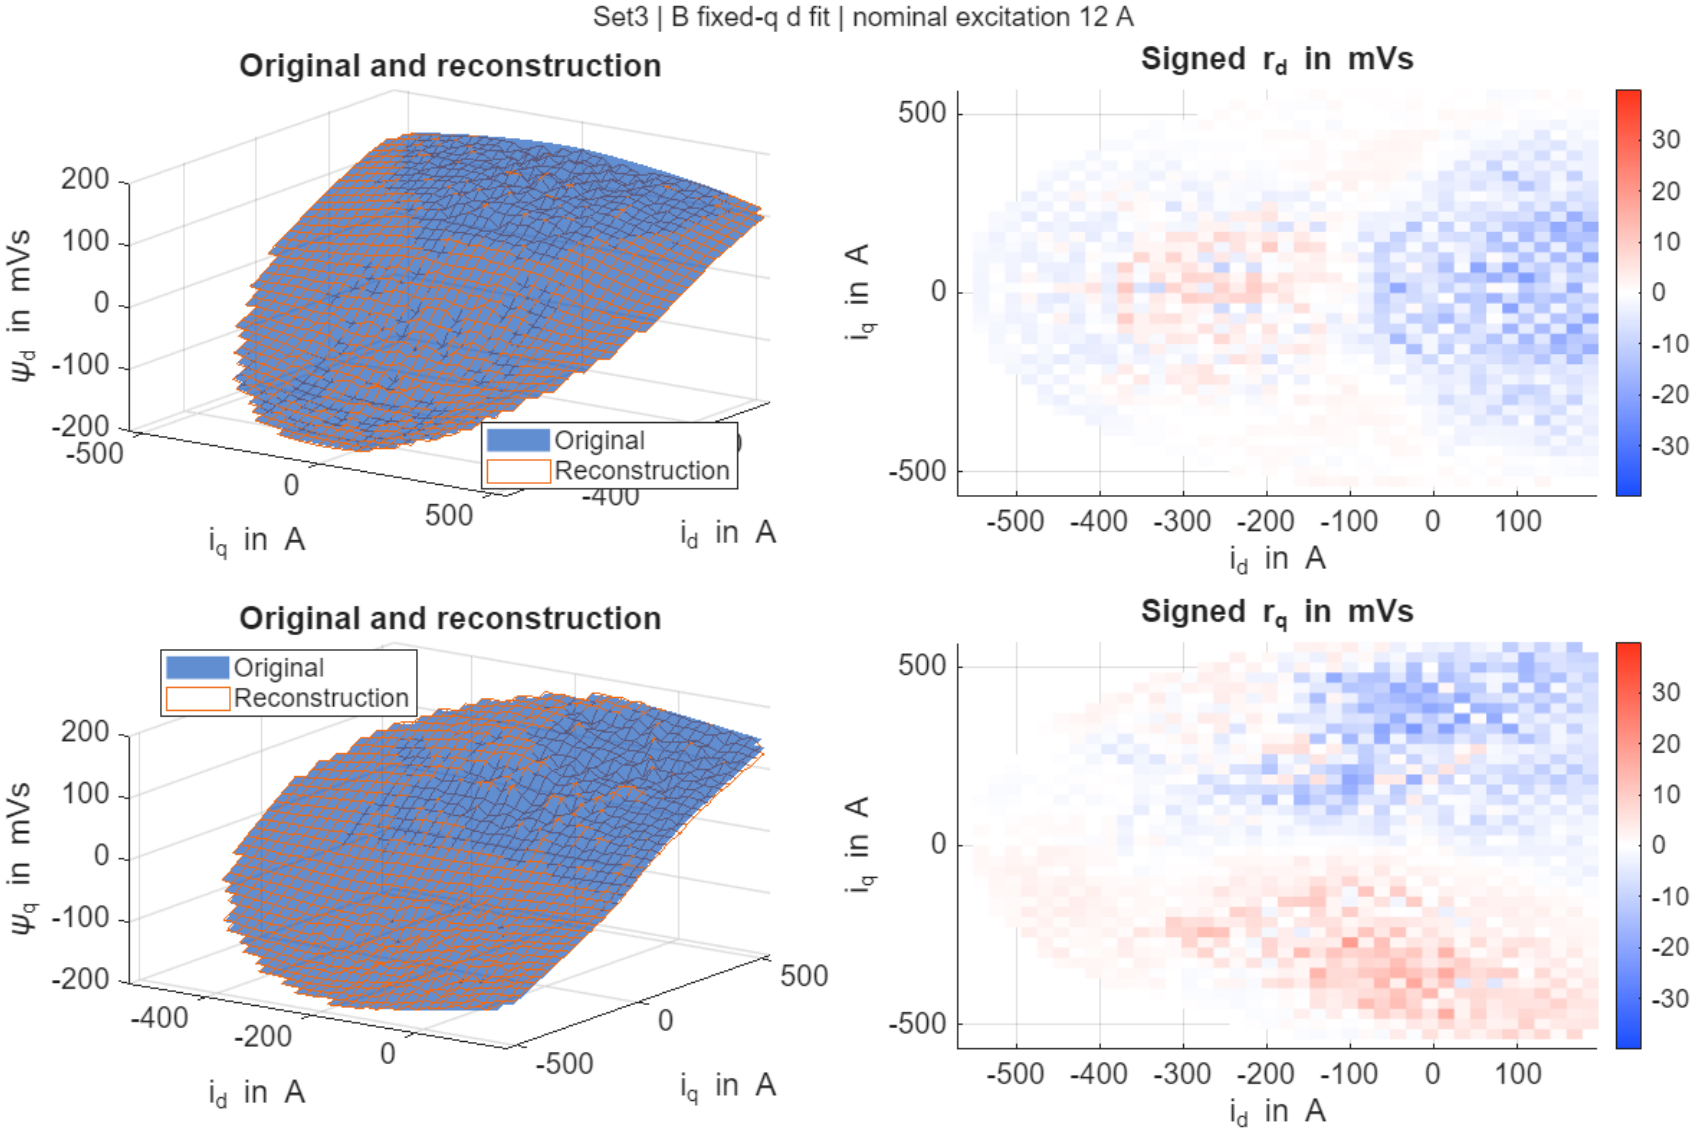

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method C, excitation 12 A

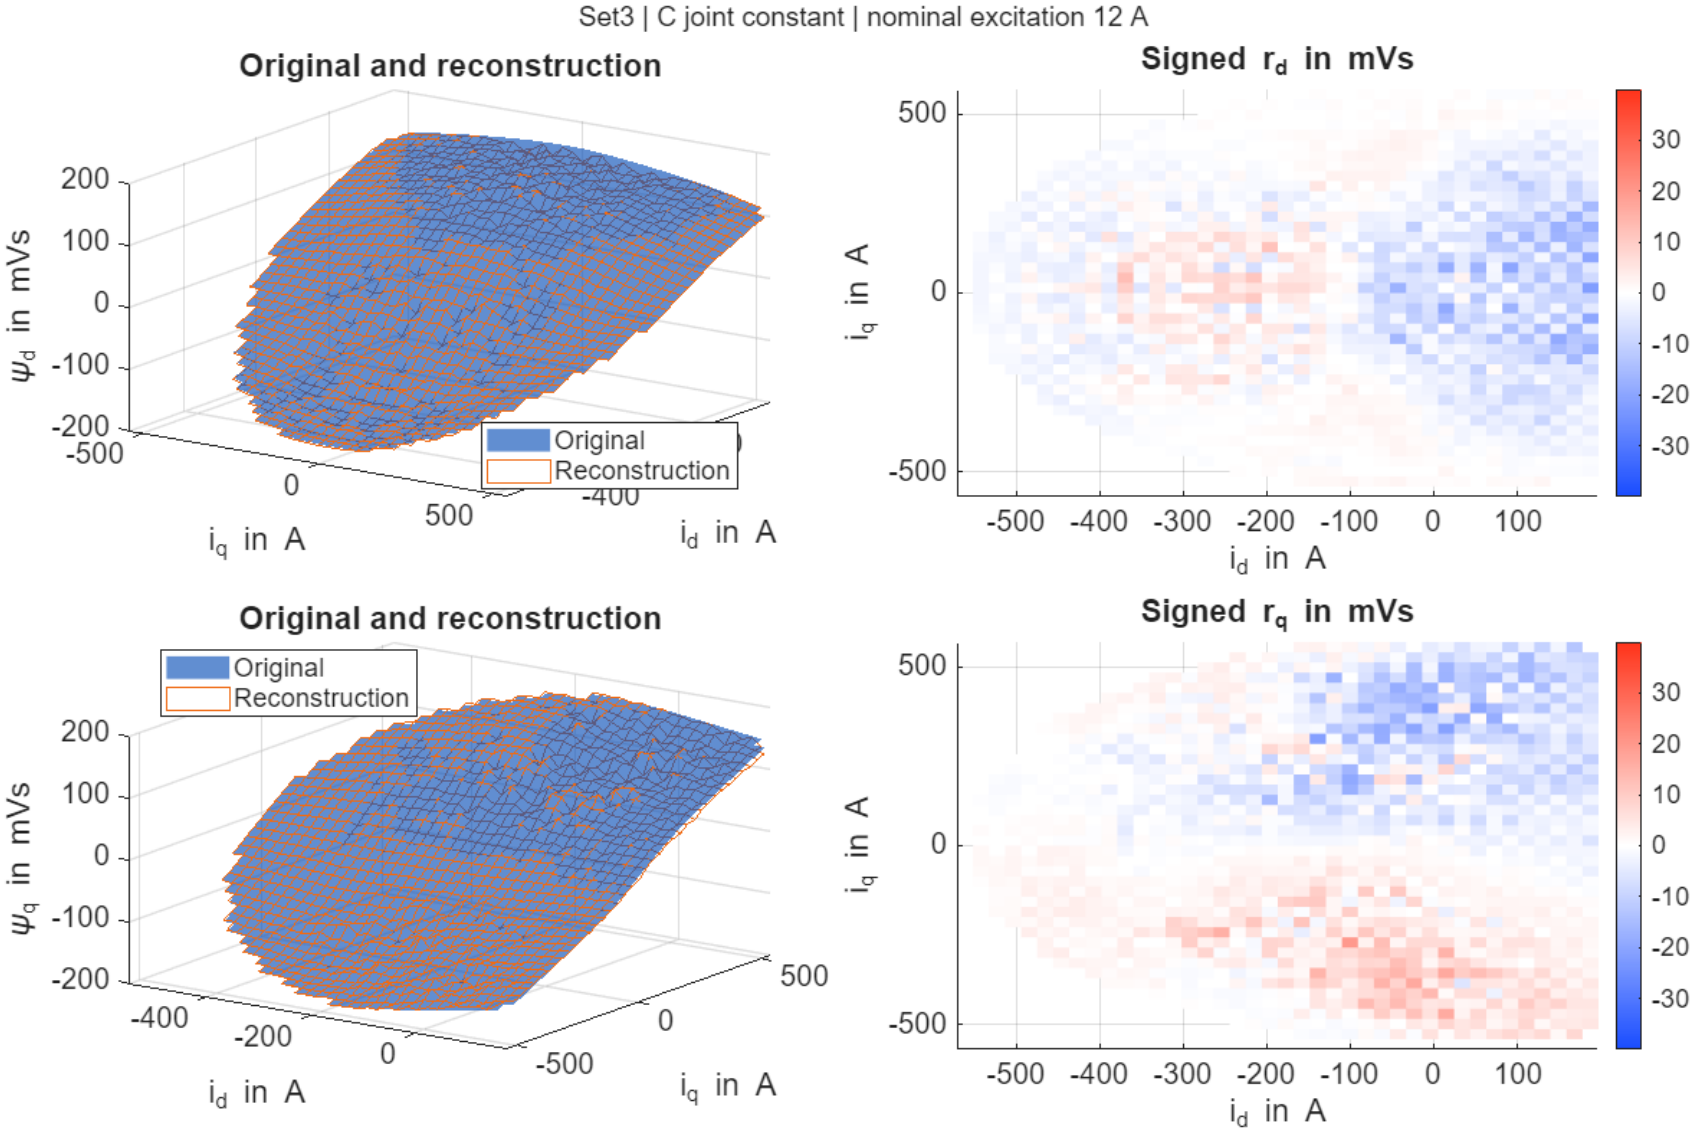

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method D, excitation 12 A

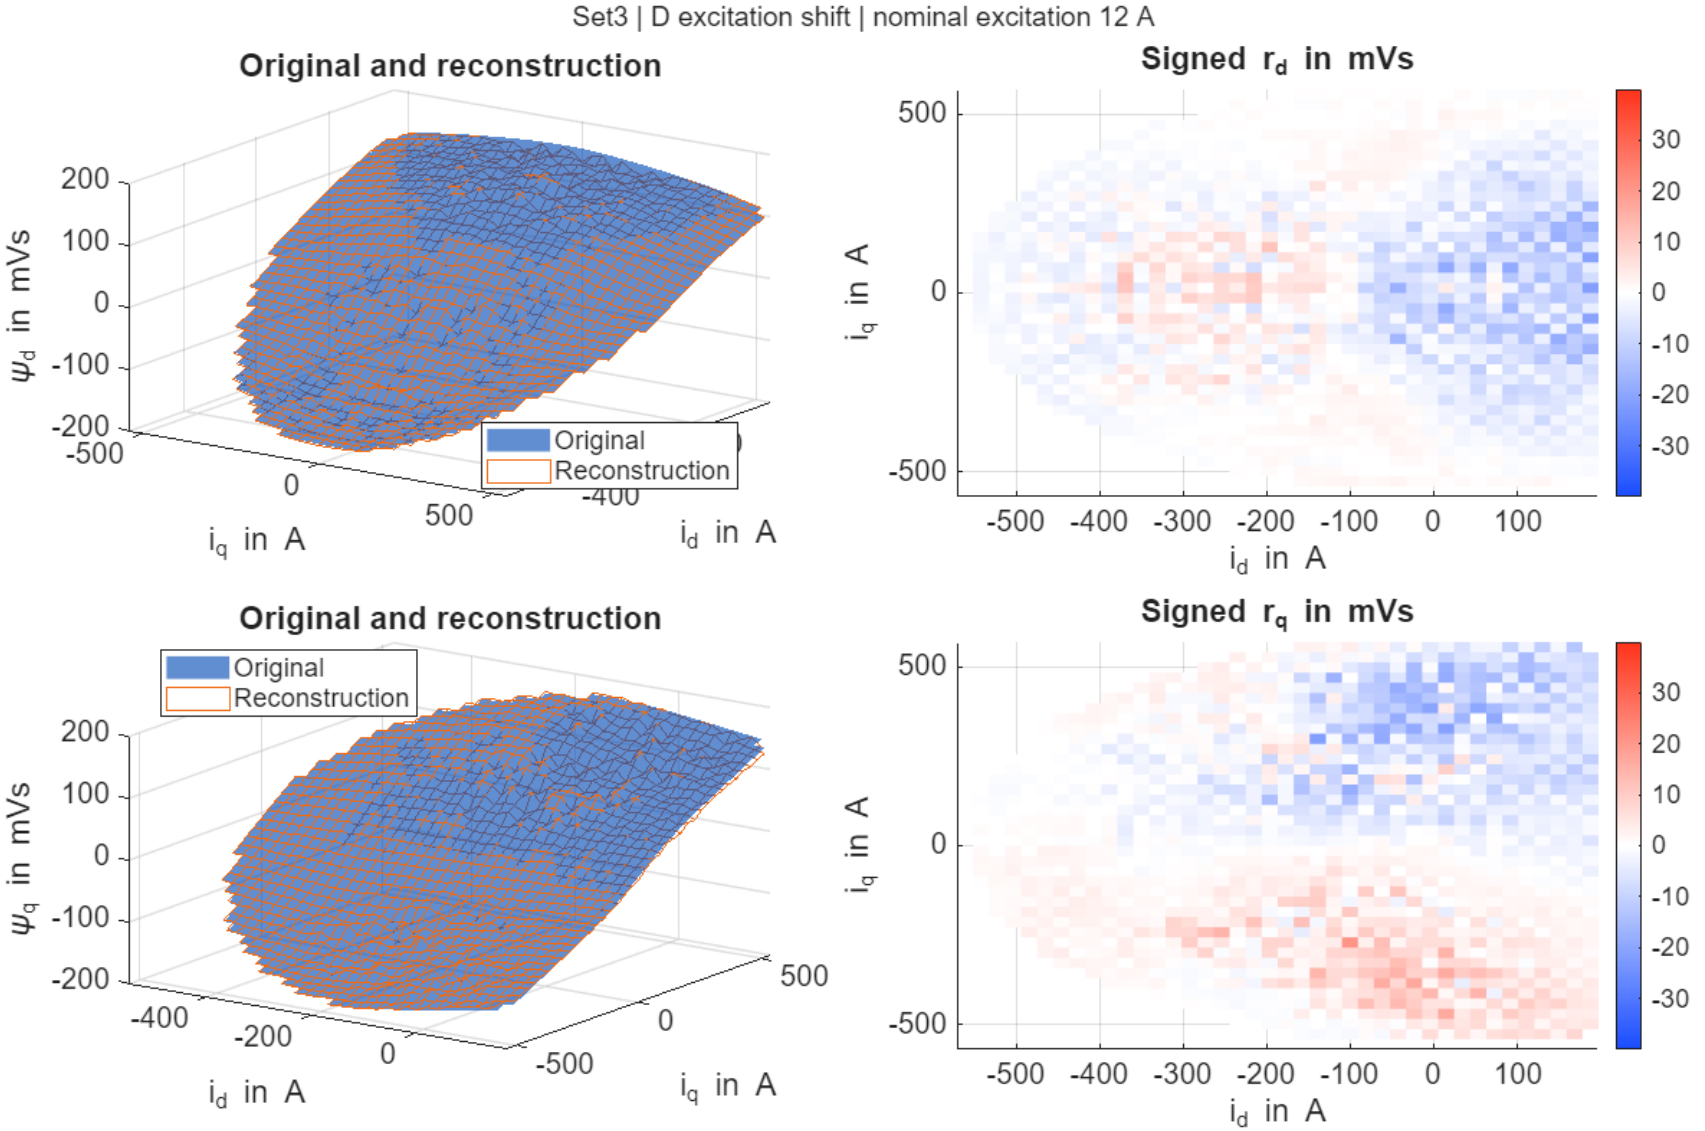

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method E, excitation 12 A

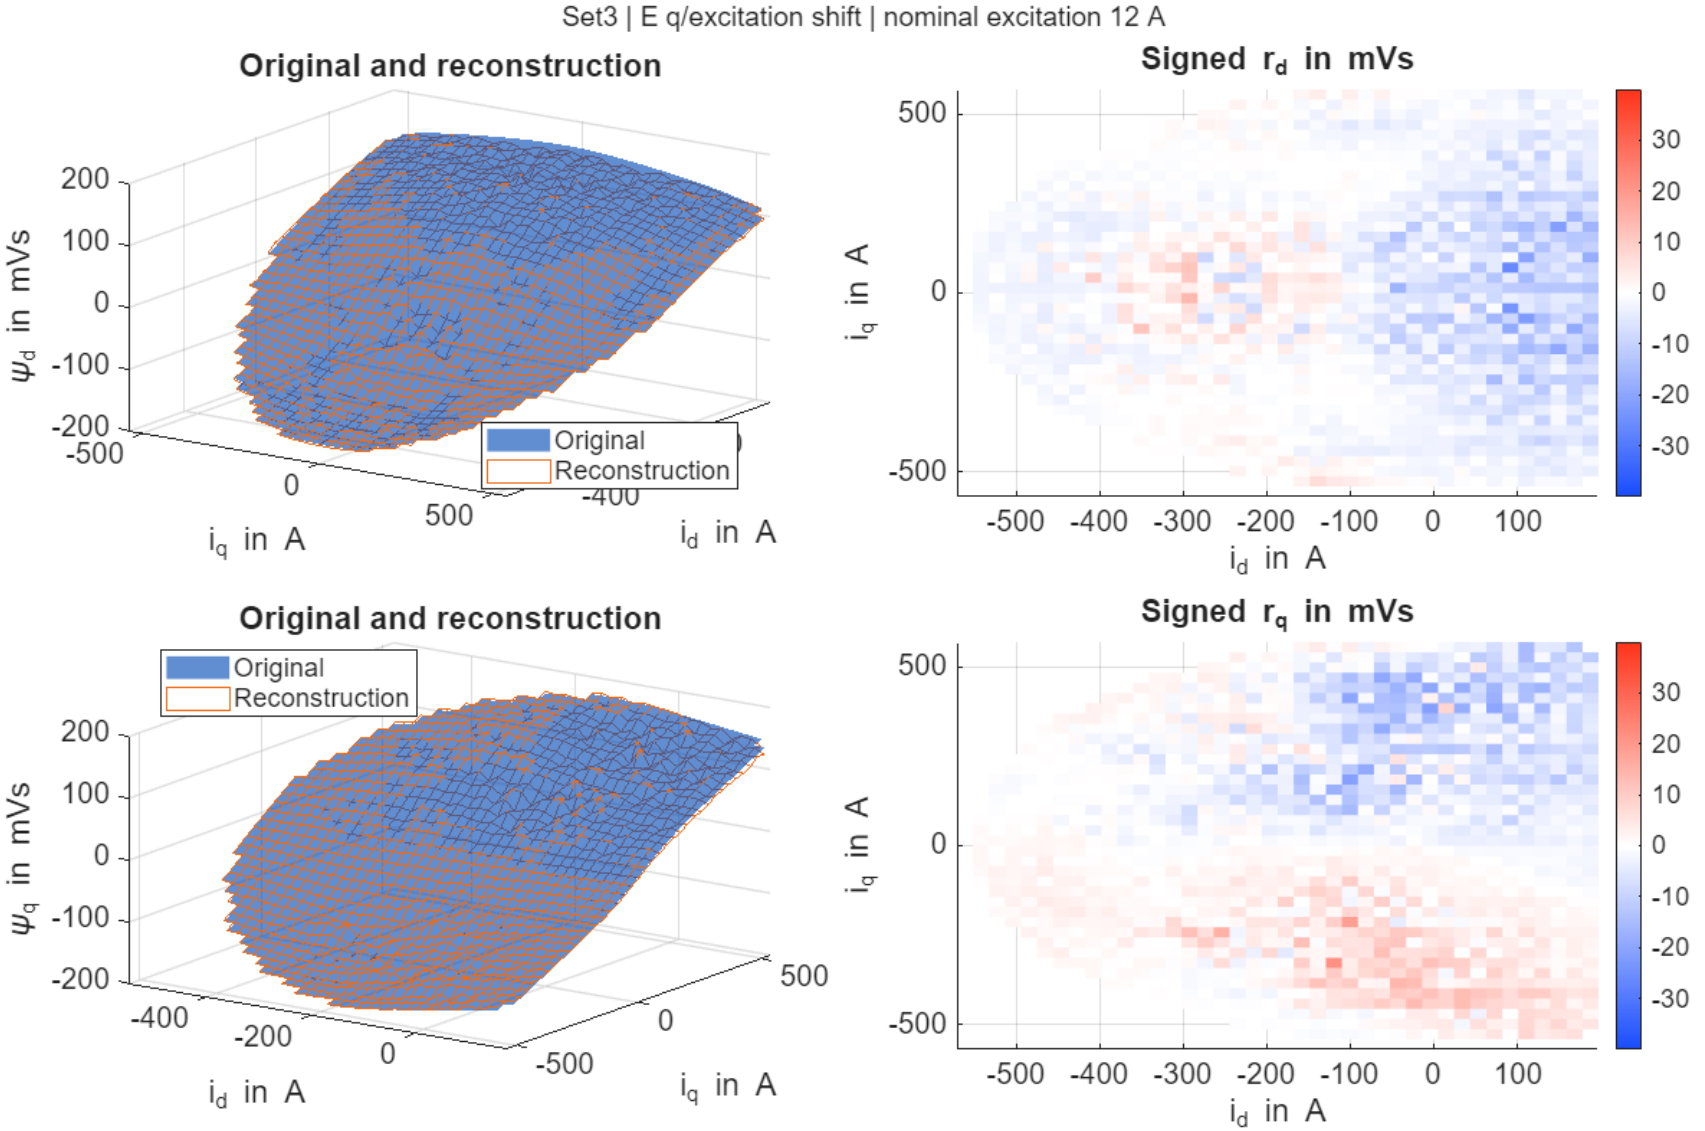

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method F, excitation 12 A

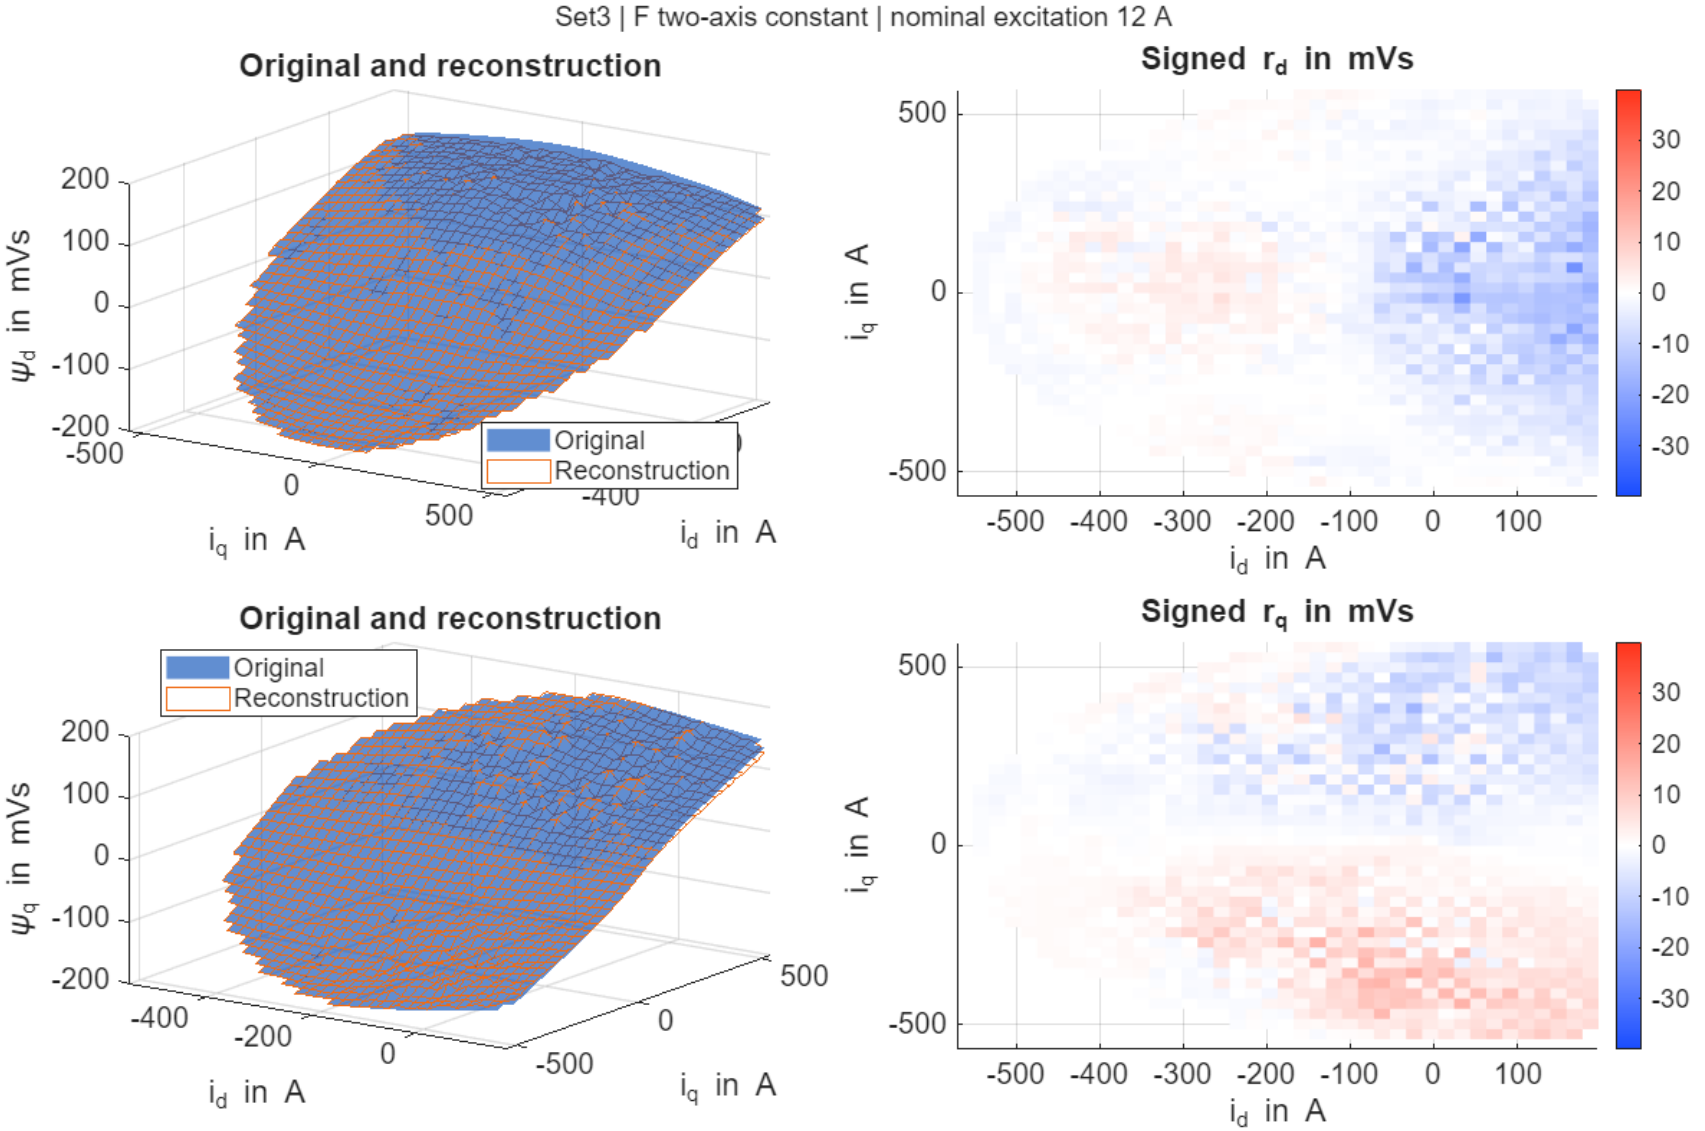

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method G, excitation 12 A

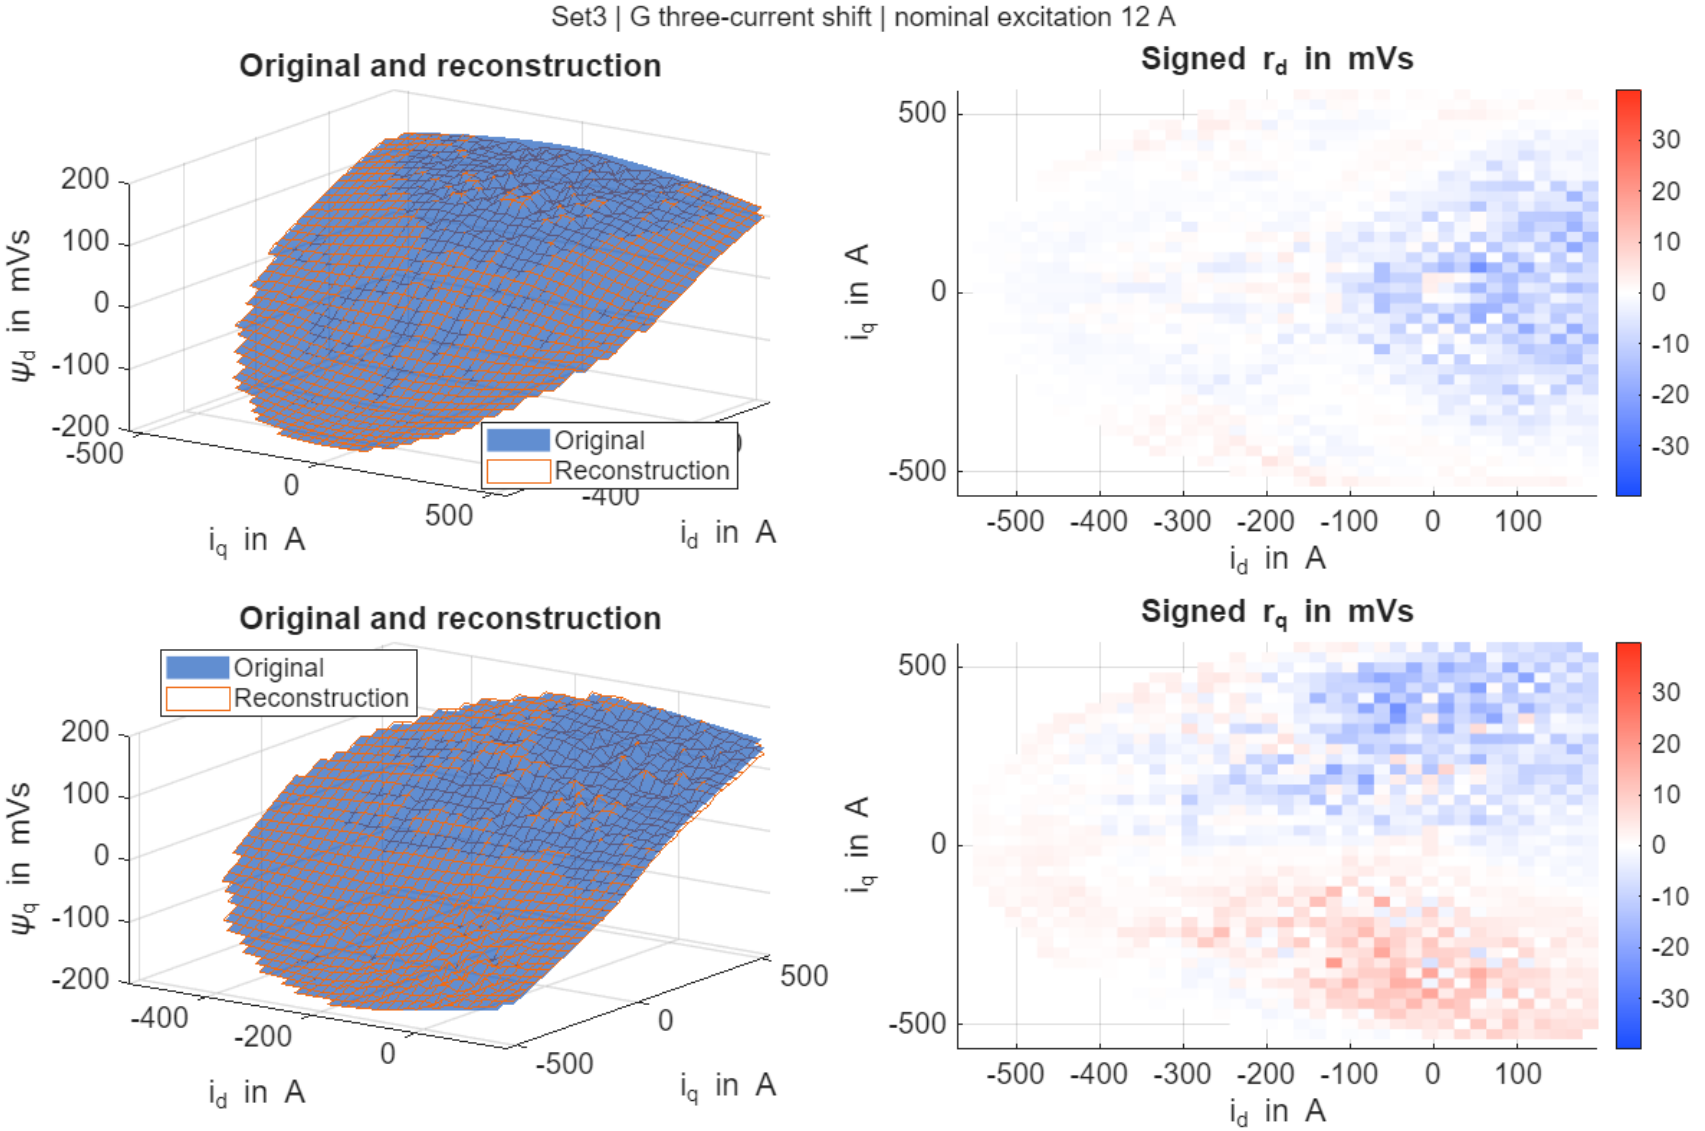

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method H, excitation 12 A

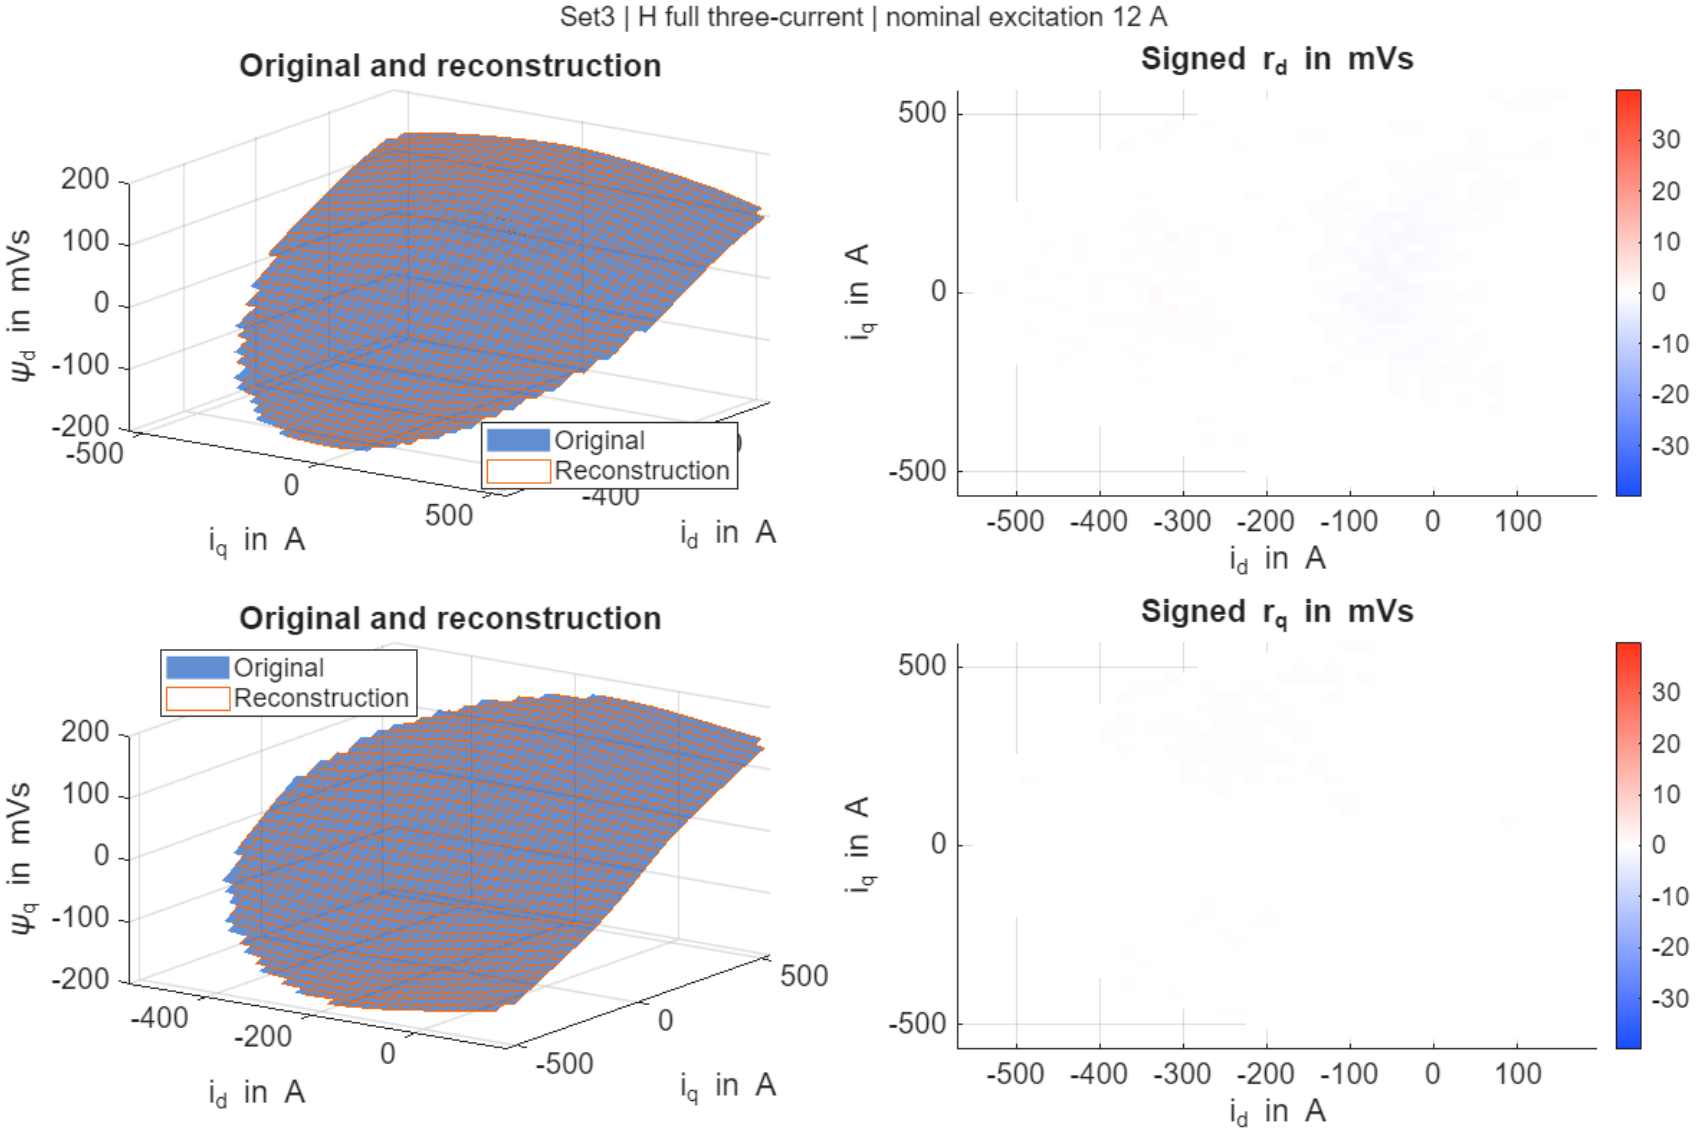

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method A, excitation 15 A

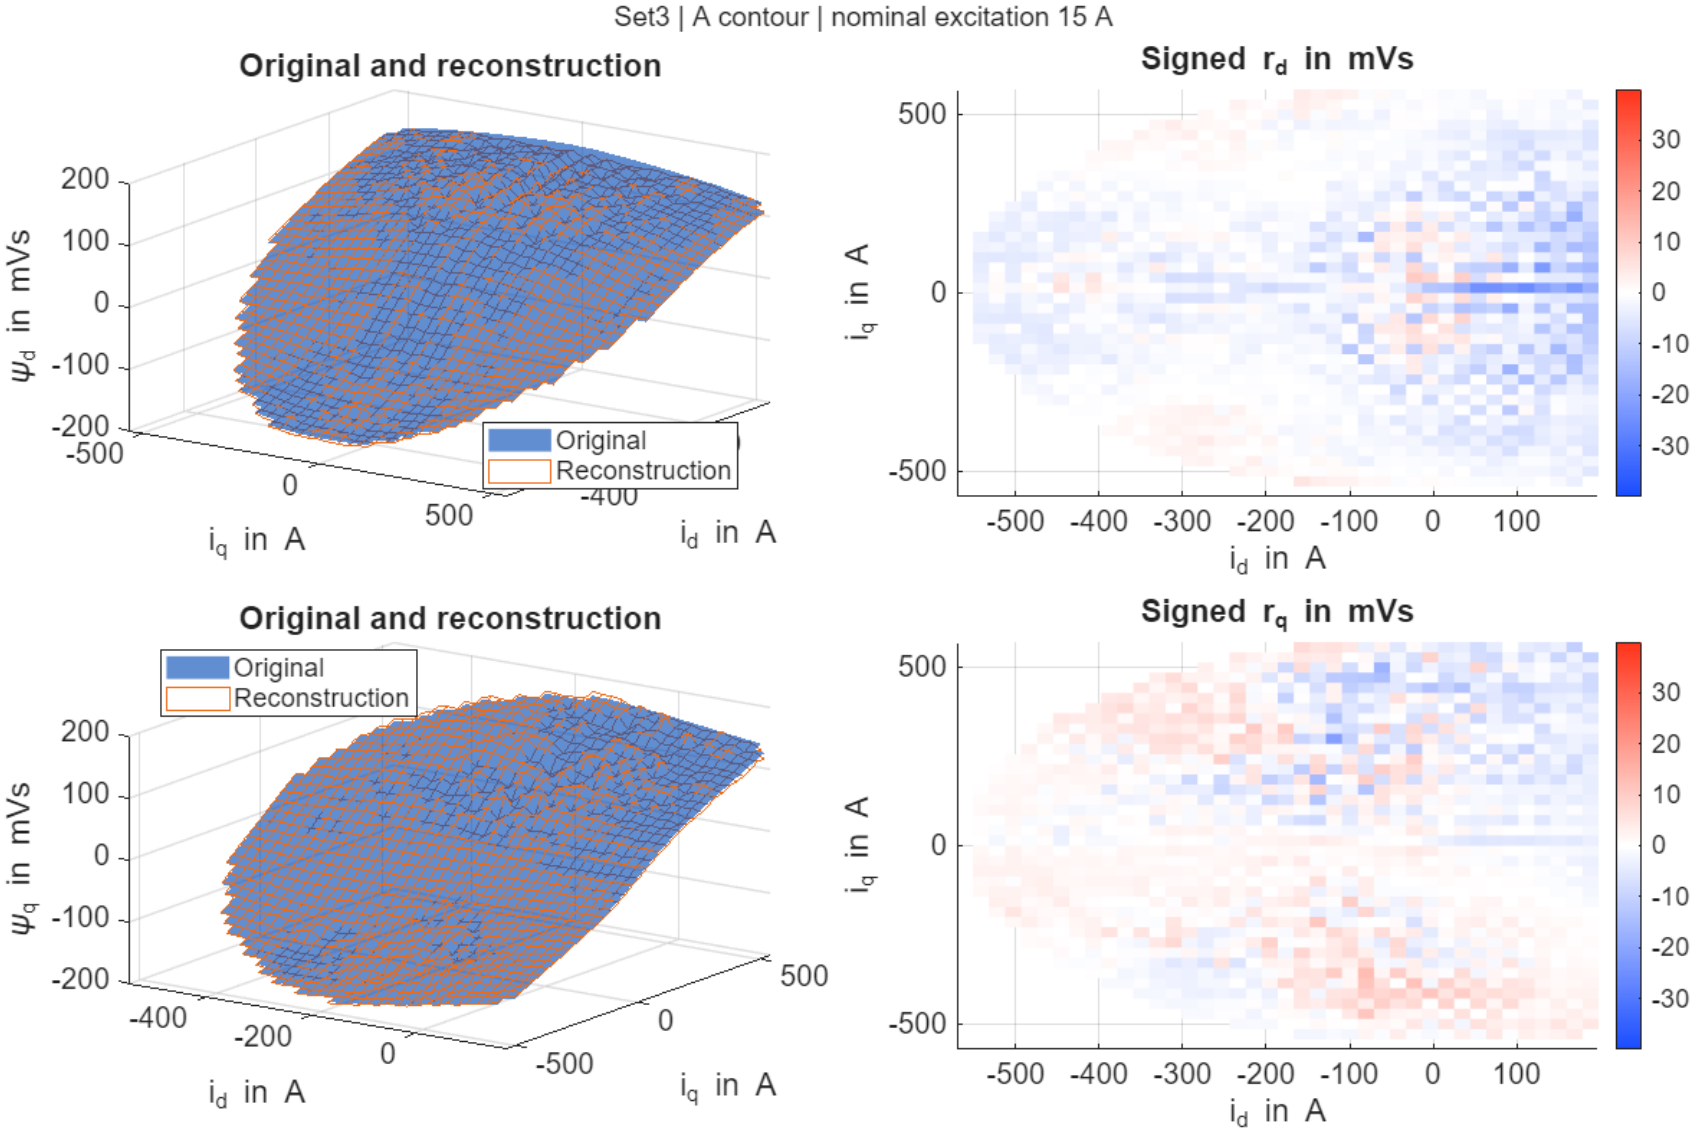

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method B, excitation 15 A

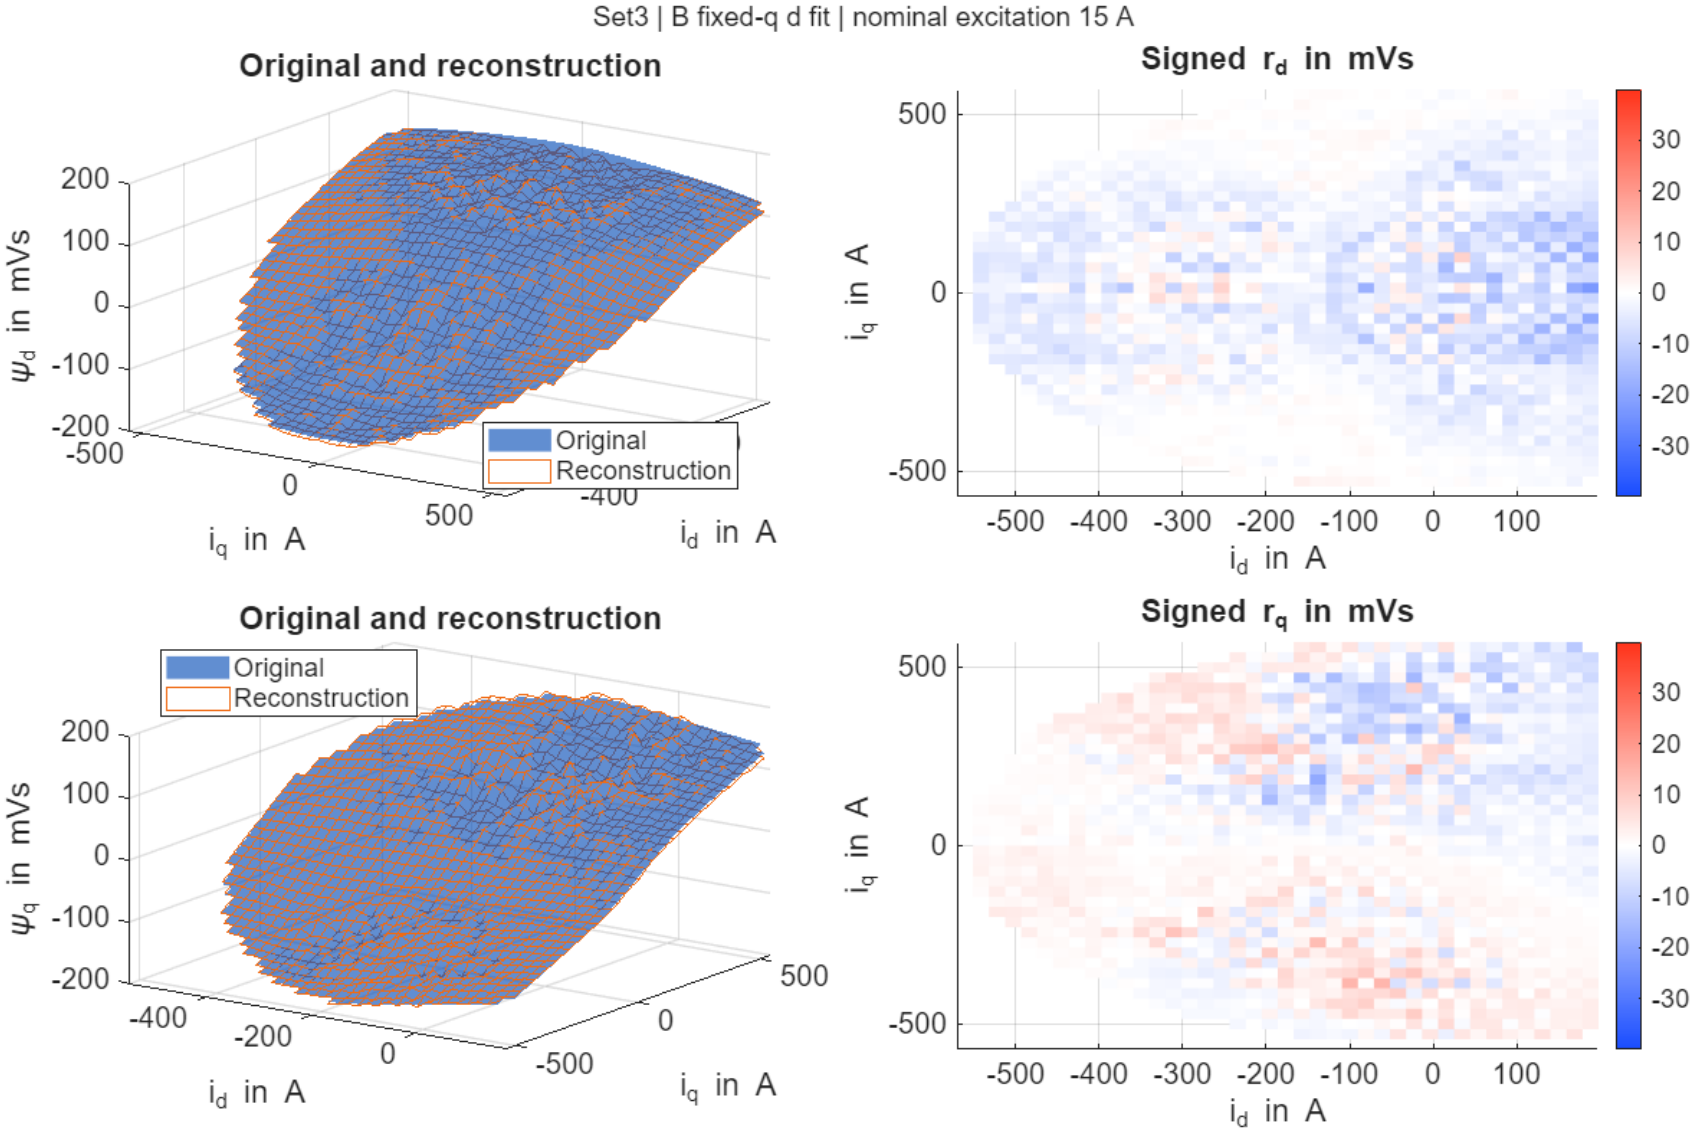

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method C, excitation 15 A

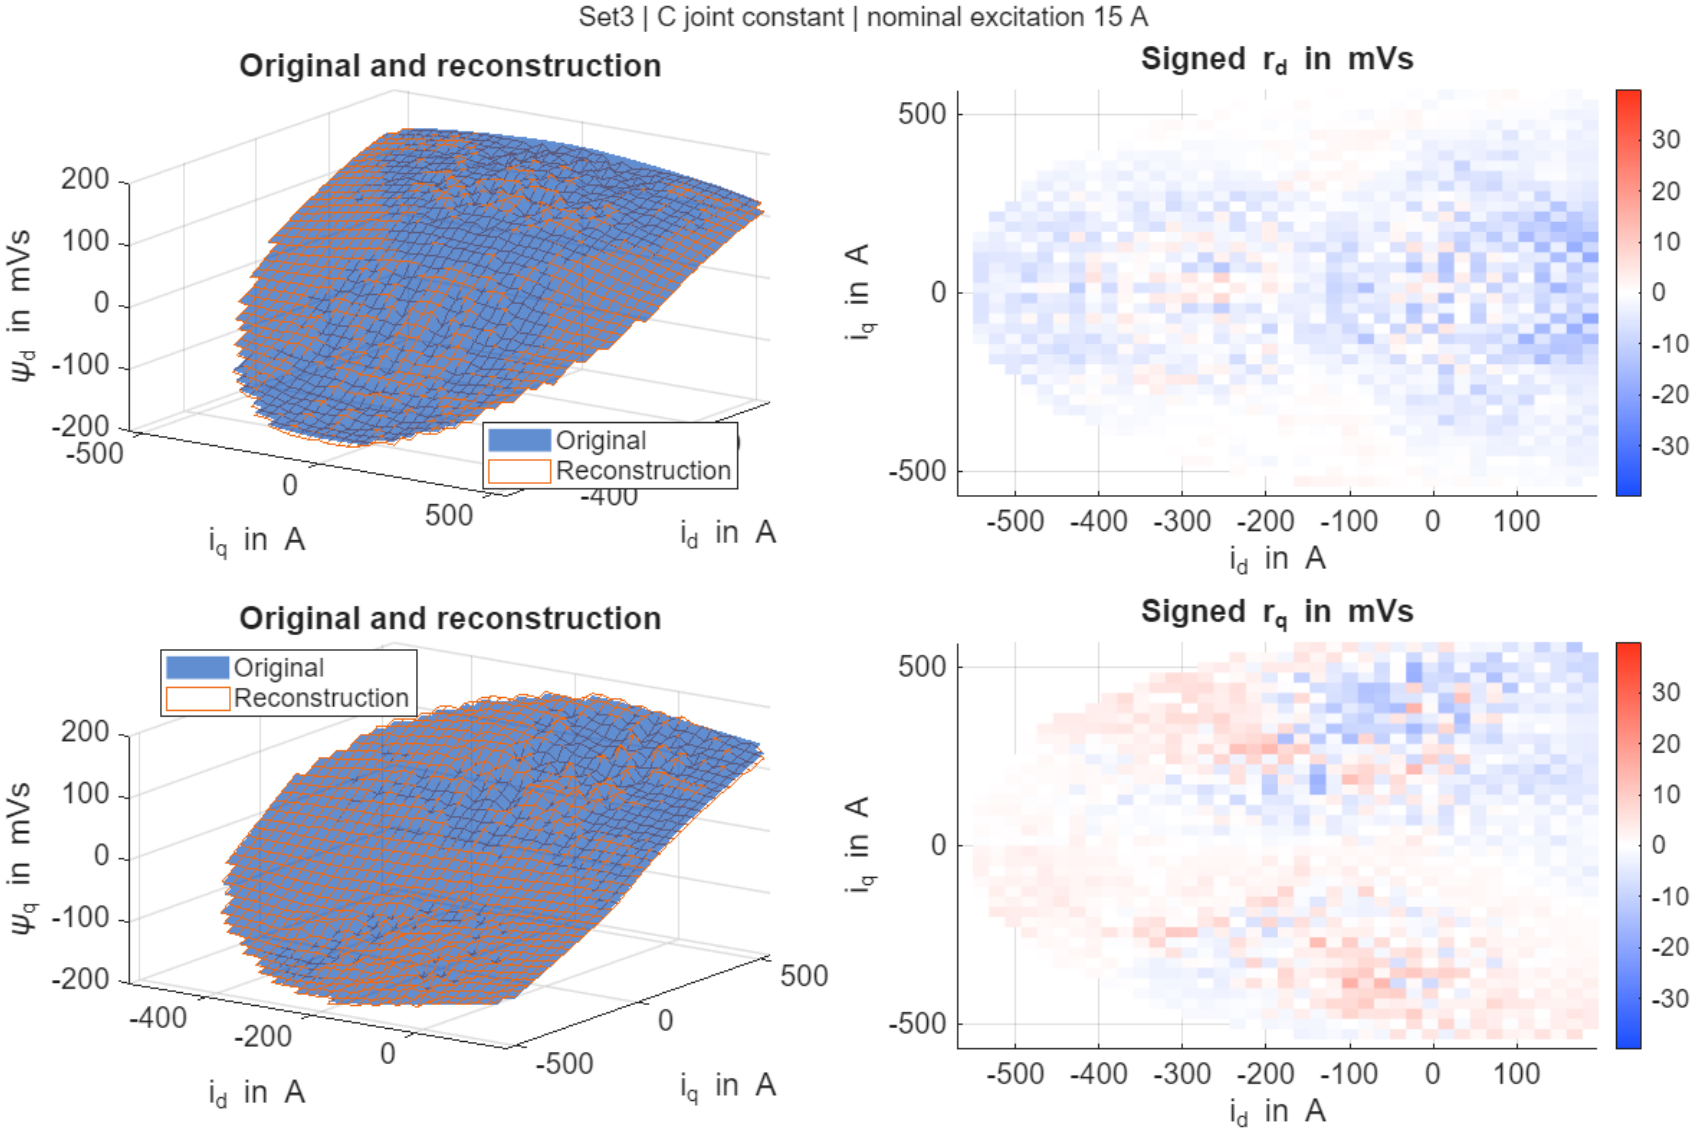

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method D, excitation 15 A

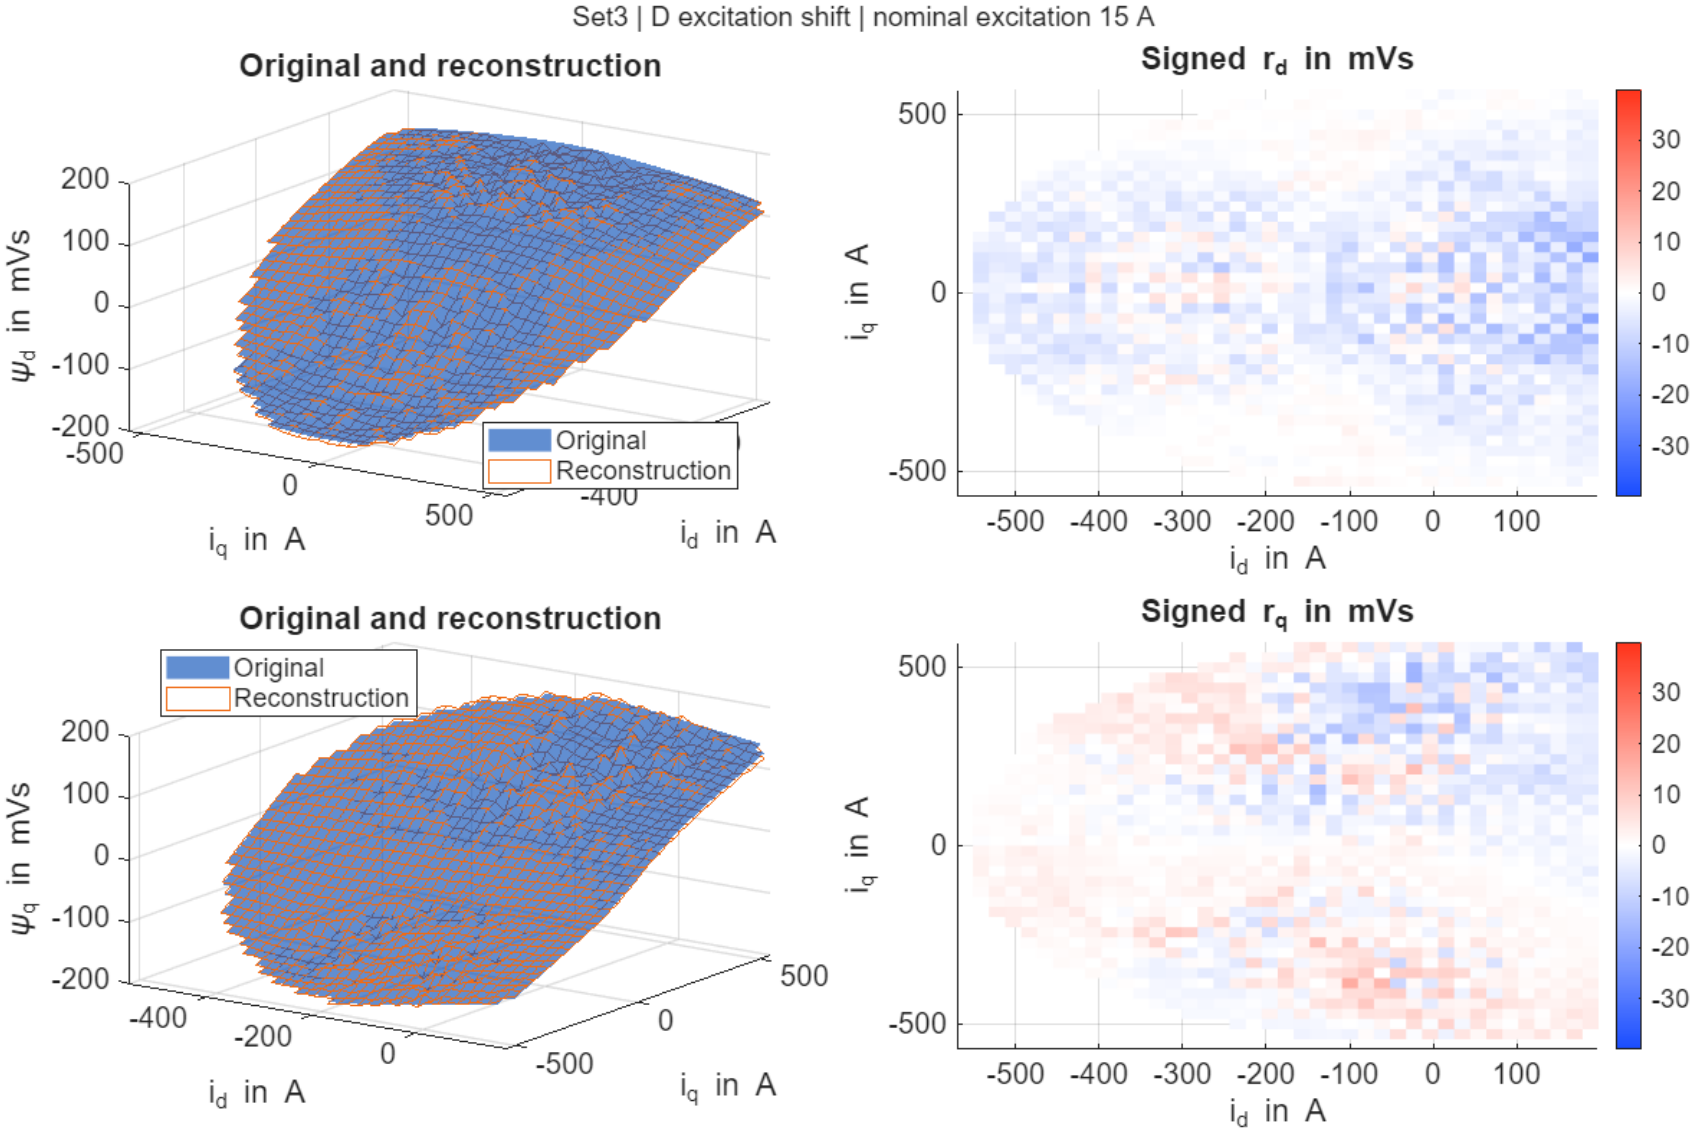

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method E, excitation 15 A

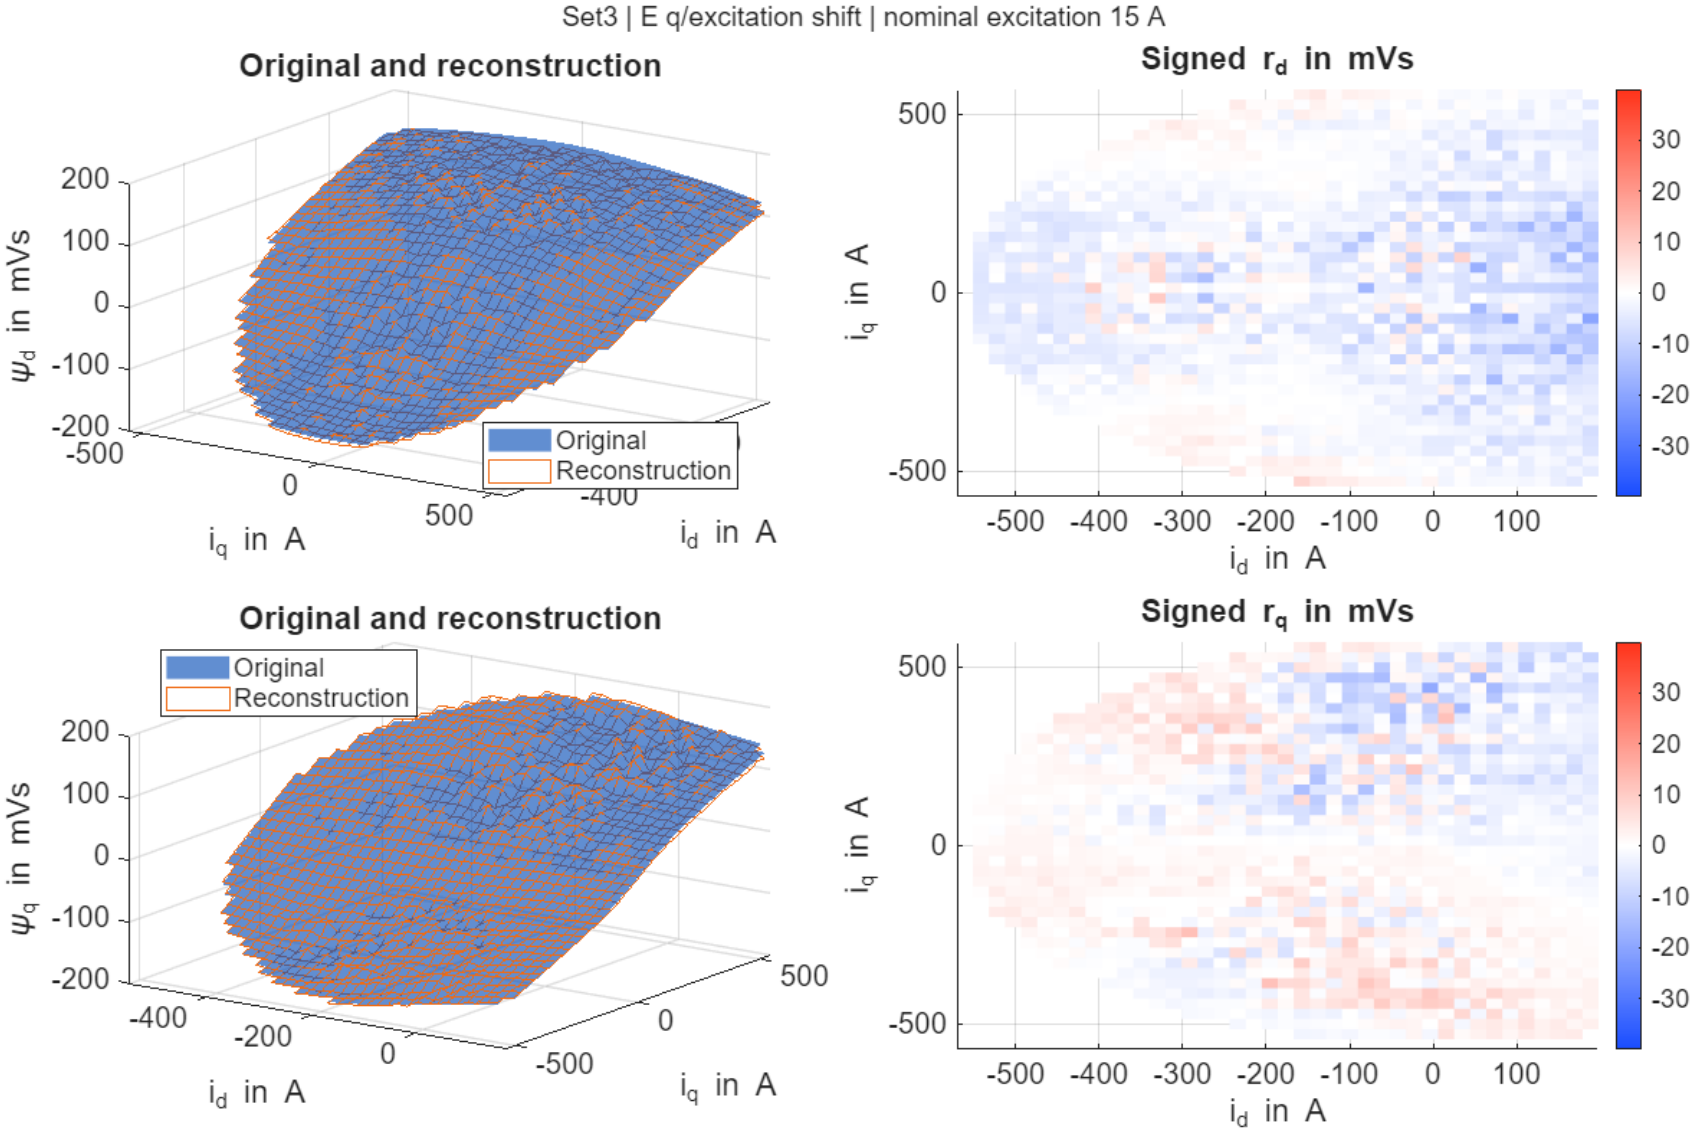

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method F, excitation 15 A

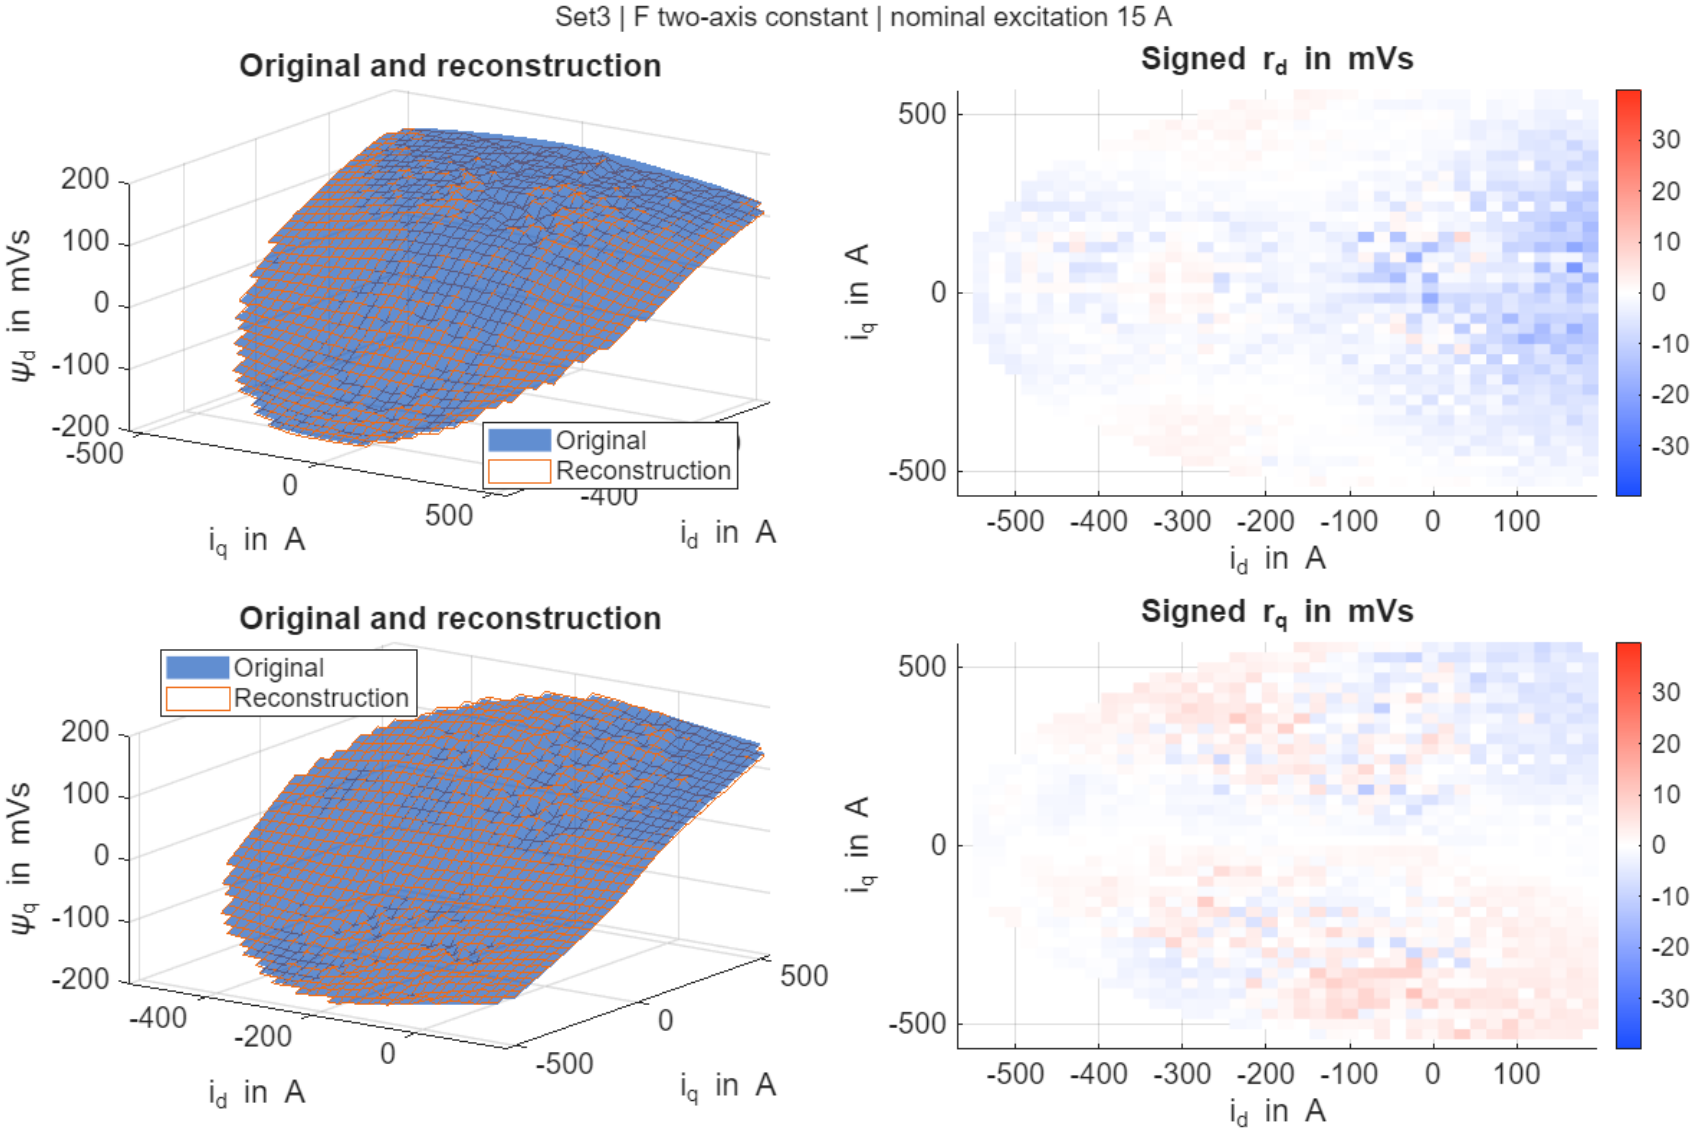

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method G, excitation 15 A

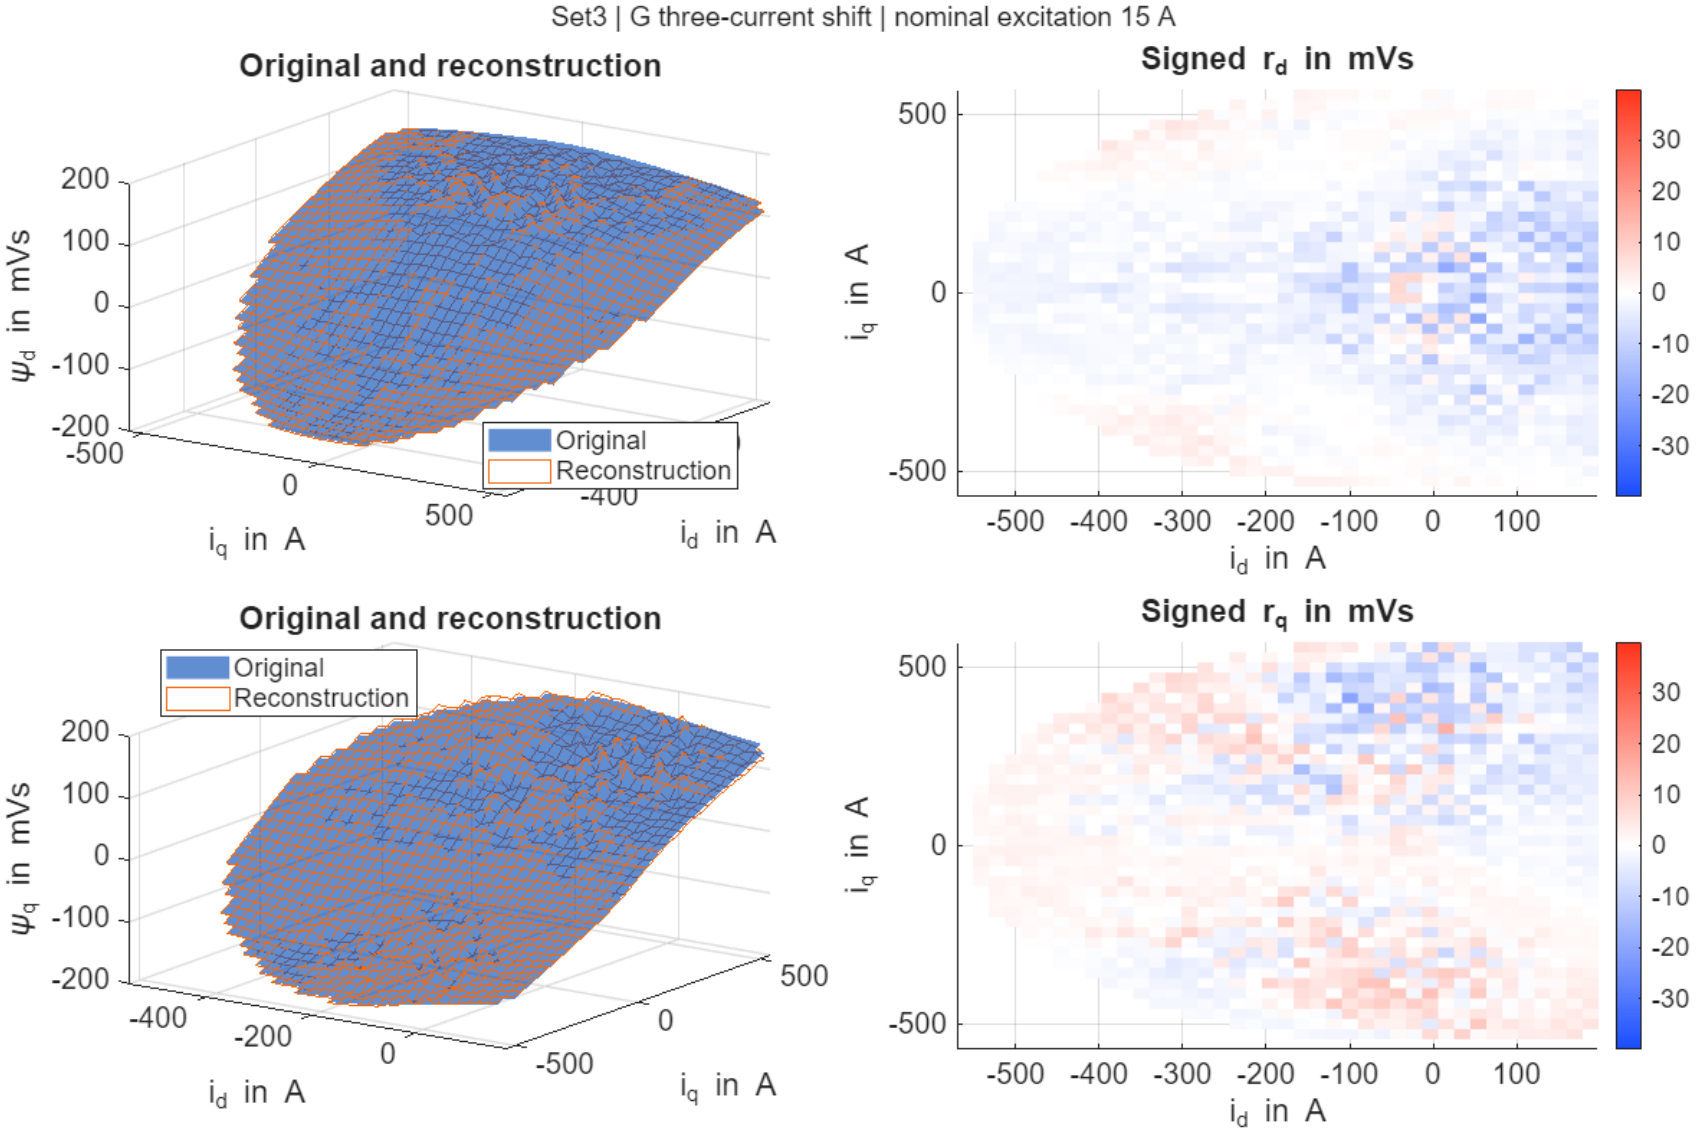

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method H, excitation 15 A

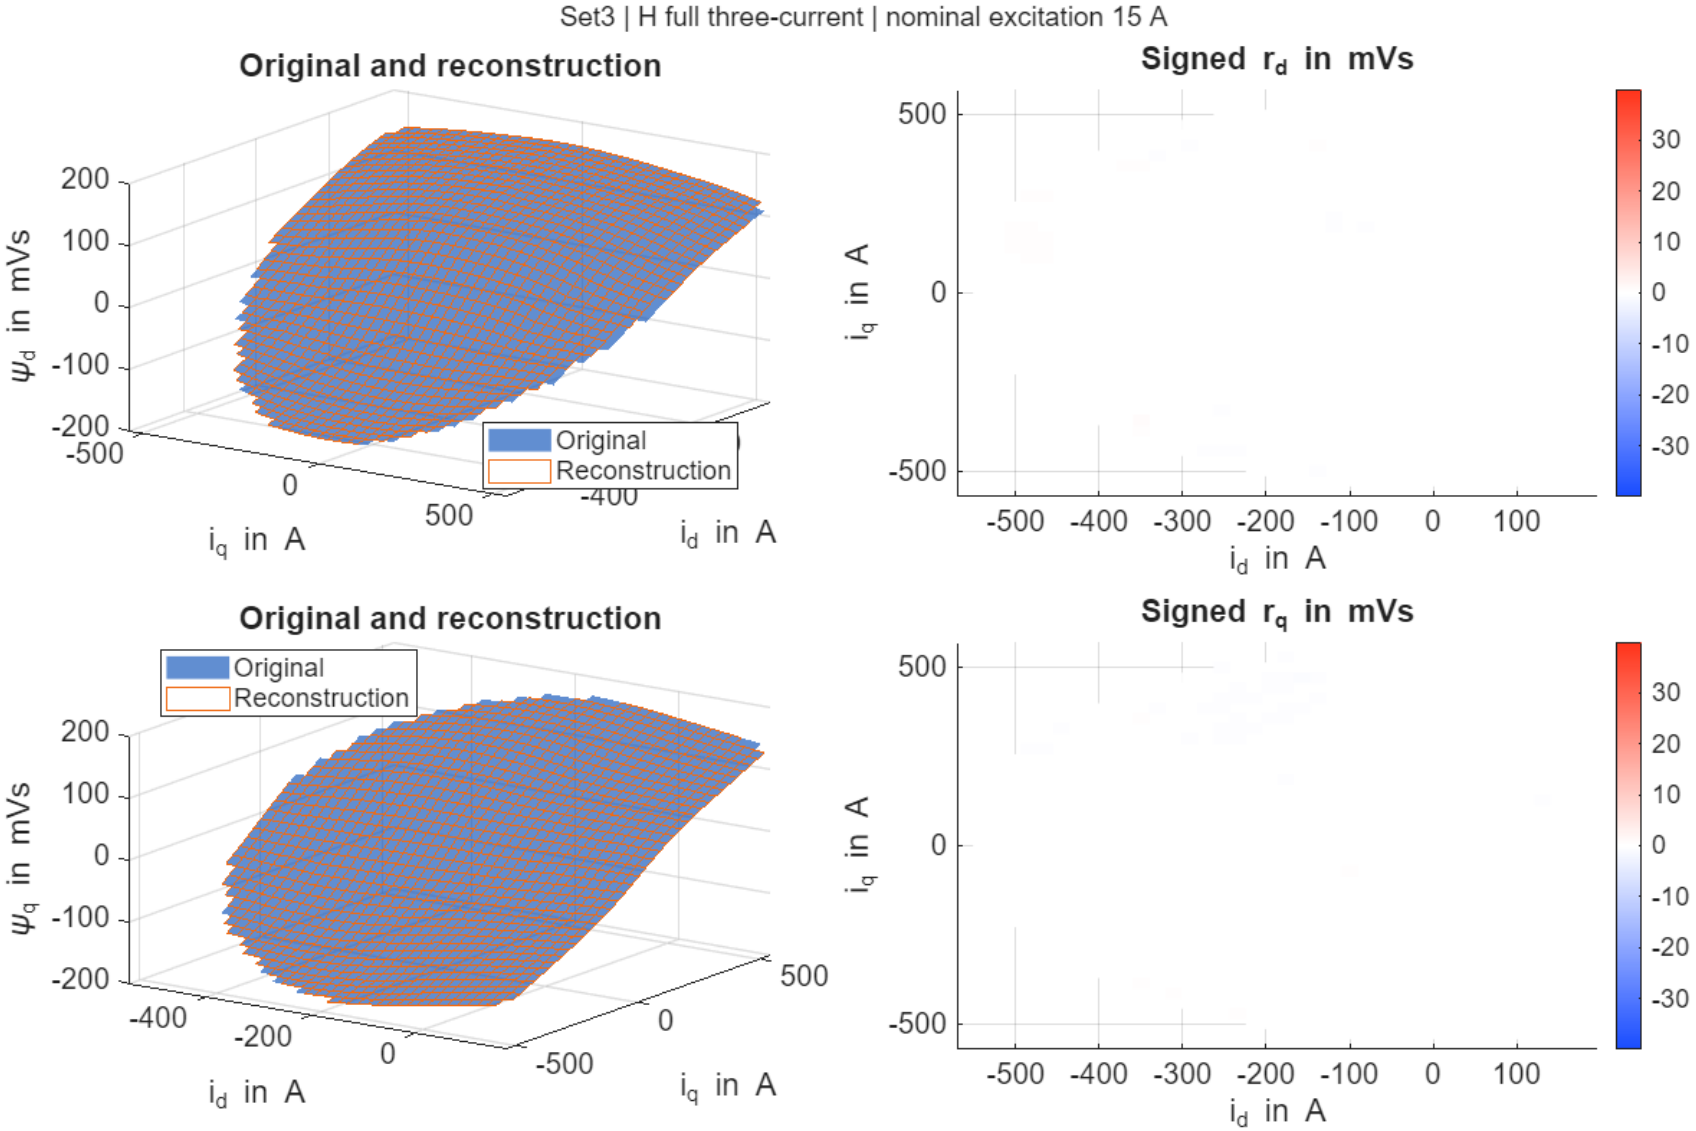

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method A, excitation 18 A

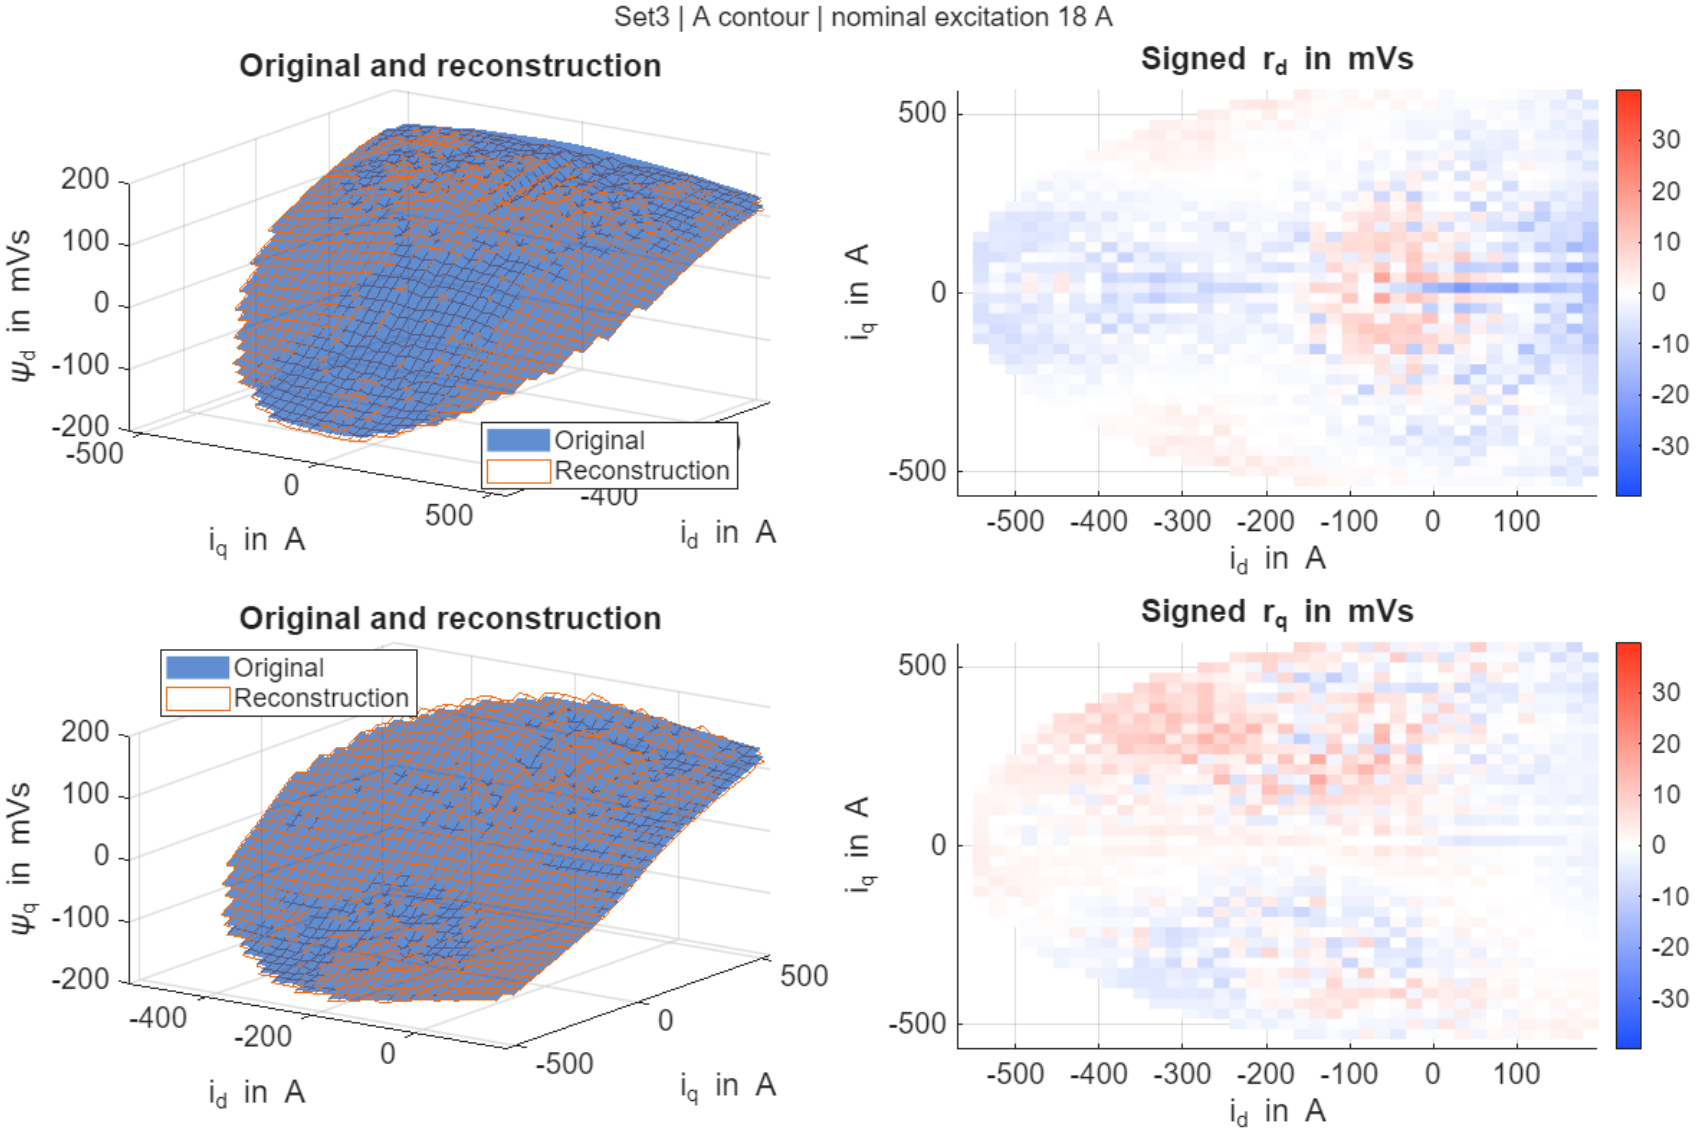

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method B, excitation 18 A

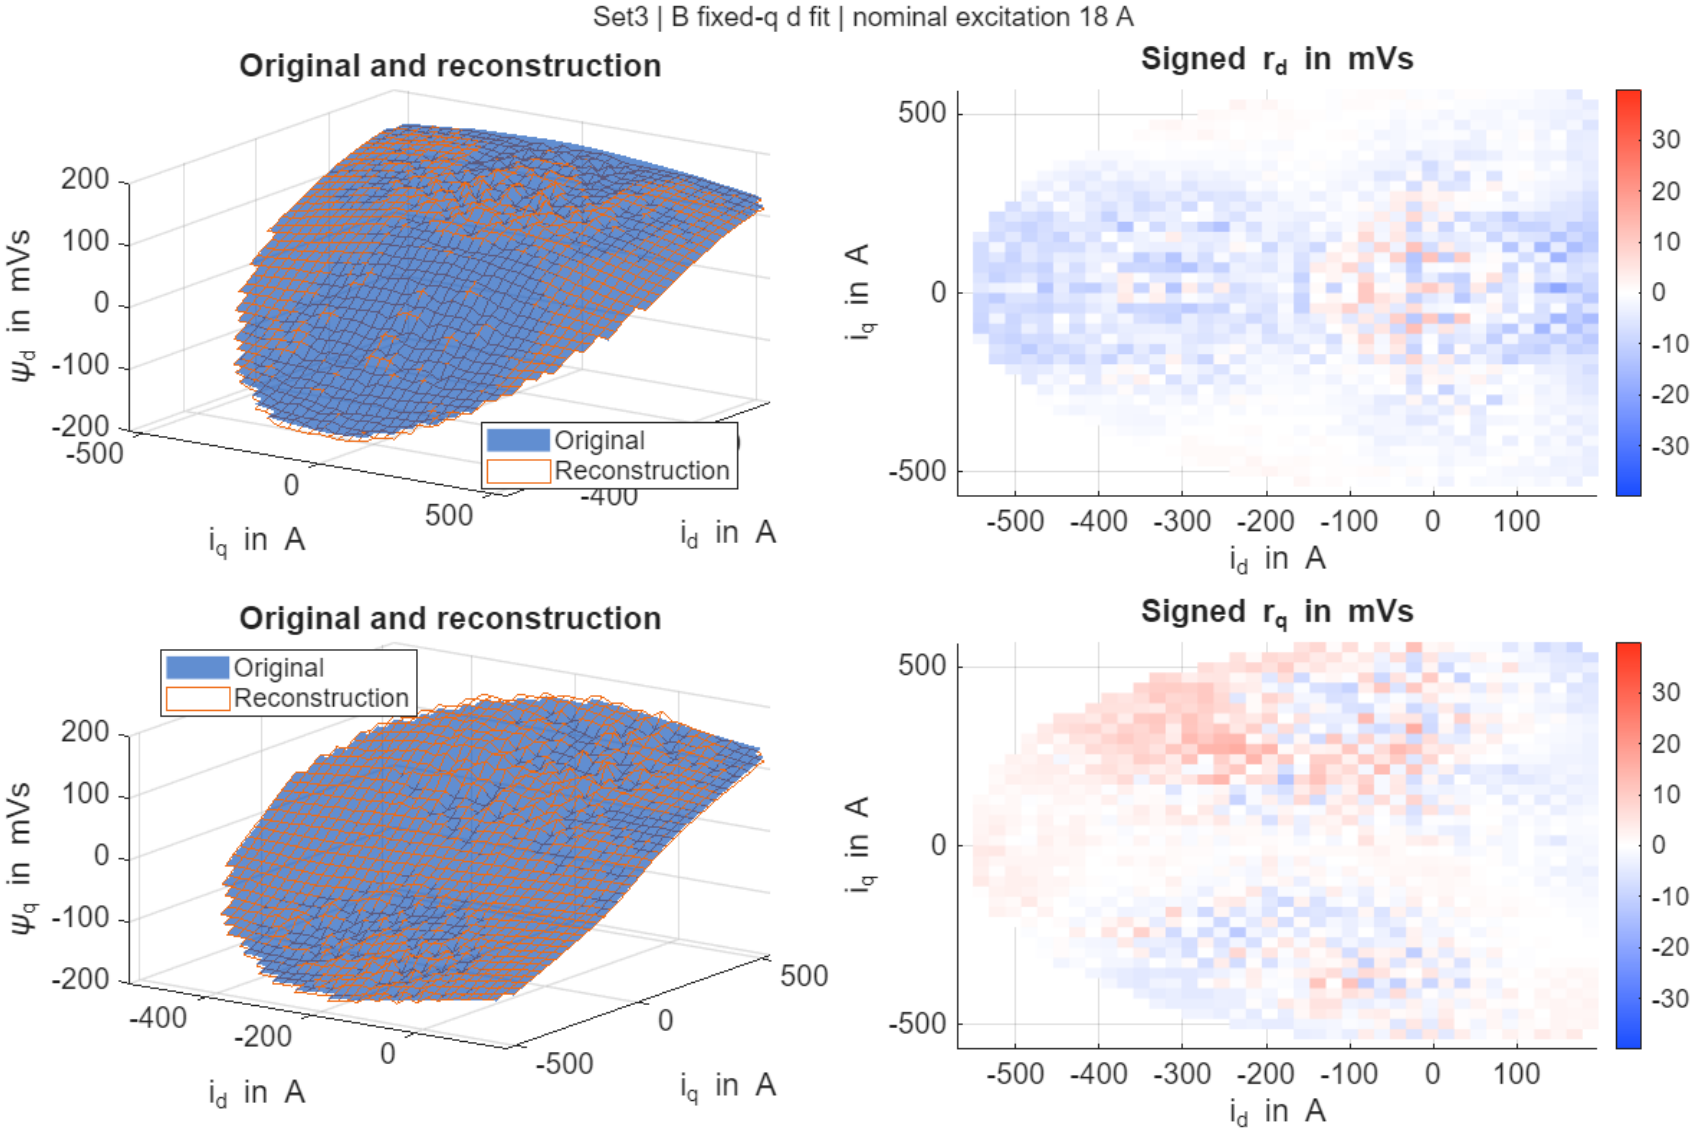

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method C, excitation 18 A

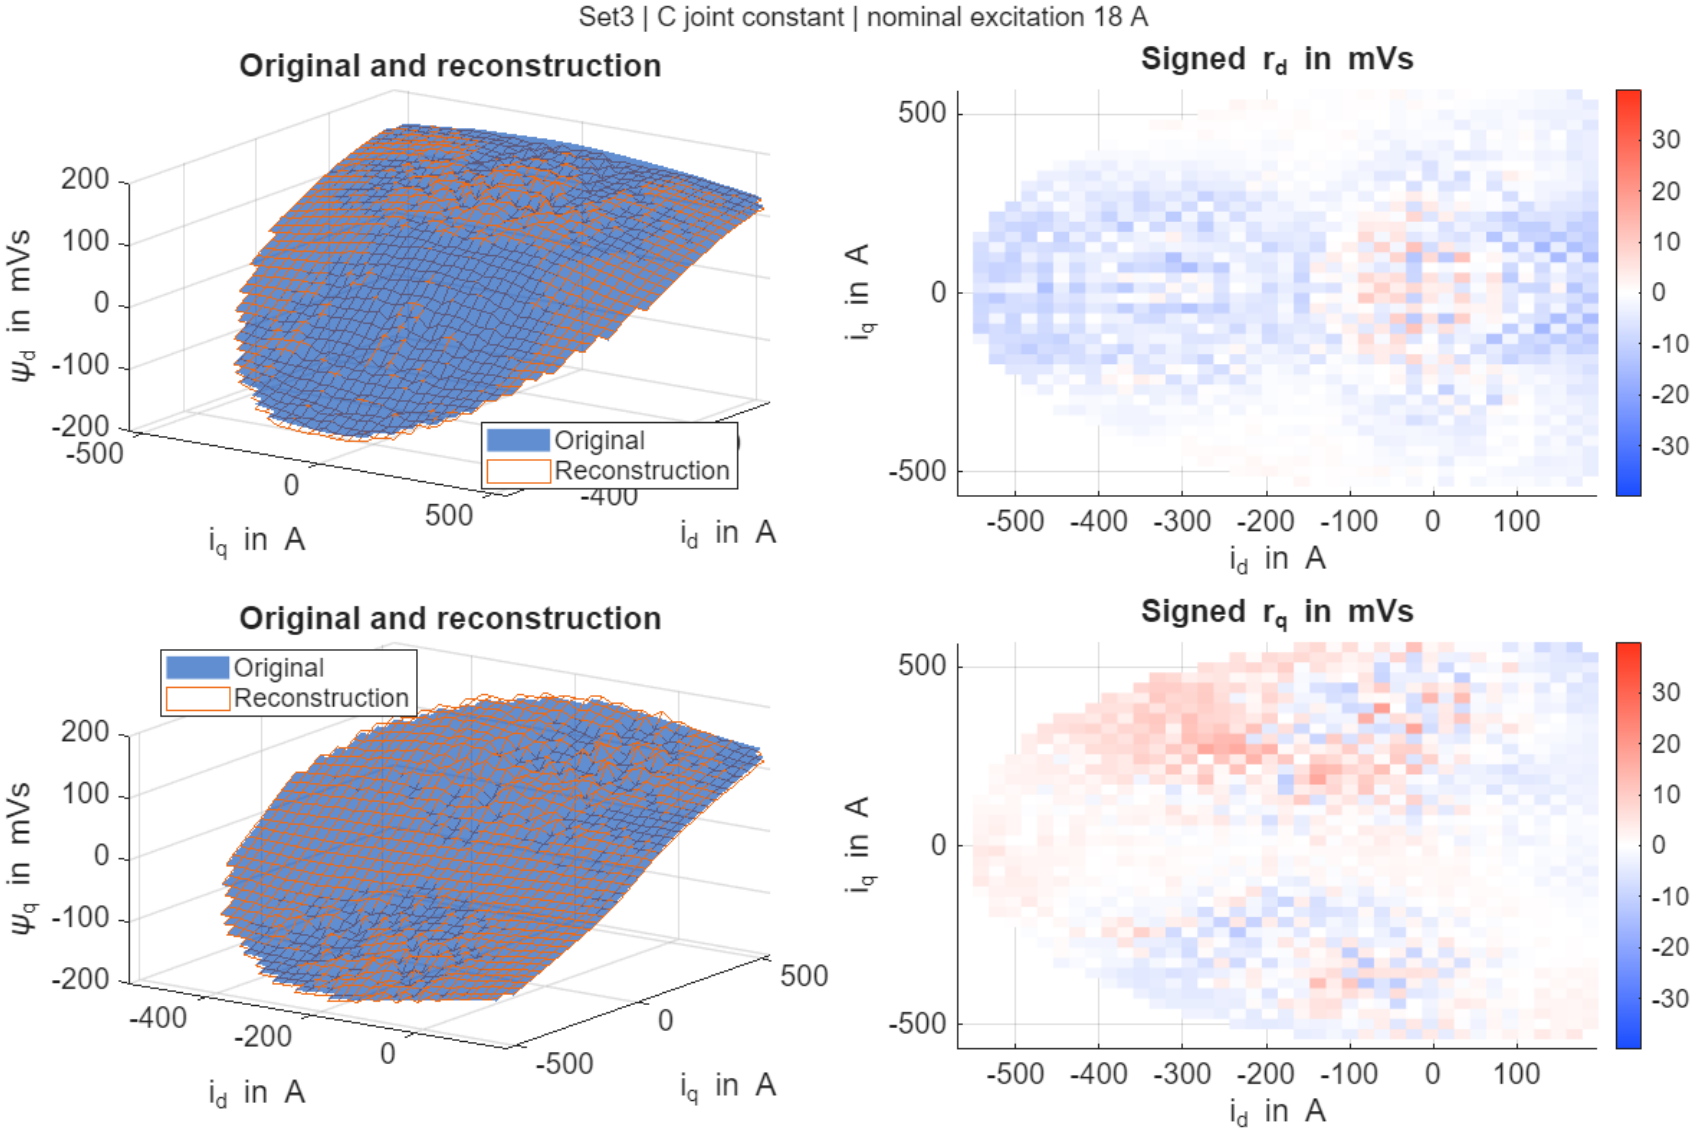

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method D, excitation 18 A

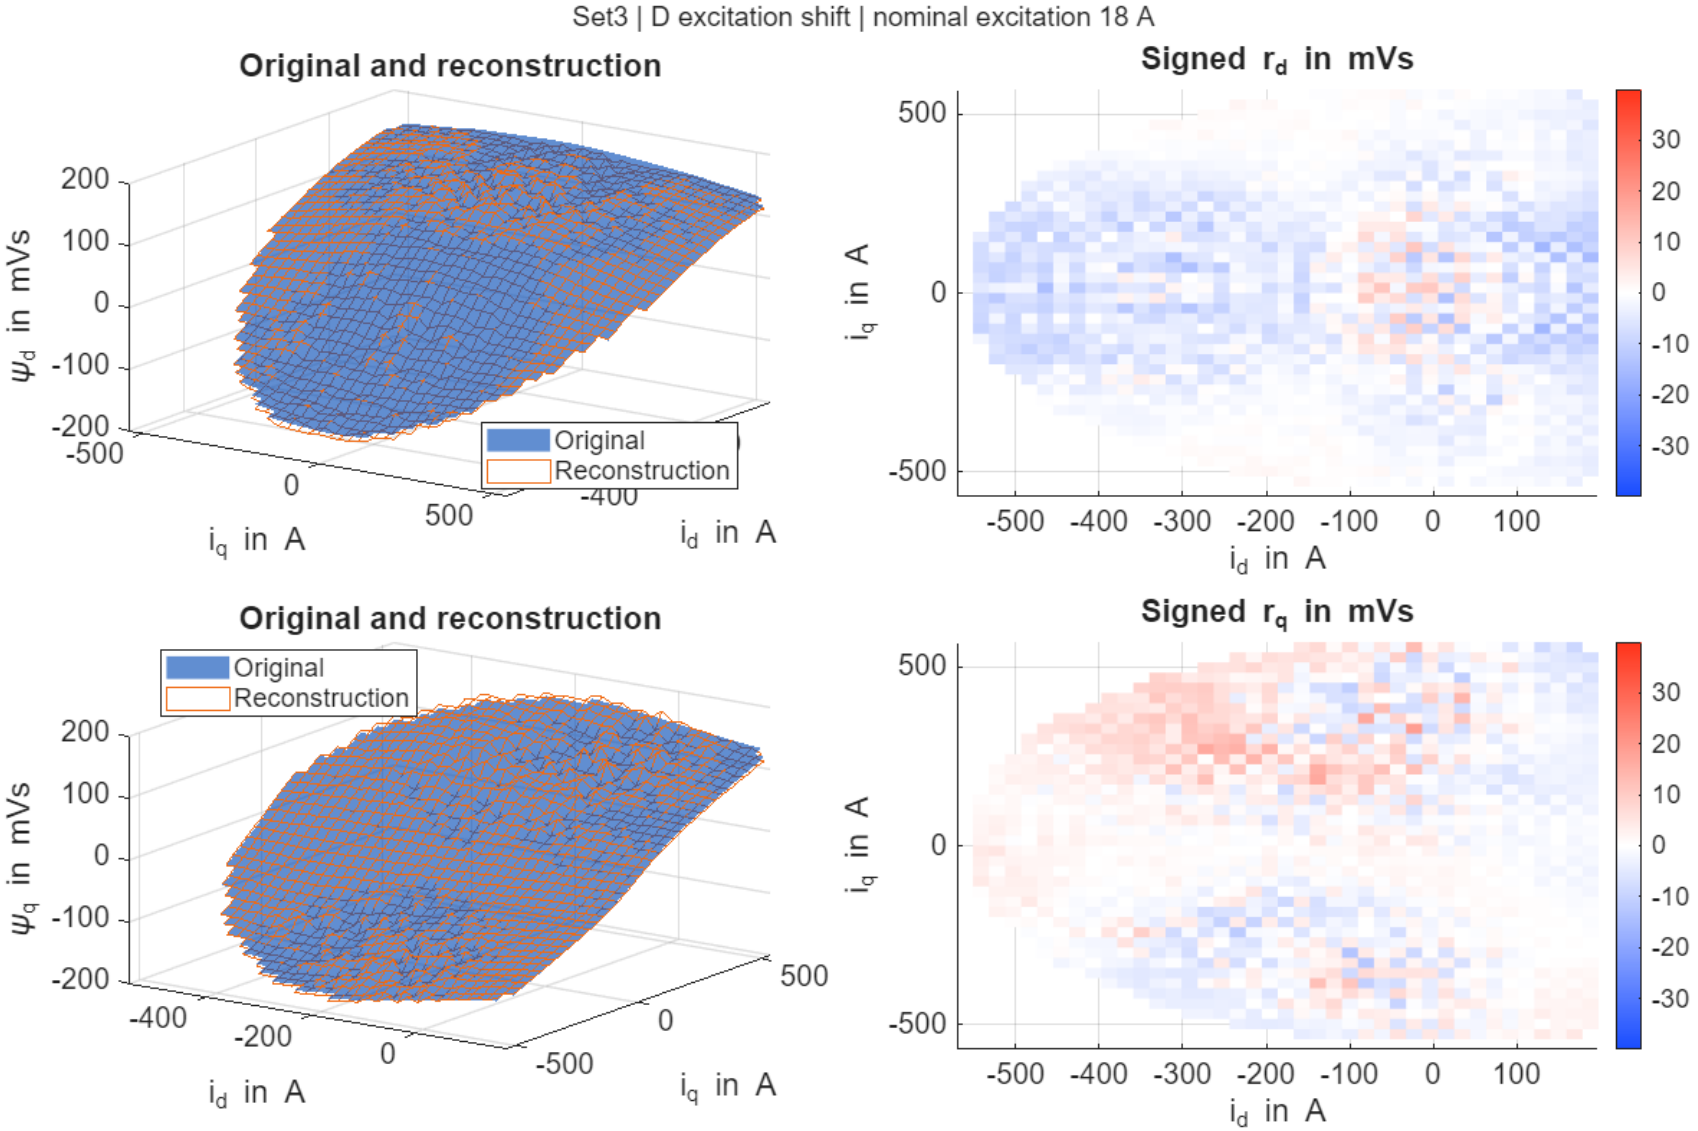

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method E, excitation 18 A

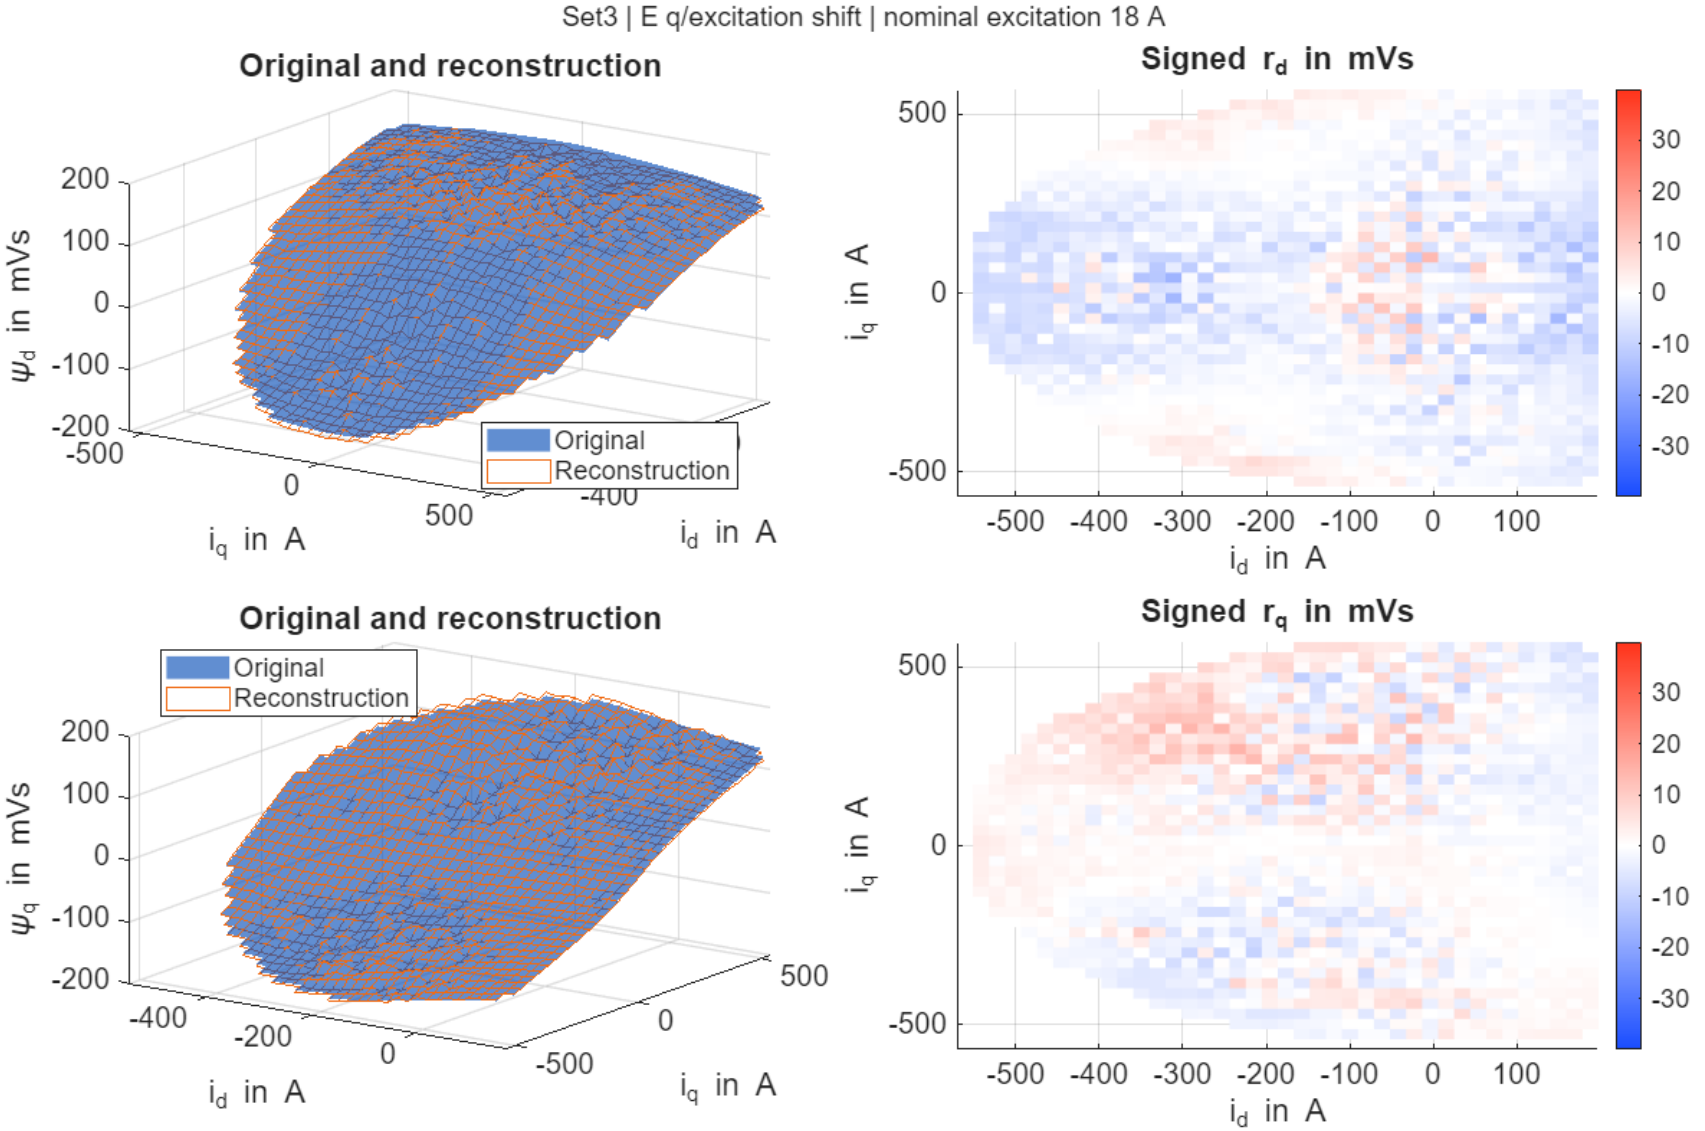

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method F, excitation 18 A

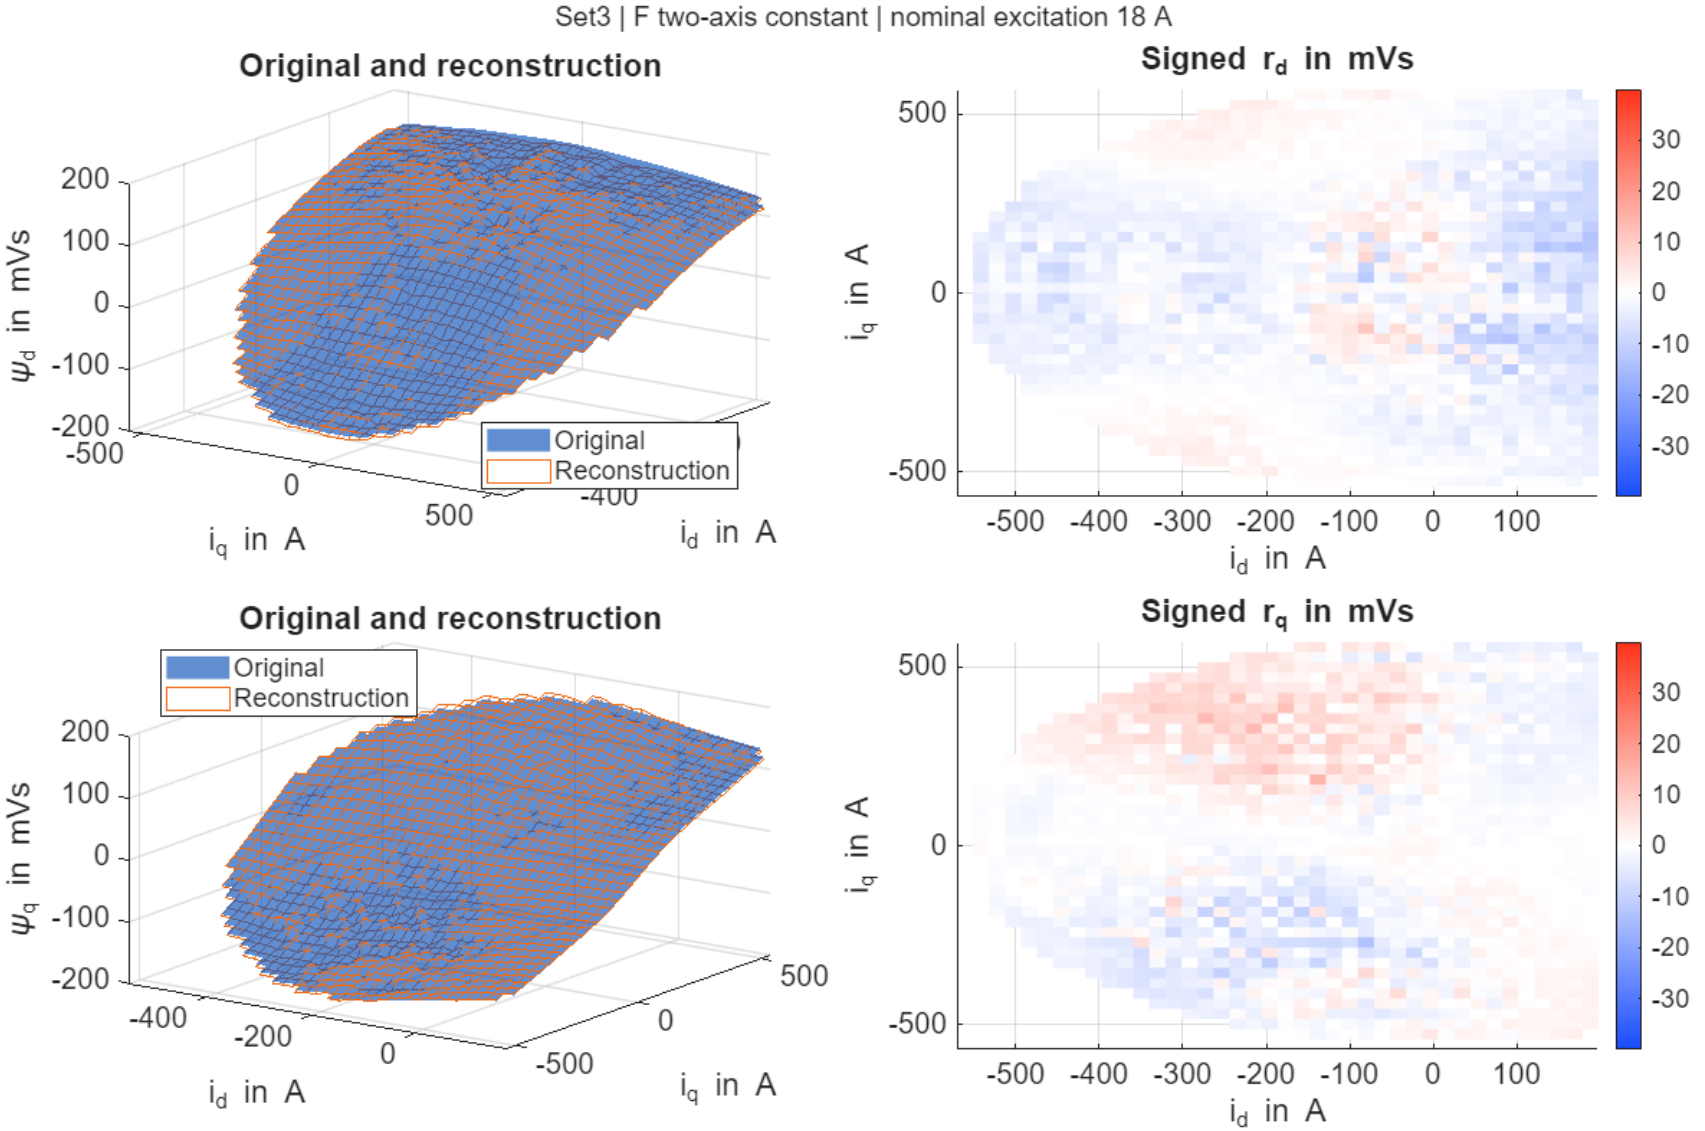

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method G, excitation 18 A

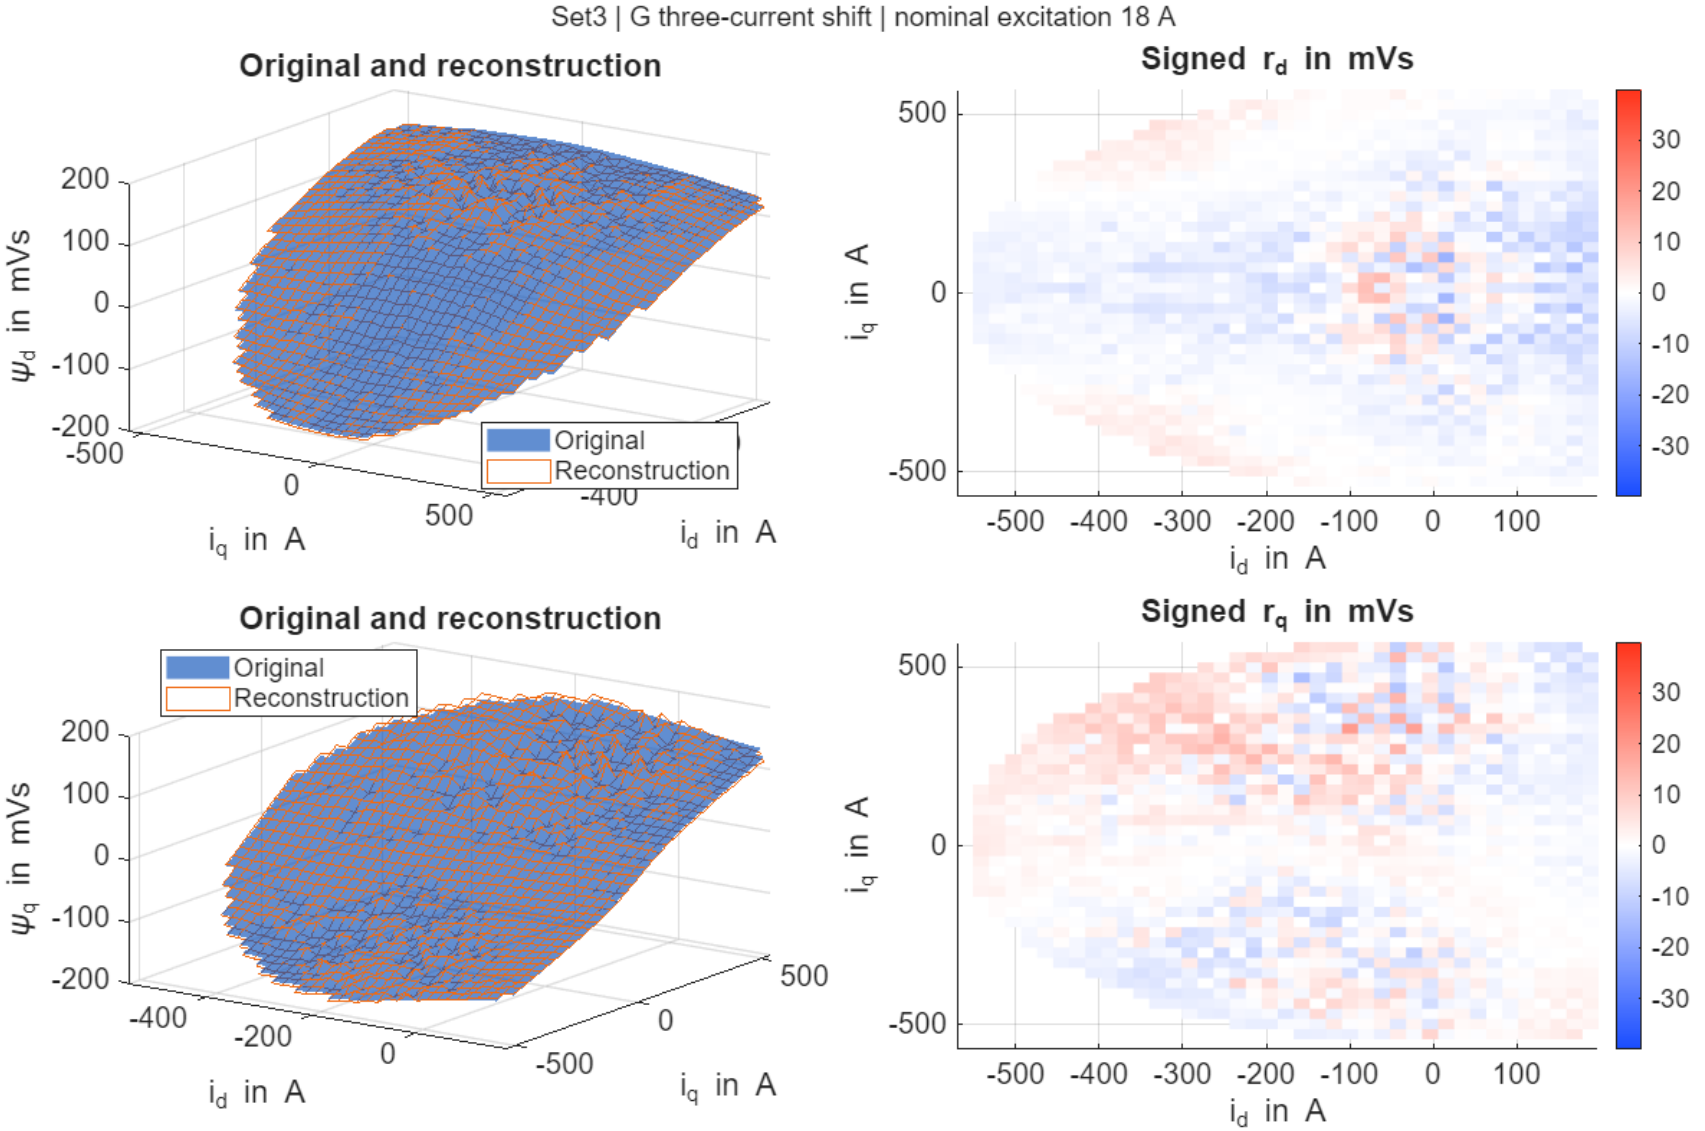

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method H, excitation 18 A

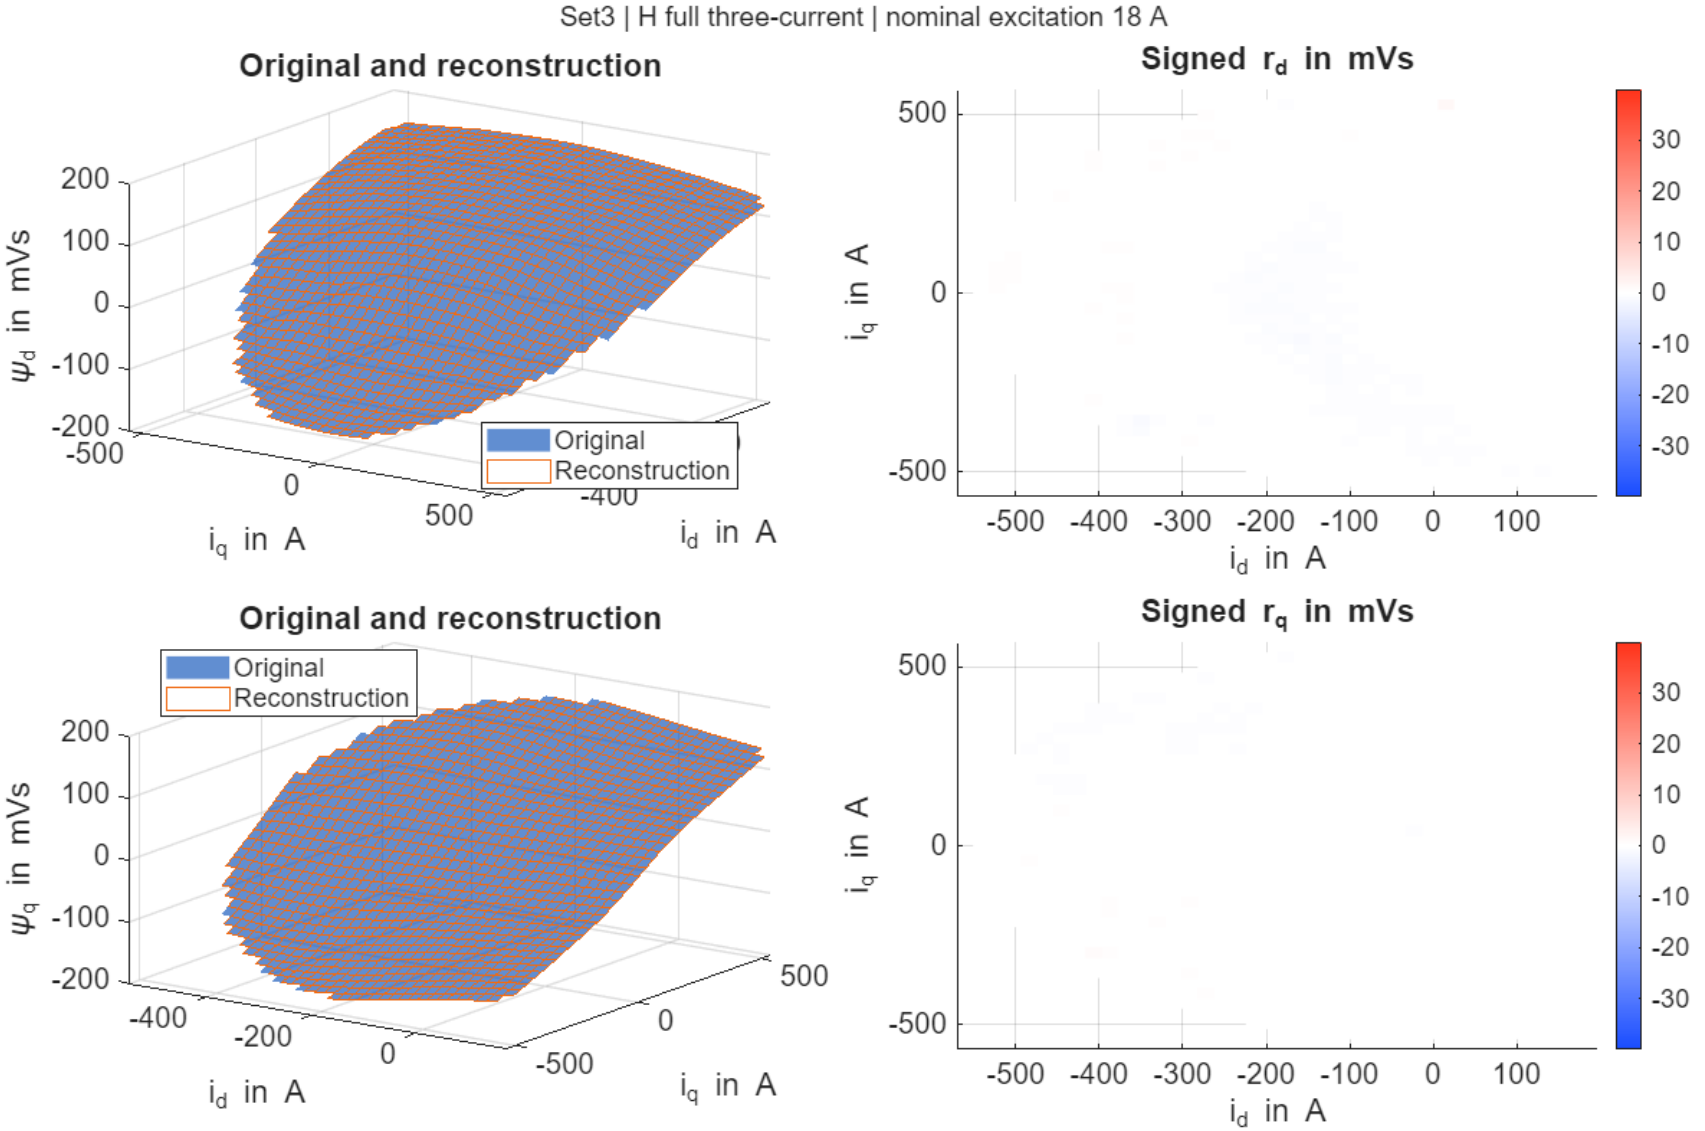

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method A, excitation 21 A

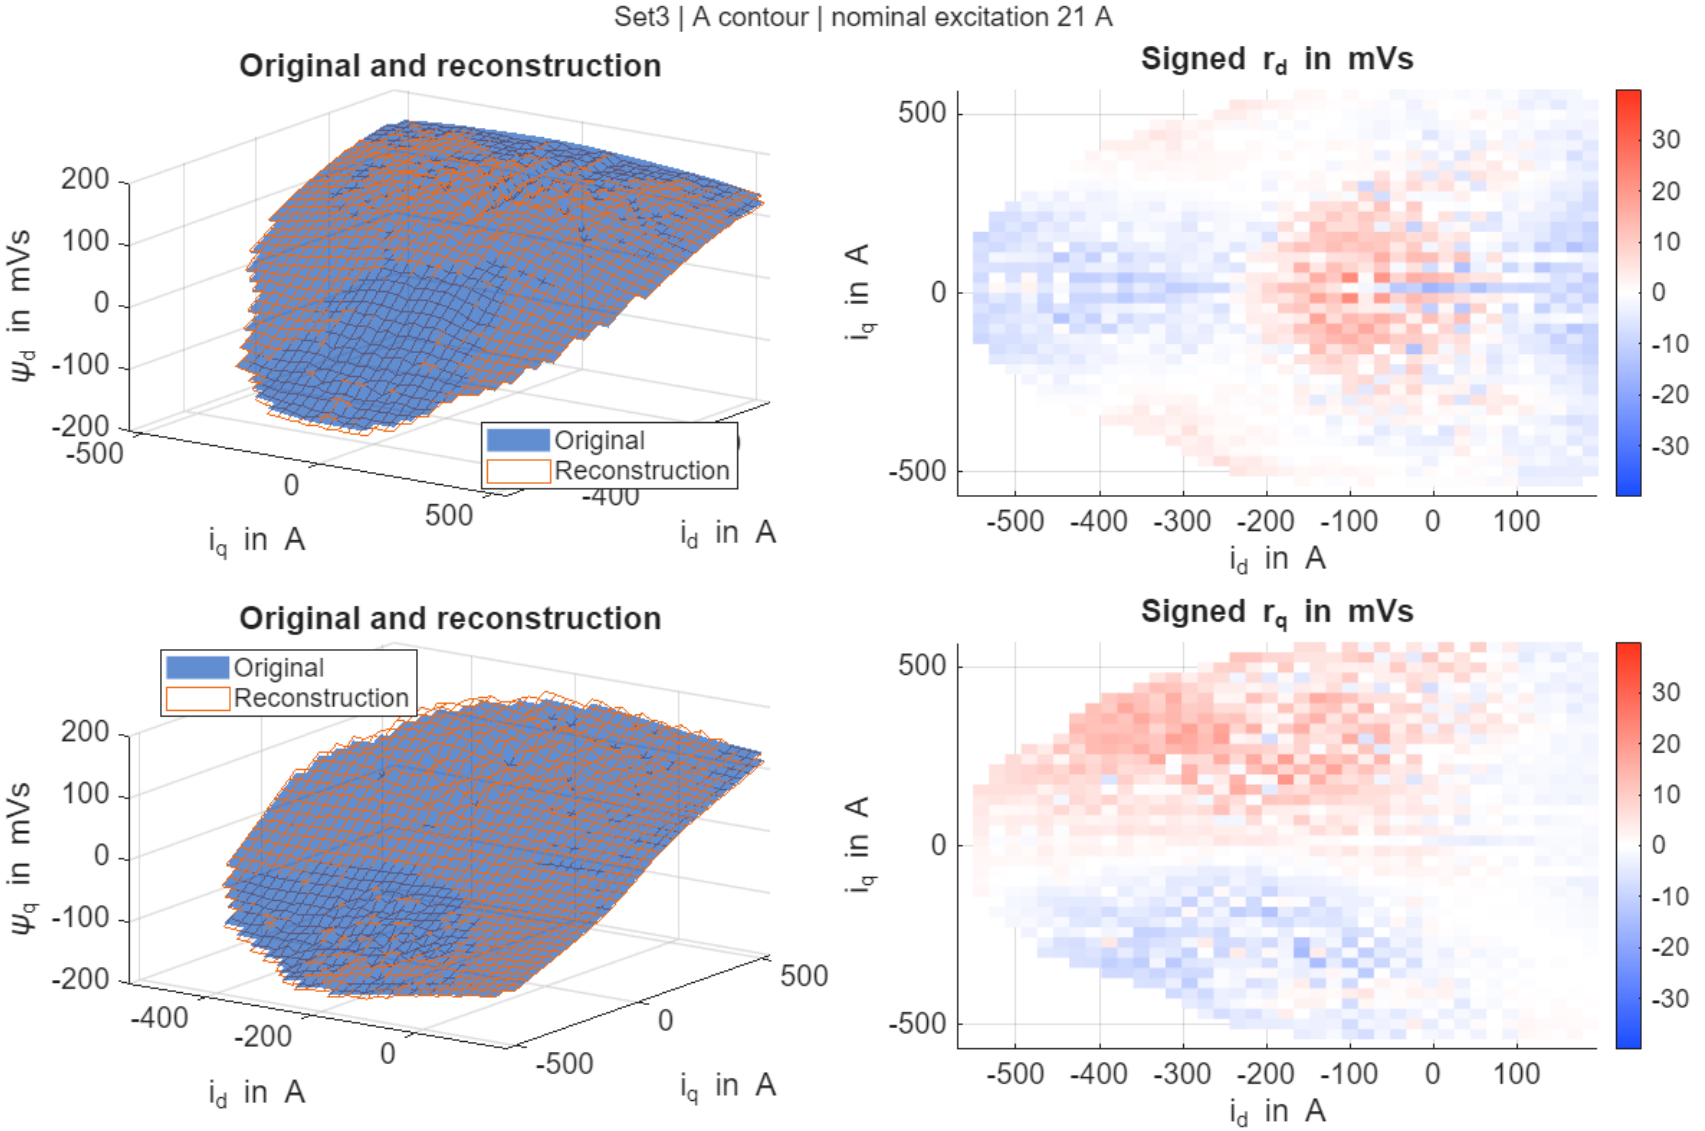

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method B, excitation 21 A

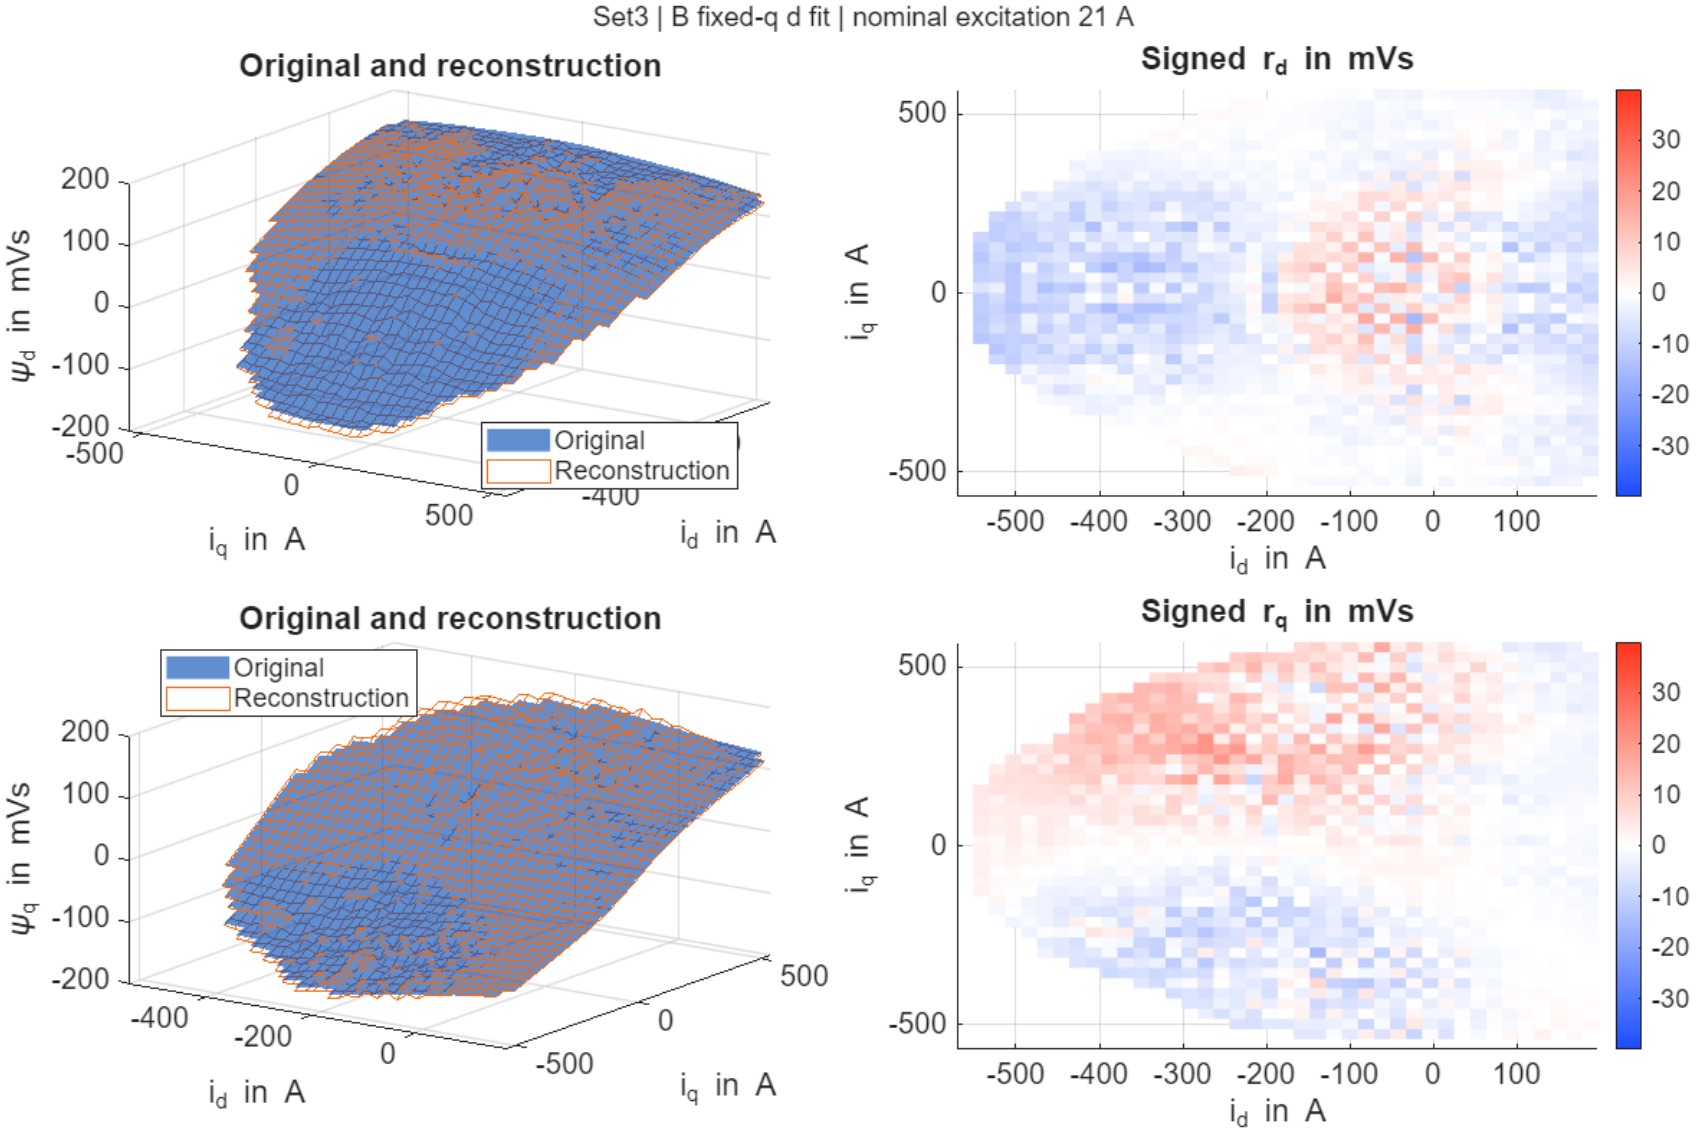

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method C, excitation 21 A

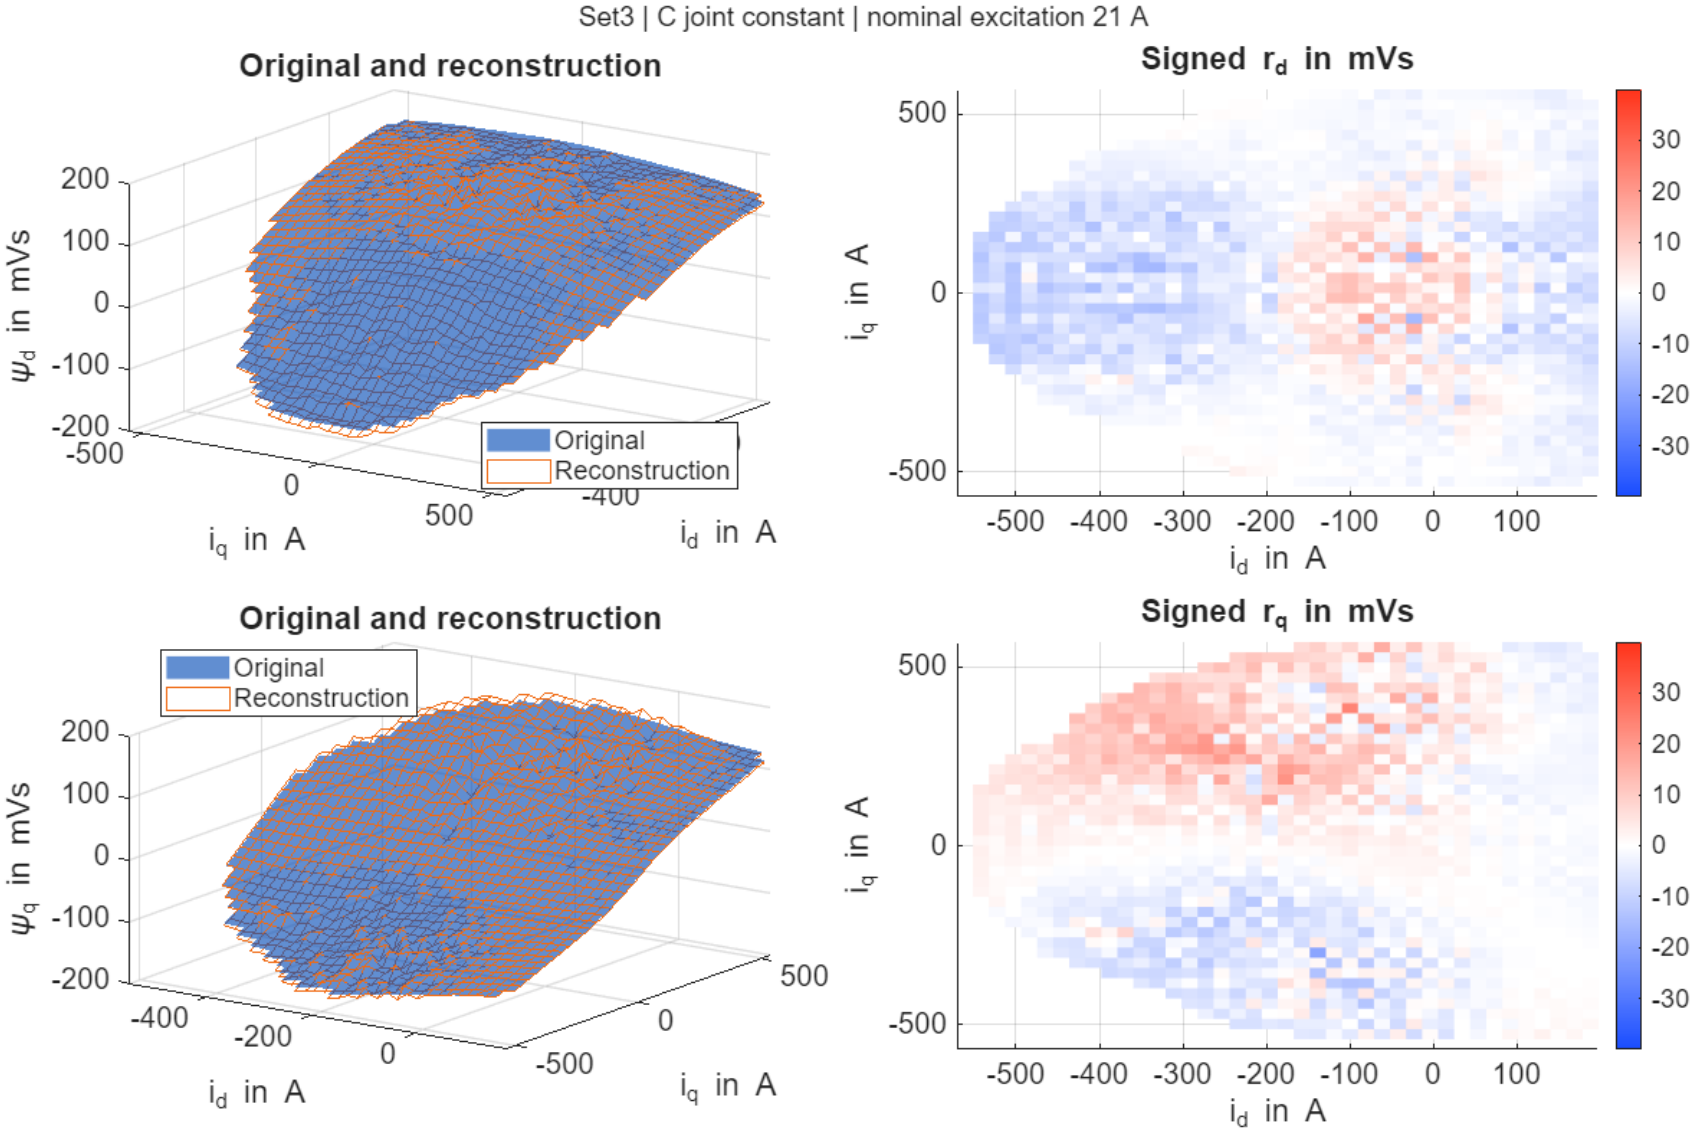

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method D, excitation 21 A

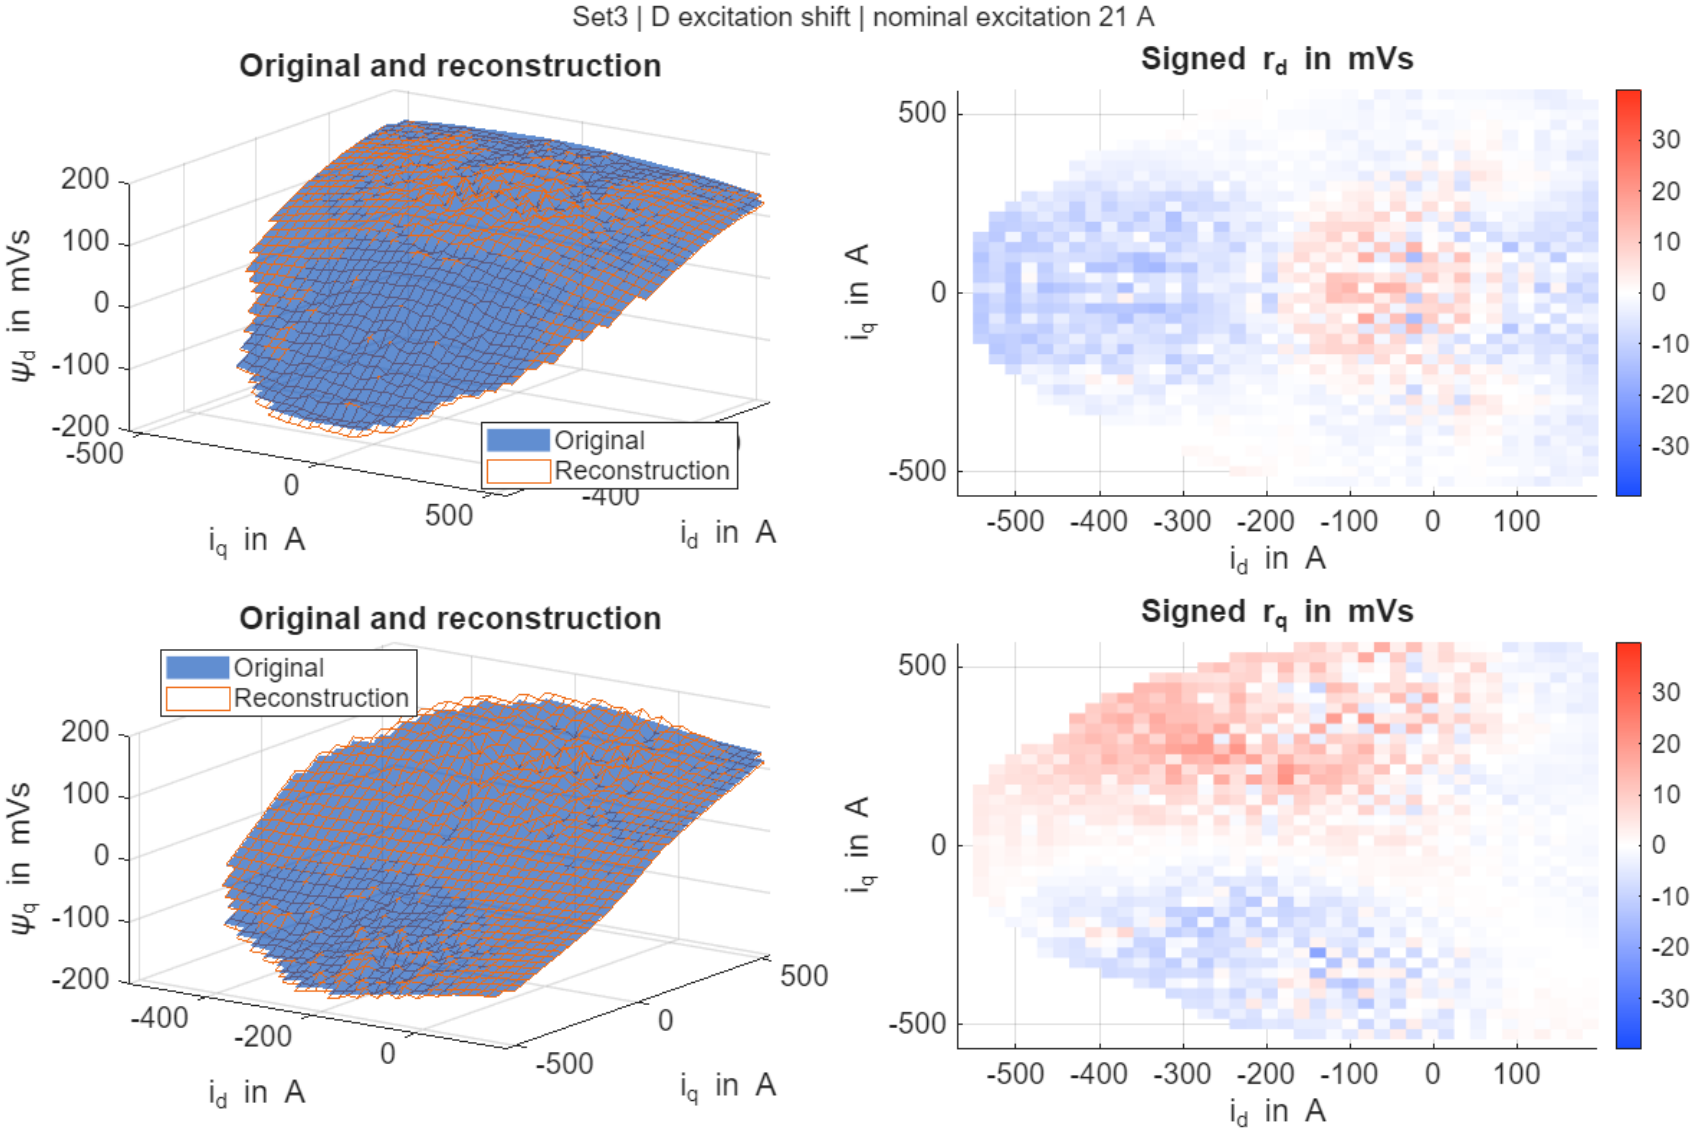

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method E, excitation 21 A

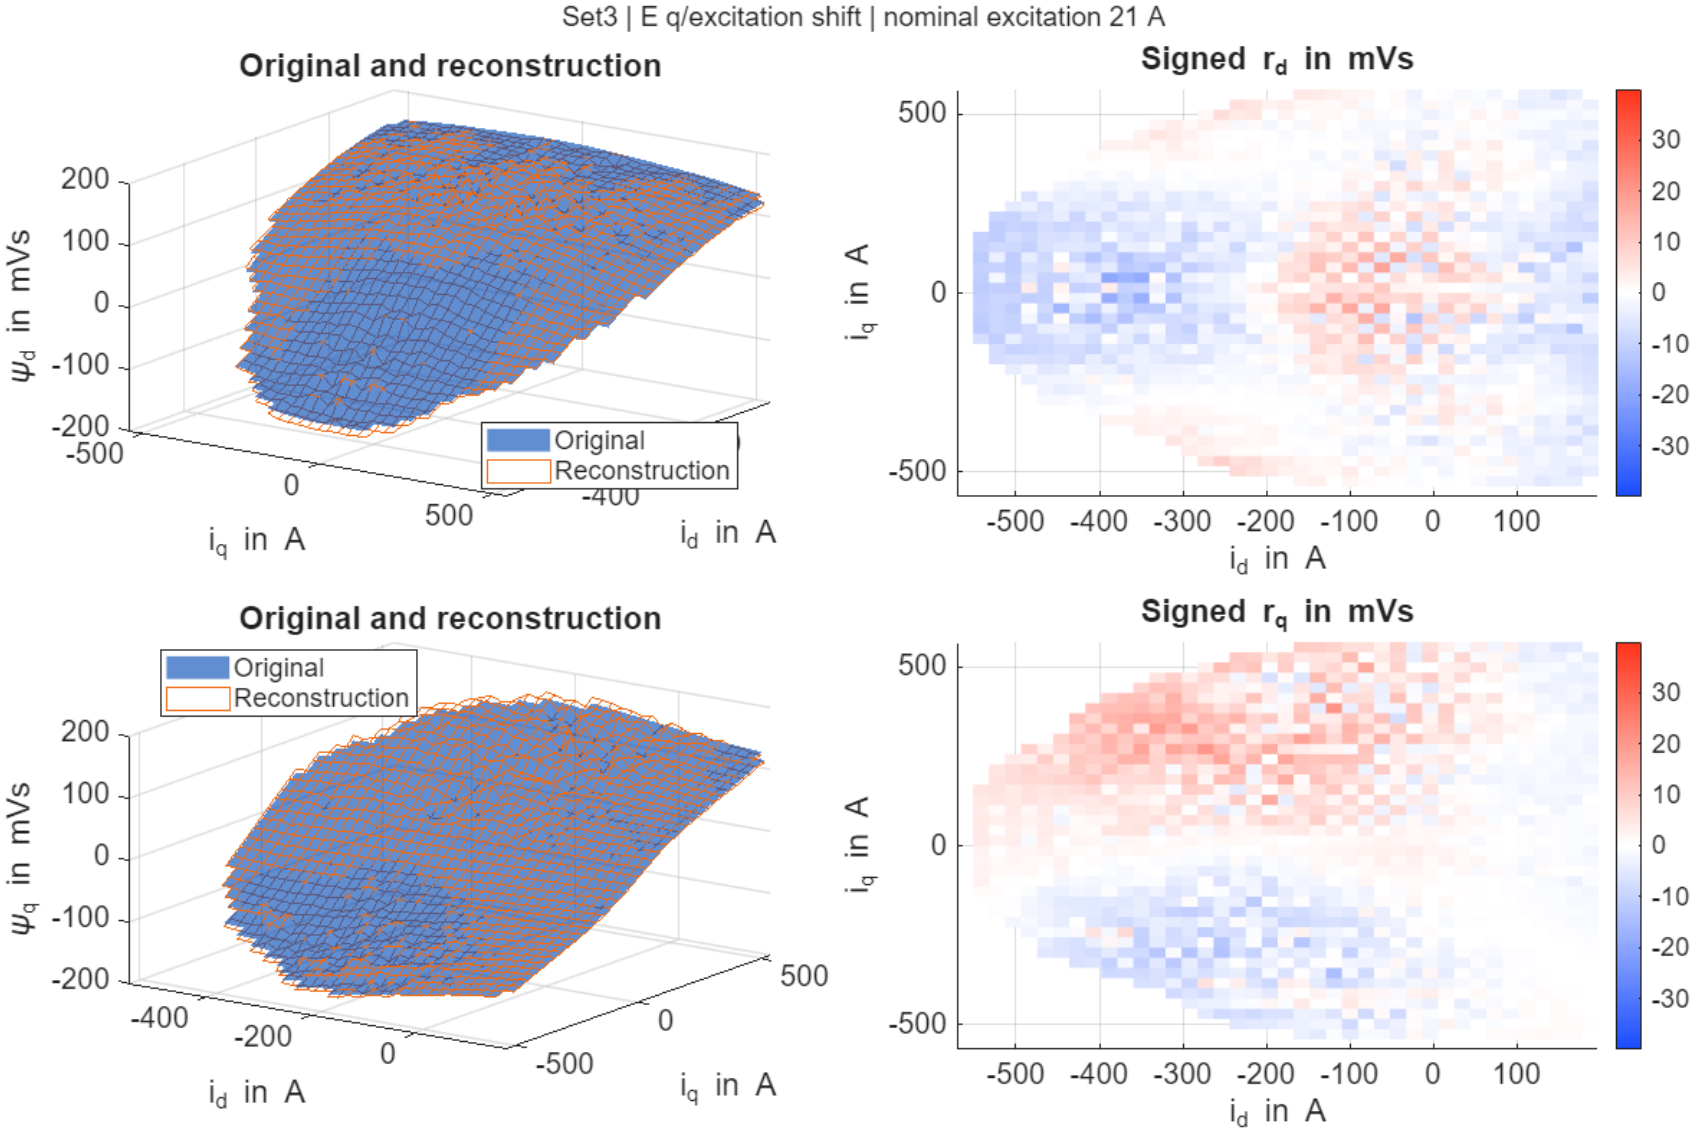

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method F, excitation 21 A

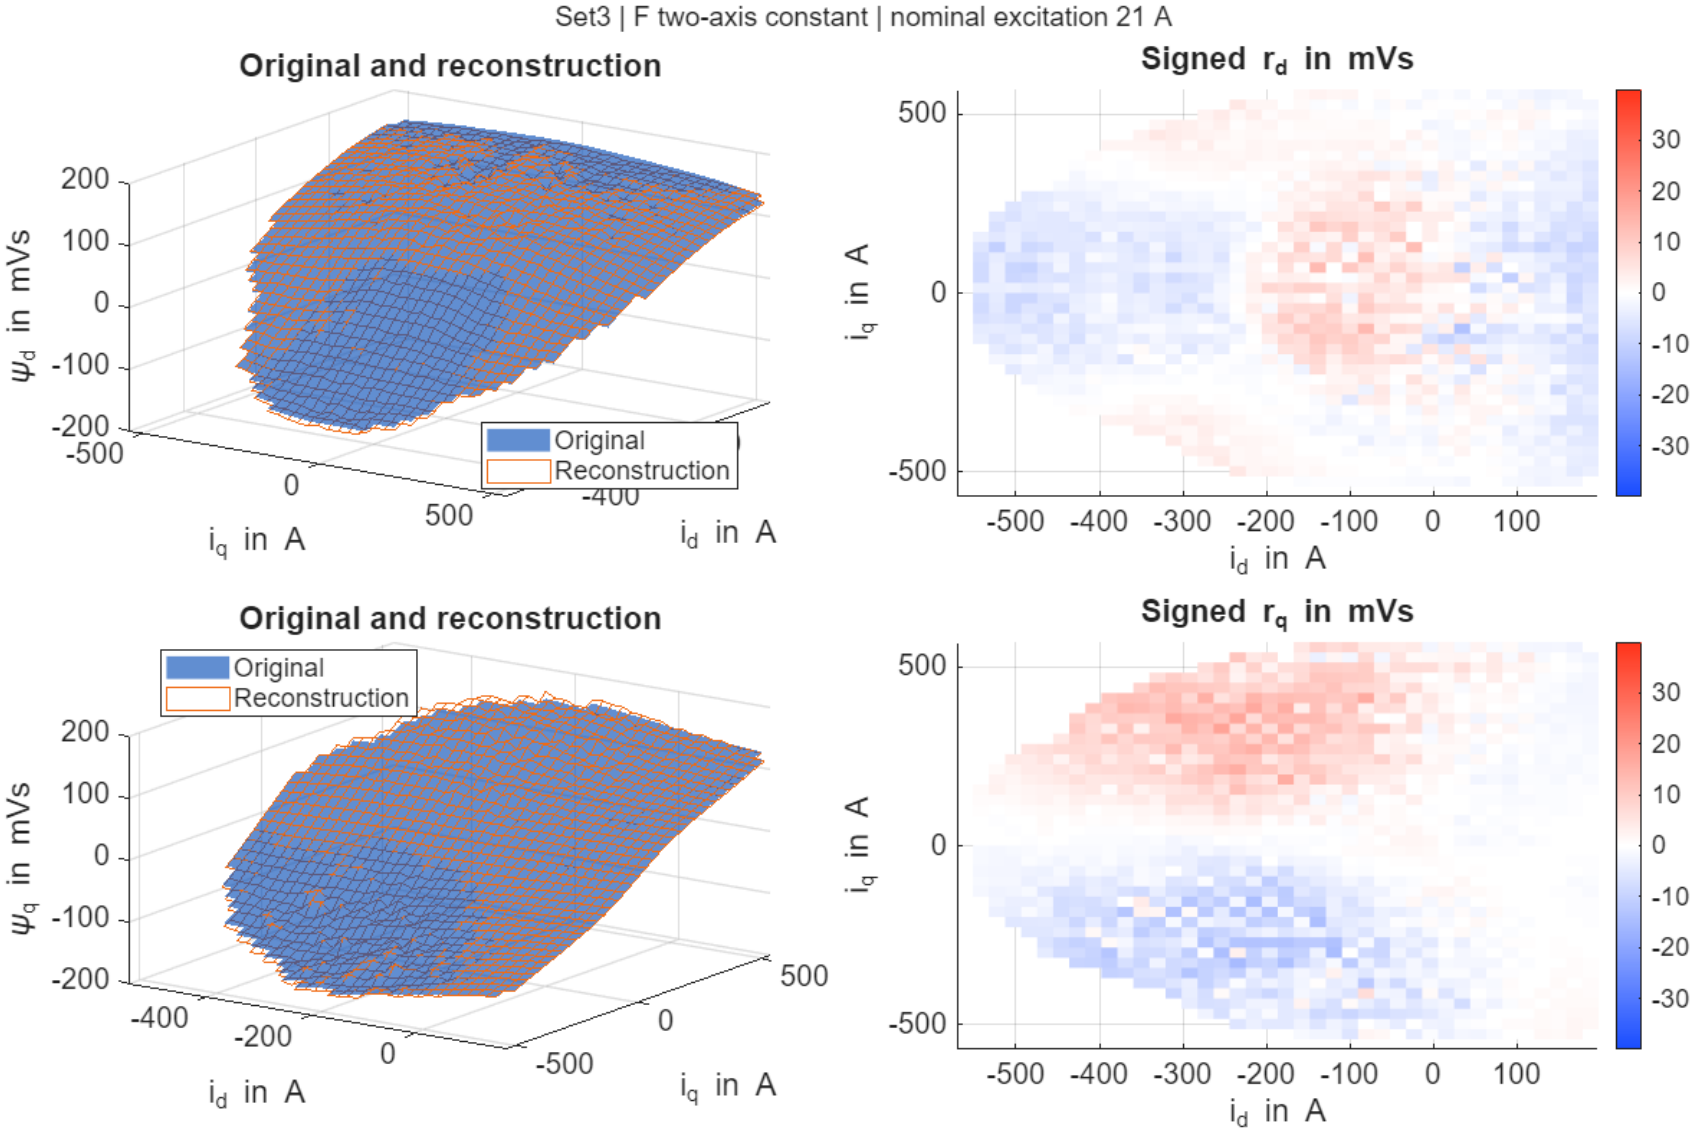

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method G, excitation 21 A

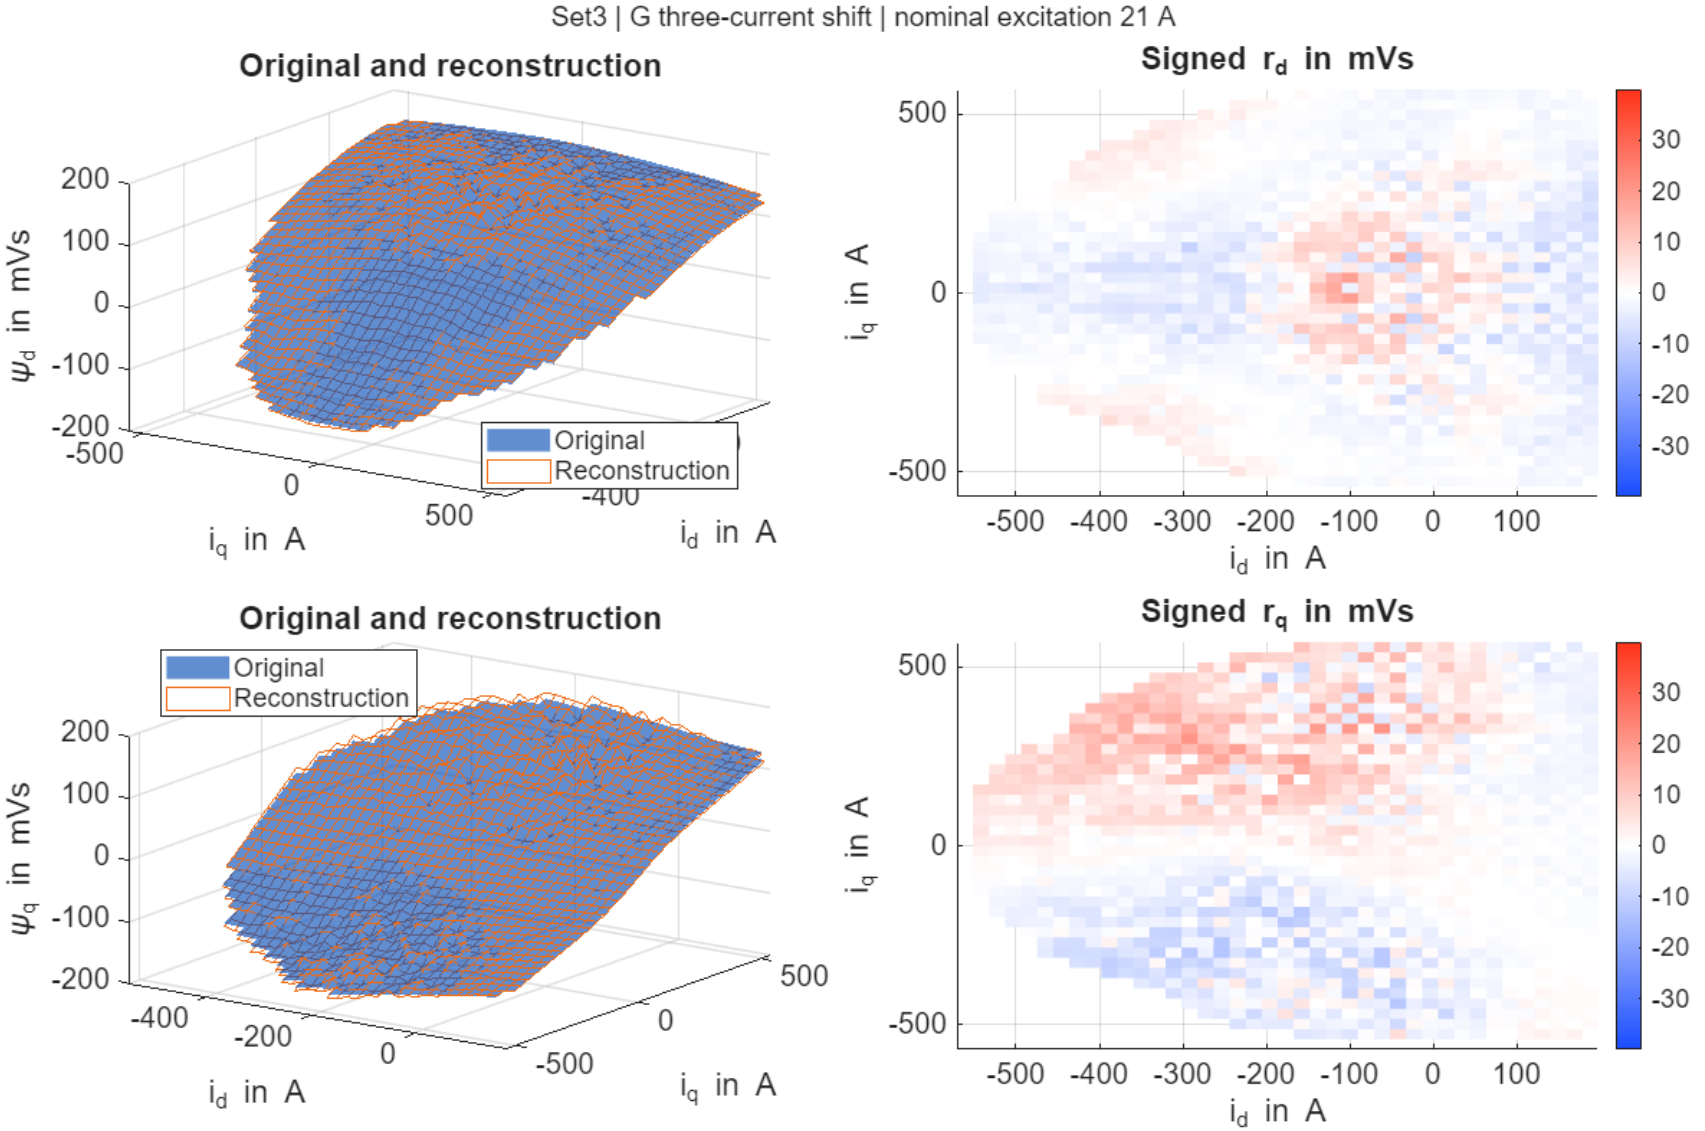

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method H, excitation 21 A

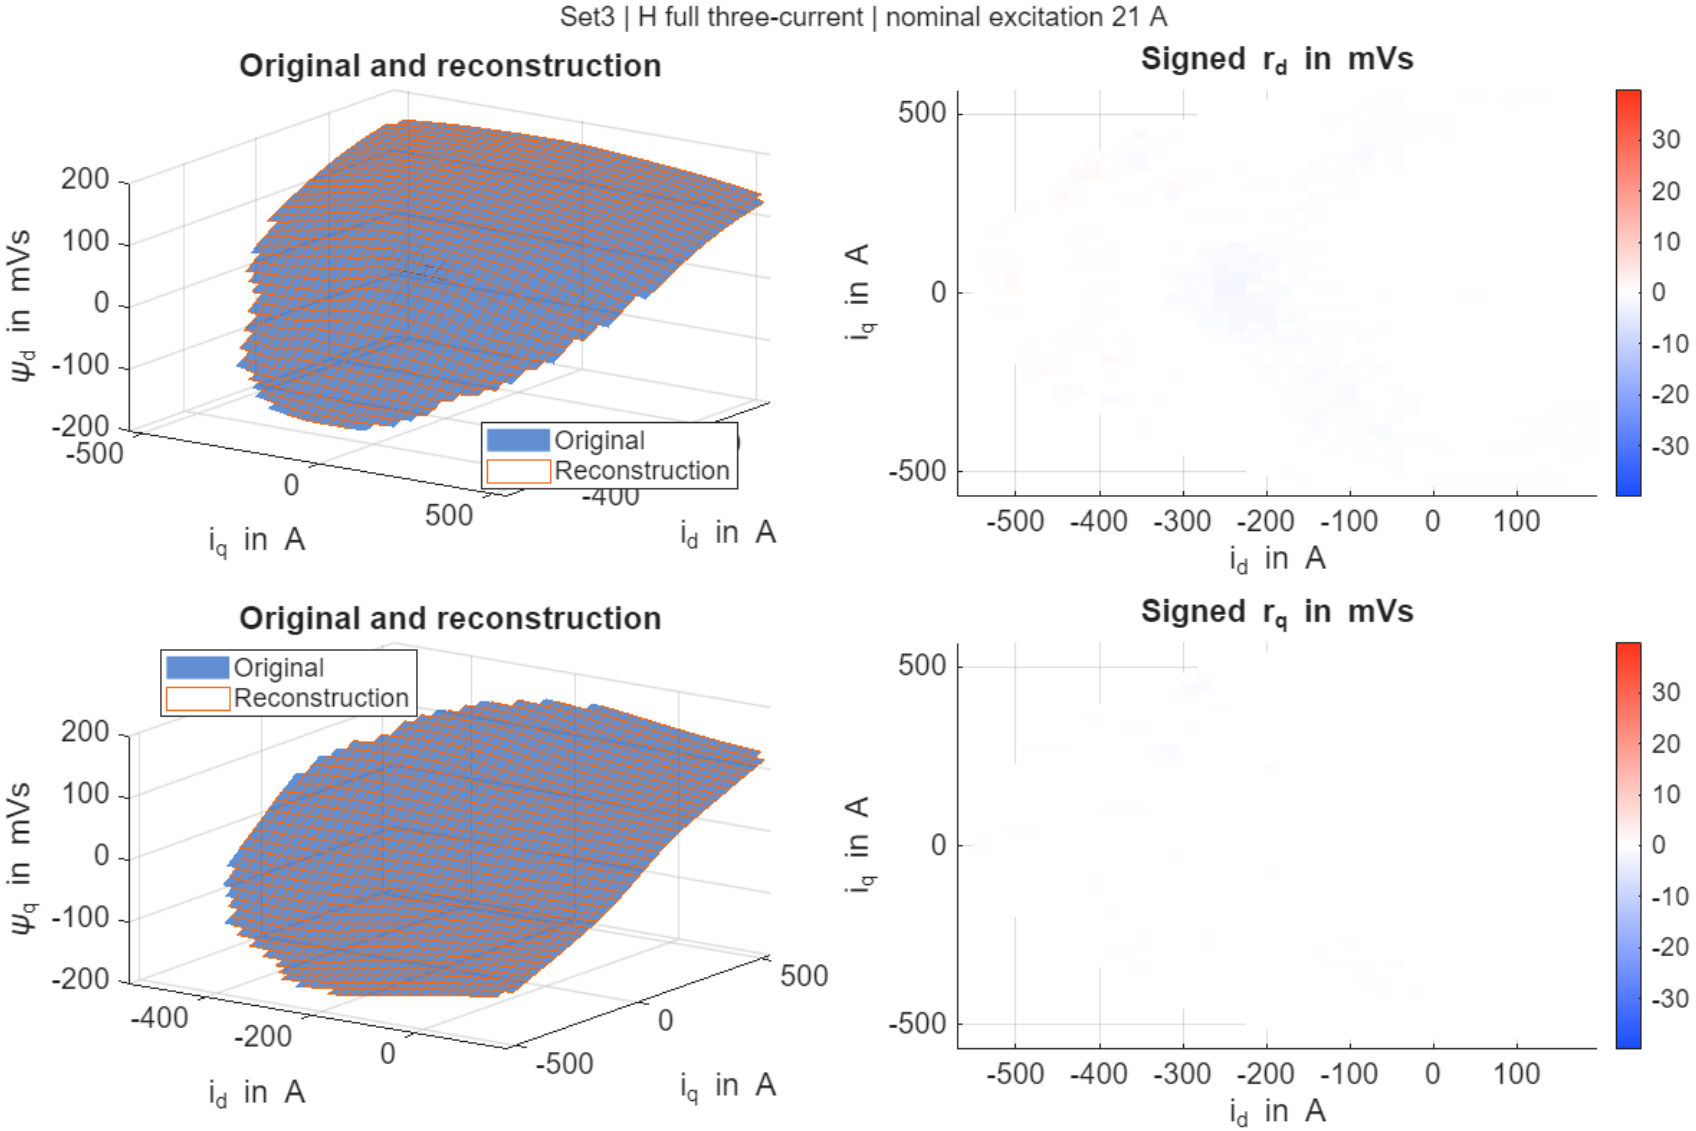

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method A, excitation 24 A

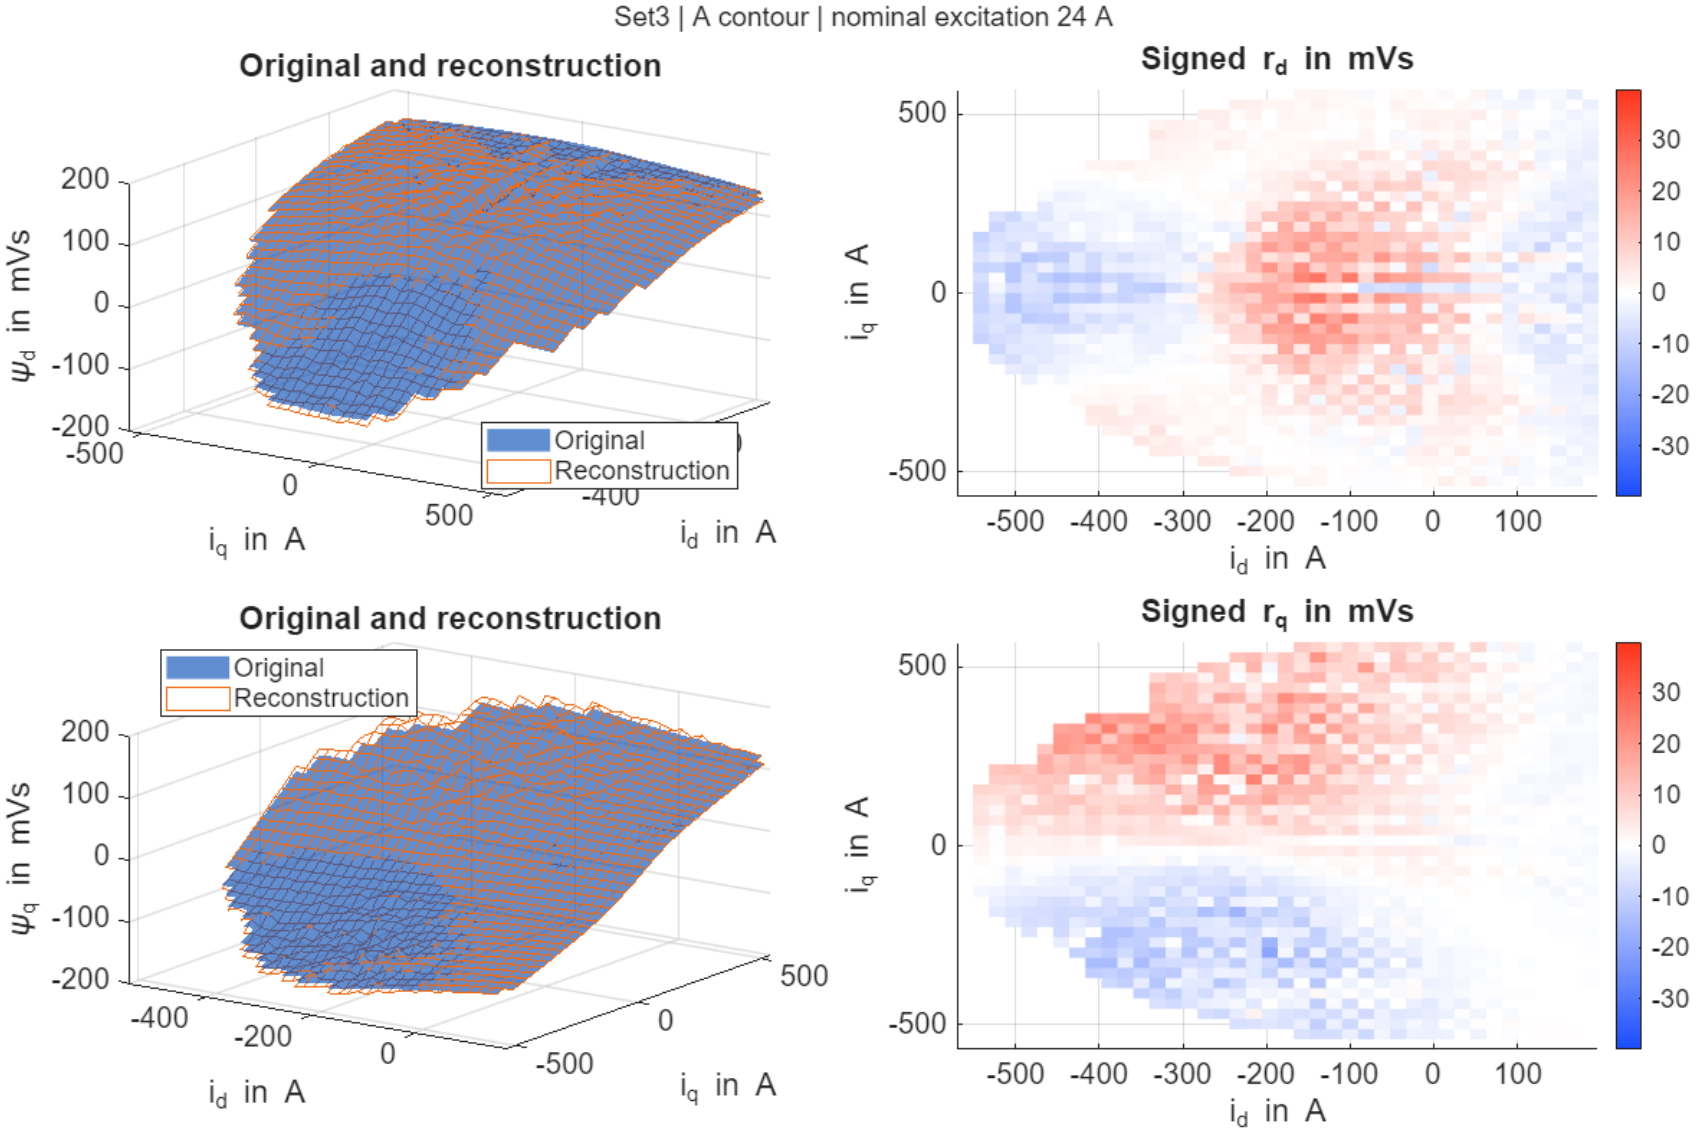

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method B, excitation 24 A

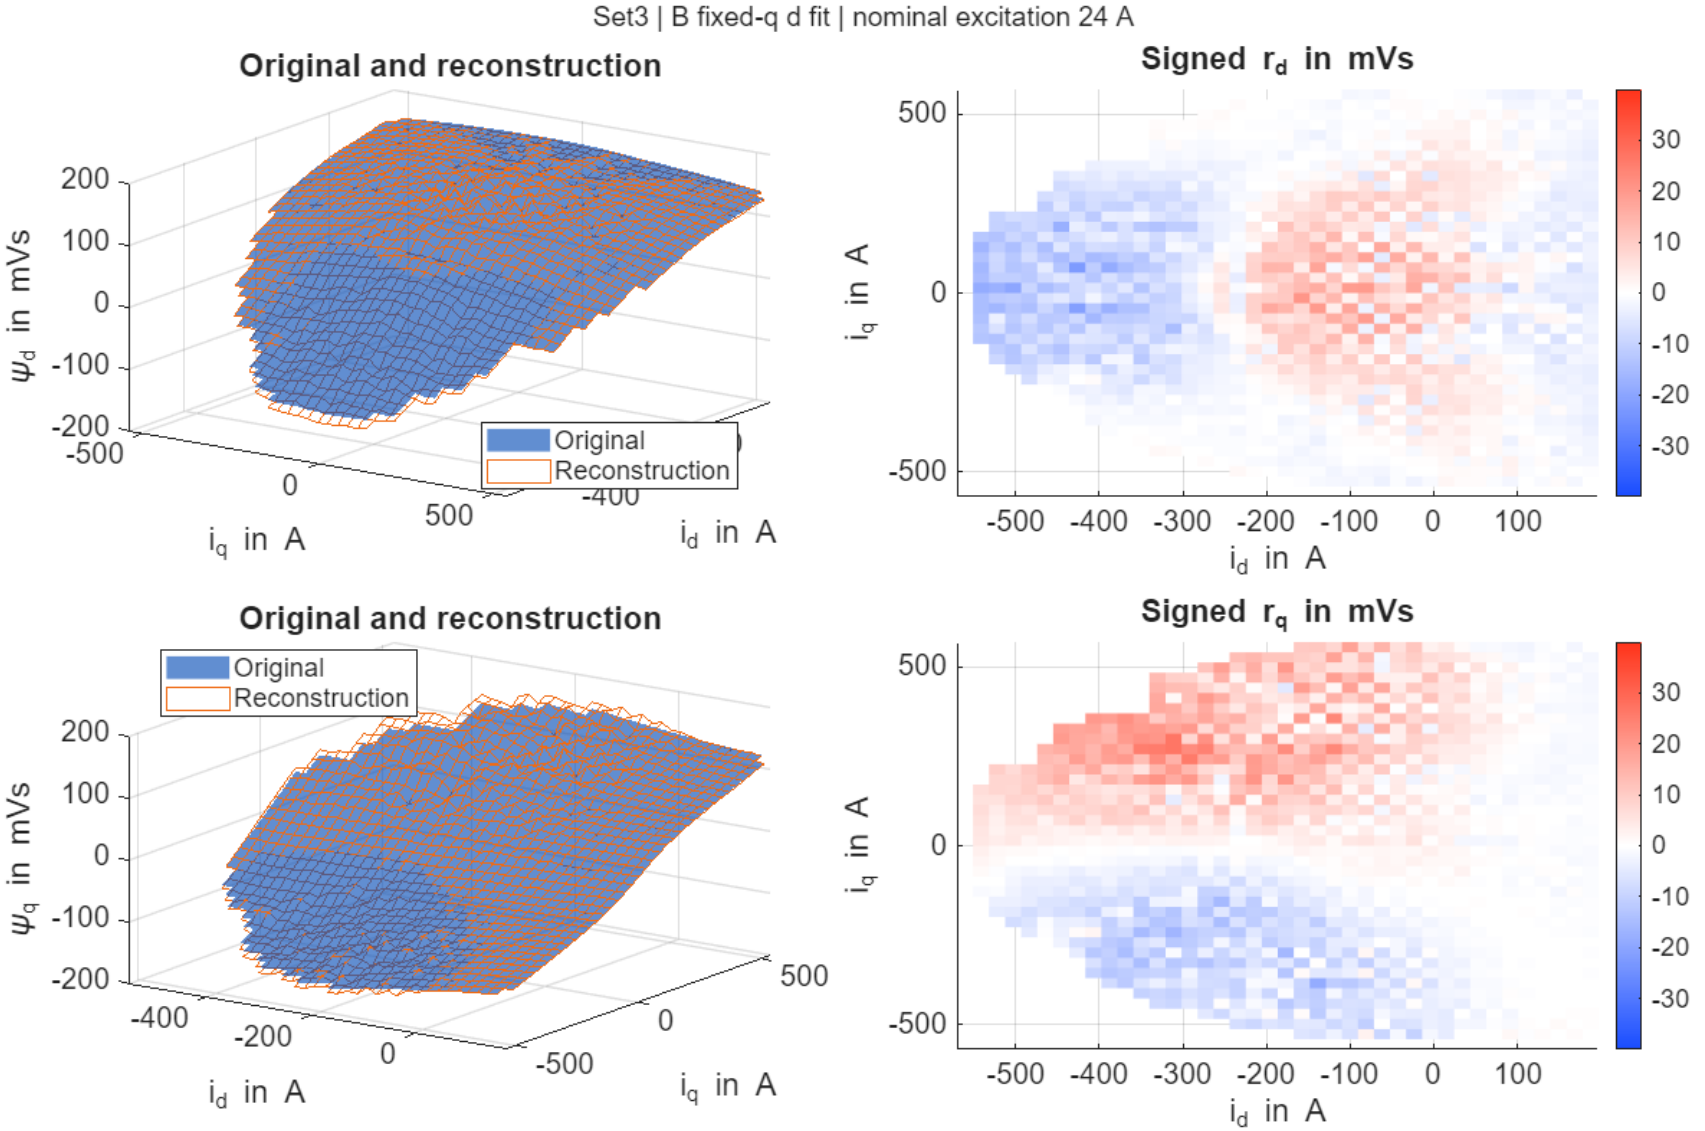

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method C, excitation 24 A

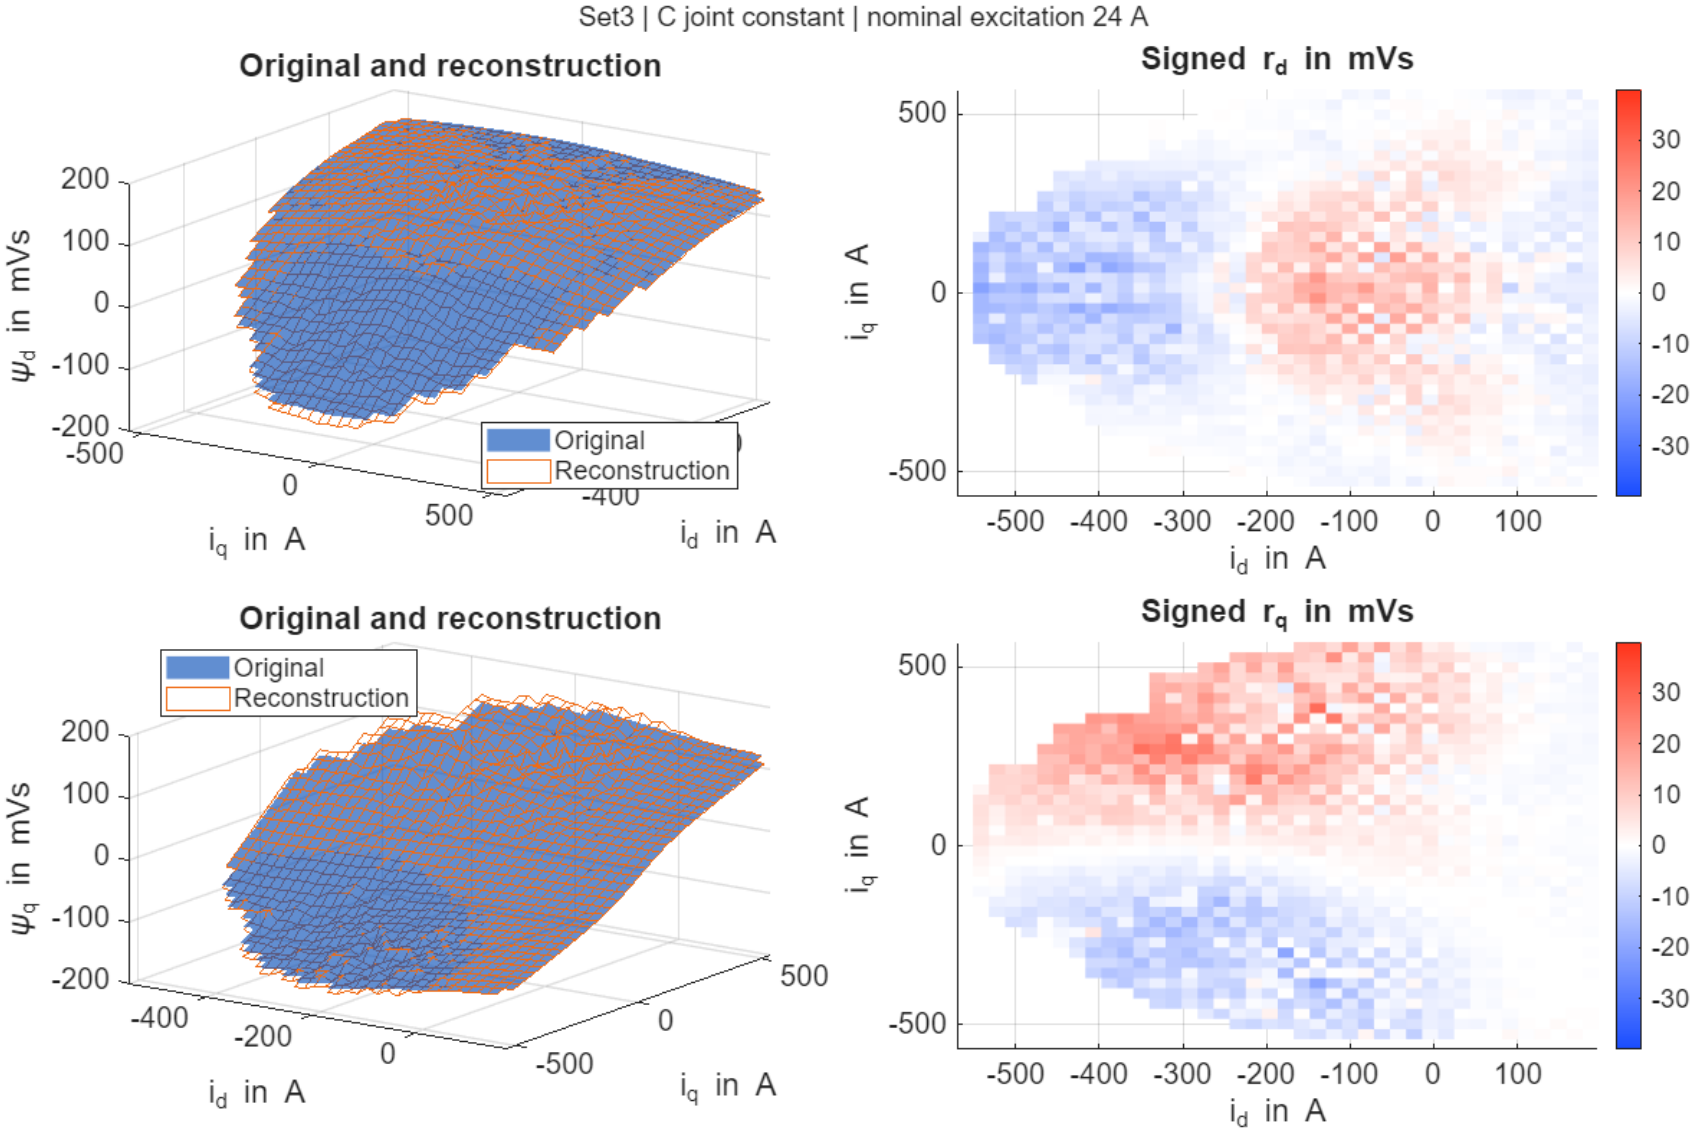

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method D, excitation 24 A

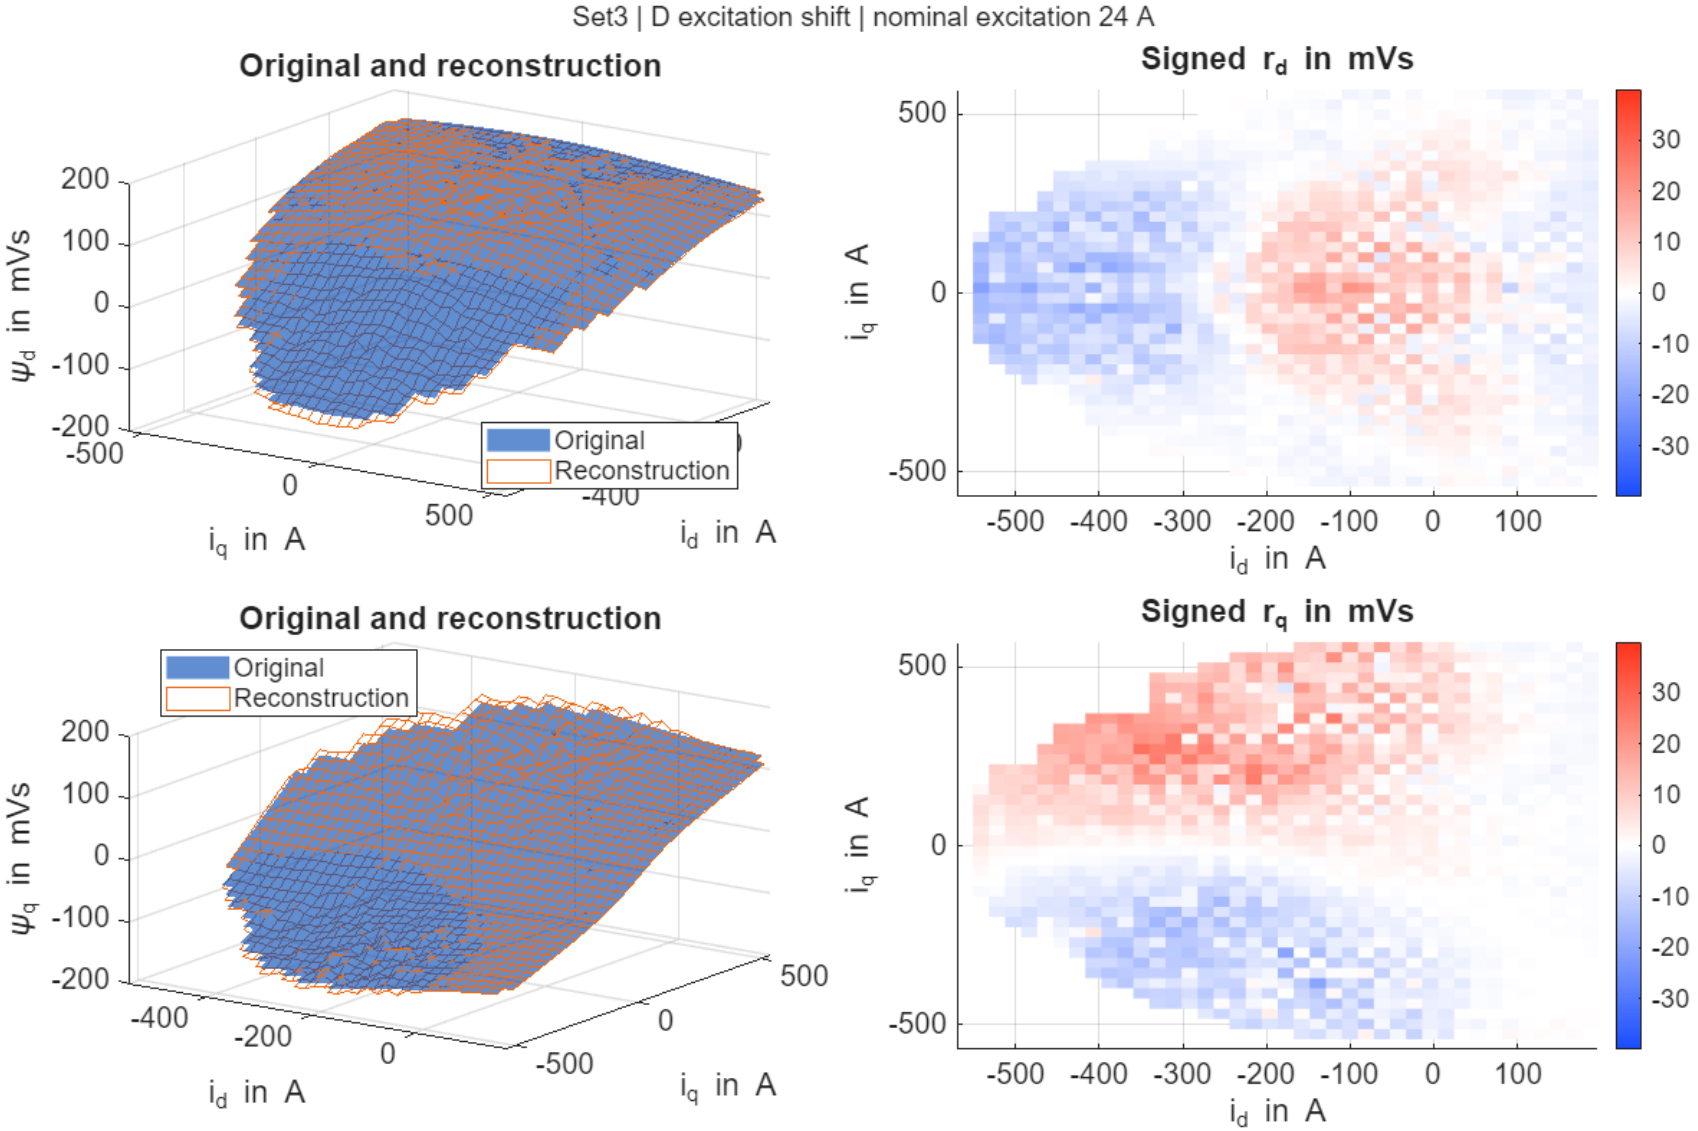

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method E, excitation 24 A

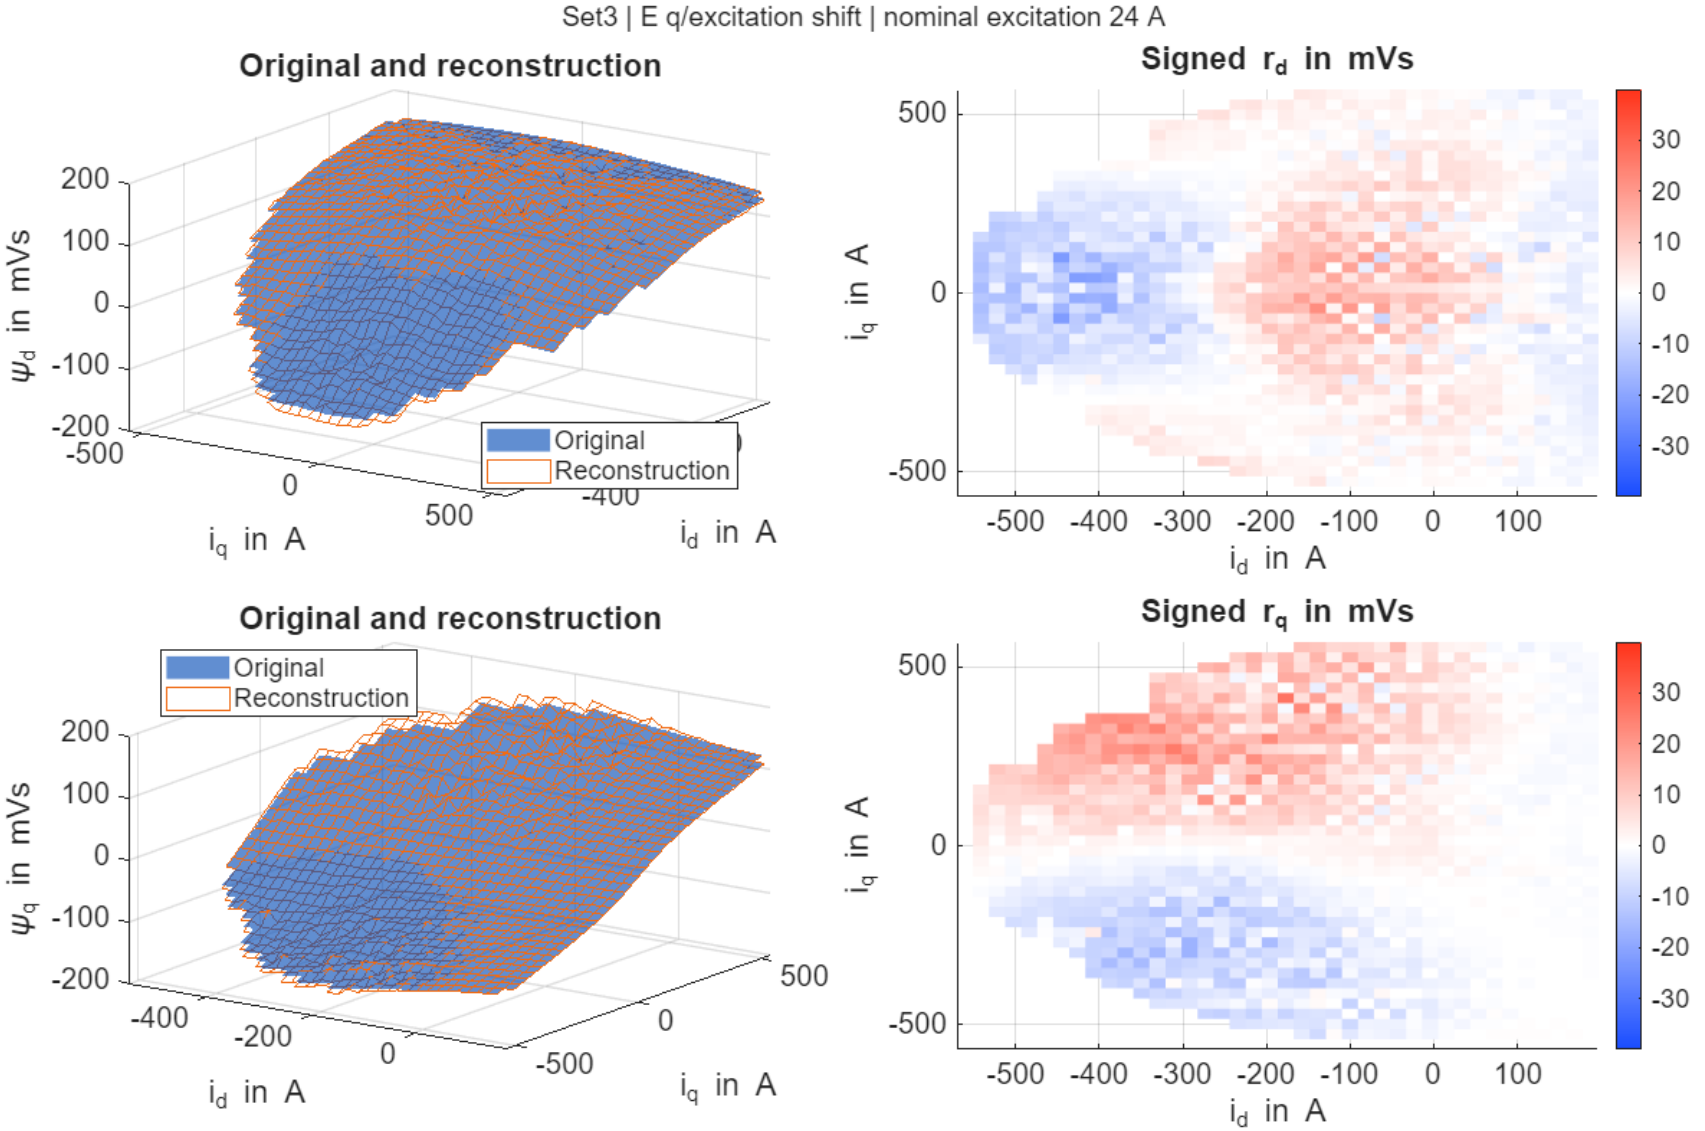

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method F, excitation 24 A

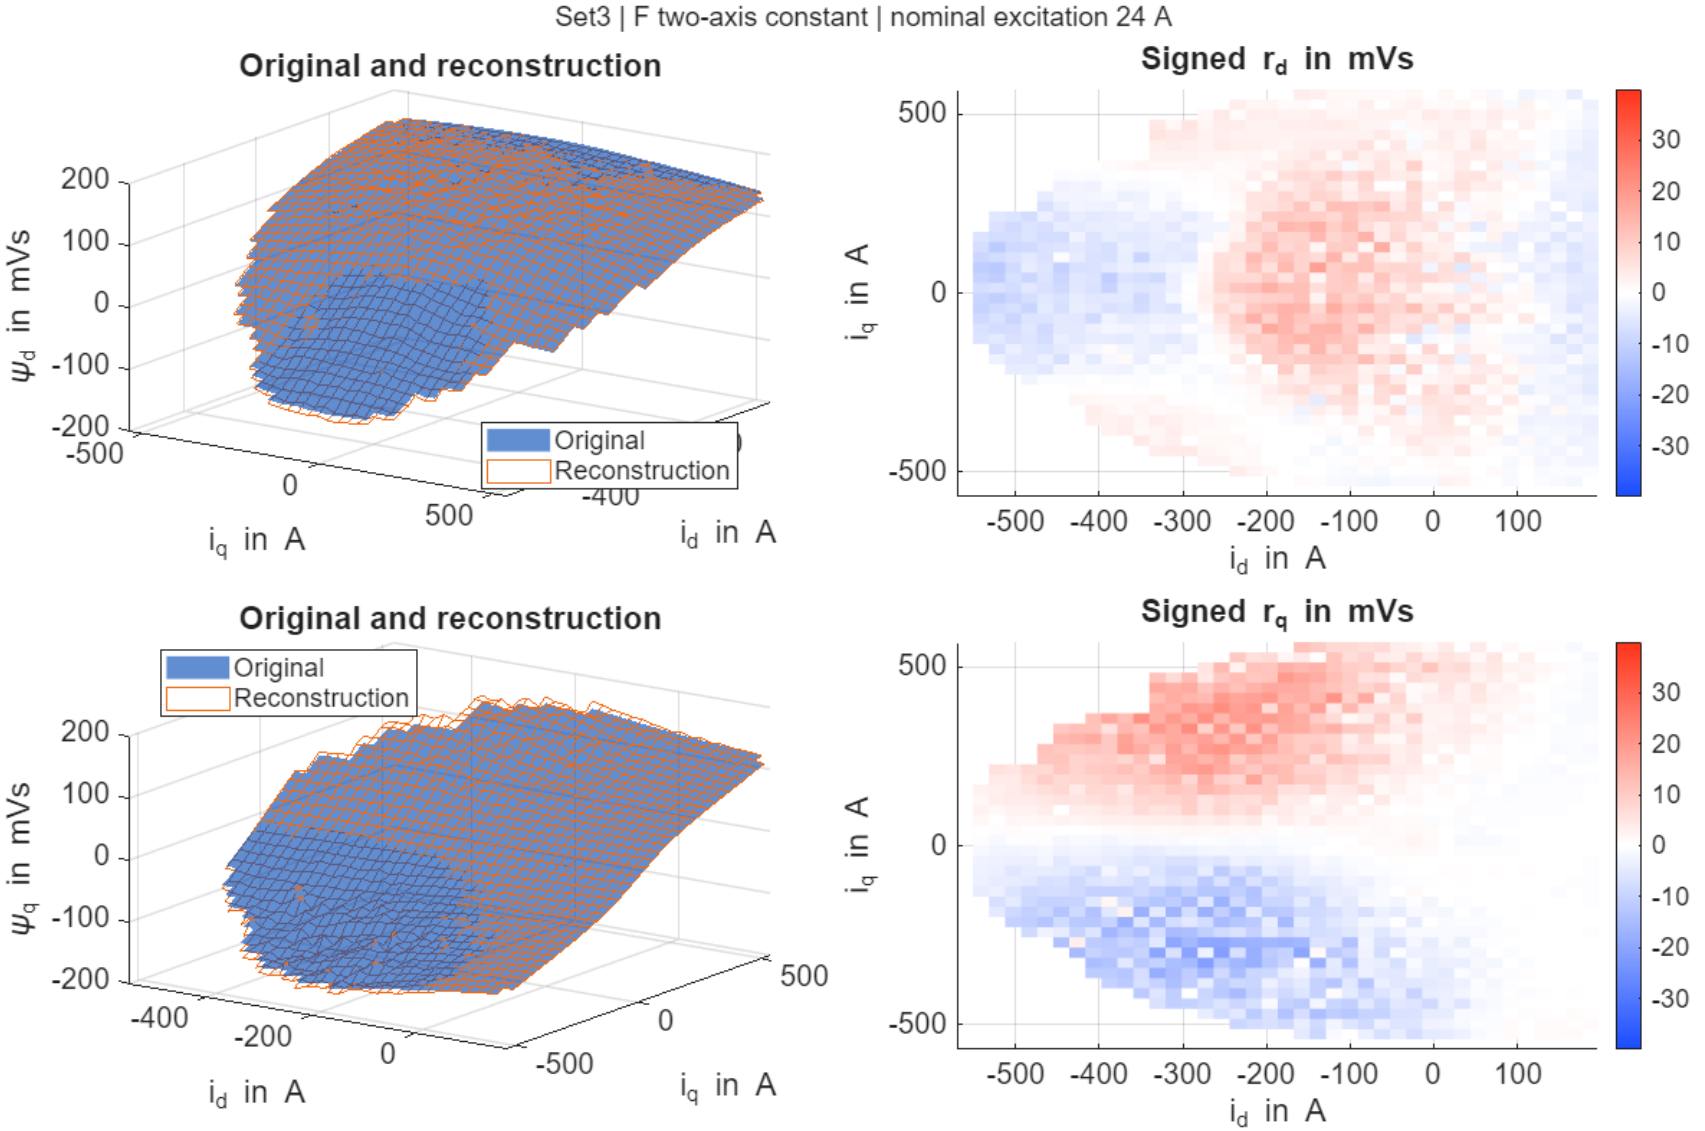

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method G, excitation 24 A

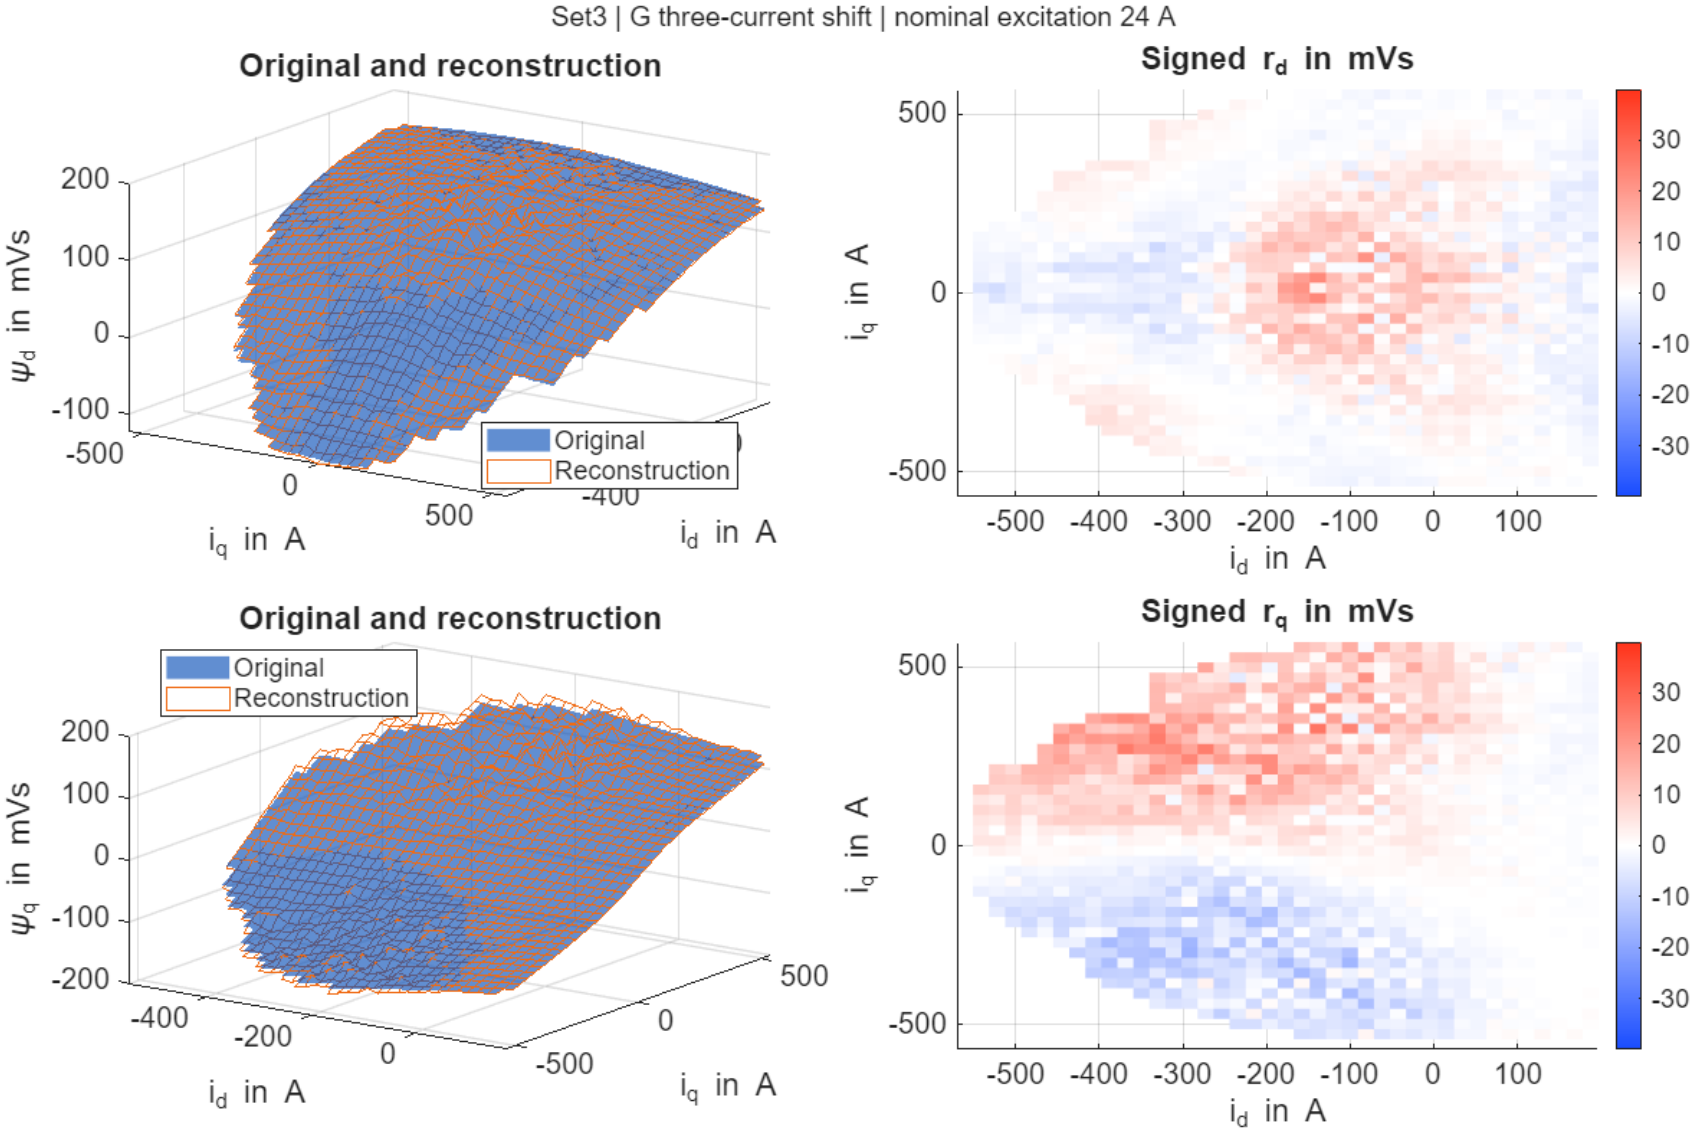

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method H, excitation 24 A

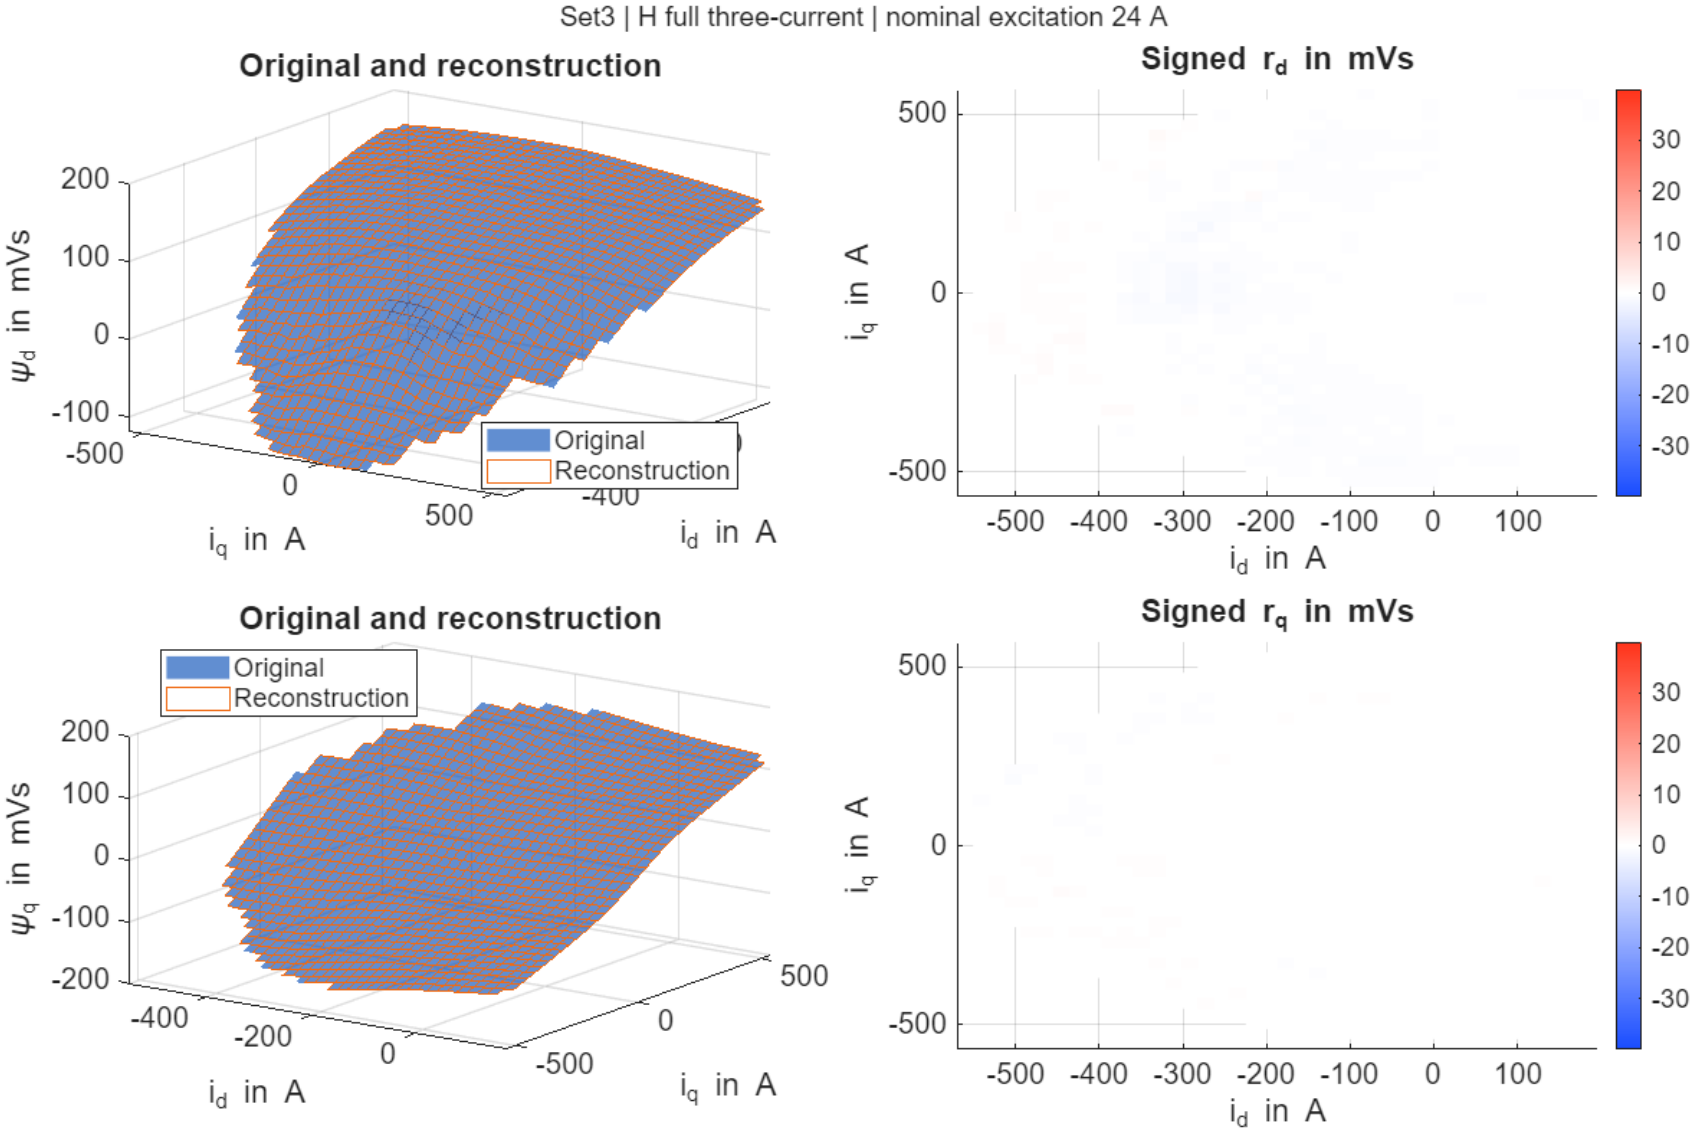

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method A, excitation 27 A

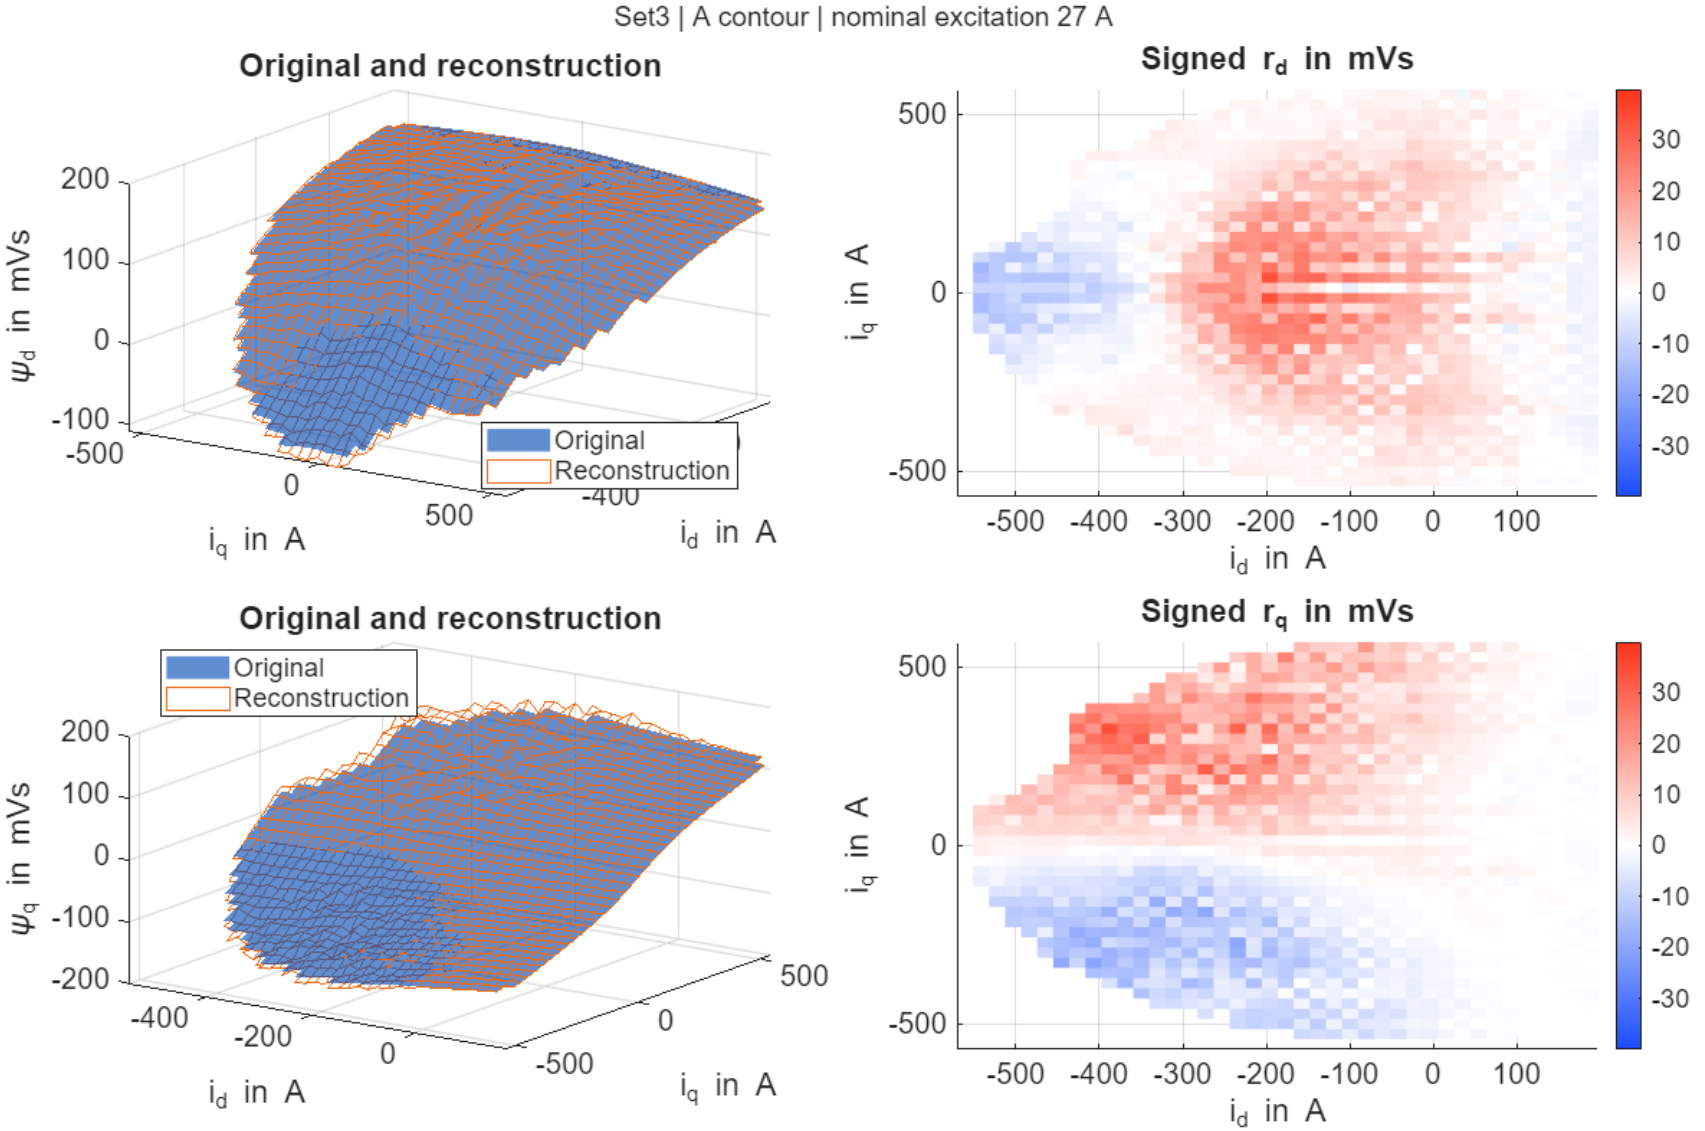

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method B, excitation 27 A

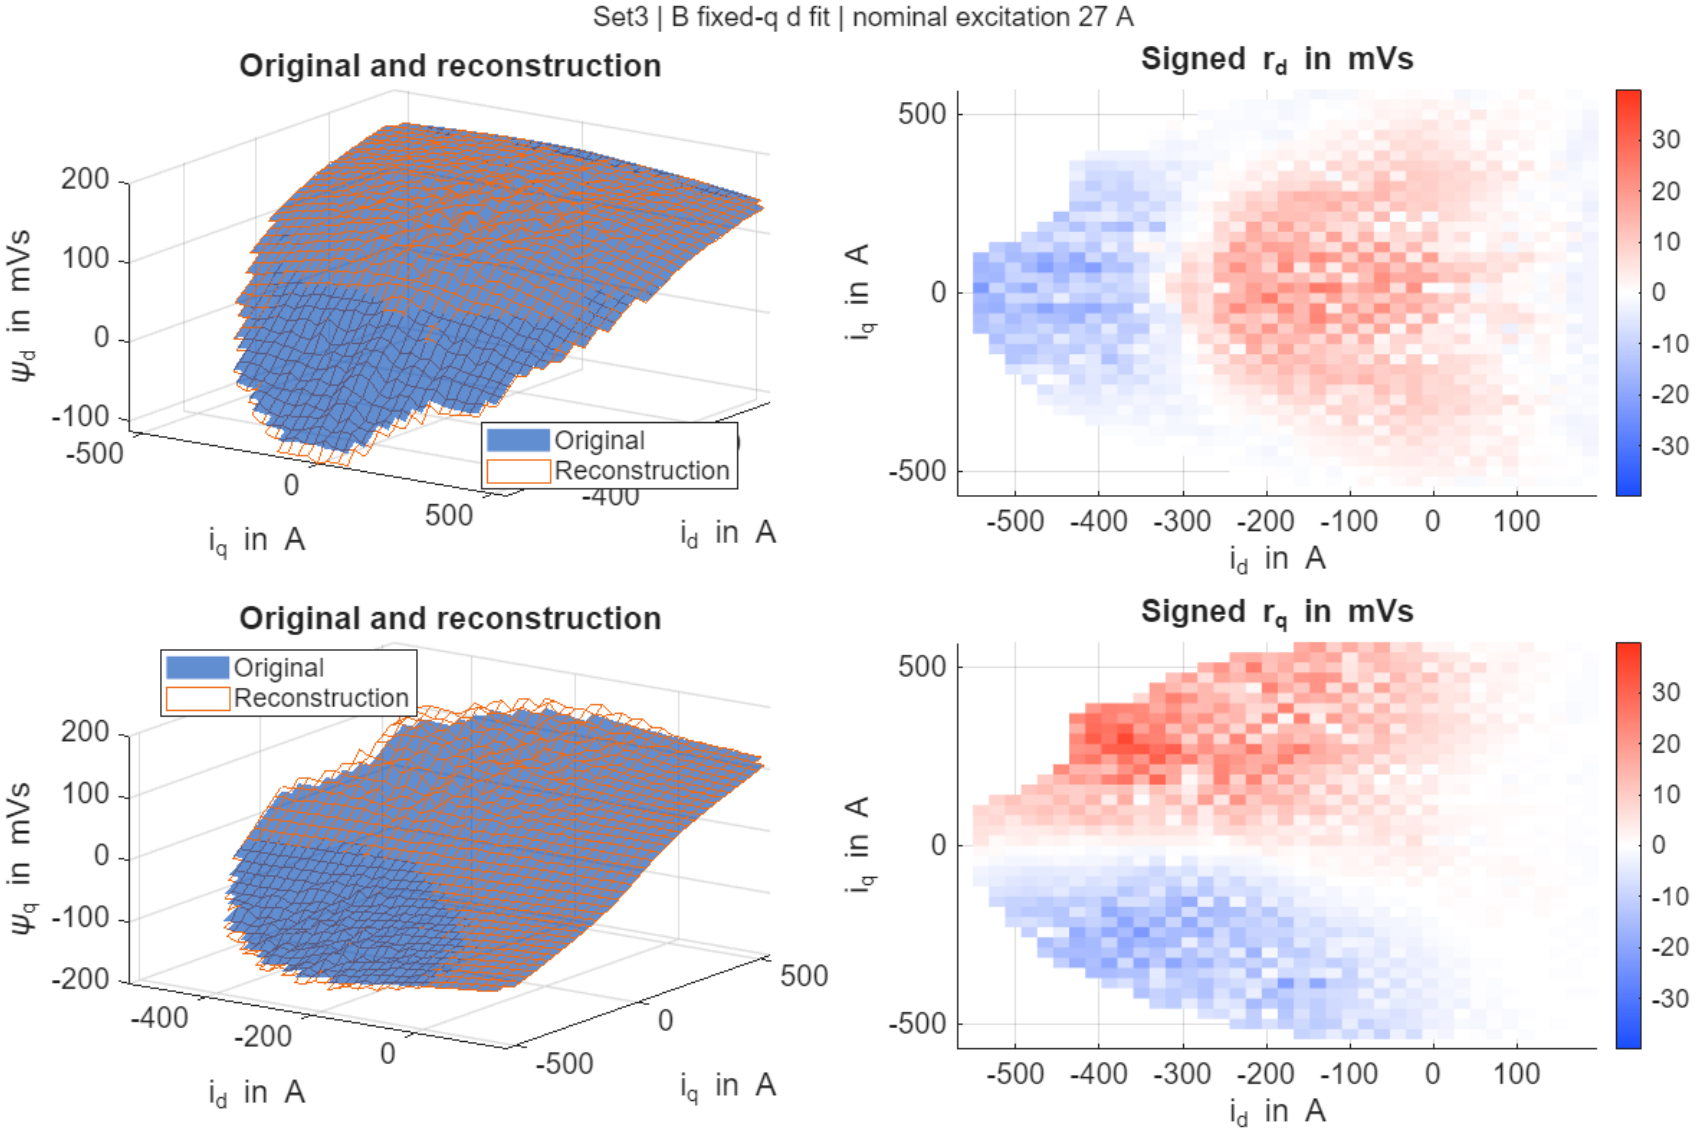

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method C, excitation 27 A

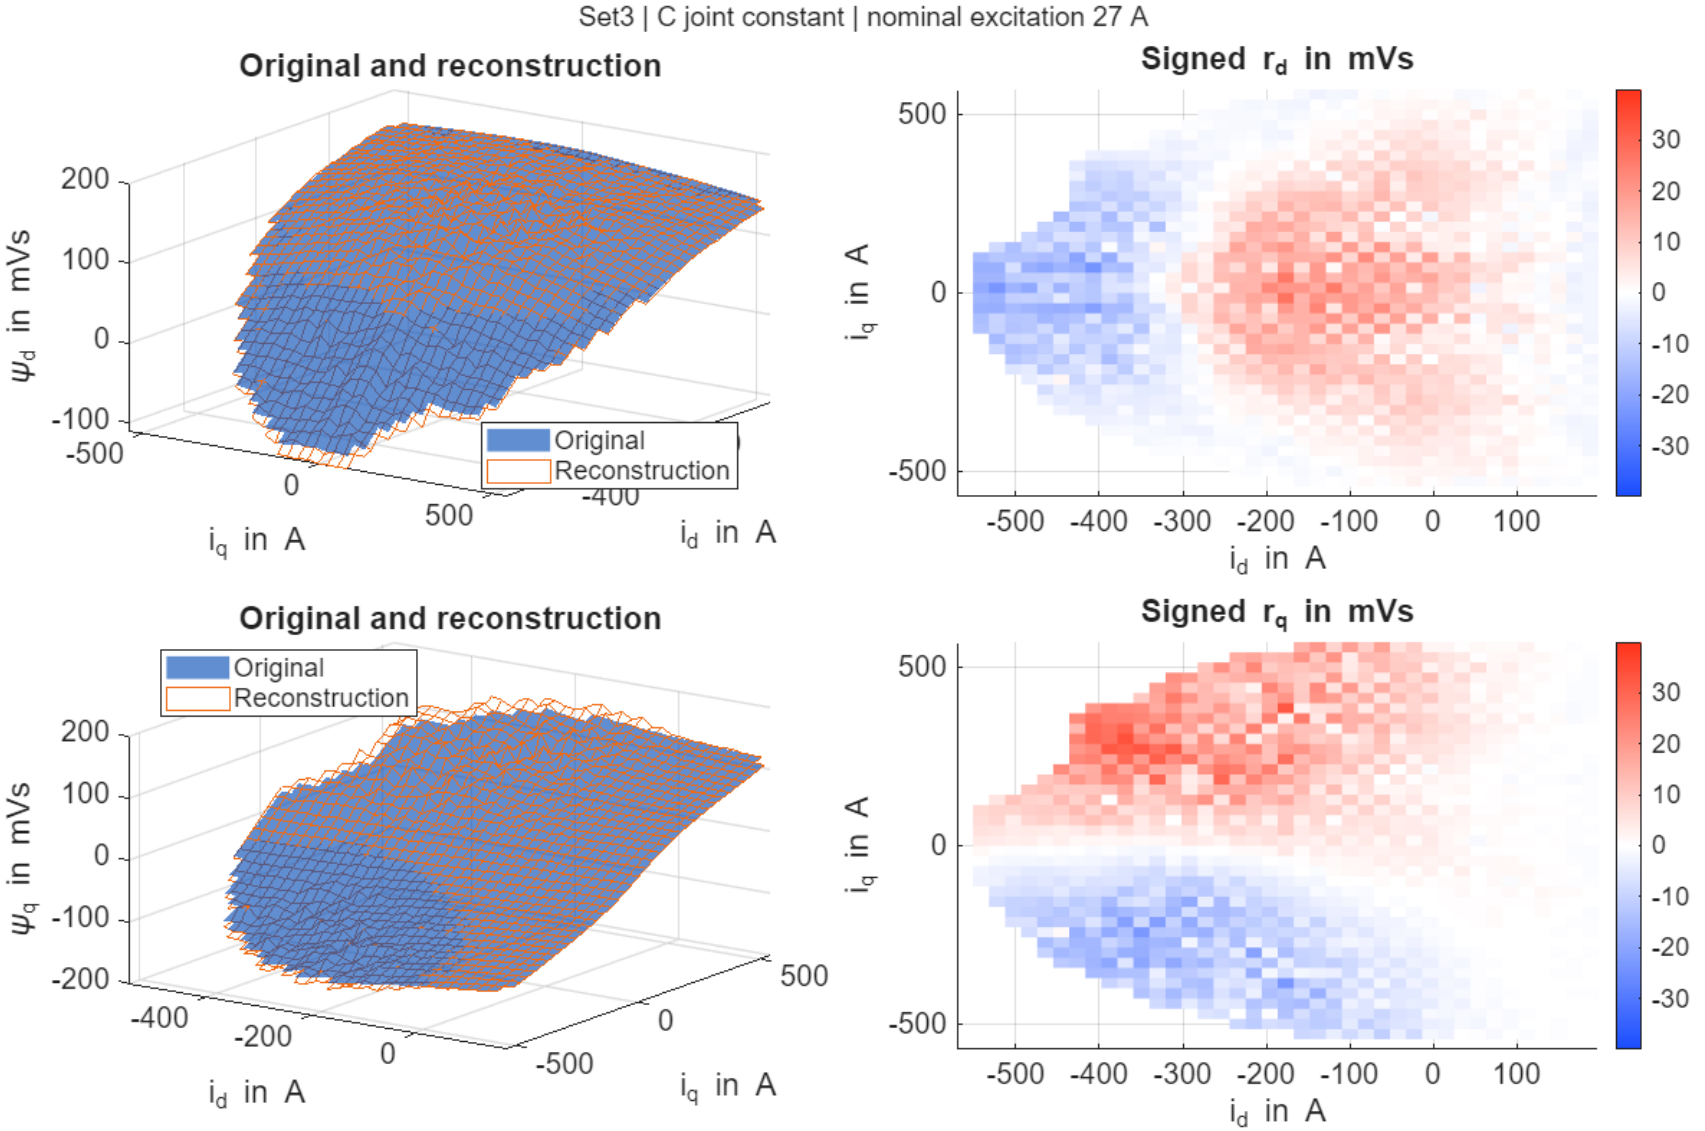

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method D, excitation 27 A

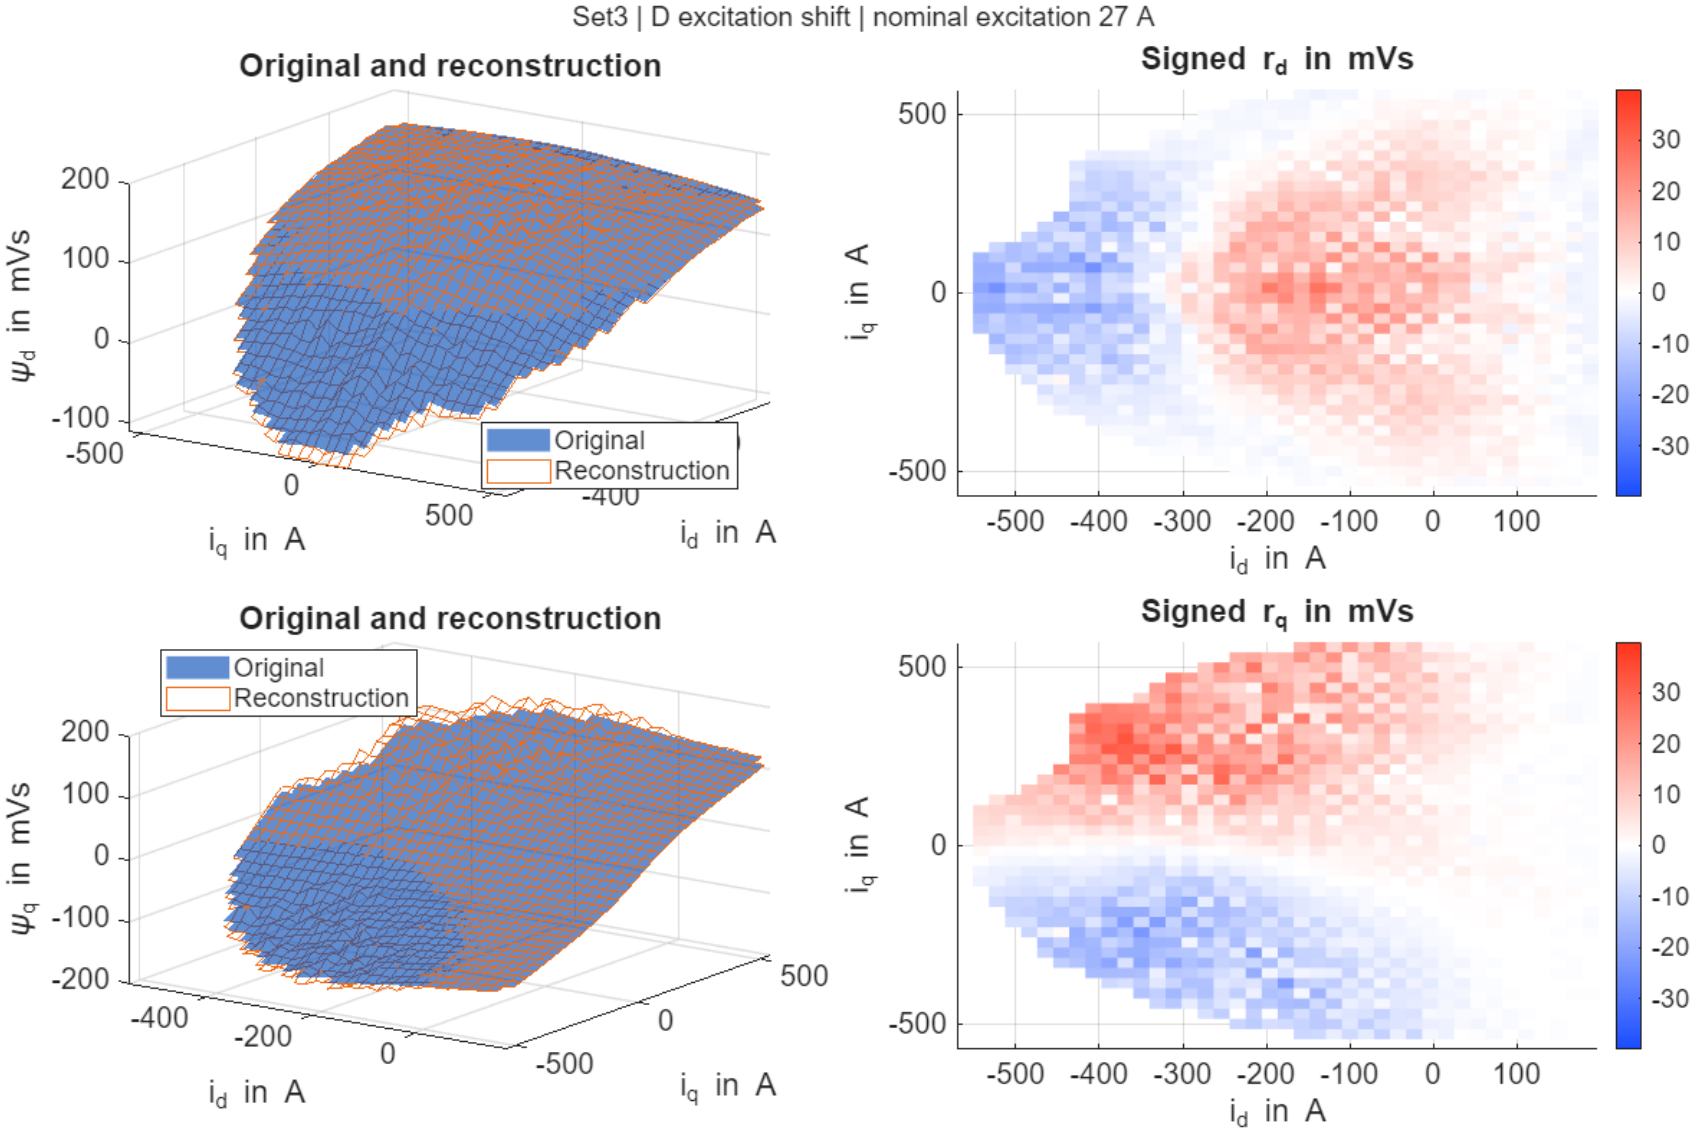

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method E, excitation 27 A

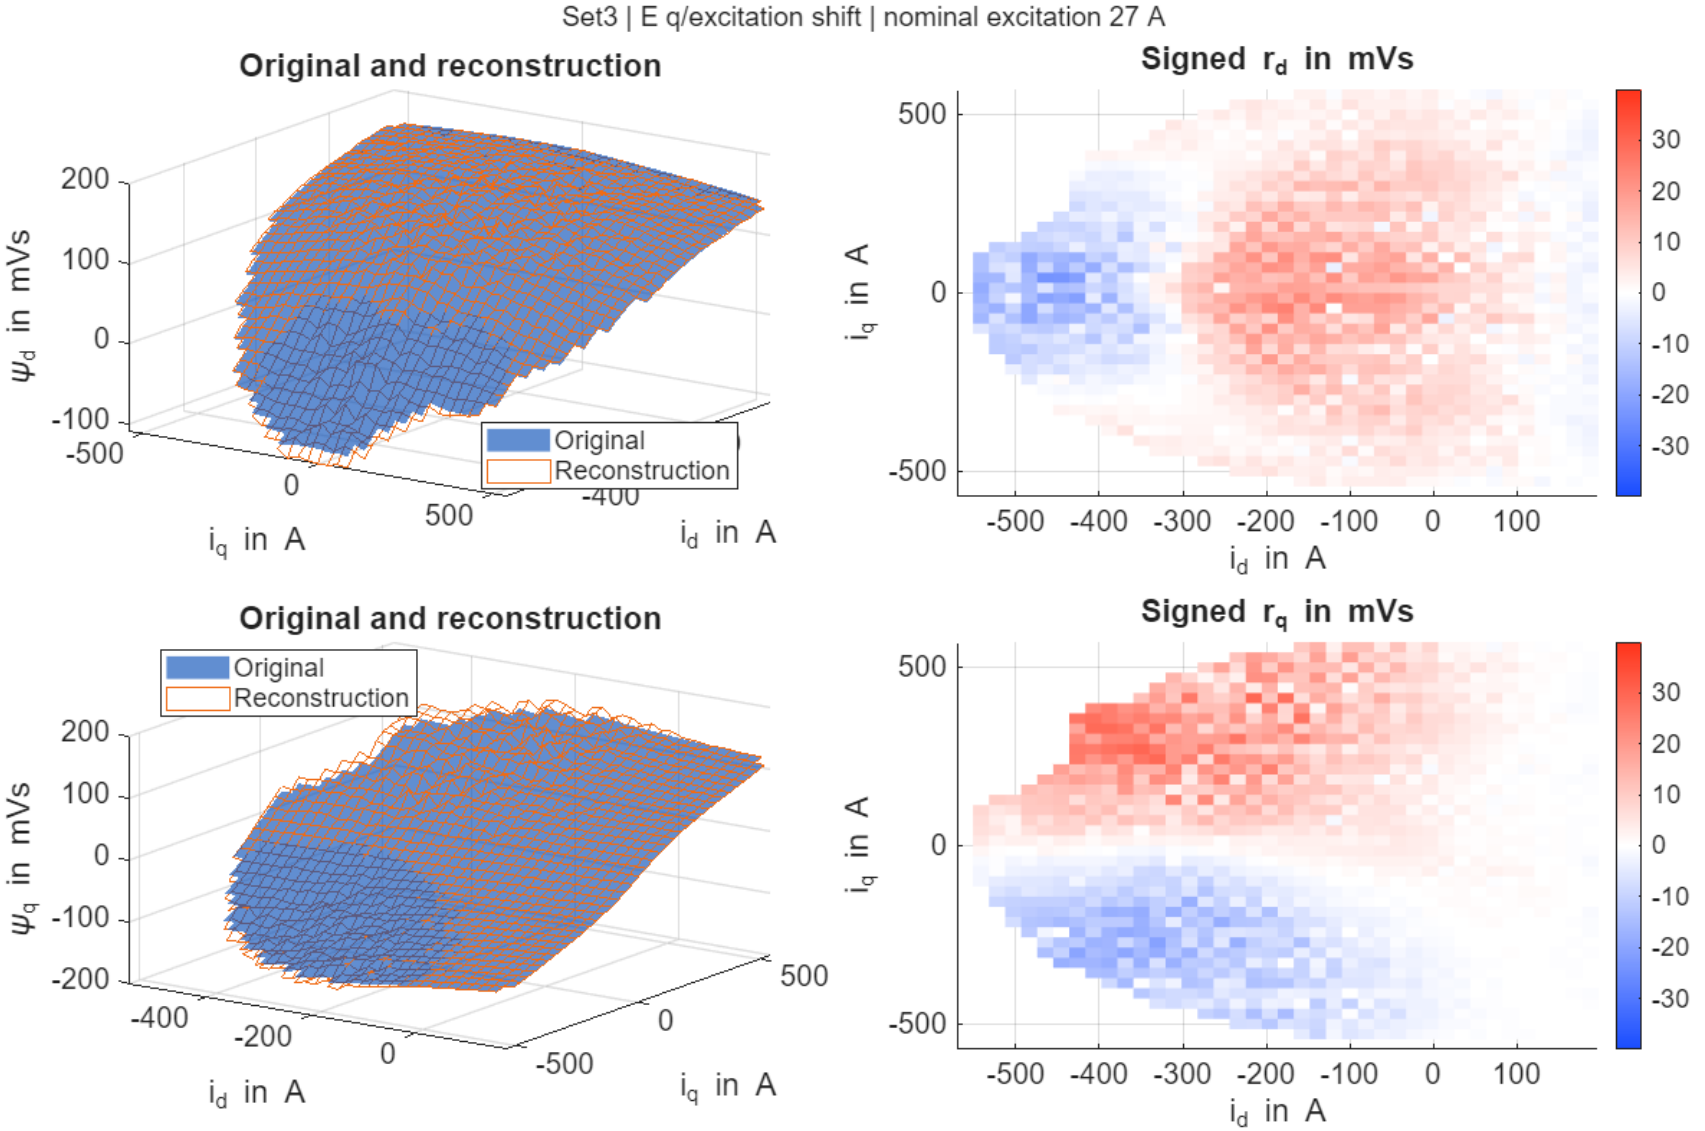

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method F, excitation 27 A

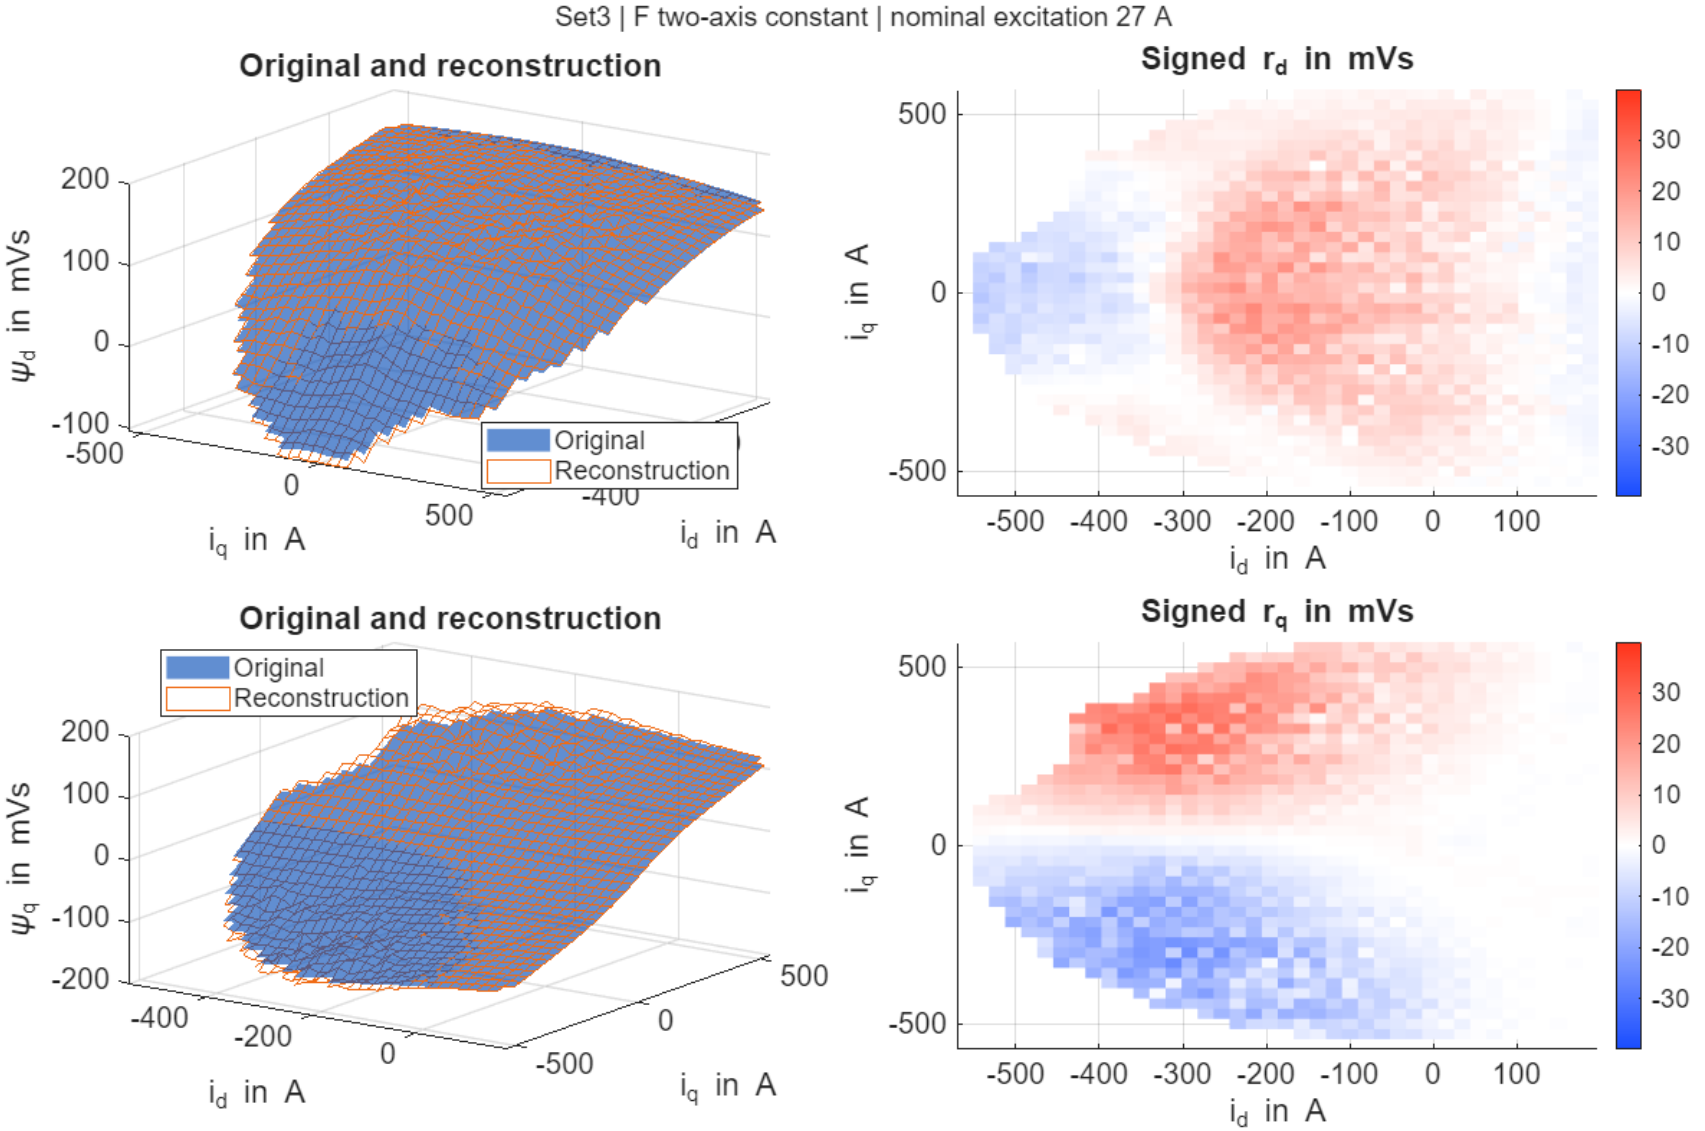

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method G, excitation 27 A

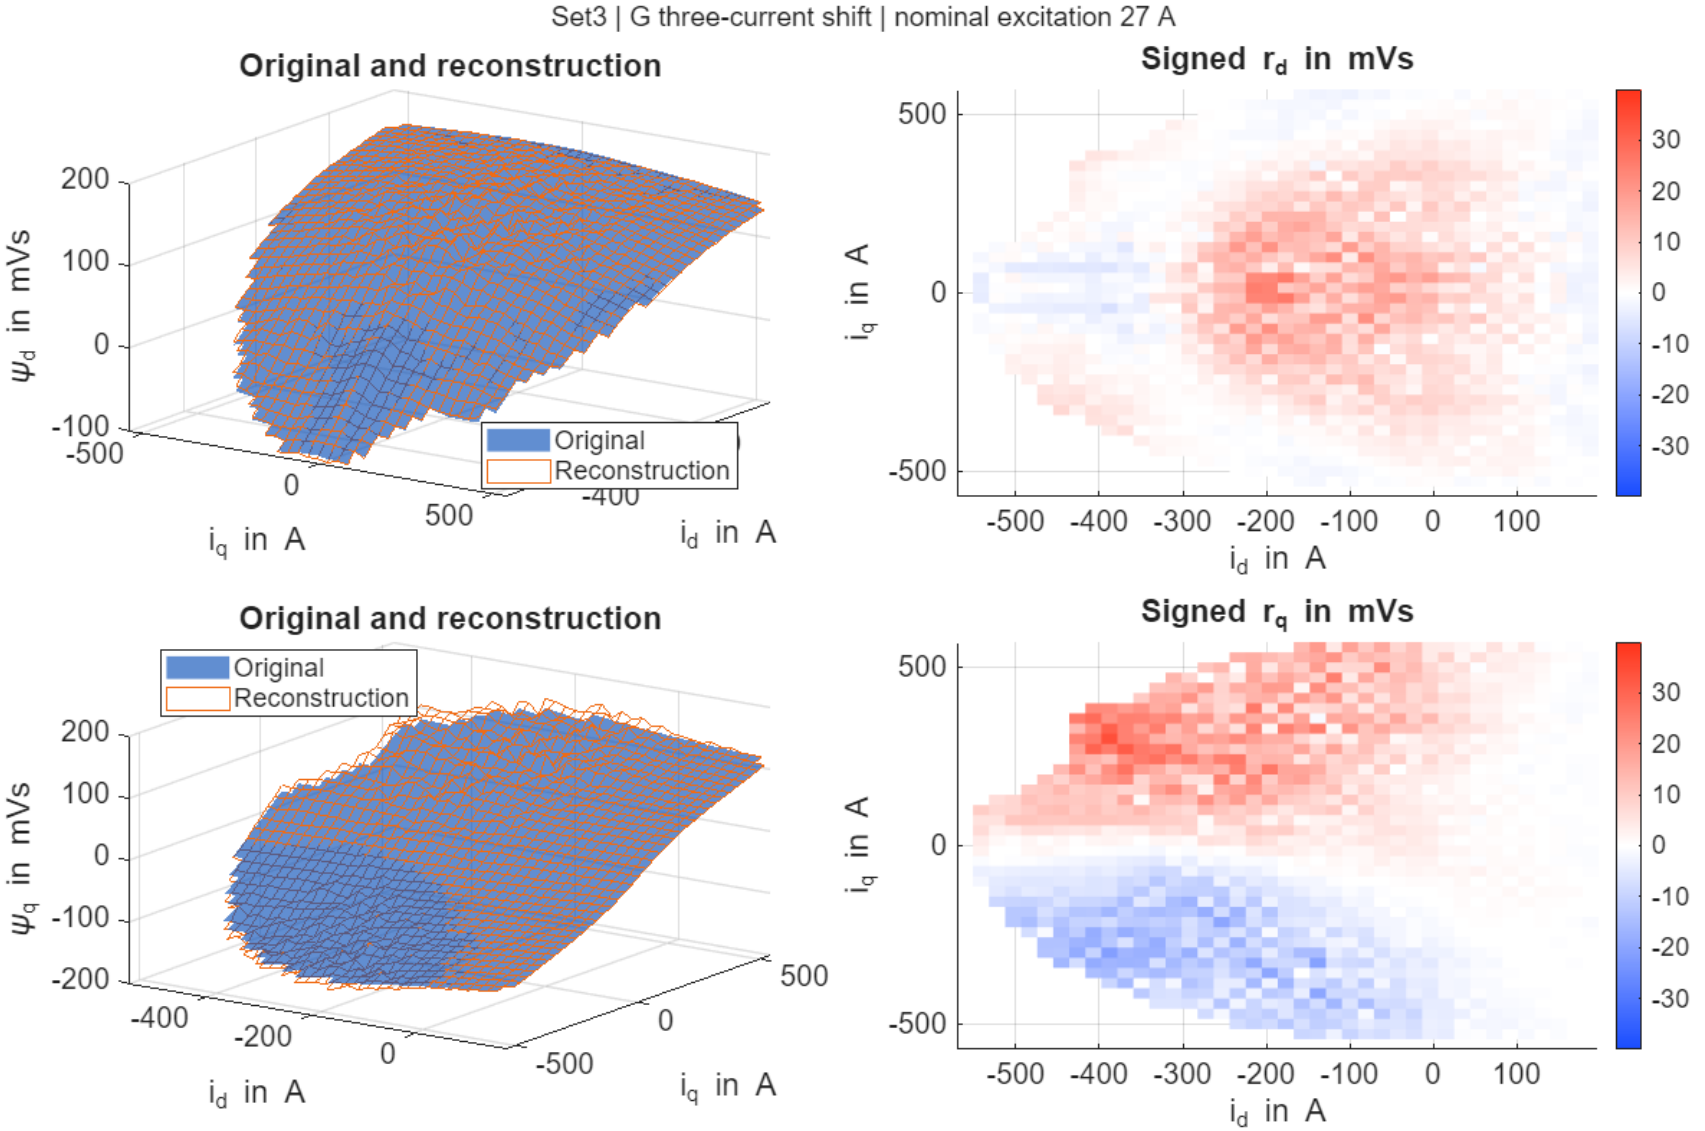

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method H, excitation 27 A

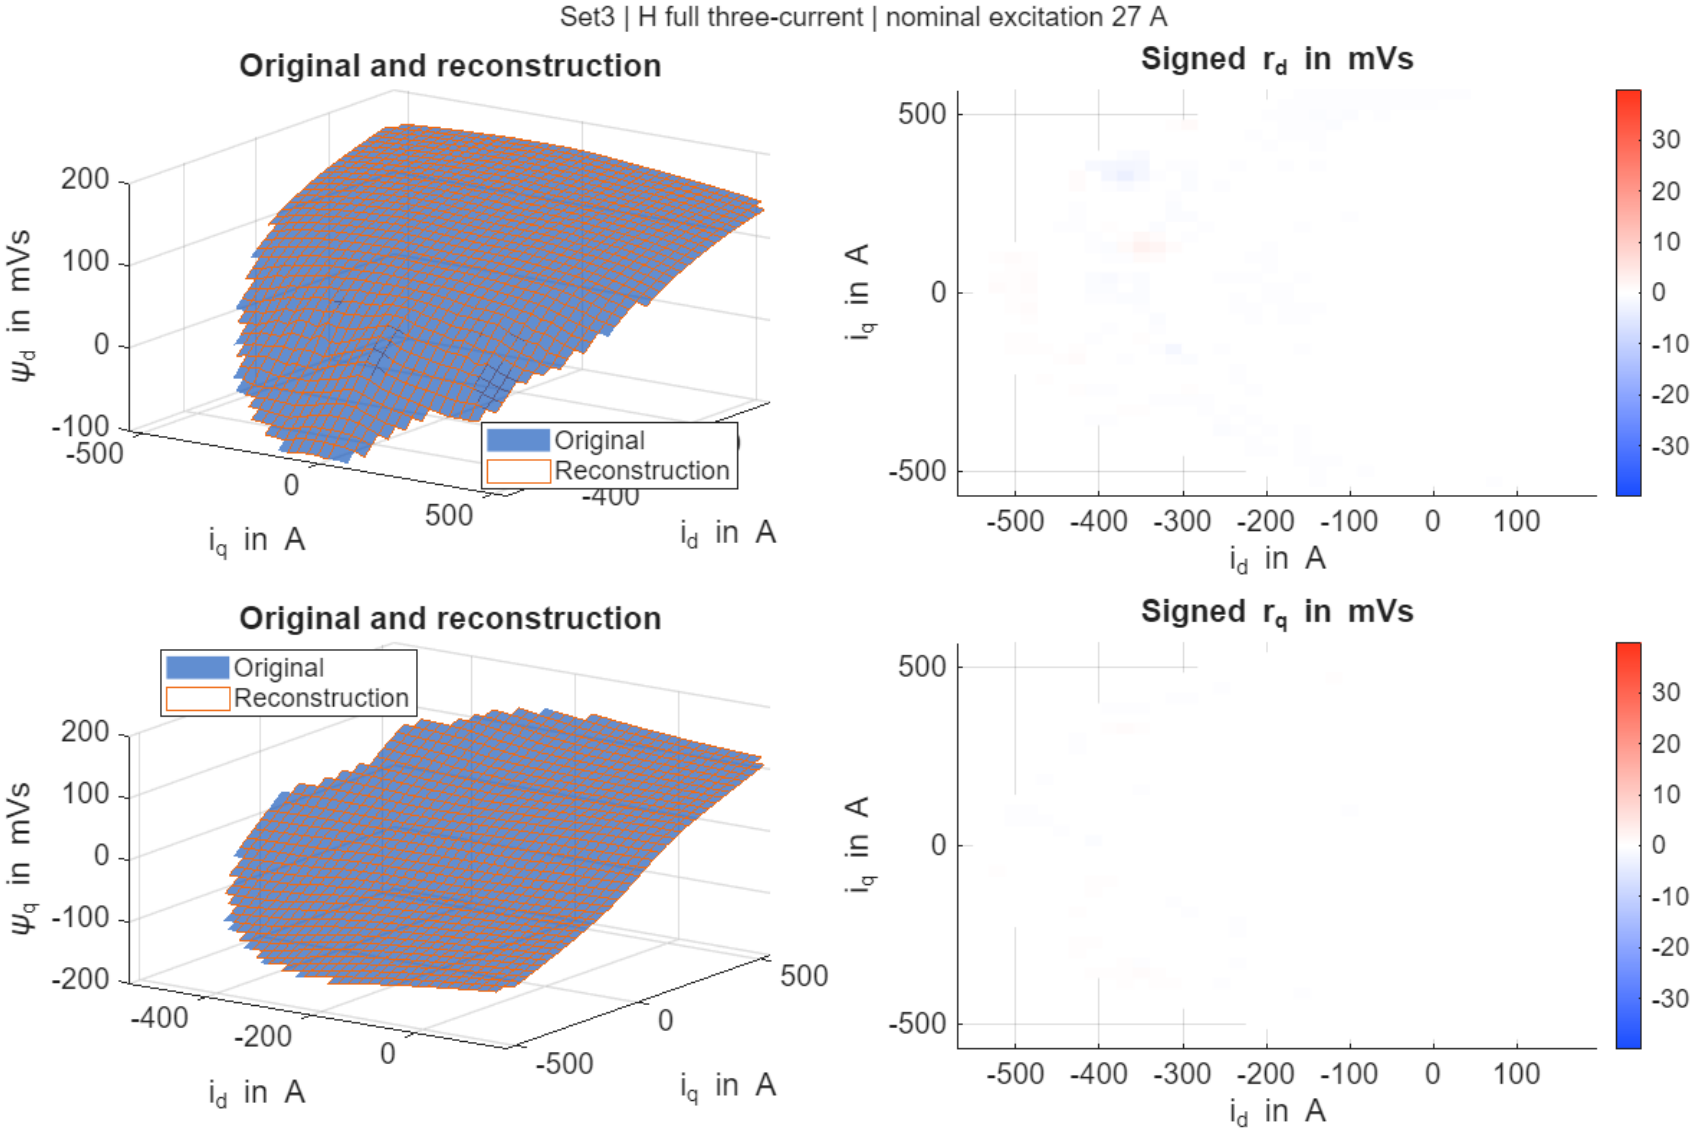

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method A, excitation 30 A

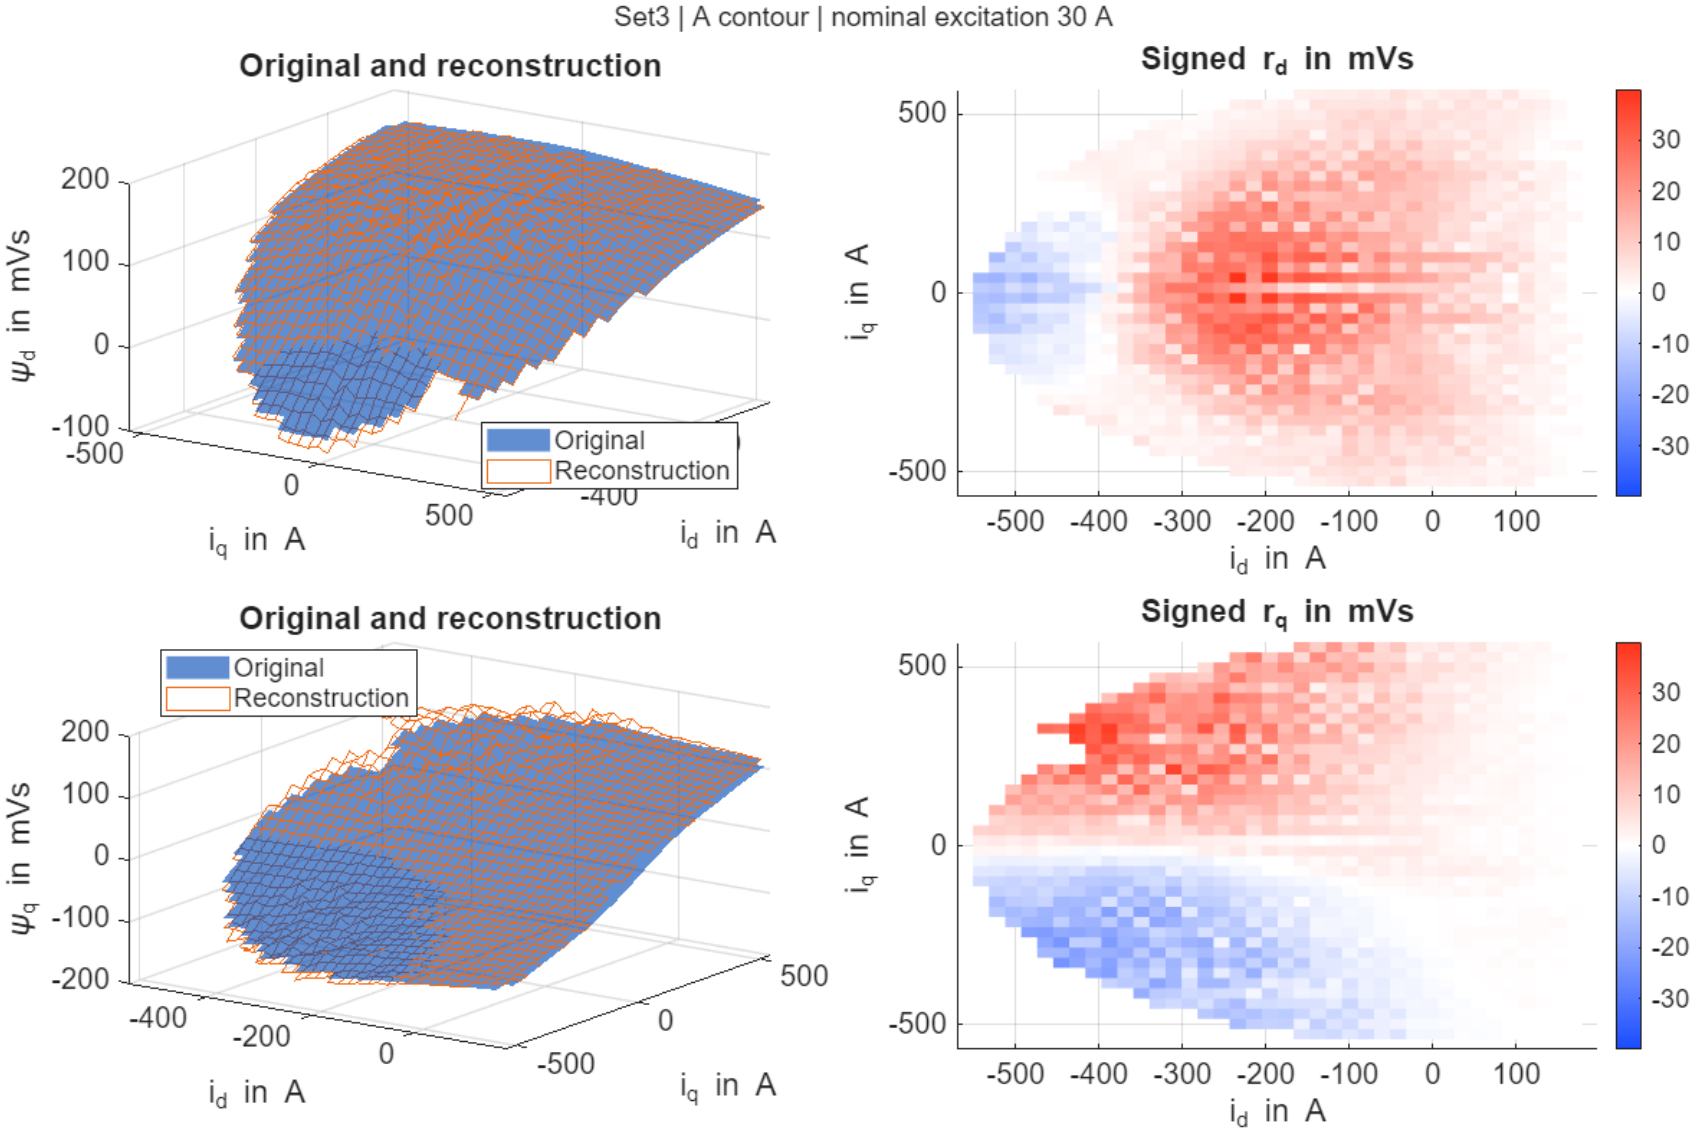

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method B, excitation 30 A

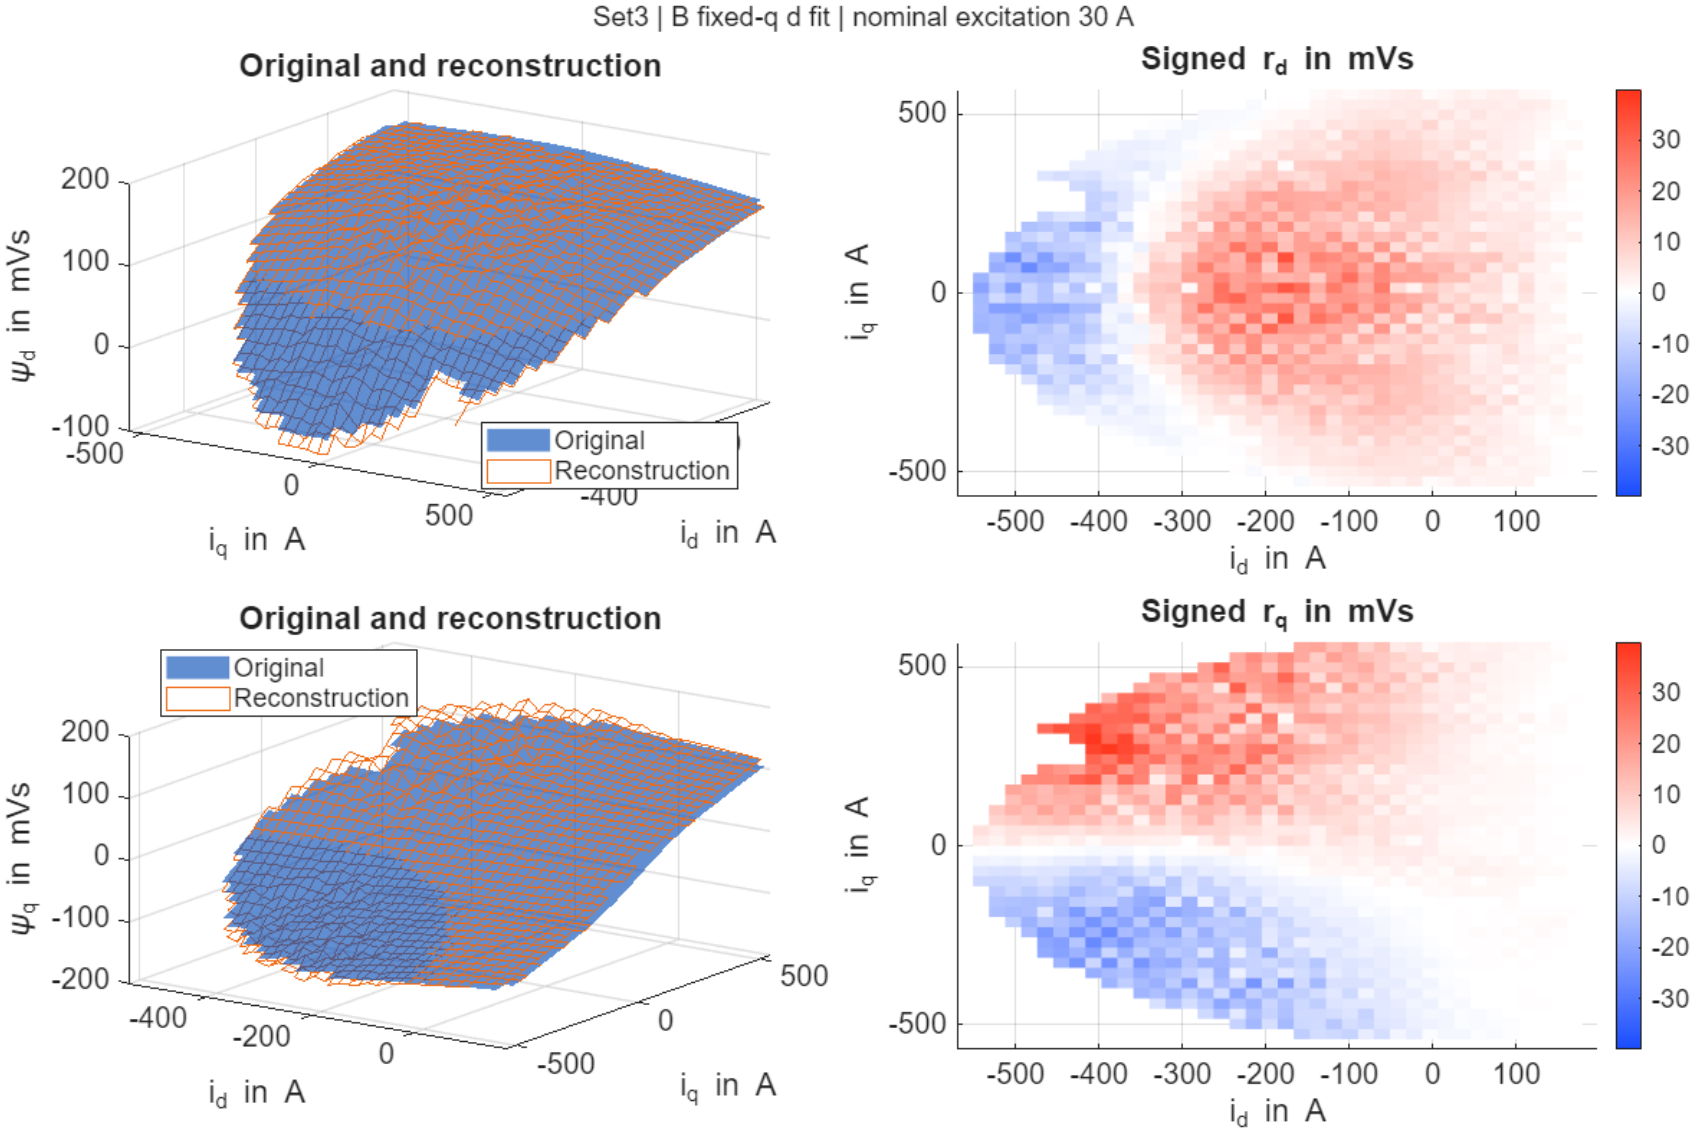

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method C, excitation 30 A

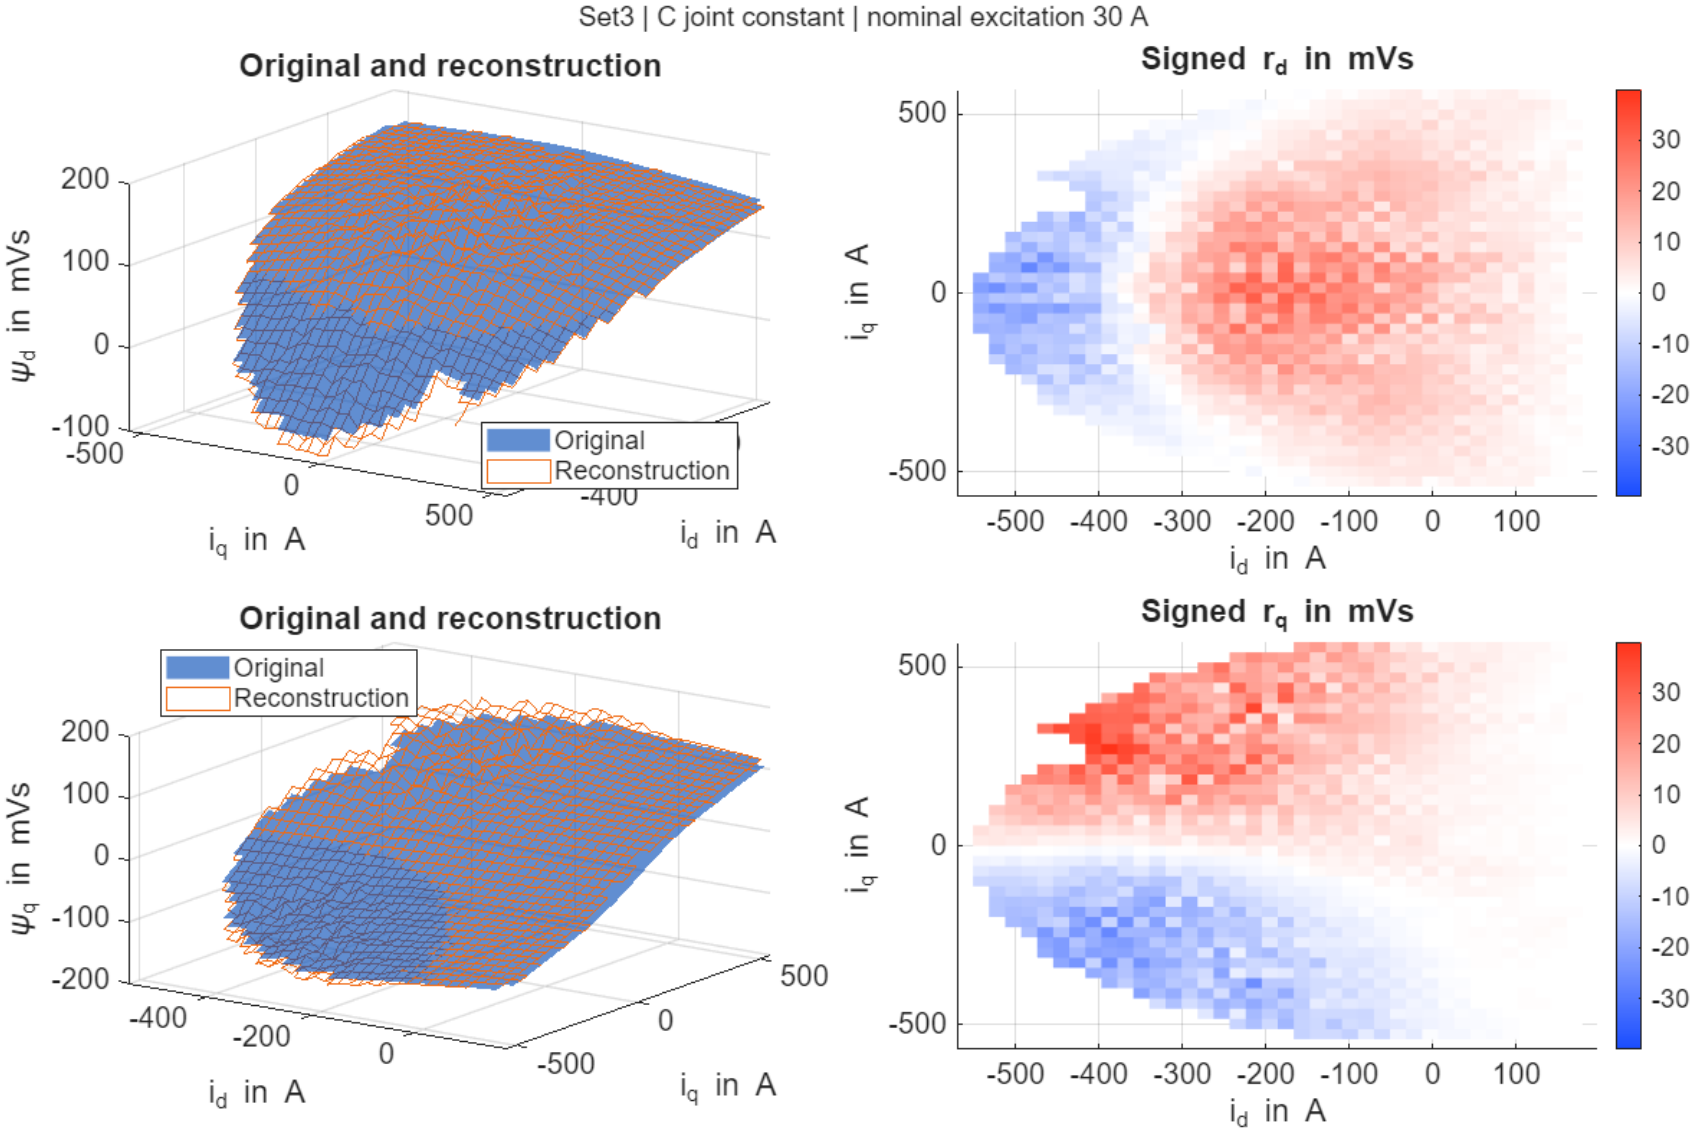

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method D, excitation 30 A

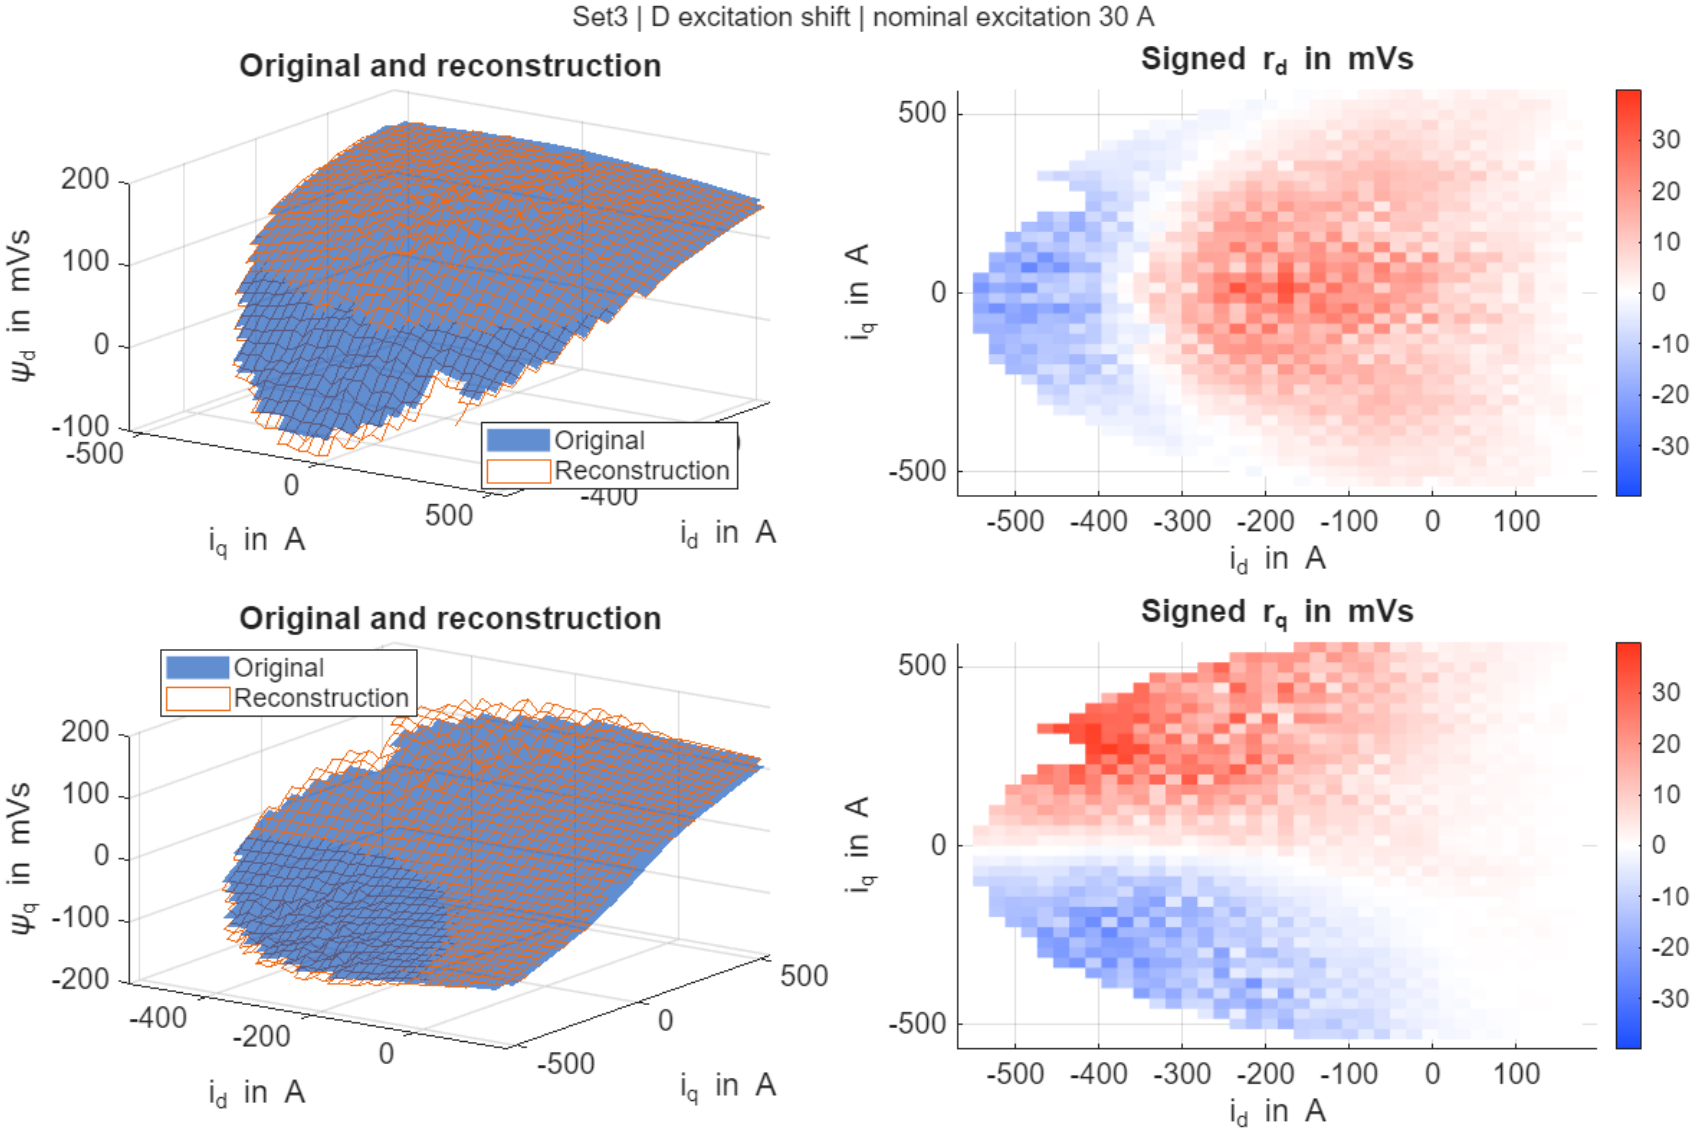

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method E, excitation 30 A

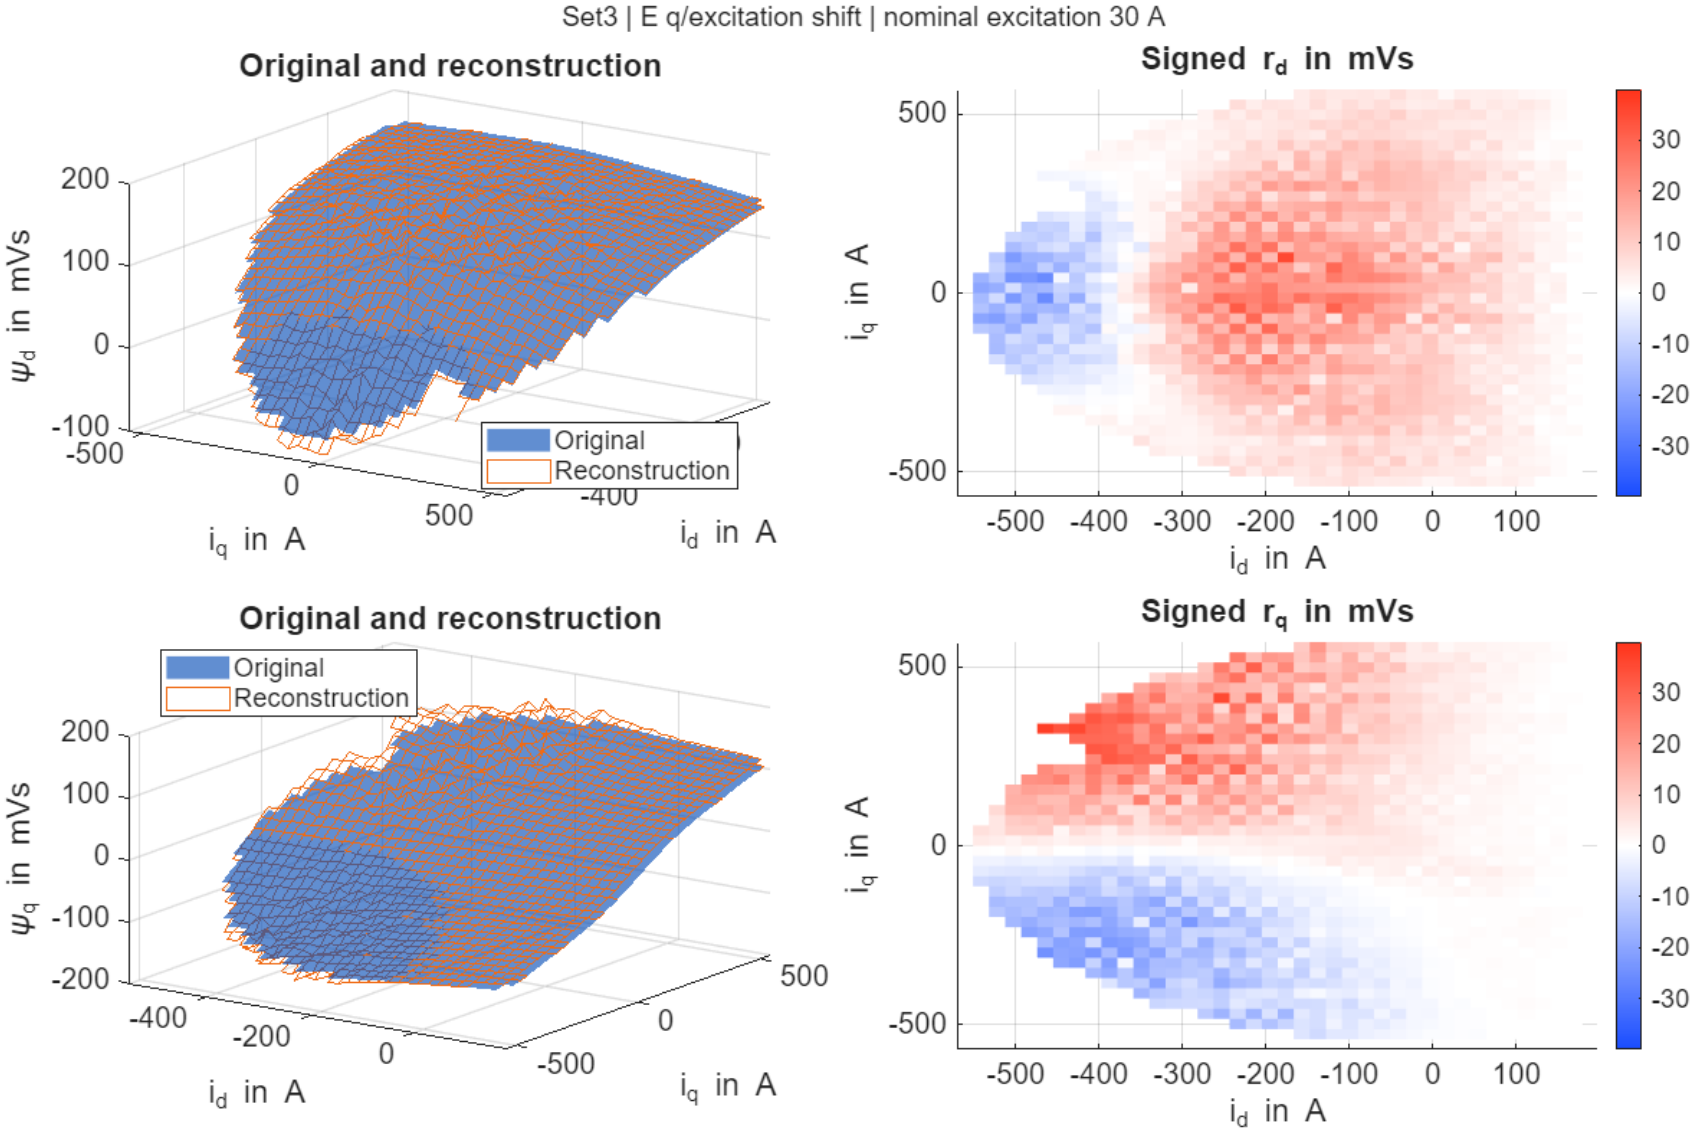

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method F, excitation 30 A

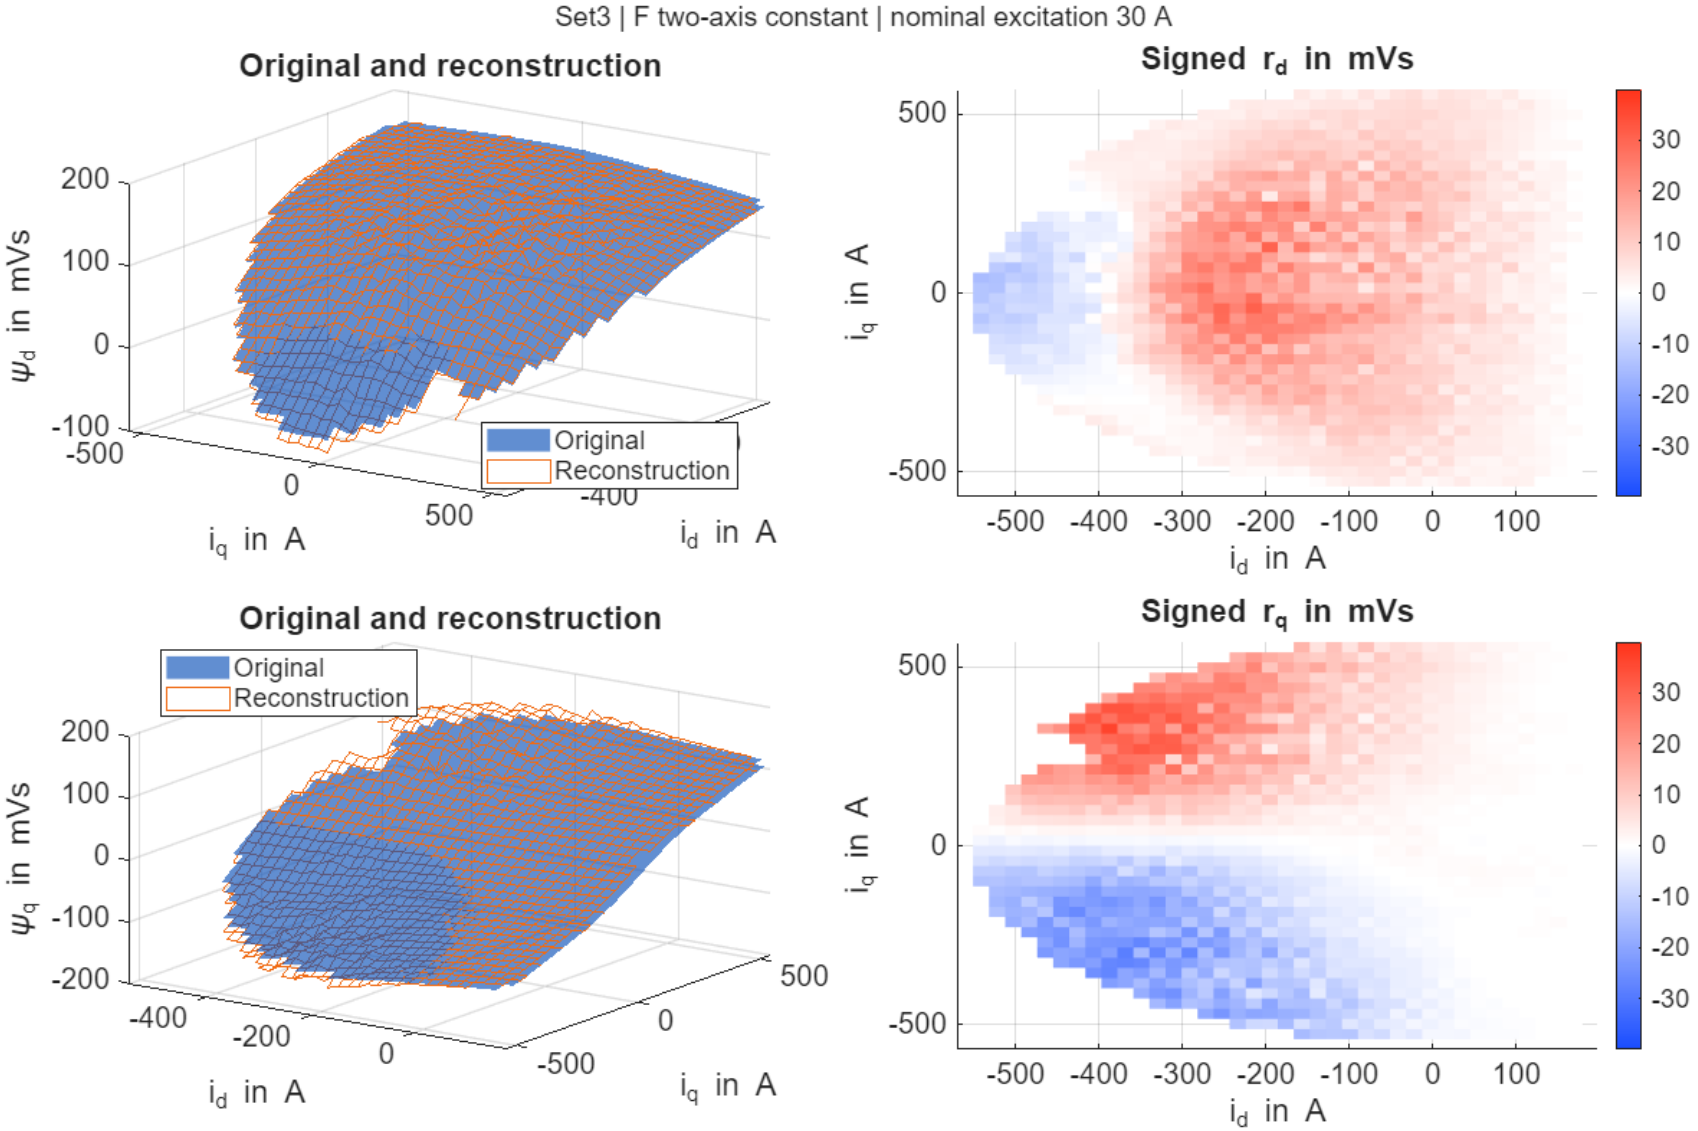

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method G, excitation 30 A

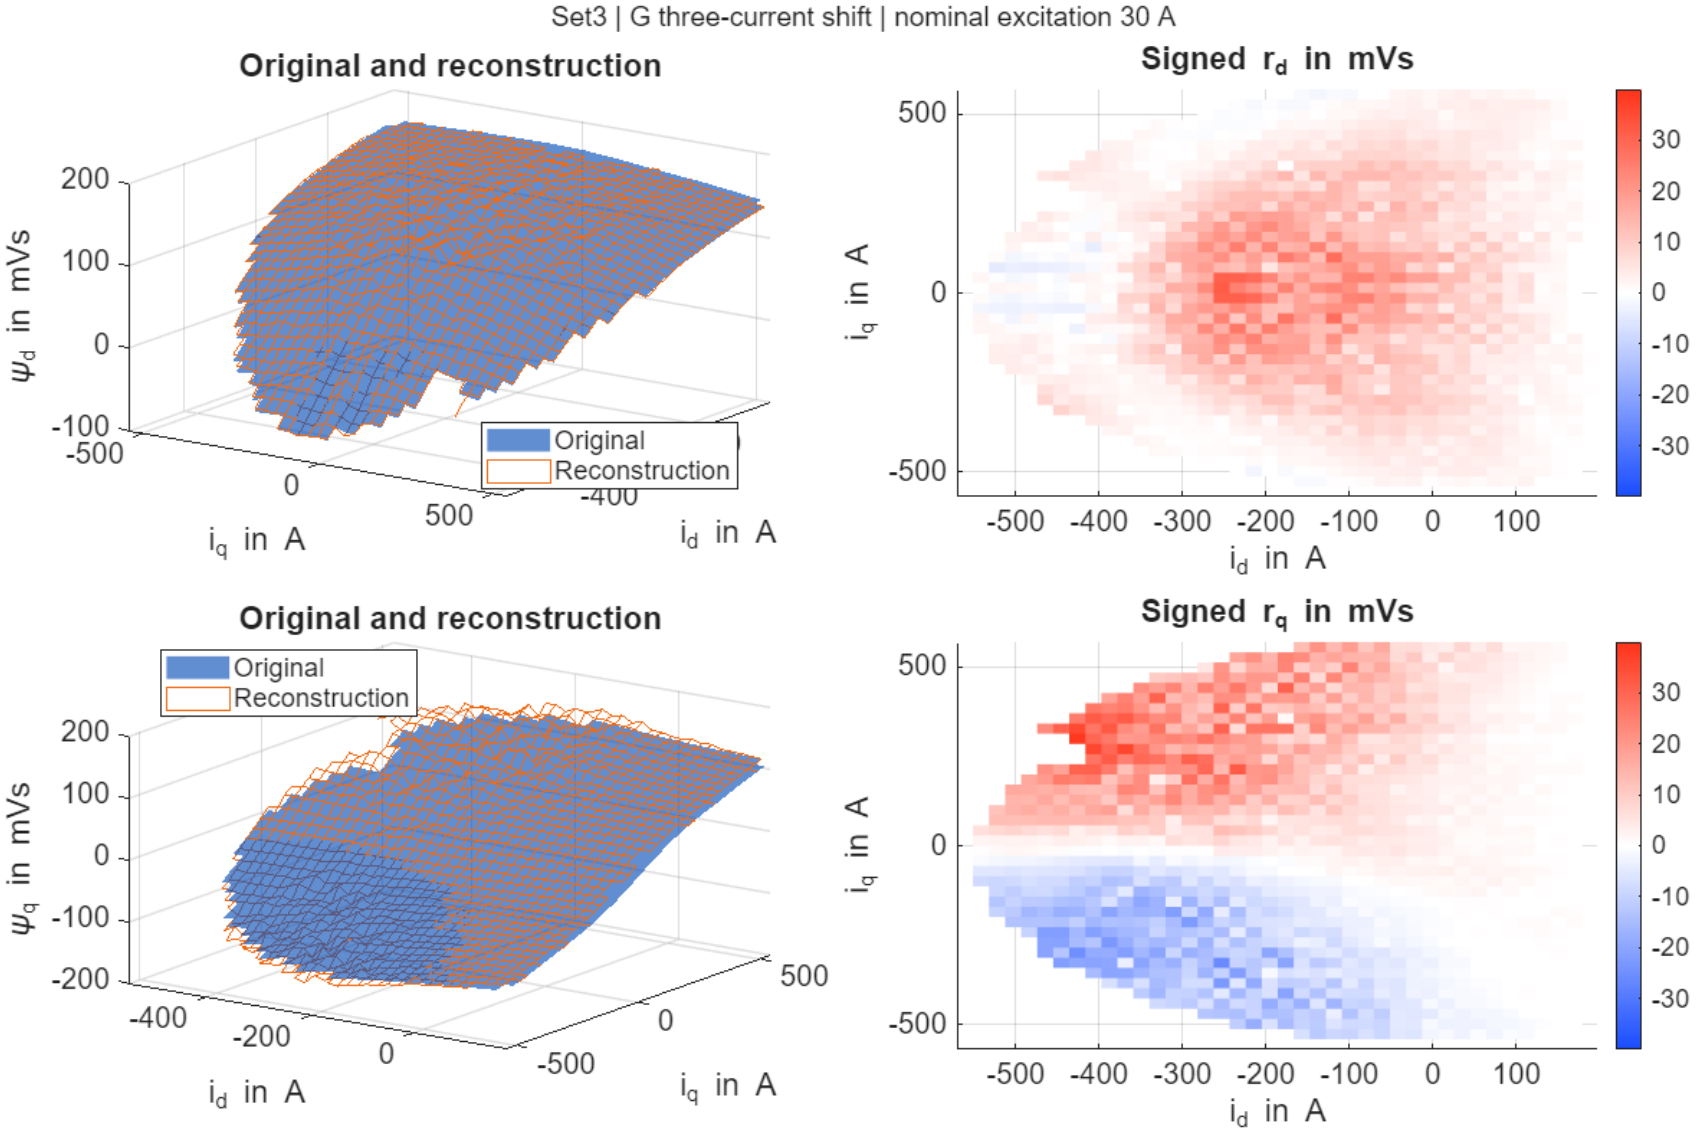

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.

Set 3, method H, excitation 30 A

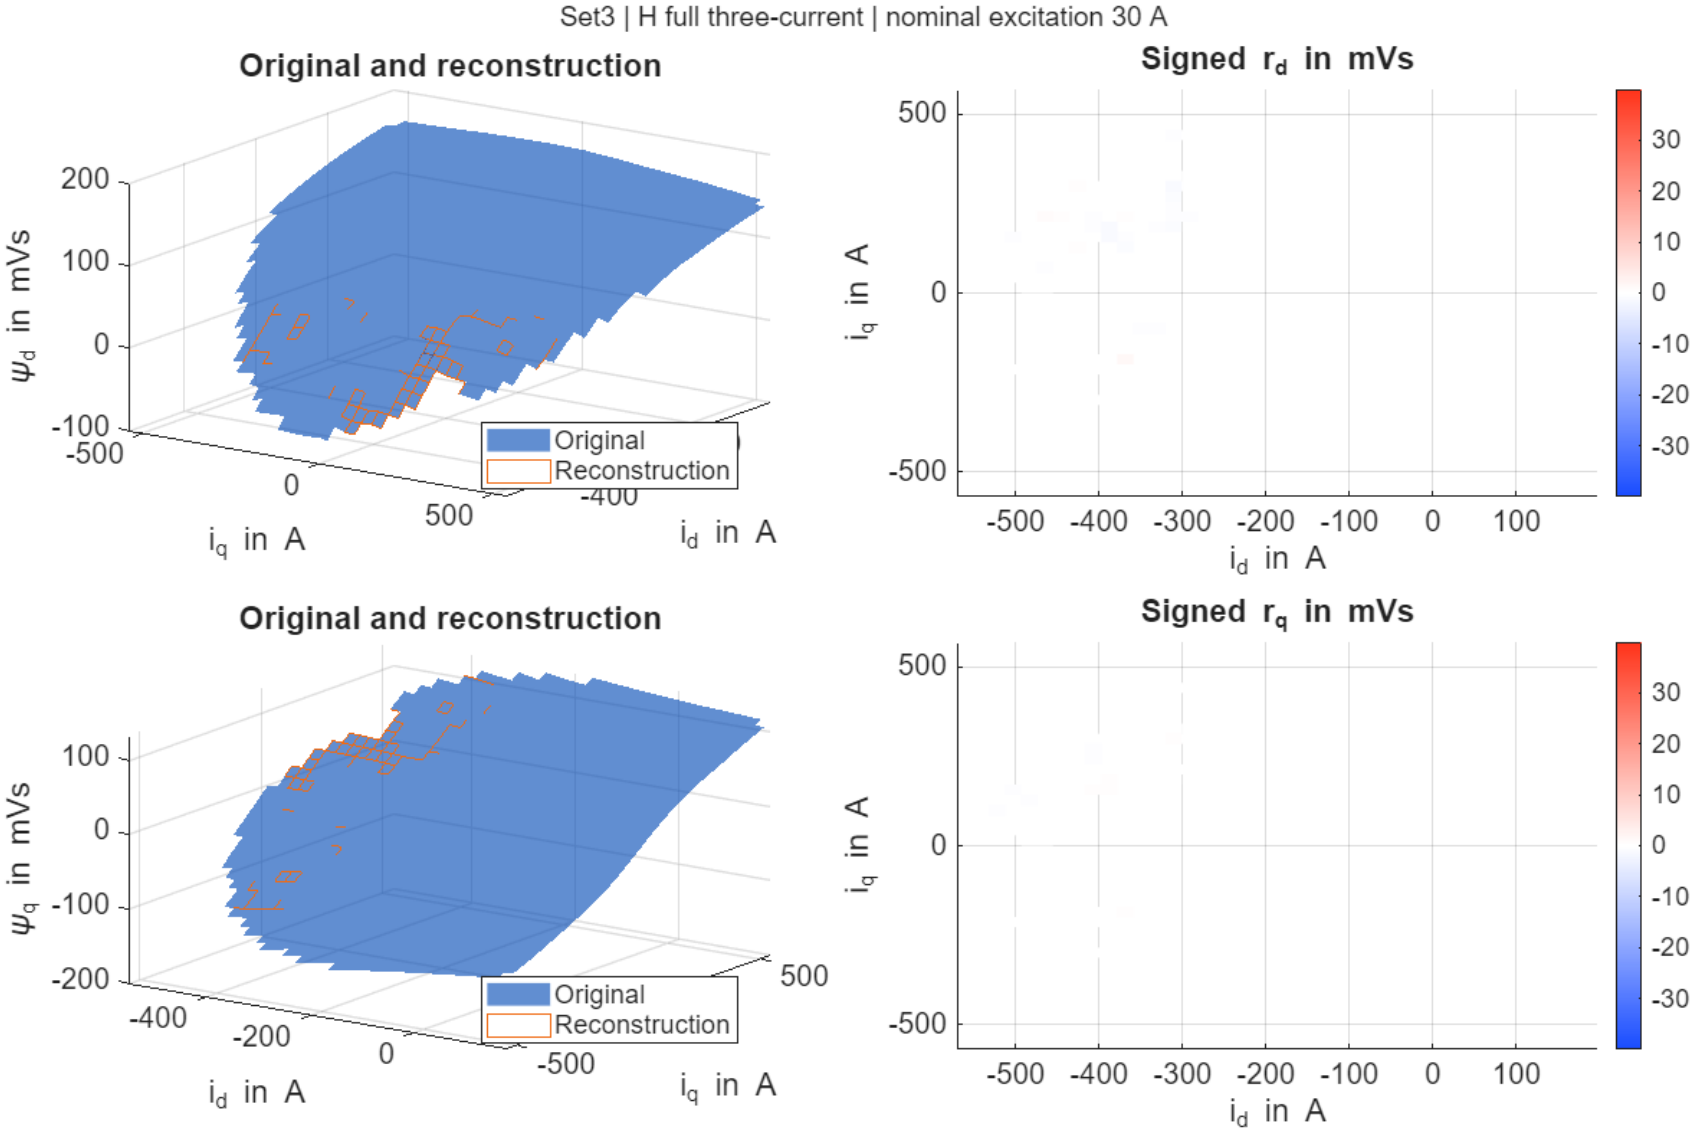

Original: blue; reconstructed: orange. Errors are signed, in mVs. The excitation graph uses measured currents. White regions lack support. The d-flux 3D view places q-current on the first axis; heatmaps keep physical d/q order.