

Micro-macro changepoint inference for periodic data sequences

Rebecca Killick

r.killick@lancs.ac.uk

Joint work with Anastasia Ushakova (Lancaster) and Simon Taylor (Edinburgh)
CMStatistics, Dec 2021


- Motivation
- Micro changepoint model
- RJMCMC Implementation
- Macro changepoint model
- Simulations
- Application

Motivation






- How can we make the most of highly granular time series?
- How can we study changes in periodic and cyclical behaviours?

NAO fluctuations (1979–2020)

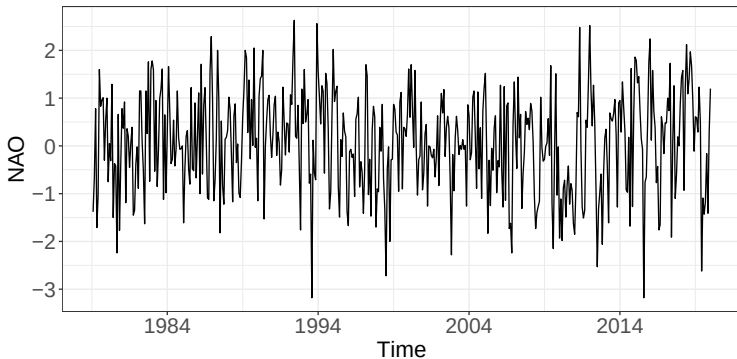

What are changepoints?


For data $y_1, \dots, y_n$, a changepoint is a location τ where the statistical properties of $y_1, \dots, y_\tau$ are different from $y_{\tau+1}, \dots, y_n$ in some way. Traditional changepoints include: mean, regression, variance.



- Binary segmentation & PELT
 - Assumes conditional independence ...
 - ... but dependence exists across days.

- Multivariate time series
 - Stack days to align changepoints ...
 - ... but what should 'time zero' be.

- Circular changepoint
 - For circular data (e.g. direction) ...
 - ... but time axis is linear.
- Circular Binary Segmentation
 - local time axis is circular ...
 - ... but just joins up ends not each day.
- Cyclic-HMM – Achieves periodicity via a structured transition matrix ... but period duration is stochastic.

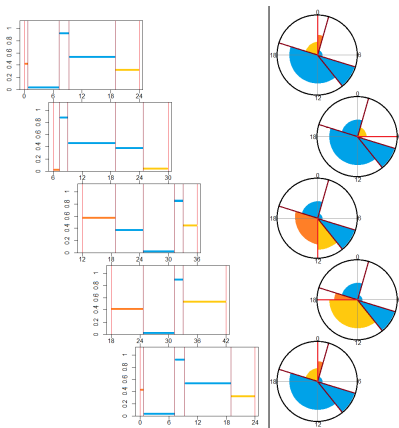

Create method for within-period changepoint detection

- This talk for real-valued data - original RSSC paper is binary data
- Bayesian method with truncated poisson prior for cpt locations
- RJMCMC for fitting

Extend the within-period to across period changes too.

Create layered visualizations for ease of inference.

We denote changepoints as micro (within) and macro (across) level changepoints.

Micro level changepoint detection

- $\{X_t\}_{t \geq 0}$ — Real-valued time series.
- $N \in \mathbb{N}$ — Given period length.
 - $t = cN + i$ where $c \in \mathbb{N}_0$ and $i \in \{0, 1, \dots, N - 1\}$.
- $m \geq 1$ — Number of segments partitioning the period.
- $\tau_1, \dots, \tau_m \in \{0, 1, \dots, N - 1\}$ — Changepoint positions.
 - Ordered: $\tau_{j-1} < \tau_j$.
 - Periodic: $\tau_{m+1} = \tau_1$.
 - Minimum separation: $\tau_j - \tau_{j-1} \geq l$ for $l > 0$.
- μ_j for $j \in \{1, \dots, m\}$ — Segment means.
- σ_j^2 for $j \in \{1, \dots, m\}$ — Segment variances.


$X_t \sim \text{Normal}(\mu(t), \sigma^2(t))$ for $t \geq 0$ where
 $\mu(t) = \sum_{j=1}^m \mu_j \mathbb{I}\{i \in (\tau_{j-1}, \tau_j]\}$ and $\sigma^2(t) = \sum_{j=1}^m \sigma_j^2 \mathbb{I}\{i \in (\tau_{j-1}, \tau_j]\}$.



- $m \sim \text{Truncated - Poisson} \left(1, \{1, \dots, \lfloor \frac{N}{l} \rfloor\} \right)$.
- $\mu_j | \sigma_j^2, \tau, m \sim \text{Normal}(d, c\sigma_j^2)$ for $j = 1, \dots, m$.
- $\sigma_j^2 | \tau, m \sim \text{InvGamma}(a, b)$ for $j = 1, \dots, m$.
- Transform τ to excess segment length:
 - $\delta_j = \tau_j - \tau_{j-1} - l$ for $j = 1, \dots, m$.
 - $(\delta_1, \dots, \delta_m) \sim \text{Dirichlet - Multinomial}(N - lm, \alpha \mathbf{1}_m)$
- $\tau_1 \sim \text{Uniform}\{0, \dots, N - 1\}$.


Cluster

$\alpha = 0.5$




Random

$\alpha = 1$



Repel

$\alpha = 2$



Segment probabilities: Posteriors conditional on a sampled number and location of changepoints are easy to compute via conjugacy.

Number of segments and changepoint positions:

$$\pi(\boldsymbol{\tau}, m | \mathbf{x}) \propto \begin{cases} B(1 + \sum_t x_t, 1 + \sum_t (1 - x_t)) & m = 1, \\ \prod_{j=1}^m \left[\frac{B(1+s_j, 1+n_j-s_j)}{(\alpha+\delta_j)B(\alpha, \delta_j+1)} \right] \frac{(m\alpha+N-lm)B(m\alpha, N-lm+1)}{m!N} & \text{o/w,} \end{cases}$$

where $B(\cdot, \cdot)$ is the beta function.

- Trivial to evaluate $\pi(\boldsymbol{\tau}, m | \mathbf{x})$ for a given changepoint vector.
- Support size is potentially impractically large:
 - For $N = 96$ and $l = 4$, then there are $\sim 27.3 \times 10^{12}$ events.

Reversible Jump Monte Carlo Markov Chain (RJMCMC)

- Permits exploration of varying dimensional spaces.
- Need to satisfy 'dimension-matching' condition.
- Focus inference on the marginal posterior $\pi(\boldsymbol{\tau}, m|\mathbf{x})$.

Algorithm

1. Sample a segment $j \in \{1, \dots, m\}$ uniformly.
2. Define the proposal set $\mathcal{P}_j(\boldsymbol{\tau}, m)$.
3. Sample a changepoint vector from the proposal pmf:

$$q(\boldsymbol{\tau}', m'|\boldsymbol{\tau}, m) \propto \pi(\boldsymbol{\tau}', m'|\mathbf{x}) \mathbb{I}\{(\boldsymbol{\tau}', m') \in \mathcal{P}_j(\boldsymbol{\tau}, m)\}.$$

4. Accept/Reject proposal. Return to 1.



- Evaluate $\pi(\boldsymbol{\phi}|\boldsymbol{\tau}, m, \mathbf{x})$ given the changepoint posterior samples.

Proposal set, $\mathcal{P}_j(\tau, m)$, contains three move types:

- Combine sampled segment with the next.
- Contract or extend the length of the current segment.
- Partition current segment into two.

Unique mapping

For each $(\tau', m') \in \mathcal{P}_j(\tau, m)$ excluding (τ, m) , there exists a unique segment j' such that $(\tau, m) \in \mathcal{P}_{j'}(\tau', m')$.

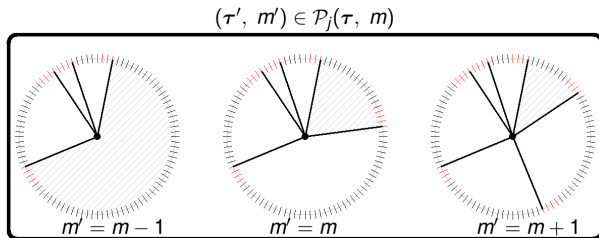

Macro Level Changepoint Detection

- Treat the micro-level detection as a “fit” for a segment ...
- ... thus we can use traditional, linear time algorithms.

We use PELT which optimizes:

$$\sum_{i=1}^{q+1} [\mathcal{C}(y_{(\alpha_{i-1}+1):\alpha_i})] + \beta q. \quad (1)$$


where q is the number of macro level changepoints and $\mathcal{C}(\cdot)$ is the MAP likelihood:

$$\mathcal{C}(y_{(\alpha_{i-1}+1):\alpha_i}) = -2 \sum_{j=1}^{\hat{m}_i} \sum_{t \in B_{i,j}^*} \log f(y_t | \hat{\mu}_{i,j}, \hat{\sigma}_{i,j}^2)$$


Simulations

See pre-print for full simulation study.


Simulation Results




(a) Realisation



(b) Number of Segments



(c) Macro-changes Positions



(d) Micro-changes Positions

Figure: Simulation results for scenario 11: 2 macro-change points at 6th month of 15th period and 10th month of 21st period, micro-changes at months 3,10, 2,11 and 5,11 for the segments 1,2 and 3 respectively.

Application

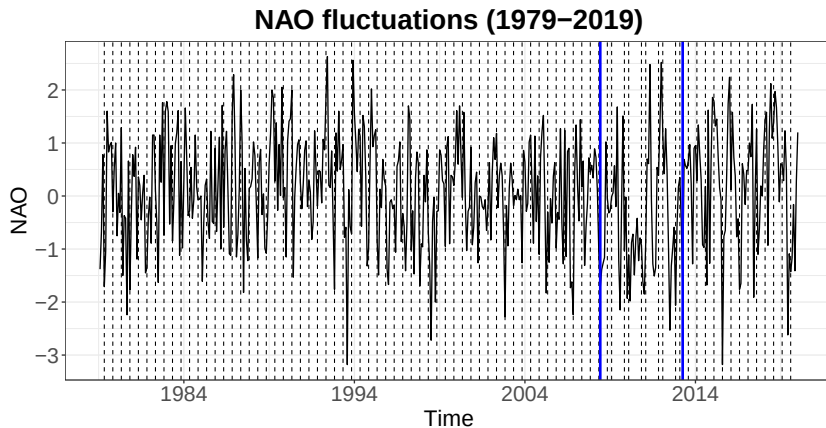


Figure: NAO data and Changepoint positions using $pen = 4 \log(n)$

Macro-level segment	Micro-level changepoints
1979-2008	April and October
2008-2013	May and August
2013-2019	April and October

Table: Macro- and micro-level changepoint positions for the NAO index.

Overview:


- A new approach for identifying within-period changepoint events for time series.

Taylor, S. A. C., Killick, R., Burr, J. and Rogerson, L. (2021)

'[Changepoint Detection within Periodic Binary Time Series](#)'. JRSS:Series C.

- Pooling of evidence across multiple periods by applying a circular perspective to time.
- Periodic changepoint patterns of real-valued time series.
- Introduced the micro-macro level changepoint approach
Ushakova, A., Taylor, S. A. C., Killick, R. (2021)
'[Multi-level Changepoint Inference for Periodic Data Sequences](#)'. Under Review.

Scenario 11

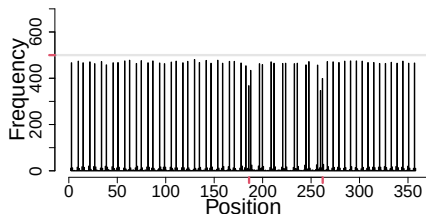

Scenario 7

