

# Statebins Guided Lab (Part 3)

Robert Thomas Kohn


11/4/25

#Graph 1 : Statebins with Continuous Data


```
data(election)
election = socviz::election
head(election)
```

```
## # A tibble: 6 x 22
##   state      st      fips total_vote vote_margin winner party pct_margin r_points
##   <chr>    <chr> <dbl>      <dbl>      <dbl> <chr> <chr>      <dbl>    <dbl>
## 1 Alabama  AL        1    2123372    588708 Trump Repu~    0.277    27.7
## 2 Alaska   AK        2     318608    46933 Trump Repu~    0.147    14.7
## 3 Arizona  AZ        4    2604657     91234 Trump Repu~    0.035     3.5
## 4 Arkansas AR        5    1130635    304378 Trump Repu~    0.269    26.9
## 5 California CA       6   14237893   4269978 Clint~ Demo~    0.300   -30.0
## 6 Colorado CO       8    2780247    136386 Clint~ Demo~    0.0491   -4.91
## # i 13 more variables: d_points <dbl>, pct_clinton <dbl>, pct_trump <dbl>,
## #   pct_johnson <dbl>, pct_other <dbl>, clinton_vote <dbl>, trump_vote <dbl>,
## #   johnson_vote <dbl>, other_vote <dbl>, ev_dem <dbl>, ev_rep <dbl>,
## #   ev_oth <dbl>, census <chr>
```


```
statebins( election , state_col = "st", value = "pct_clinton")
```

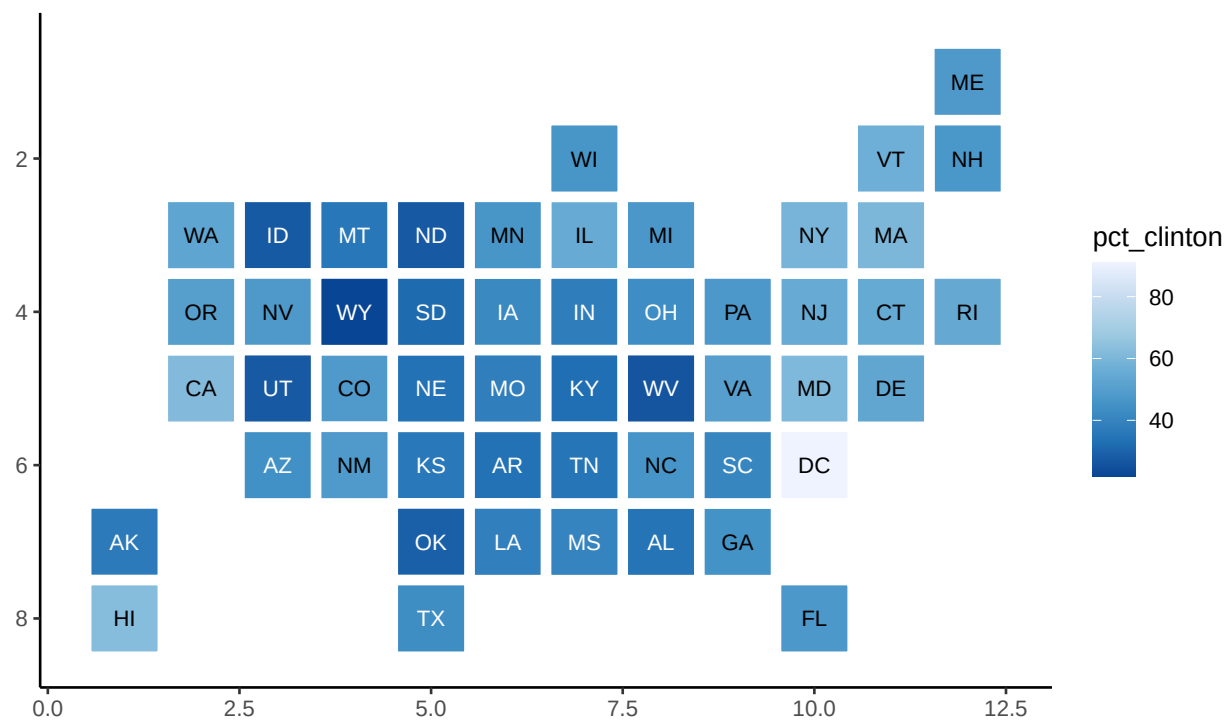

```
statebins( election , state_col = "st", value = "pct_clinton")%>%gf_theme(theme_statebins())
```

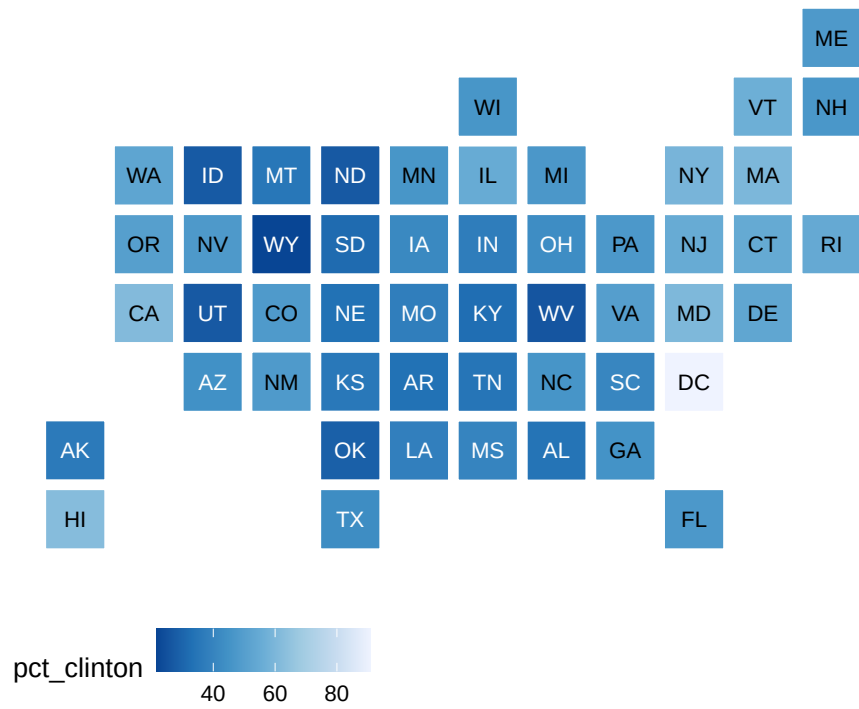


```
statebins( election , state_col = "st", value = "pct_clinton", round = TRUE)%>%gf_theme(theme_statebins
```

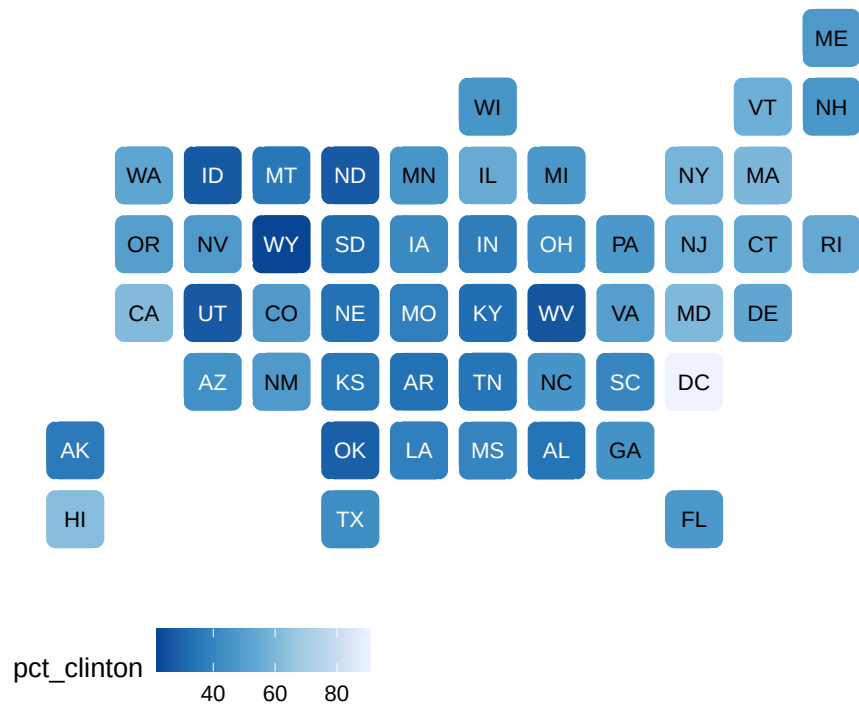

```
statebins( election , state_col = "st", value = "pct_clinton", round = TRUE)%>%gf_theme(theme_statebins
```

```
## Scale for fill is already present.
```

```
## Adding another scale for fill, which will replace the existing scale.
```

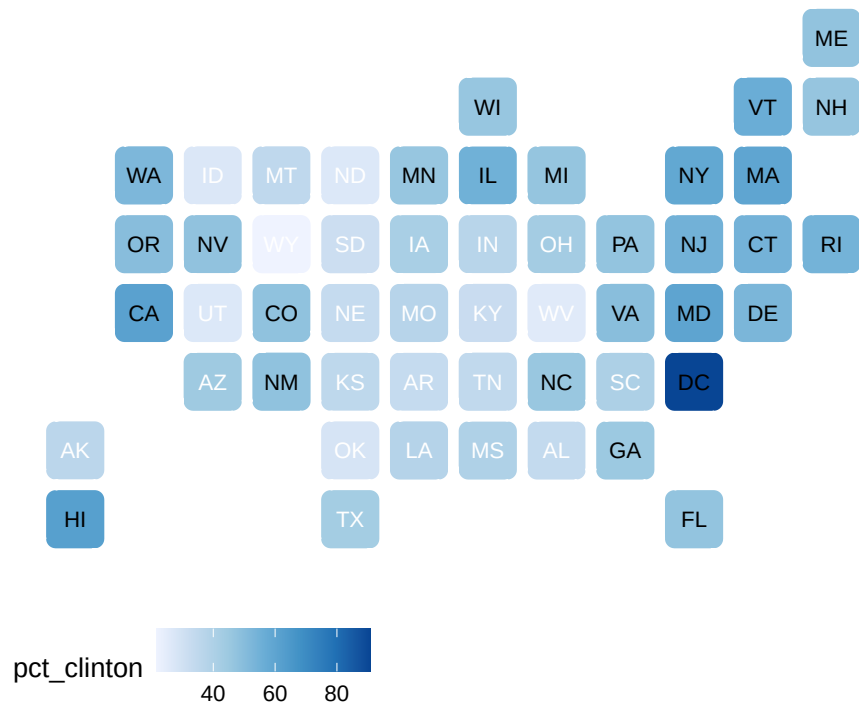


```
statebins( election , state_col = "st", value = "pct_clinton", round = TRUE)%>%gf_theme(theme_statebins
```

```
## Scale for fill is already present.
```

```
## Adding another scale for fill, which will replace the existing scale.
```

## 2016 Election Map

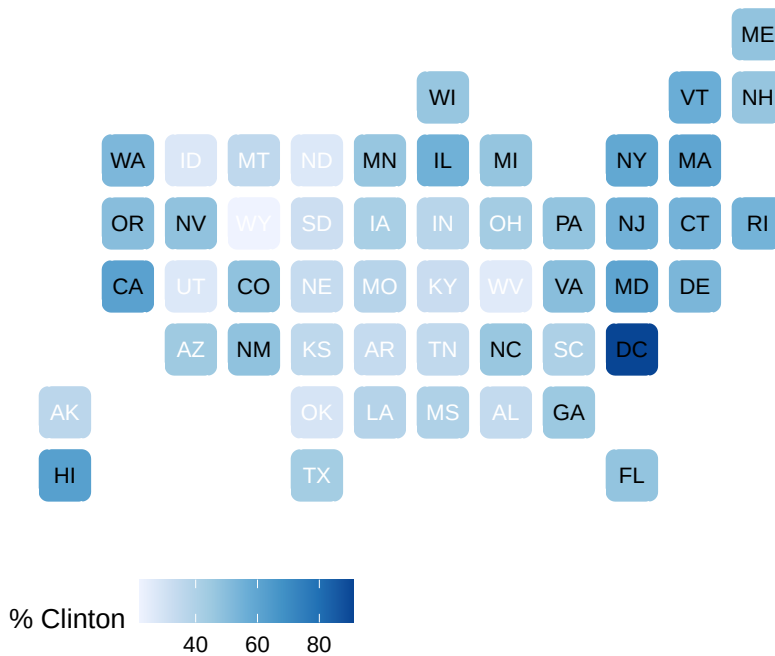


## Graph 2: Discretized Continuous Data

```
diced = election %>% mutate( clinton = cut( pct_clinton , breaks = 3 , labels = c("High Desire", "Average", "Low Desire") ) )
head(diced)
```


```
## # A tibble: 6 x 23
##   state      st    fips total_vote vote_margin winner party pct_margin r_points
##   <chr>    <chr> <dbl>      <dbl>      <dbl> <chr> <chr>      <dbl>    <dbl>
## 1 Alabama  AL        1    2123372    588708 Trump  Repu~    0.277    27.7
## 2 Alaska   AK        2     318608     46933 Trump  Repu~    0.147    14.7
## 3 Arizona  AZ        4    2604657     91234 Trump  Repu~    0.035     3.5
## 4 Arkansas AR        5    1130635    304378 Trump  Repu~    0.269    26.9
## 5 California CA        6   14237893   4269978 Clint~ Demo~    0.300   -30.0
## 6 Colorado CO        8    2780247    136386 Clint~ Demo~    0.0491   -4.91
## # i 14 more variables: d_points <dbl>, pct_clinton <dbl>, pct_trump <dbl>,
## #   pct_johnson <dbl>, pct_other <dbl>, clinton_vote <dbl>, trump_vote <dbl>,
## #   johnson_vote <dbl>, other_vote <dbl>, ev_dem <dbl>, ev_rep <dbl>,
## #   ev_oth <dbl>, census <chr>, clinton <fct>
```

```
statebins( diced , state_col = "st", value = "clinton", ggplot2_scale_function = scale_fill_brewer )
```

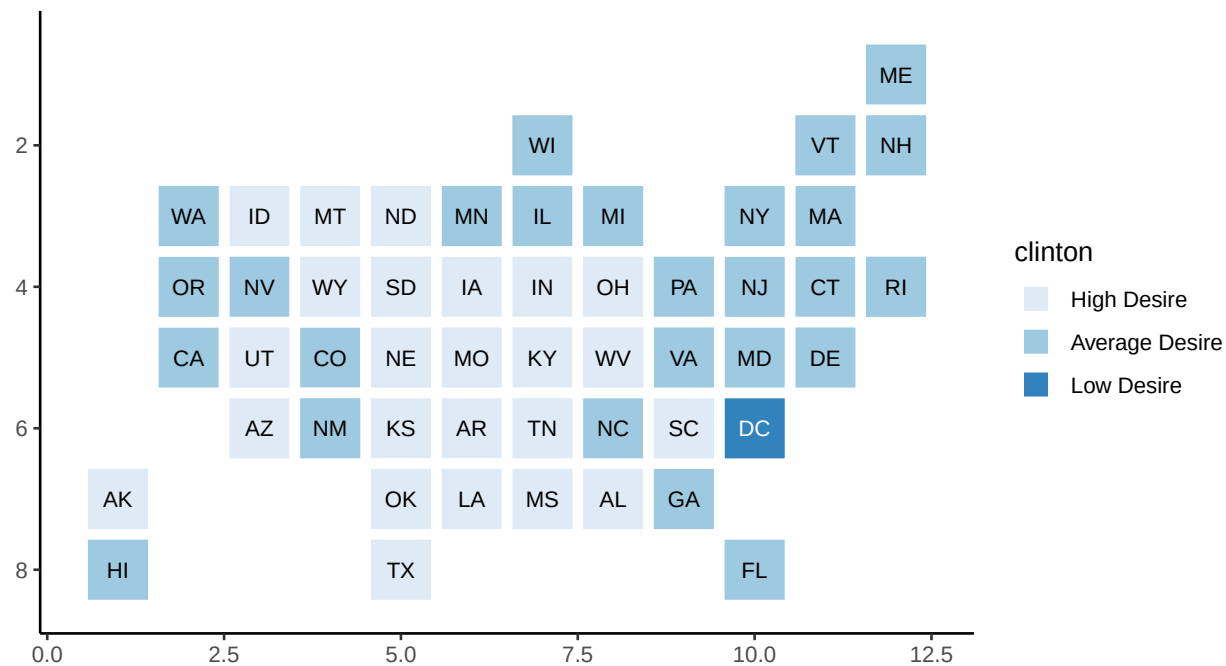


```
statebins( diced , state_col = "st", value = "clinton", ggplot2_scale_function = scale_fill_brewer )%>%
```

## 2016 Election Map

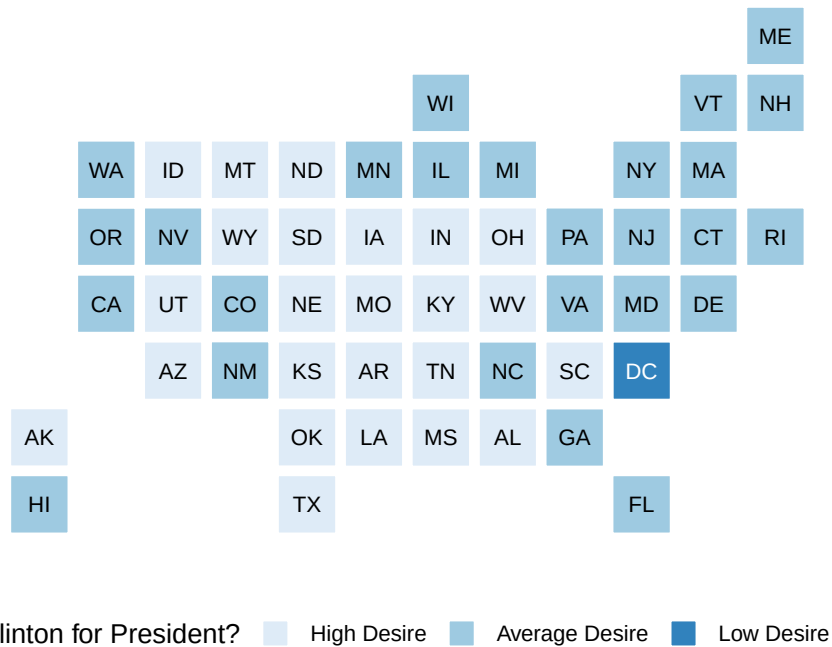


### Graph 3: Statebins Binary Graph

```
statebins(election, state_col = "st", value = "party", ggplot2_scale_function = scale_fill_brewer)
```

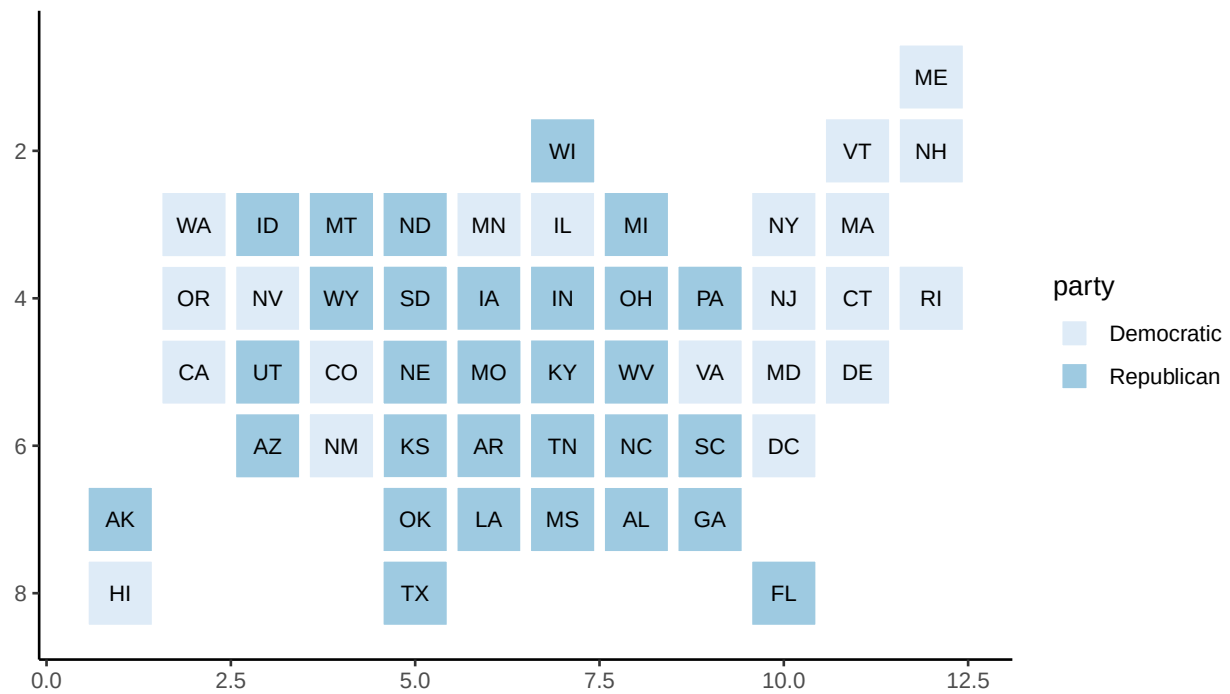


```
statebins(election, state_col = "st", value = "party", ggplot2_scale_function = scale_fill_manual, value = "party")
```

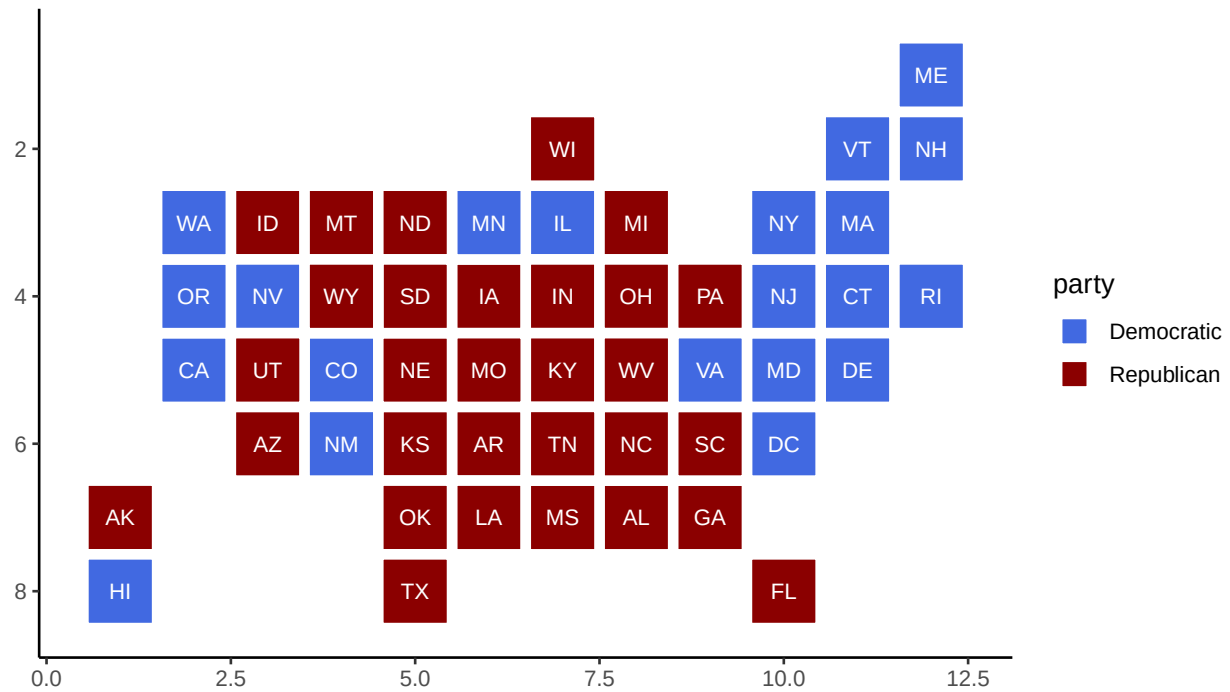

```
#statebins(election, state_col = "st", value = "party", ggplot2_scale_function = scale_fill_manual, val
```

## Graph 4: Multiple Categories

```
statebins(election, state_col = "st", value = "census", ggplot2_scale_function = scale_fill_brewer)
```

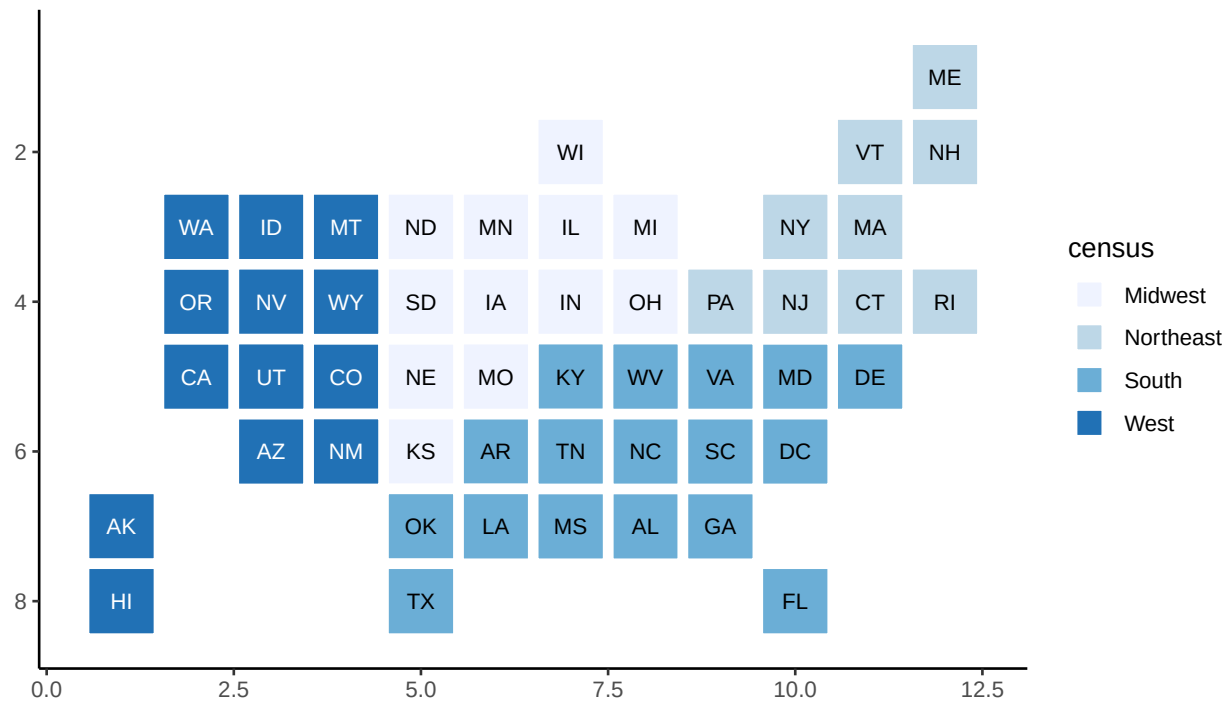

```
#statebins(election, state_col = "state", value = "census", ggplot2_scale_function = scale_fill_brewer, p
```

## Graph 5 New Dataset!

```
NewState77 <- as.data.frame(state.x77) %>% rownames_to_column("state") %>% rename(LifeExp = `Life Exp`, HSGrad = `HS Grad`)
statebins(NewState77, state_col = "st", value = "HSGrad", round = TRUE) %>% gf_theme(theme_statebins()) %>%
  scale_fill_brewer(palette = "Set1")
```

## Scale for fill is already present.

## Adding another scale for fill, which will replace the existing scale.

## High School Graduation Rates

