

Wrangling Data Guided Lab (Separate, Mutate, Strings)

Robert Thomas Kohn


9/27/25

Car Prices


```
#CarPrices <- read_csv(file.choose("STA227 - Data Visualization/CarPrices.csv"))
CarPrices <- read_csv("CarPrices.csv")

## Rows: 50 Columns: 3
## -- Column specification -----
## Delimiter: ","
## chr (2): Car, Price
## dbl (1): Mileage
##
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.
NewCarPrices <- CarPrices
#NewCarPrices <- NewCarPrices %>% separate_wider_delim(Car, delim = " ", names = c("Make", "Model"), to
#NewCarPrices <- NewCarPrices %>% separate_wider_delim(Car, delim = " ", names = c("Make", "Model"), to
NewCarPrices <- NewCarPrices %>% separate_wider_delim(Car, delim = " ", names = c("Make", "Model"), too


gf_point(Price ~ Mileage, data = NewCarPrices, color = ~Make)%>%gf_labs(title = "Car Prices vs Mileage l
```

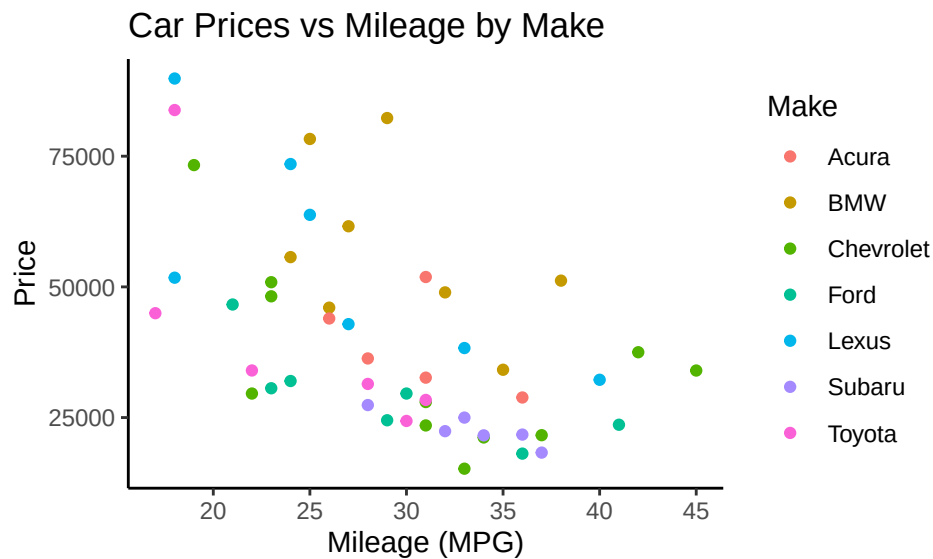


```
gf_point(Price ~ Mileage, data = NewCarPrices, color = ~ Make) %>% gf_facet_wrap(~ Make)%>%gf_labs(titl
```

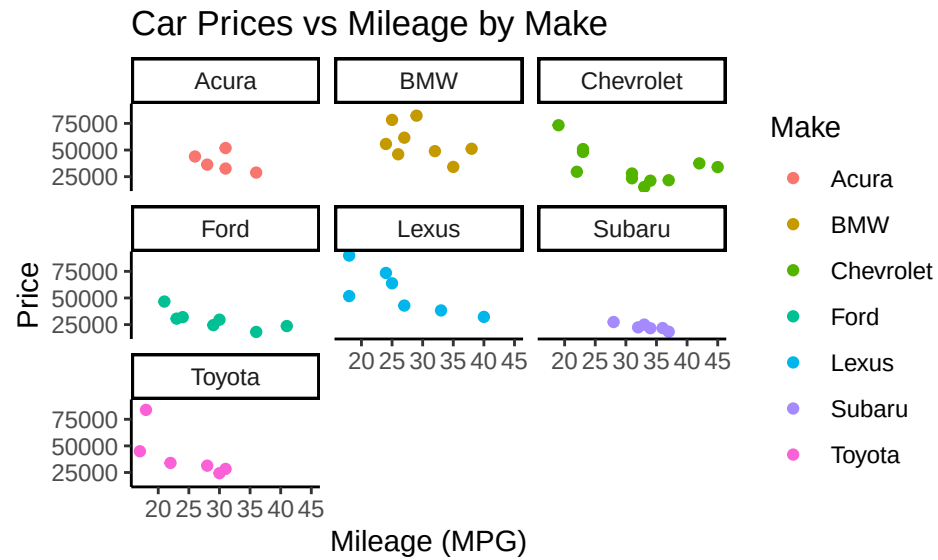


```
gf_point(Price ~ Mileage, data = NewCarPrices, color = ~ Make) %>% gf_facet_wrap(~ Make)%>%gf_theme(leg
```

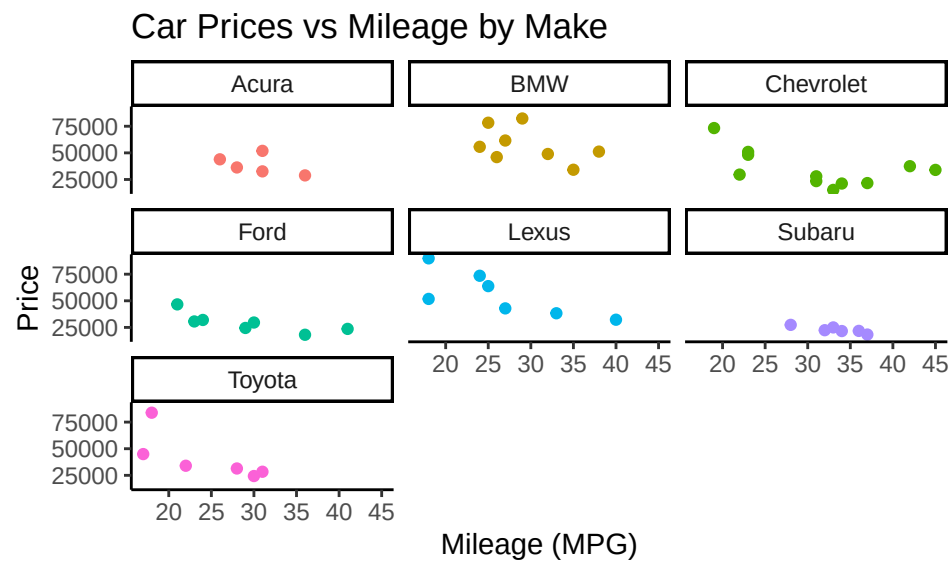

```
gf_point(Price ~ Mileage, data = transform(NewCarPrices, Make = NULL), color = "grey85", alpha = 0.4) %>
```

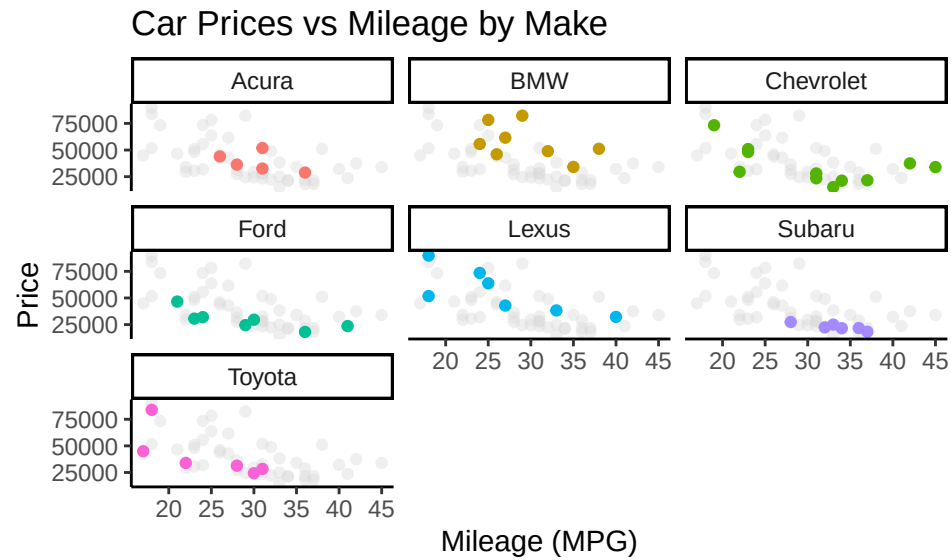


```
gf_point(Price ~ Mileage, data = transform(NewCarPrices, Make = NULL), color = "grey85", alpha = 0.4) %>
```

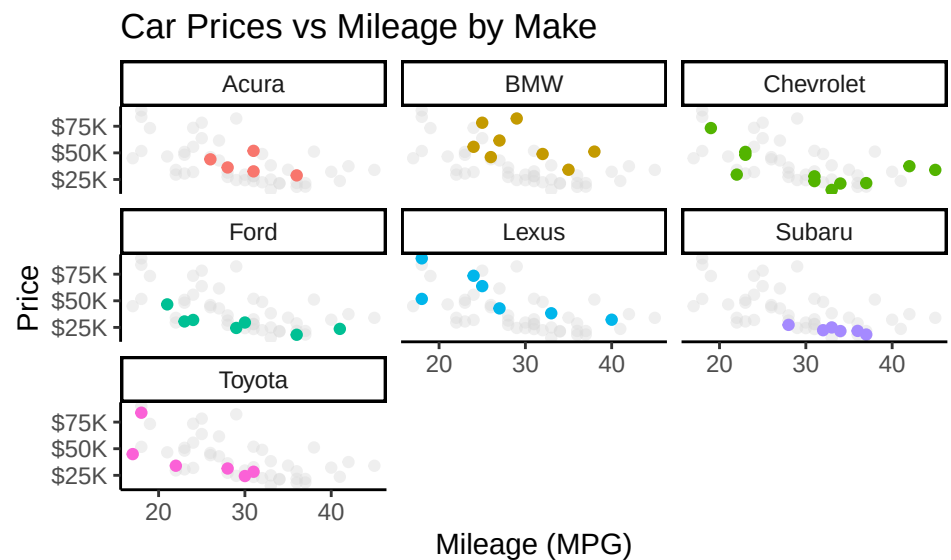


Music Preferences


```
Music <- read.csv("Music.csv")
gf_bar(~ Genre, data = Music) %>% gf_facet_wrap(~ Gender) %>% gf_labs(title = "Music Genre Preferences by
```

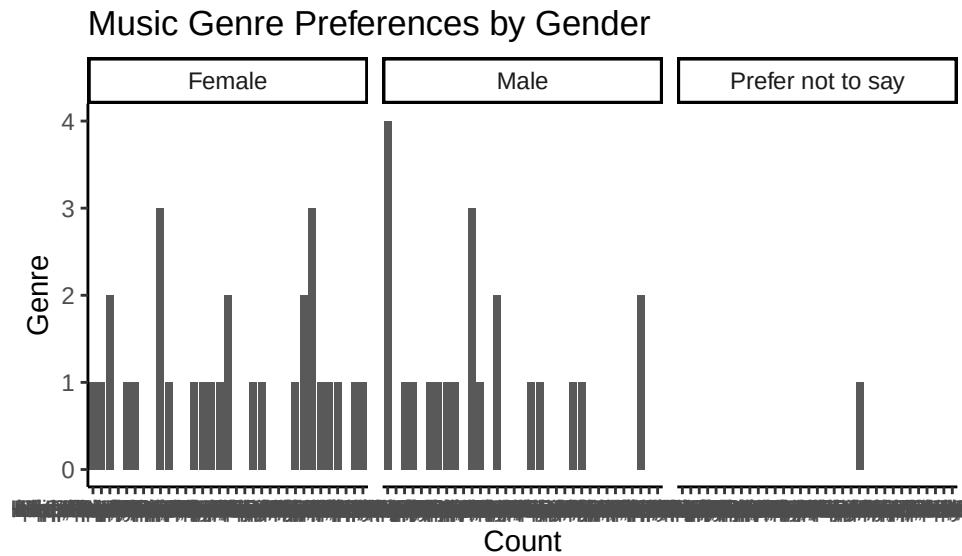

```
gf_bar(Genre ~ ., data = Music) %>% gf_facet_wrap(~ Gender) %>% gf_labs(title = "Music Genre Preferences by Gender")
```

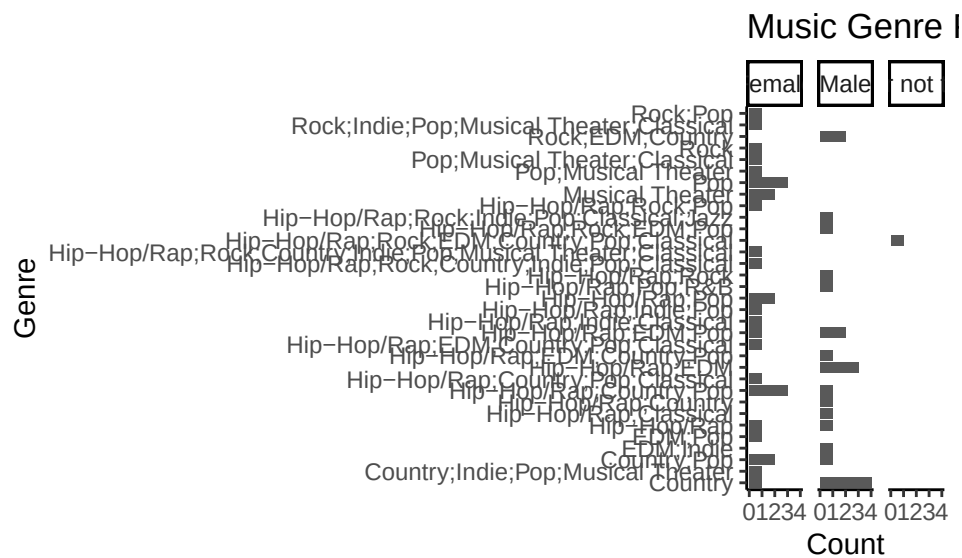


```
CleanMusic <- Music %>% separate_longer_delim(Genre, delim = ";")
gf_bar(Genre ~ ., data = CleanMusic) %>% gf_facet_wrap(~ Gender) %>% gf_labs(title = "Music Genre Preferences by Gender")
```

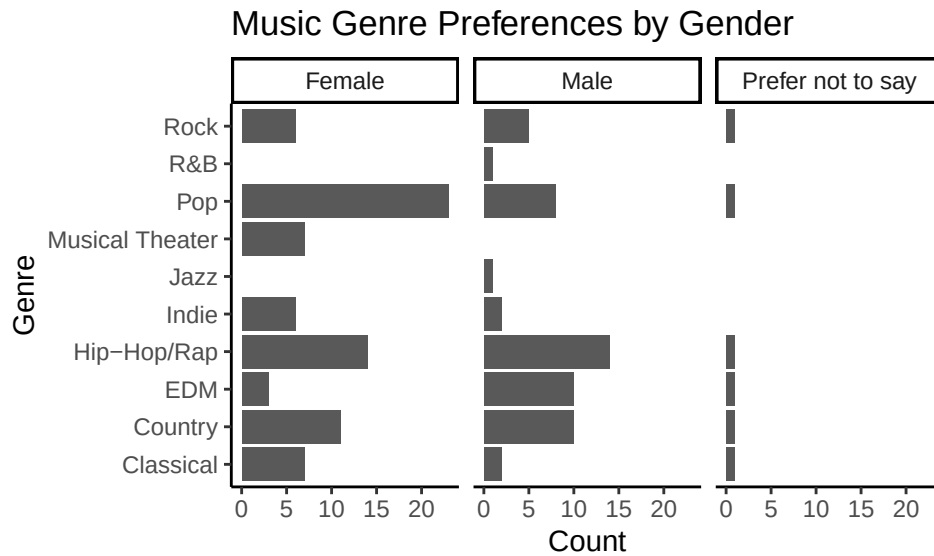


Major League Baseball Salaries


```
library(Lock5Data)
data(BaseballSalaries2015)
Baseball12 <- BaseballSalaries2015
Baseball12 <- BaseballSalaries2015 %>%group_by(Team)
Baseball12 <- BaseballSalaries2015 %>%group_by(Team)%>%mutate(TotalSalary = sum(Salary), NumPlayers = n())
gf_linerange(Team ~ 0 + TotalSalary, data = Baseball12, size = 3)%>%gf_labs(title = "Total Team Salary by Team Size")
```

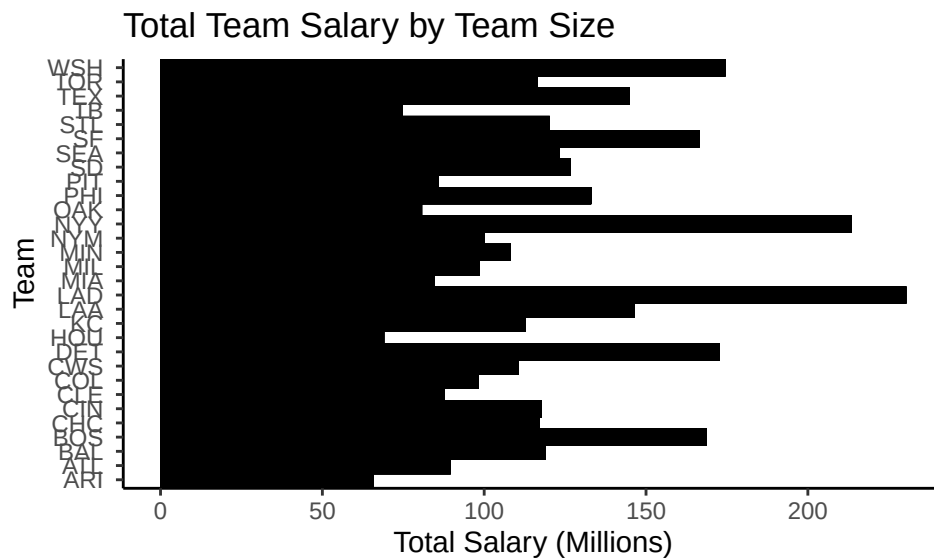


```
gf_linerange(fct_reorder(Team, TotalSalary) ~ 0 + TotalSalary, data = Baseball12, size = 3)%>%gf_labs(title = "Total Team Salary by Team Size")
```

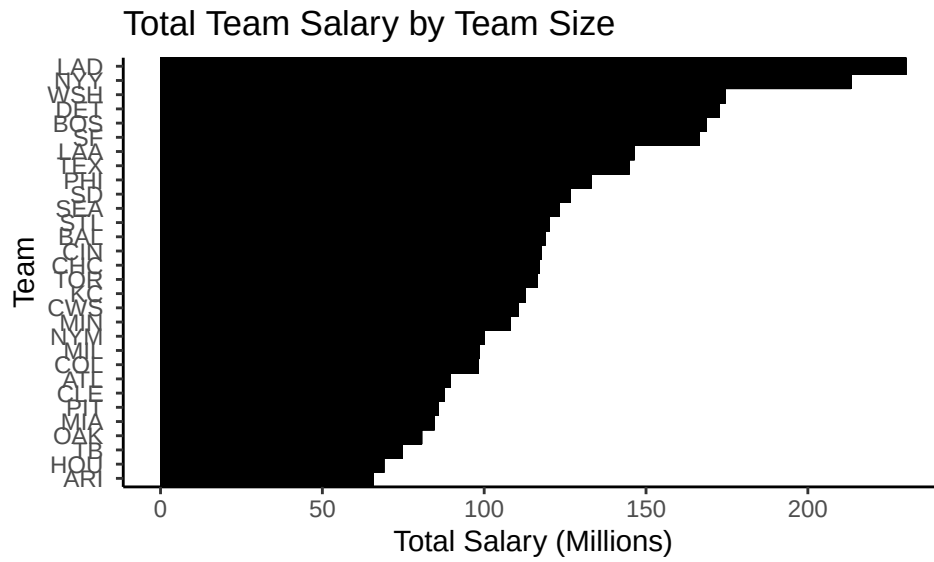

```
gf_linerange(fct_reorder(Team, TotalSalary) ~ 0 + TotalSalary, data = Baseball12, size = 3, color = ~Num
```

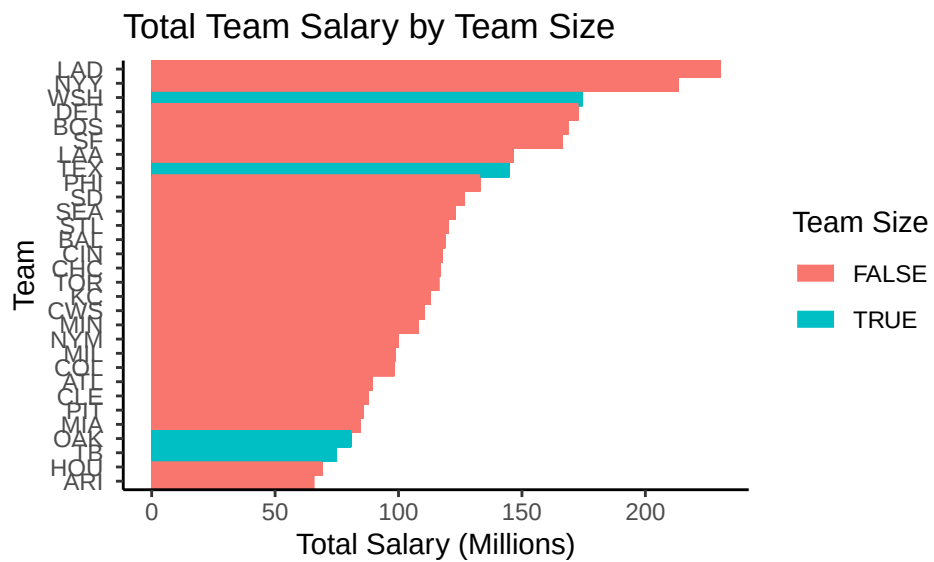

```
gf_linerange(fct_reorder(Team, TotalSalary) ~ 0 + TotalSalary, data = Baseball12, size = 3, color = ~Num
```

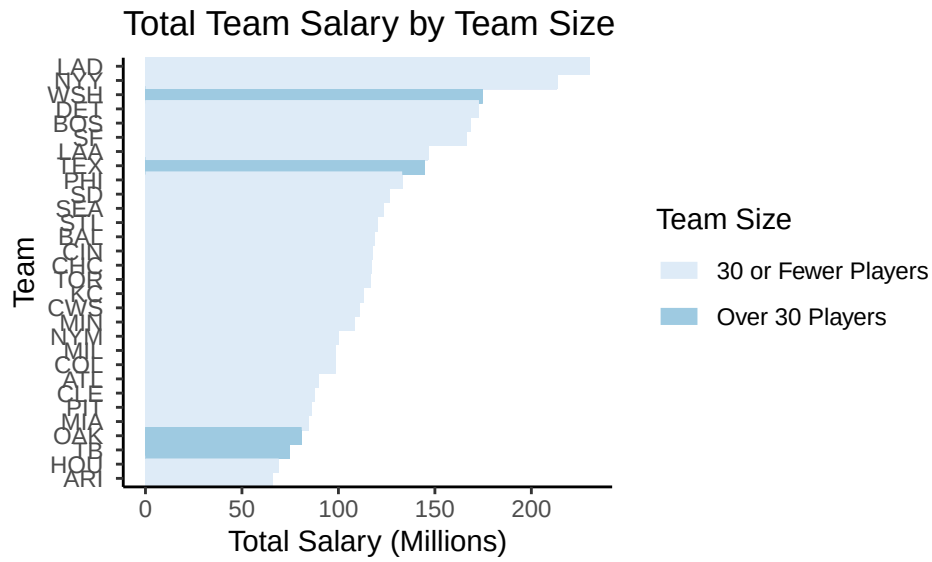

```
gf_linerange(fct_reorder(Team, TotalSalary) ~ 0 + TotalSalary, data = Baseball12, size = 3, color = ~Num
```

