

Wrangling Data Open Ended Assignment

Robert Thomas Kohn

9/30/25

Option 1: Dealbreakers in Dating (Yes/No)

My question to explore is “What is the least attractive trait to someone looking for a relationship?” I anticipate that the ordering will be Personality, Tobacco, Political, Appearance, Dependent, Underplanner, Overplanner, Marijuana, Independent. I don’t know how to import a sketch to R.

I need to get all types of dealbreakers into a summarized format. I can do this with raw numbers as there is equal participants or as a percentage if I divide over n. I think in this case a percentage will serve to be more beneficial as to most a random number of people who think these things is irrelevant. Seeing “x% of people find y to be the greatest dealbreaker” is much more impactful.

```
library(readr)
DatingPreferencesBinary <- read_csv("DatingPreferencesBinary.csv")

## Rows: 52 Columns: 10
## -- Column specification -----
## Delimiter: ","
## chr (10): OpposingReligiousBeliefs, OpposingPoliticalBeliefs, UnpleasantAppe...
##
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.
head(DatingPreferencesBinary)


## # A tibble: 6 x 10
##   OpposingReligiousBeliefs OpposingPoliticalBeliefs UnpleasantAppearance
##   <chr>                  <chr>                  <chr>
## 1 No                    No                    Yes
## 2 Yes                  No                    No
## 3 No                    No                    Yes
## 4 Yes                  Yes                   No
## 5 Yes                  Yes                   No
## 6 Yes                  Yes                   No
## # i 7 more variables: UnpleasantPersonality <chr>, TobaccoSmoker <chr>,
## #   MarijuanaSmoker <chr>, IndependantPerson <chr>, DependentPerson <chr>,
## #   OverPlanner <chr>, Underplanner <chr>
summary(DatingPreferencesBinary)

## OpposingReligiousBeliefs OpposingPoliticalBeliefs UnpleasantAppearance
## Length:52              Length:52              Length:52
## Class :character       Class :character       Class :character
## Mode :character        Mode :character       Mode :character
## UnpleasantPersonality TobaccoSmoker      MarijuanaSmoker    IndependantPerson
## Length:52              Length:52          Length:52          Length:52
```

```
## Class :character      Class :character      Class :character      Class :character
## Mode :character      Mode :character      Mode :character      Mode :character
## DependentPerson      OverPlanner           Underplanner
## Length:52            Length:52            Length:52
## Class :character      Class :character      Class :character
## Mode :character      Mode :character      Mode :character

dpc <- DatingPreferencesBinary %>% mutate(across(everything(), as.factor)) #Cleaning and Factor
dr<-dpc%>%summarise(across(everything(), ~sum(. == "Yes")/n() * 100))%>%pivot_longer(everything(), names
dr <- dr %>% mutate(Dealbreaker = str_replace_all(Dealbreaker, pattern = "(?<=.)([A-Z])", replacement =


gf_linerange(fct_reorder(Dealbreaker, Percentage) ~ 0 + Percentage, data = dr, size = 3, color = ~Perce
```

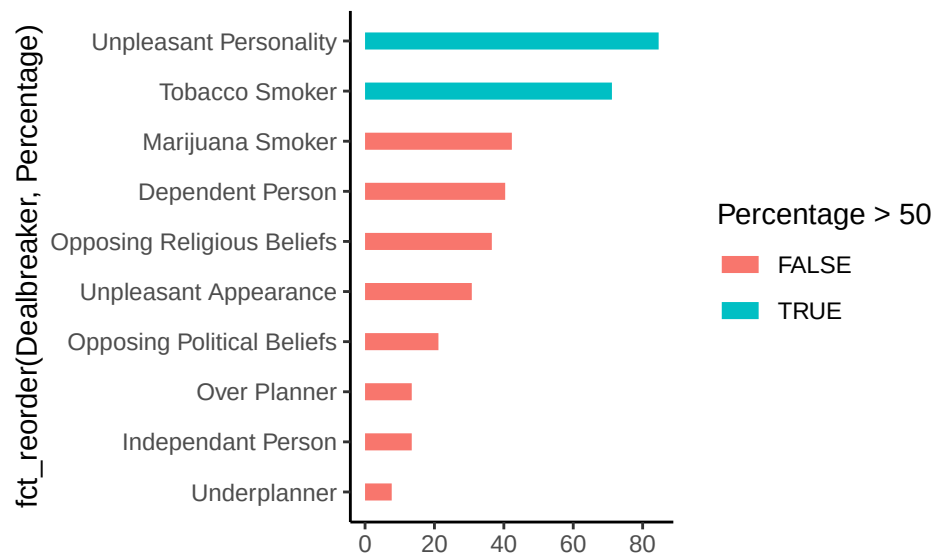

```
head(dr)
```

```
## # A tibble: 6 x 2
##   Dealbreaker      Percentage
##   <chr>            <dbl>
## 1 Opposing Religious Beliefs      36.5
## 2 Opposing Political Beliefs      21.2
## 3 Unpleasant Appearance          30.8
## 4 Unpleasant Personality          84.6
## 5 Tobacco Smoker                 71.2
## 6 Marijuana Smoker               42.3
```

```
gf_linerange(fct_reorder(Dealbreaker, Percentage) ~ 0 + Percentage, data = dr, size = 3, color = ~Perce
```

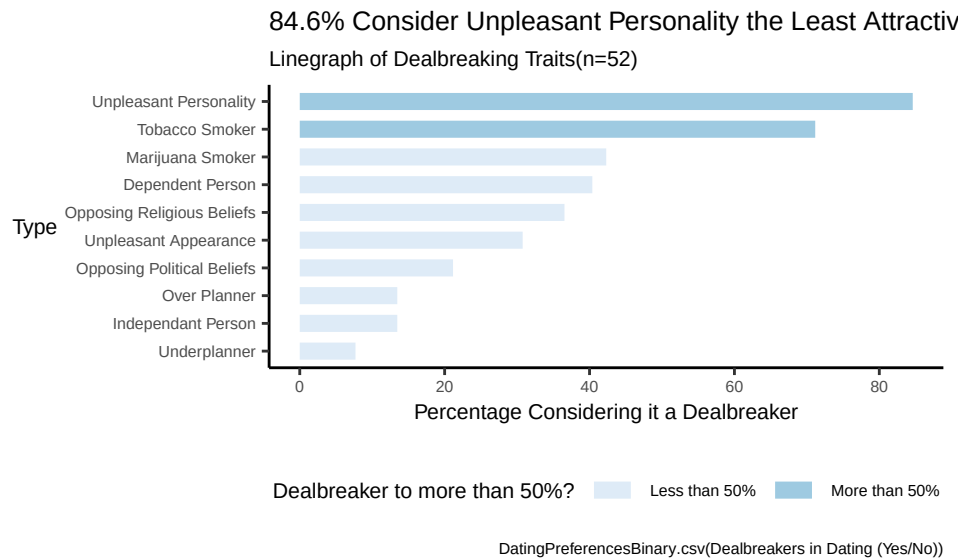

I hate wrangling data in R so much. I am a spreadsheet merchant outside of this class and so having to wrangle things which are a small update is tedious at times but I digress. Trying to think about modifying columns in R to get what I want was a little troublesome for me at first until I realized I can effectively make this just like baseball but with a little spicing it up. There's a lot of ways they could have simplified this off rip but I wonder if you could do a chi squared type test with this for some experiment. I think having only binary options within these categoricals made things slightly difficult too. I think what I would love to do would be making a heat map of these but I considered that too frustrating.

In my revised graph, I improved the legend so it has useful descriptors and moved it to the bottom. I also color coded it in a nicer way. Further, I also labeled the axes and added a caption. I thought with the subtitle including the n could be useful too.