how the dag branch builds a DAG: seed 7, p = 6, k = 1 (d = k/p = 0.167)

1–2. a random order π of the nodes, and the 15 forward slots
(the slot j → i is open only if π(j) < π(i): no arrow may point left)

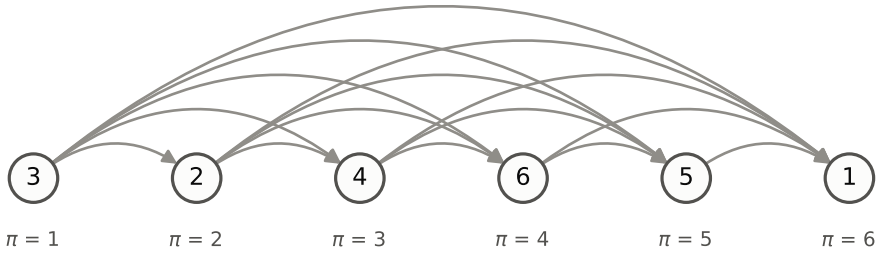

3. an independent coin with probability min(2d, 1) = 0.333 on every open slot
here 5 of 15 kept (expected 5 = p(p−1)d, the random class's count)

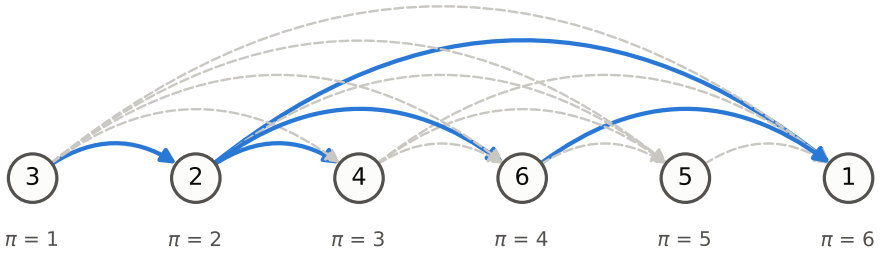

the result in the node labels,
as sample_drift returns it

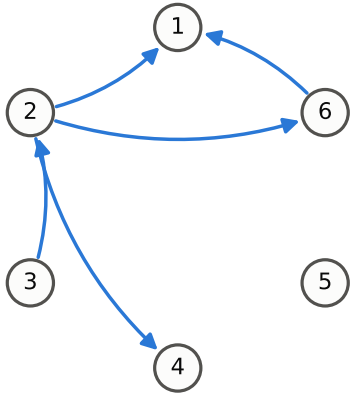

5 edges, 0 two-cycles: class DAG
identified on its support: yes

its support ω in the node labels
(grey: blocked slot, would point backwards)

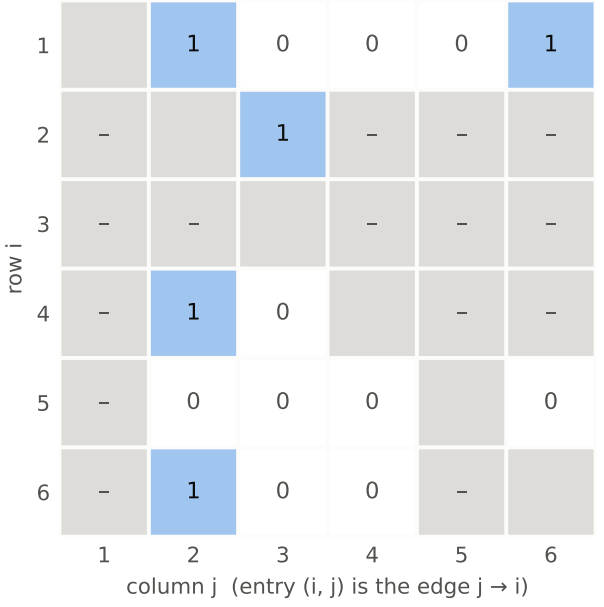

rows and columns sorted by π: strictly lower
triangular, so no walk returns to its start

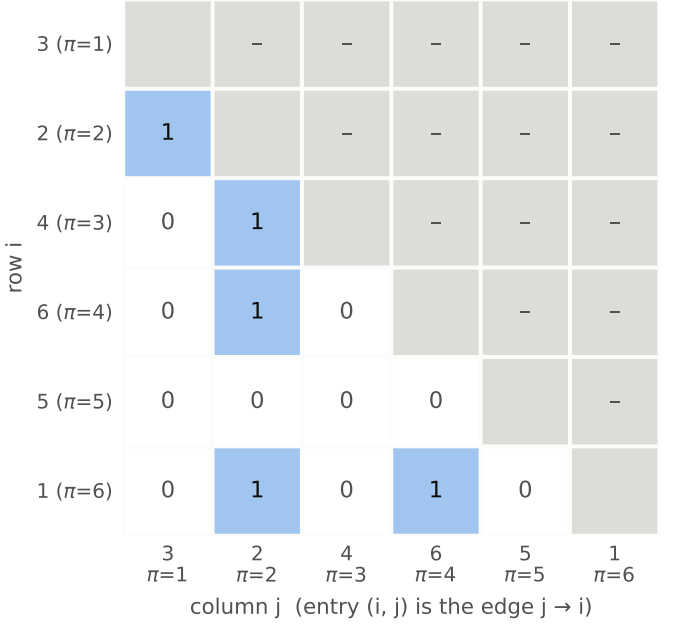

open slot coin kept: an edge coin dropped