E3: the weight distribution as a knob, direct loss -- the true single edges in the search from the BIC selection, n = 10^4 (fp: false positives per graph)
[laptop rehearsal: p = 10, true C = 2I, 4 replicates, 16 graphs per cell]

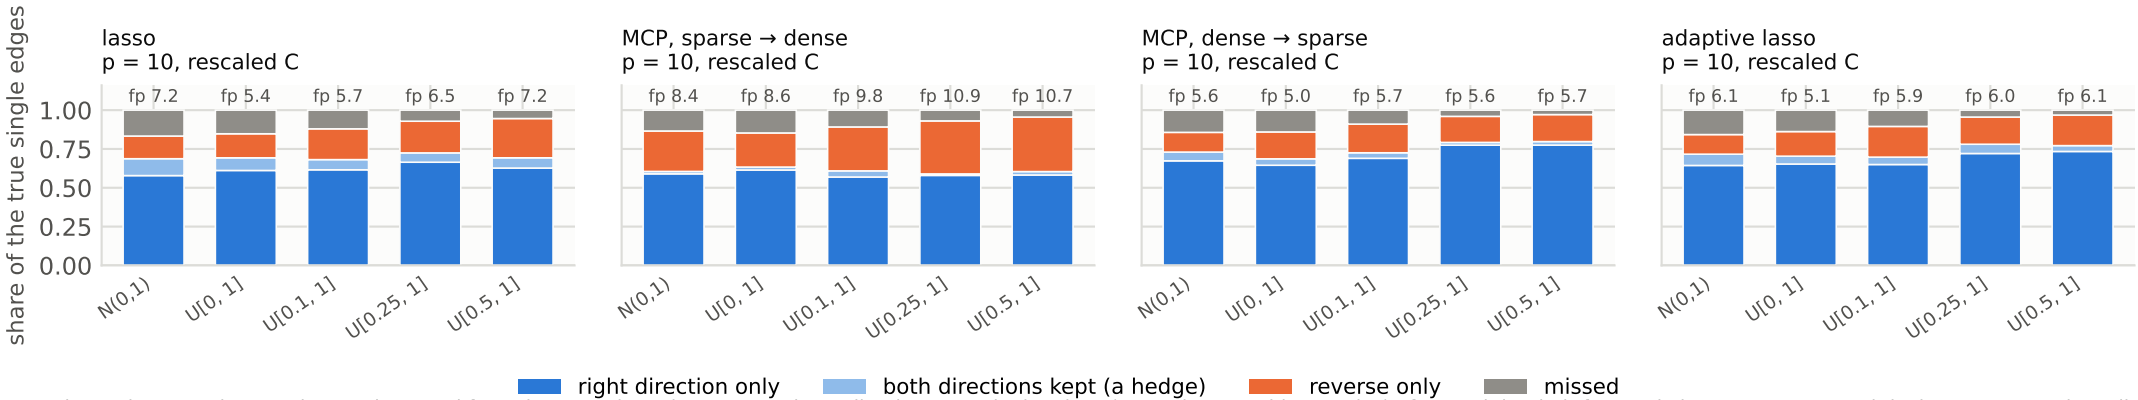

Graph per data set: the greedy search started from the BIC-selected support. A bar splits the TRUE single edges (true edges outside 2-cycles) of a graph by their fate and always sums to one; it is the mean over the cell's graphs of those shares. The estimated graph's size is not shown: fp = its false positives per graph (hedges + reversals + edges between unconnected nodes).