


Breakpoint list and paused execution.

fig:running-simulations-breakpoint | figure

Generated from FIGURE-SPEC comments

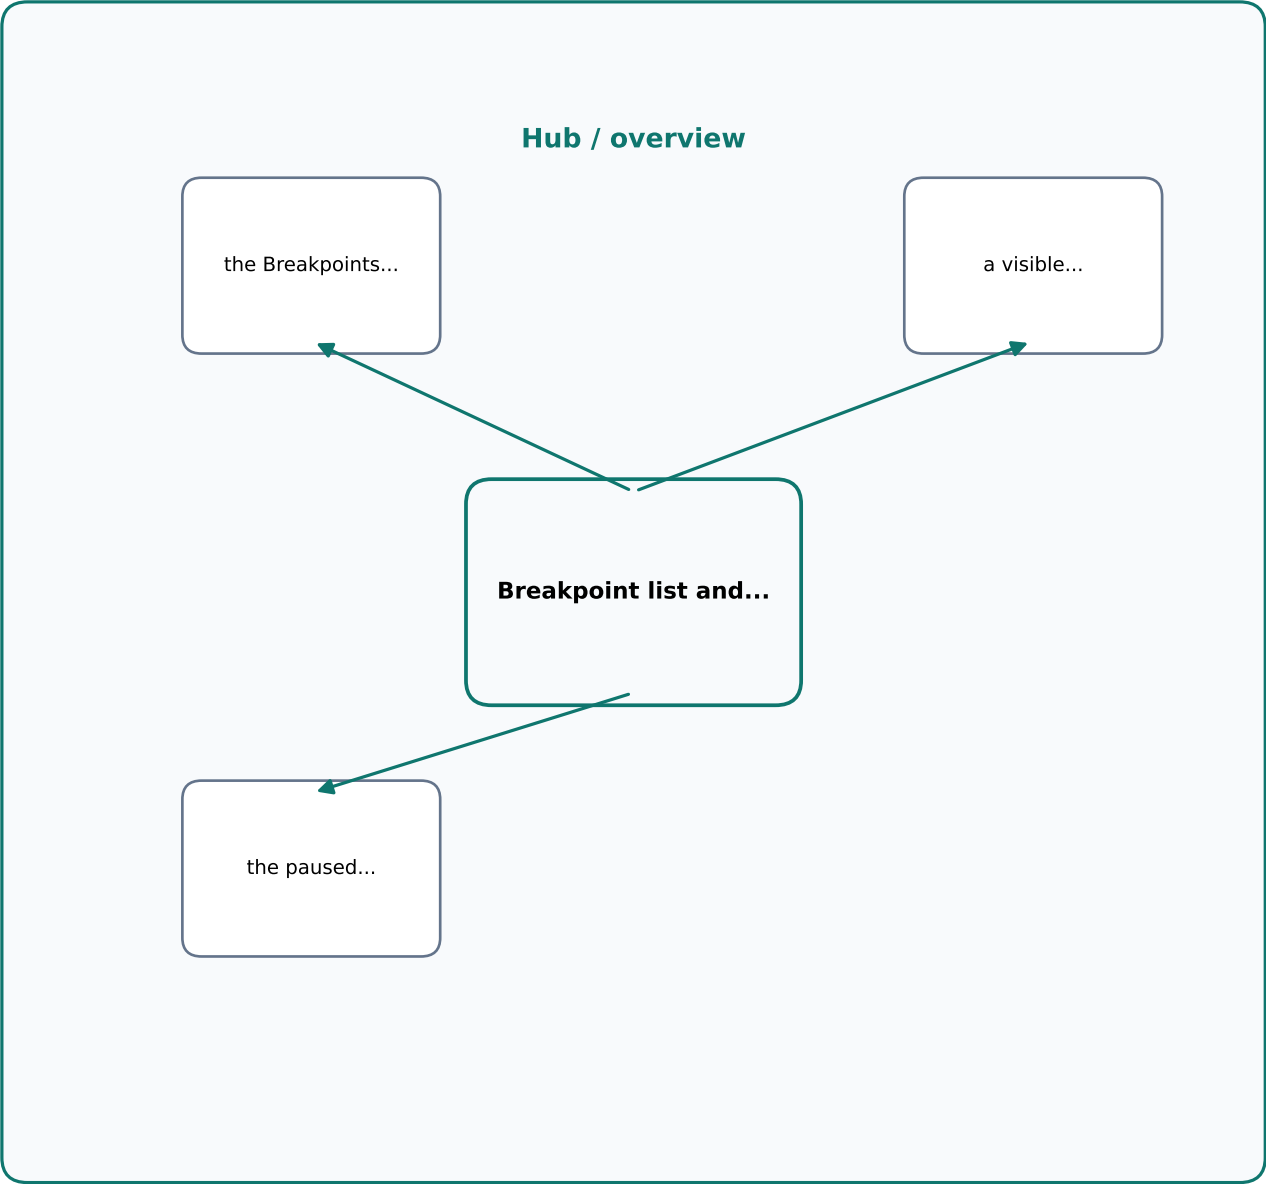

Source

- source/applications/gui/genesys/mainwindow.cpp
- source/kernel/simulator/model/ModelSimulation.cpp

Purpose

- Show the breakpoint table and one paused
- run caused by a breakpoint.

Required content

- the Breakpoints tab table
- a visible breakpoint type such as Component, Entity, or Time
- the paused simulation state in context

Accessibility

- A screenshot that proves the run can stop
- at a breakpoint and keep the breakpoint
- list visible.

Validation

- The breakpoint must correspond to a real live breakpoint list entry from the current model.

The source block remains the authoritative specification.
The rendered asset is a compact visual summary.