


Minimal local worker call sequence.

fig:worker-local-call-sequence | figure

Generated from FIGURE-SPEC comments

Process / flow

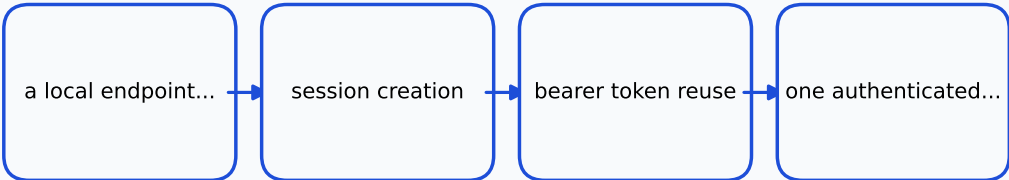

Source

- source/applications/worker/README.md
- source/applications/mcp/README.md
- source/applications/worker/api/ApiRouter.cpp
- source/applications/worker/service/SimulatorSessionService.cpp

Purpose

- Show one concrete local call sequence from
- health check to session creation and an
- authenticated worker request.

Required content

- a local endpoint call
- session creation
- bearer token reuse
- one authenticated call such as worker info, model creation, or simulation status

Accessibility

- A terminal or API transcript that
- demonstrates the minimal supported local
- workflow.

Validation

- Every request and response shown must correspond to a route currently implemented in the code.

The source block remains the authoritative specification.
The rendered asset is a compact visual summary.