


# Current provider configuration paths and transport assumptions.

fig:ai-provider-configuration | figure

Generated from FIGURE-SPEC comments

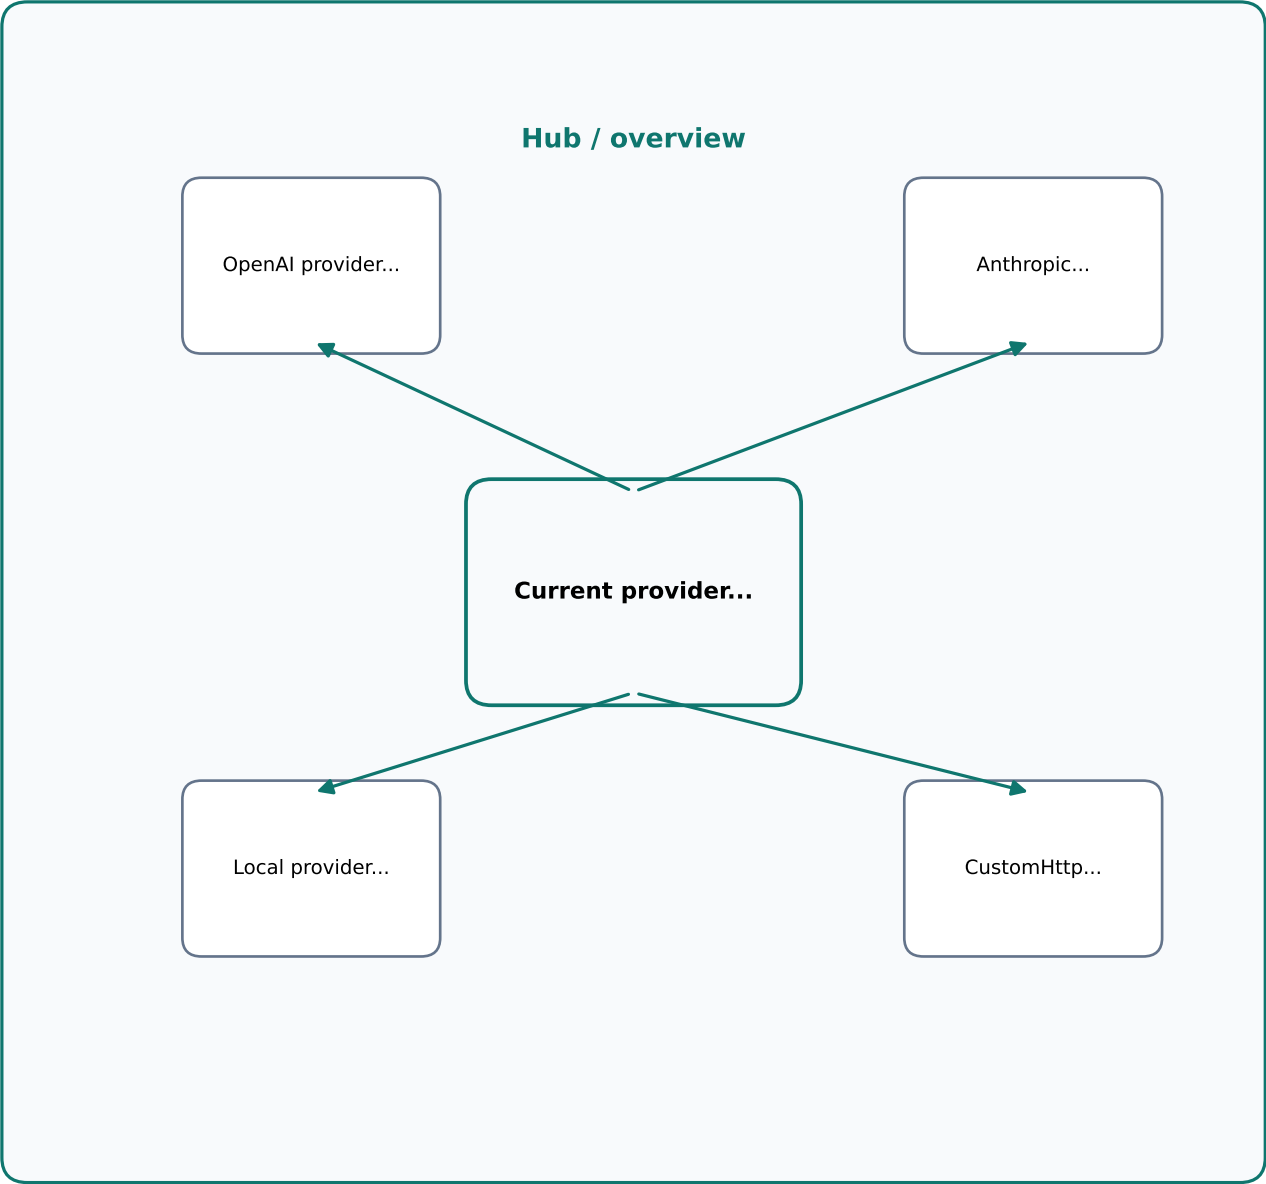

**Source**

- ../source/tools/AIAssistant/AIProviderClient\_if.h
- ../source/tools/AIAssistant/AIConversationService.h
- ../source/tools/AIAssistant/OpenAIProviderClientImpl.h
- ../source/tools/AIAssistant/AnthropicProviderClientImpl.h
- ../source/tools/AIAssistant/LocalProviderClientImpl.h
- ../source/tools/AIAssistant/HttpProviderClientBase.h
- ../source/tools/AIAssistant/AIAssistantDefaultImpl.cpp
- ../source/applications/gui/ai\_assistant/AIAssistantWindow.cpp

**Purpose**

- Show how each provider family is
- configured and what transport assumptions
- it makes.

**Required content**

- OpenAI provider with Bearer auth and optional organization/project headers
- Anthropic provider with x-api-key, anthropic-version, and thinking budget
- Local provider with OpenAI-compatible chat-completions format
- CustomHttp facade-level choice mapped to the local OpenAI-compatible client
- keyring and environment-variable fallback paths in the GUI

**Accessibility**

- A provider matrix that helps the reader
- see which settings belong to which
- backend.

**Validation**

- Every provider branch must match the current class headers and implementation code.
- The source block remains the authoritative specification.  
The rendered asset is a compact visual summary.