


Current session, token, and workspace lifecycle.

fig:worker-architecture-session-flow | figure

Generated from FIGURE-SPEC comments

Process / flow

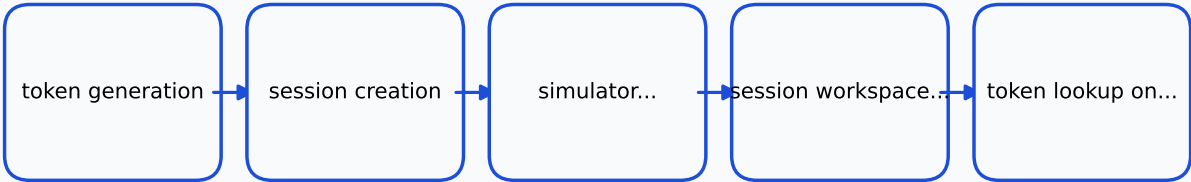

Source

- ../source/applications/worker/auth/TokenService.h
- ../source/applications/worker/auth/TokenService.cpp
- ../source/applications/worker/session/SessionContext.h
- ../source/applications/worker/session/SessionManager.h
- ../source/applications/worker/session/SessionManager.cpp
- ../source/applications/worker/service/SimulatorSessionService.cpp

Purpose

- Show how a bearer token becomes a session,
- simulator instance, and isolated workspace
- directory.

Required content

- token generation
- session creation
- simulator construction
- session workspace root and per-session folder
- token lookup on subsequent requests

Accessibility

- A lifecycle diagram that helps the reader
- understand token scope and workspace
- isolation.

Validation

- The diagram must match the current SessionManager and TokenService implementation.

The source block remains the authoritative specification.
The rendered asset is a compact visual summary.