


Current worker runtime topology.

fig:worker-runtime-topology | figure

Generated from FIGURE-SPEC comments

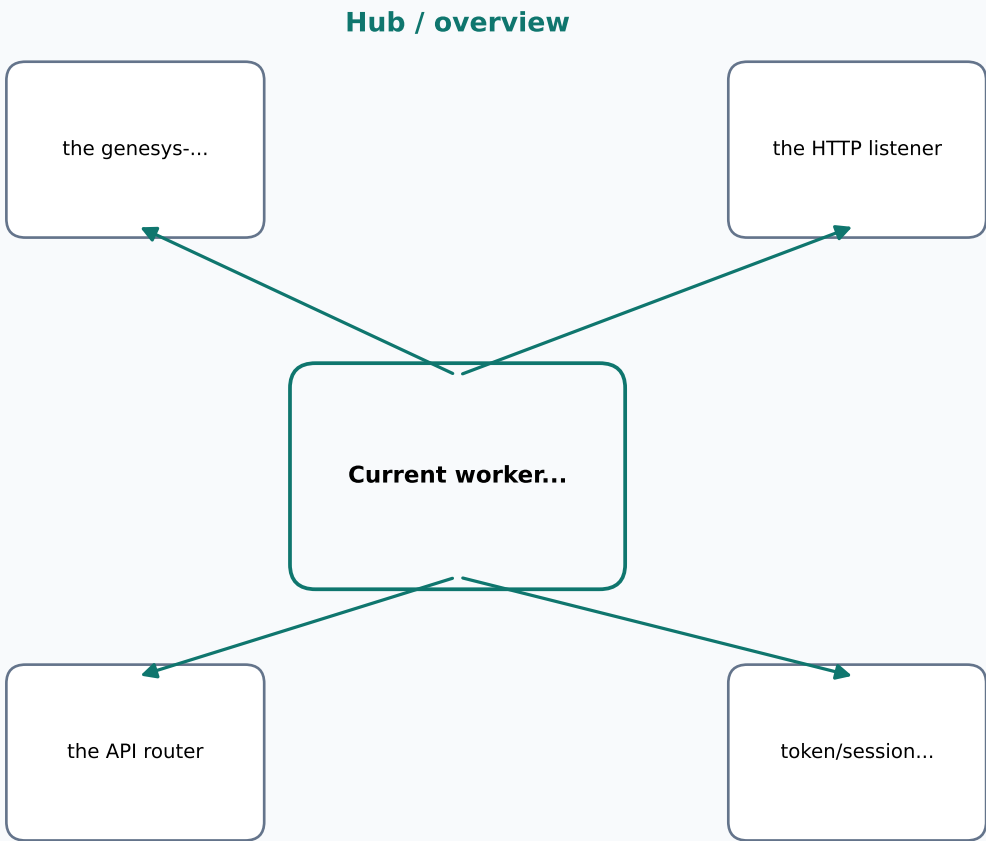

Source

- source/applications/worker/main.cpp
- source/applications/worker/BaseGenesysWebApplication.cpp
- source/applications/worker/http/SimpleHttpServer.cpp
- source/applications/worker/api/ApiRouter.cpp
- source/applications/worker/service/SimulatorSessionService.cpp

Purpose

- Show the current worker runtime topology
- from the executable entry point to the
- router and simulator session service.

Required content

- the genesys-worker executable
- the HTTP listener
- the API router
- token/session management
- the session-scoped simulator and worker-job storage

Accessibility

- A block diagram that shows the worker as a
- single-process HTTP service with
- session-scoped simulator state.

Validation

- The boxes and arrows must match the current code structure and not imply background execution o

The source block remains the authoritative specification.
The rendered asset is a compact visual summary.