

Sample Presentation

Dr. Ridenour

Department of Philosophy

July 6, 2026

1 Section

1.1 Subsection

1.1.1 Files

1. config.typ
2. content.typ
3. slides.typ
4. handout.typ

This is a handout note. They are used for producing detailed handouts that compile as article type documents. Handout notes only appear in the handouts; they are never part of the slide content.

My goal here was to replicate a LaTeX workflow of using Beamer to produce slides and article-format handouts from a single content file. The configuration file requires very minimal editing:

- Change the title, author, etc. in the `#let presentation-info` section.
- Change any desired variants in the `#let-project(variant: "white", slide-level: 3, body)` line.

The content.typ file contains the content shared by both the slides and the handout. The slides.typ and handout.typ are the files compiled to produce the final documents.

1.1.2 Heading Structure

- Structure includes
 - Slides
 - Sections
 - Subsections (optional)

Sections are designated by level-one headings. Slides can be either level-two or level-three, depending on the value of the “slide-level” variant in the config.typ file. Note that changing the slide level requires changing three lines in config.typ:

1. `#let project(variant: "white", slide-level: 3, body) = {`
2. `#let handout-frame-level = state("handout-frame-level", 3)`
3. `#let handout-project(slide-level: 3, body) = {`

1.1.3 Slide Content

- Anything not contained in a `note[]` wrapper becomes slide content.
 - Speaker notes in `#speaker-note[]`
-

The `#slide[]` function can be omitted, as far as I can tell. The only consequence will be that the handout won't have the box designating the slide. If you don't want to produce the handout, then feel free to omit `#slide[]`.

2 Special Slides

2.1 Types

2.1.1 Gradual Reveal

- Use `#pause` to hide content.
 - Which is then revealed by paging forward.
-

The `#pause` function can be used to gradually reveal slide content.


2.1.2 Two Column Slide

- | | |
|-----------|-----------|
| • Point 1 | • Point 3 |
| • Point 2 | • Point 4 |
-

It's helpful sometimes to use two columns for slides. They're very simple to form.

The next slide is an example of a full-frame slide with no visible title.

2.1.3 Full-Frame Graphic

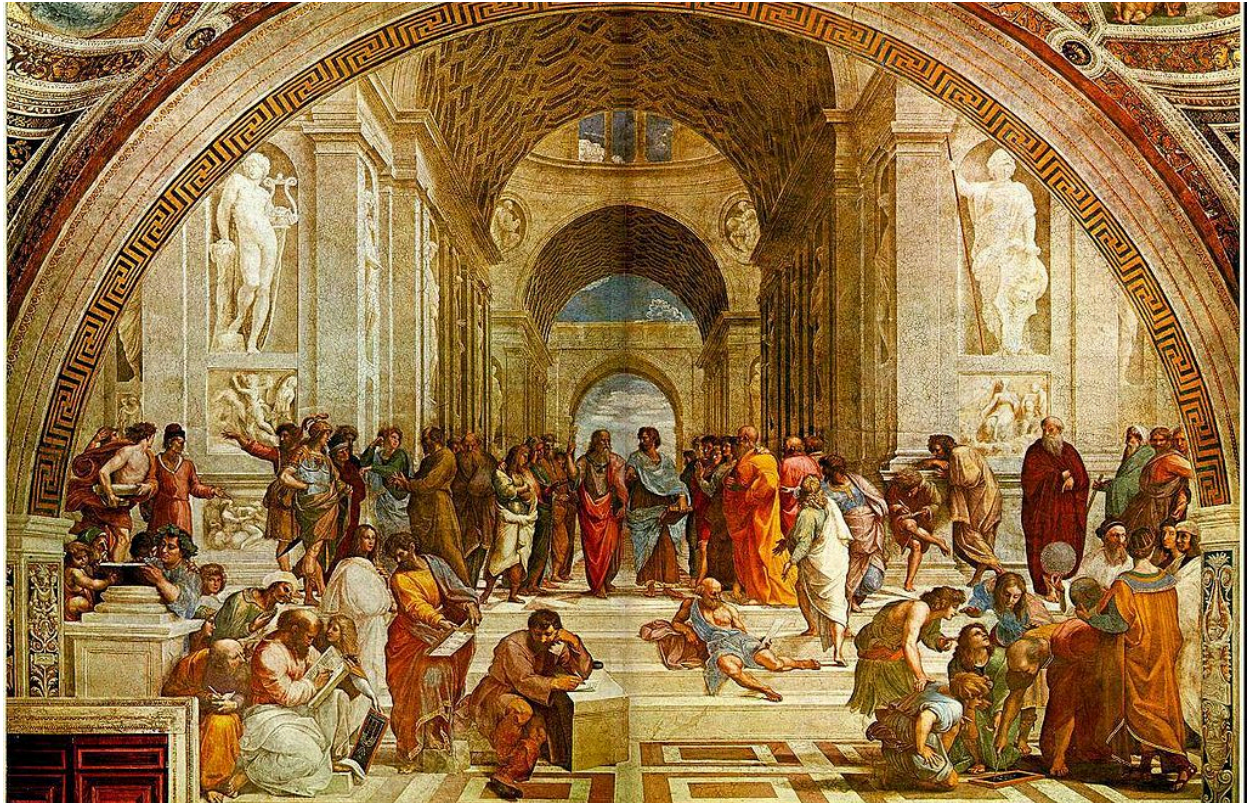

This is Raphael's "School of Athens" displayed as a full-frame image.

2.1.4 Full-Frame Text

Main Point!

Full-frame slides are sometimes also useful for text, especially for emphasizing something that students especially need to note.

3 Conclusion

3.1 Assessment

3.1.1 Typst vs Beamer

Typst

- Instant compilation
- Helpful error messages
- Messier content file

Beamer

- Better use of Org mode
- Simple content file
- Slow compilation

Making slides with Typst is much easier than making Beamer slides with LaTeX. The Typst syntax is very similar to a lightweight markup language like Markdown. Beamer has a significant advantage for Emacs users, however. Beamer export in Emacs Org mode is excellent.

Typst can be used with Org mode with the Ox-Typst package. The next task will be to try to write the content file in Org Mode and export to typst.typ.