

# Sample Presentation

Dr. Ridenour

Department of Philosophy

July 6, 2026

## 1 Section

### 1.1 Subsection

#### 1.1.1 Files

1. config.typ
2. content.typ
3. slides.typ
4. handout.typ

---

This is a handout note. They are used for producing detailed handouts that compile as article type documents. Handout notes only appear in the handouts; they are never part of the slide content.

My goal here was to replicate a LaTeX workflow of using Beamer to produce slides and article-format handouts from a single content file. The configuration file requires very minimal editing:

- Change the title, author, etc. in the `#let presentation-info` section.
- Change any desired variants in the `#let-project(variant: "white", slide-level: 3, body)` line.

The content.typ file contains the content shared by both the slides and the handout. The slides.typ and handout.typ are the files compiled to produce the final documents.

#### 1.1.2 Heading Structure

- Structure includes
  - Slides
  - Sections
  - Subsections (optional)

---

Sections are designated by level-one headings. Slides can be either level-two or level-three, depending on the value of the “slide-level” variant in the config.typ file. Note that changing the slide level requires changing three lines in config.typ:

1. `#let project(variant: "white", slide-level: 3, body) = {`
2. `#let handout-frame-level = state("handout-frame-level", 3)`
3. `#let handout-project(slide-level: 3, body) = {`

### 1.1.3 Slide Content

- Anything not contained in a `note[]` wrapper becomes slide content.
  - Speaker notes in `#speaker-note[ ]`
- 

The handout places a line underneath the displayed slide content. The speaker notes appear under the line.

## 2 Special Slides

### 2.1 Types

#### 2.1.1 Gradual Reveal

- Use `#pause` to hide content.
  - Which is then revealed by paging forward.
- 

The `#pause` function can be used to gradually reveal slide content.


#### 2.1.2 Two Column Slide

- |           |           |
|-----------|-----------|
| • Point 1 | • Point 3 |
| • Point 2 | • Point 4 |
- 

It's helpful sometimes to use two columns for slides. They're very simple to form.

The next slide is an example of a full-frame slide with no visible title.

### 2.1.3 Full-Frame Graphic

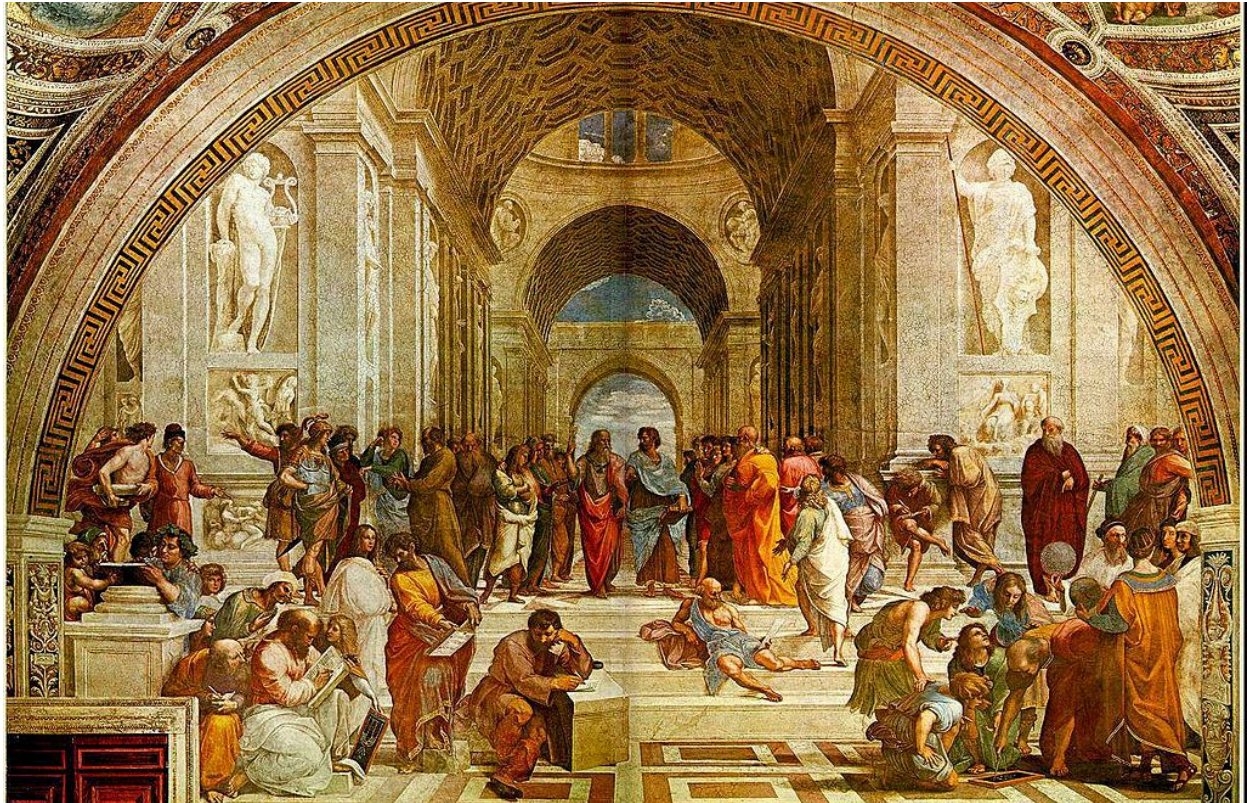

This is Raphael's "School of Athens" displayed as a full-frame image.

#### 2.1.4 Full-Frame Text

# Main Point!

---

Full-frame slides are sometimes also useful for text, especially for emphasizing something that students especially need to note.

## 3 Conclusion

### 3.1 Assessment

#### 3.1.1 Typst vs Beamer

##### Typst

- Instant compilation
- Helpful error messages
- Messier content file

##### Beamer

- Better use of Org mode
- Simple content file
- Slow compilation

---

Making slides with Typst is much easier than making Beamer slides with LaTeX. The Typst syntax is very similar to a lightweight markup language like Markdown. Beamer has a significant advantage for Emacs users, however. Beamer export in Emacs Org mode is excellent.

Typst can be used with Org mode with the Ox-Typst package. The next task will be to try to write the content file in Org Mode and export to typst.typ.