Post :


```
☆ マ 过滤输出
                                                                                            >> $.post('http://cc.nankai.edu.cn
             南开大学
                                                                                             /dbis/backend/web/sign-in/login',
    {'username' : '1610652',
    'password' : 'ccnankai'},
    function(data)
数据库与信息系统实验室
                                                                                                     alert('hello!');
                                                                                             });
                                                                                            ← ▼ {...}
                                                                                                ▶ abort: function abort() #=
用户名
                                                                                                ▶ always: function always() →=
                                                                                                ▶ complete: function add() →=
                          确定
                                                                                                ▶ done: function add() ♂3
                                                                                                ▶ error: function add() #=
*福
                                                                                                ▶ fail: function add() 🏞
                                                                                                ▶ getAllResponseHeaders: function
 *********
                                                                                                 getResponseHeader: function getI
                                                                                                ▶ overrideMimeType: function over
                                                                                                pipe: function then() r=
                                                                                                ▶ progress: function add() →=
☑ 记住我
                                                                                                ▶ promise: function promise() 
                                                                                                 readyState: 4
responseText: "\r\n<!DOCTYPE ht
                                                                                                 英ノ・草
                                                                                                 content=\"DBIS,Nankai Universit
                                                                                                  name=\"csrf-param\" content=\"
```

```
>> $.get('http://cc.nankai.edu.cn
  /about',{}, function(data){});
← ▼ {...}
    ▶ abort: function abort() →=
    ▶ always: function always() 
    ▶ complete: function add() →=
    ▶ done: function add() 
    ▶ error: function add() 
    ▶ fail: function add() →=
    ▶ getAllResponseHeaders: function
    ▶ getResponseHeader: function getI
    ▶ overrideMimeType: function over
    ▶ pipe: function then() 
    ▶ progress: function add() →=
    ▶ promise: function promise() →=
      readyState: 4
      responseText: "<!DOCTYPE html P
      \"http://www.w3.org/TR/xhtml1/D
      xmlns=\"http://www.w3.org/1999/.
      equiv=\"Content-Type\" content=
      \r\nbody{margin:0;font-size:.7e
      serif;background:#EEEEEE;}\r\nf
      size:2.4em;margin:0;color:#FFF;
      \r\nh3{font-size:1.2em;margin:1
      \r\n#header{width:96%;margin:0
      family:\"trebuchet MS\", Verdan
      color:#555555;}\r\n#content{mar.
      container{background:#FFF;width
      top:8px;padding:10px;position:r
      \r\n<body>\r\n<div id=\"header\
      id=\"content\">\r\n <div class=
```

Get:

Jquery:

原来状态:

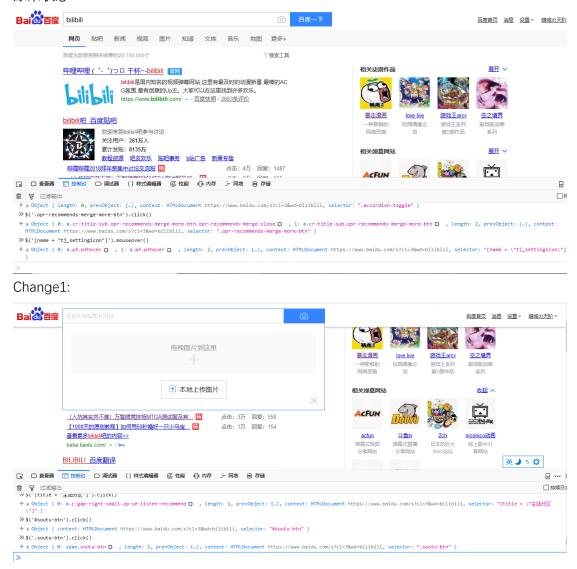

Change2:



Change3:

