

Conditional Inference Trees and Forests for Feature Selection

Robert Milletich, Justin Downes, Steve Goley, Newel Hirst
Amazon Web Services
{rmilleti,jusdow,sgoley,nhirst}@amazon.com

Abstract

Conditional inference trees choose a split variable by a permutation test of association before searching for a threshold, a separation designed to reduce the preference of CART-style splitting for features with many cutpoints. We ask how conditional inference trees (CIT) and forests (CIF), whose splits pass a Stage A feature test and a Stage B threshold test each under a Bonferroni correction, compare with established feature rankers, and what that correction costs and changes. We benchmark them against 15 classification and 16 regression rankers, among them partykit’s ctree and cforest, random forests (RF), recursive feature elimination with random forests (RF-RFE), ExtraTrees, and gradient boosting, on 31 real datasets, scoring each ranking by the held-out accuracy of fixed learners fitted to its top- k features. CIF ranks tied 3rd of 17 in classification, behind RF-RFE and XGBoost and level with RF; 2nd of 18 in regression, behind ExtraTrees. On the smaller panels where every method completed it ranks tied 6th and tied 5th, the regression ordering is descriptive (Friedman $p = 0.072$), and single trees rank near the bottom. Three answers are negative: on synthetic designs with known informative features CIF sits in the lower half on recovery (8th of 15 and 11th of 16), it is weakest at small k , and a random forest ranked by out-of-bag permutation importance does no better than CIF or the impurity-ranked forest. At the minimum permutation budget the correction costs on the order of m^2/α permutations per node in the feature test over m features and K^2/α in the per-threshold rule over K candidate thresholds; the threshold term dominates on most datasets and the feature term on the widest, where one tree on 5,000 features takes 29 minutes. A max-type threshold test, an opt-in alternative to the default per-threshold rule, reaches the nominal level with about $999K$ statistic evaluations, has realized size closer to nominal, and loses 0.006 in power when the two rules are compared at equal realized size (95% interval -0.011 to -0.002); under it CIF ranks 5th of 17 and 4th of 18. The adaptive stopping rule has exact null size 0.0488 at a fixed budget of 999 permutations for a continuous null. For a practitioner, CIF gives a real-data ranking level with random forests in classification, and the max-type rule lowers its fitting cost at nodes with many candidate thresholds.

1 Introduction

Conditional inference separates feature selection from threshold optimization to reduce split selection bias. Classical CART trees choose both a feature and a threshold from the same label-dependent search, which produces the documented preference for features with many admissible cutpoints [4, 23, 27, 28, 36, 38, 39]. In the conditional inference framework [18, 19], Stage A tests features for association with the response at the current node and selects among them; Stage B then optimizes a threshold within the selected feature. That separation targets split selection bias, but conditional inference can require large permutation budgets and exhaustive threshold scans at every node. The same conditional inference framework also motivated later work on conditional variable importance [40]. A related line of work uses forests directly for variable screening and ranking, rather than only for final prediction [10].

This paper evaluates conditional inference trees (CIT) and conditional inference forests (CIF), as implemented in the software of Millettich et al. [30], as feature rankers. It asks how their rankings compare with established rankers, and what the Bonferroni corrections inside their split tests, the feature correction in the Stage A feature test and the threshold correction in the Stage B threshold test, cost and change. For each seed and cross-validation fold, a method produces a ranking from the training fold. We then fit fixed downstream learners on top- k prefixes of that ranking, score them on the held-out fold, and summarize the scores across datasets. We also ask whether the runtime hyperparameters of CIT and CIF reduce computation while preserving ranking quality, and how well CIF recovers known informative features in high-dimensional and synthetic designs. This feature-selection benchmark is separate from work on trees and forests as direct predictors or causal estimators [1, 3, 43]. Because several methods have tunable configurations, the benchmark chooses one configuration per method and task. As a sensitivity check, leave-one-dataset-out (LODO) analyses repeat the configuration choice after holding out each dataset, on the complete-case and all-method panels defined in Section 4.2.

Contributions.

1. A benchmark of CIT and CIF against 15 classification and 16 regression rankers on 31 real datasets with five seeds, scored by fixed downstream learners on top- k prefixes (Section 5.1). CIF is the strongest conditional inference ranker in the study, ahead of cforest, ctrees, and single CIT, with bootstrap intervals for the paired score difference that exclude zero in classification. The comparators include random forests (RF) and recursive feature elimination with random forests (RF-RFE), and positions are on the all-method panels unless stated. CIF ranks tied 3rd of 17 in classification, behind RF-RFE and XGBoost and level with RF; 2nd of 18 in regression, behind ExtraTrees. We read the 0.05 gap in mean rank to XGBoost as a tie. On the complete-case panels CIF is tied 6th of 17 in classification, behind all three boosting families, and tied 5th of 18 in regression, where the Friedman test gives $p = 0.072$ and the ordering is descriptive.
2. The negative results of that comparison (Sections 5.4 to 5.6). On the synthetic designs, where the informative features are known, CIF sits in the lower half on recovery, 8th of 15 in classification and 11th of 16 in regression. It is weakest at small k , ranking 6th to 8th at $k \leq 10$ on the complete-case panels against 3rd or 4th at $k = 100$ (Figures 1 and 2). A random forest ranked by out-of-bag permutation importance does no better than CIF or the impurity-ranked forest (Table 4).
3. An account of the cost of the corrections (Sections 5.2 and 5.3). Under the minimum budget, which gives each of the m_t features at a node $\lceil m_t/\alpha \rceil$ permutations and each of its K candidate thresholds $\lceil K/\alpha \rceil$, the Stage A feature test costs, when every test runs, of order m_t^2/α permutations per node and the per-threshold rule of Stage B of order K^2/α . The runtime ablations place most of the fitting time in the threshold search; the feature term dominates on the widest data, where a single tree on the 5,000 features of gisette takes 29 minutes.
4. A max-type rule for the Stage B threshold test, an opt-in alternative to the default per-threshold rule (Corollary 3 and Section 5.3). At a fixed budget of 999 permutations the per-threshold rule cannot reject once a node has more than about 50 candidates. The max-type rule reaches the nominal level with about $999K$ statistic evaluations, has realized size closer to nominal, loses about 0.006 in power when the two rules are compared at equal realized size, and reduces the preference of the per-threshold rule for features with few distinct values.

5. As a secondary result, the null size of the adaptive stopping rule, exact under A0.1 to A0.3 at fixed B for a continuous null (Proposition 1 and Appendix A.2). The rule is inert at the minimum budget the benchmark uses, because that budget equals the smallest budget at which the rule may stop, and it acts only at the larger auto budget, the library default.

The theory establishes the validity of each split test at a fixed node, conditional on the node sample; the cardinality behavior of the rankings is established empirically. Under the minimum budget every rejecting candidate returns the smallest attainable p -value, so the benchmarked procedure selects features and thresholds by the order of the observed statistics behind the feature and threshold corrections (Section 2); the guarantees rest on the standard fixed-node permutation result, stated as a cited lemma (Lemma 1), and the benchmark measures what that procedure delivers in practice. Section 2 describes the tree-growing method, Section 3 the fixed-node results, Section 4 the experimental design, Sections 5 and 5.4 the results, and Sections 6 and 7 their interpretation and limits.

2 Tree-growing method

At each internal node, conditional inference trees make two decisions. The Stage A feature test checks features for association with the response and chooses a feature to split. The Stage B threshold test then searches thresholds only for that selected feature; if no threshold is accepted, the node becomes terminal. In this paper, CIT denotes the resulting single-tree feature selection method. CIF denotes a bootstrap ensemble of such trees with feature sampling at each node and feature rankings formed by aggregating split importances across trees.

2.1 Stage A and Stage B

At a node t , write (X_t, Y_t) for the samples reaching that node. Let $F_{t,\text{avail}}$ be the feature set carried into the node by the tree-growing algorithm, including any feature muting inherited from ancestors. Let $F_{t,\text{nonconst}} \subseteq F_{t,\text{avail}}$ be the features that are nonconstant on the node samples. After any feature subsampling, Stage A considers a set $F_t \subseteq F_{t,\text{nonconst}}$; its size $m_t = |F_t|$ is the denominator of the feature correction, the Bonferroni correction over the Stage A tests at the node. The benchmarked selector statistics are multiple correlation (MC) and the randomized dependence coefficient (RDC) in classification, and Pearson correlation (PC) and RDC in regression (Section 4.4). Any label-independent auxiliary randomness used by a selector statistic, such as the random projections of RDC, is denoted by U and is held fixed in the fixed-node guarantee.

When feature scanning is enabled during tree growing, Stage A tests the features in order of their observed selector statistic and stops at the first rejection, so not every feature in F_t is tested. Let $E_t \subseteq F_t$ denote the evaluated subset; in the full-scan fixed- B reference rule, $E_t = F_t$. The fixed-node lemma and corollaries in Section 3 apply to that reference rule: the features in F_t and the budget B are fixed independently of the node responses, and every $p_{t,j}$ for $j \in F_t$ uses that budget. The implemented tree-growing rule adds response-dependent node selection, inherited feature muting, and scores from scans that stop at the first rejection.

Stage A feature test. In the full-scan fixed- B setting, Stage A follows the separation of variable selection from threshold search in conditional inference trees [19]. The original conditional inference tests use the permutation-statistic framework of Strasser and Weber [37]; here, Monte Carlo label permutations calibrate the configured selector statistic. Stage A computes a selector statistic

$T_j^{\text{sel}}(X_{t,j}, Y_t; U)$ and permutation p -value $p_{t,j}$ for every feature $j \in F_t$, then selects

$$p_t^{\star, \text{ref}} := \min_{j \in F_t} p_{t,j}, \quad M_t^* := \{j \in F_t : p_{t,j} = p_t^{\star, \text{ref}}\}. \quad (1)$$

Let $\tau_t = \alpha_{\text{sel}}/m_t$ when the feature correction is enabled and $\tau_t = \alpha_{\text{sel}}$ otherwise. If $p_t^{\star, \text{ref}} \geq \tau_t$, Stage A returns no feature and the node becomes terminal. If $p_t^{\star, \text{ref}} < \tau_t$, the selected feature $j_t^{\star, \text{ref}}$ is drawn uniformly from M_t^* , and the node enters Stage B.

In the implemented tree-growing rule, Stage A uses the same decision structure but can order features by a preliminary score and evaluate only the subset E_t . The returned stored score q_t^{feat} is used to grow the tree; it is not a full-scan fixed- B p -value covered by Lemma 1. Under the full-scan reference rule with the feature correction, $\min(1, m_t p_t^{\star, \text{ref}})$ is a conservative complete-null p -value for the fixed-node Stage A test. When feature muting is enabled, features with non-rejecting Stage A p -values can be removed from descendant feature pools. When muting is disabled, descendants keep $F_{t, \text{avail}}$ except for deterministic constant feature pruning.

Stage B threshold test. Stage B guards against a spurious split at a node whose feature passed Stage A: the node splits only when some threshold of that feature separates the responses beyond what permuted responses achieve at level α_{split} . By default, the `ctree` reference implementation instead selects the split point by maximizing a standardized two-sample statistic over the candidate splits, without a second test of the chosen split [19]. Given a selected feature j_t^* , Stage B starts from midpoints between ordered unique values of X_{t,j_t^*} . The exact method uses all such midpoints. The random method samples a bounded subset of midpoints, while the percentile and histogram methods choose bounded representative thresholds derived from the midpoint distribution. The histogram method with h bins returns the distinct edges of an h -bin histogram of the midpoints, so it yields at most $h + 1$ candidates; the 256-bin setting of the benchmark yields up to 257. Thresholds that would leave either child below the minimum leaf size are filtered out. If no threshold remains, Stage B returns no split.

For the remaining finite threshold set C_{t,j_t^*} , Stage B selects the threshold used by the tree. The tested statistic at threshold c is the weighted child impurity

$$\frac{|Y_t^L(c)|}{|Y_t|} \text{Imp}(Y_t^L(c)) + \frac{|Y_t^R(c)|}{|Y_t|} \text{Imp}(Y_t^R(c)),$$

where Imp is the chosen node impurity measure. This statistic is used in a left-tail test, and the full-scan fixed- B rule chooses the threshold with the smallest Stage B p -value, with uniform tie breaking. When threshold scanning is enabled, thresholds are tested in order of weighted child impurity and the search stops after the first rejecting threshold, so the returned Stage B score is a tree-construction score rather than a global minimum over all retained thresholds. Let $\tau_t^{\text{split}} = \alpha_{\text{split}}/|C_{t,j_t^*}|$ when the threshold correction, the Bonferroni correction over the candidate thresholds, is enabled and $\tau_t^{\text{split}} = \alpha_{\text{split}}$ otherwise; testing each candidate at τ_t^{split} is the per-threshold rule. If no evaluated Stage B p -value is below τ_t^{split} , the node becomes terminal. After a threshold passes the Stage B test, the final minimum required-improvement check uses the corresponding weighted impurity decrease. Stage B chooses the split used by the tree; the returned Stage B score is not a valid post-selection p -value. The training skeleton in Algorithm 1 summarizes this flow and, for the benchmarked CIT and CIF configurations, stores the two returned scores q_t^{feat} and q_t^{split} at each split.

Permutation budgets. Write α_{adj} for the level at which a single permutation test is run: $\alpha_{\text{adj}} = \alpha_{\text{sel}}/m_t$ for a Stage A test and $\alpha_{\text{adj}} = \alpha_{\text{split}}/K$, with $K = |C_{t,j_t^*}|$, for a per-threshold Stage B

test when the corresponding correction is enabled, and α_{sel} or α_{split} otherwise. The minimum budget gives each test $B = \lceil 1/\alpha_{\text{adj}} \rceil$ permutations, the smallest budget at which a +1 p -value can fall below α_{adj} . The auto budget, the library default, gives each test

$$B = \max\left(\left\lceil \frac{1}{\alpha_{\text{adj}}} \right\rceil, \left\lceil \frac{z^2(1 - \alpha_{\text{adj}})}{\alpha_{\text{adj}}} \right\rceil\right), \quad z = \Phi^{-1}(1 - \alpha_{\text{adj}}), \quad (2)$$

permutations, where Φ is the standard normal distribution function. The benchmark uses $\alpha_{\text{sel}} = \alpha_{\text{split}} = 0.05$ with the minimum budget, so a Stage A test at a node with 20 features receives 400 permutations and a per-threshold Stage B test over 257 candidates receives 5,140. Adaptive stopping, the default stopping rule, checks a Beta posterior for the exceedance probability every 32 permutations once at least $\lceil 1/\alpha_{\text{adj}} \rceil$ permutations have been drawn, and stops when the posterior is confident on either side of α_{adj} (Proposition 1); with no stopping, the test runs its full budget. Under the minimum budget the first check coincides with the full budget, so adaptive stopping never stops early.

Under the minimum budget a test rejects only when no permuted statistic is as extreme as the observed one: $\alpha_{\text{adj}}(B + 1) < 2$, so zero exceedances is the only count b with $(1 + b)/(B + 1) < \alpha_{\text{adj}}$. Every rejecting feature in Stage A and every rejecting threshold in Stage B therefore returns the floor p -value $1/(B + 1)$, and the p -values do not order the passing candidates. Without scanning, the smallest- p rule would draw uniformly among them. With feature and threshold scanning, which the benchmark uses, the first rejecting candidate in scan order is chosen. At the minimum budget the Stage A and Stage B decisions are therefore an ordering by the raw statistics, the observed selector statistic for features and the observed weighted child impurity for thresholds, behind the Bonferroni gate formed by the feature and threshold corrections.

Max-type rule for Stage B. The per-threshold rule tests each candidate $c \in C_{t,j_t^*}$ separately at level α_{split}/K , so under the minimum budget each candidate receives $\lceil K/\alpha_{\text{split}} \rceil$ permutations and a scan of all K candidates costs on the order of $K^2/\alpha_{\text{split}}$ impurity evaluations per node. The same scaling holds in Stage A, where each of the m_t feature tests receives $\lceil m_t/\alpha_{\text{sel}} \rceil$ permutations. The implementation also provides the max-type rule, an opt-in alternative that tests the candidates jointly. Write $S_{b,c}$ for the weighted child impurity at candidate c under the observed response ($b = 0$) and under permutation $b = 1, \dots, B$. Each column is standardized by the mean μ_c and standard deviation σ_c of its $B + 1$ entries, candidates with $\sigma_c = 0$ or an empty child are dropped, and the row statistic is

$$T_b := \min_c \frac{S_{b,c} - \mu_c}{\sigma_c}, \quad p_t^{\max} := \frac{1 + \sum_{b=1}^B \mathbf{1}\{T_b \leq T_0\}}{B + 1}, \quad (3)$$

with the split placed at $\arg \min_c (S_{0,c} - \mu_c)/\sigma_c$, the standardized rather than the raw impurity minimum, so the two rules can accept different thresholds on the same feature. Stage B rejects when $p_t^{\max} < \alpha_{\text{split}}$, without division by K . When every candidate is dropped, the test returns $p_t^{\max} = 1$ and no split. Corollary 3 gives the fixed-node guarantee.

The max-type rule is a single-step max-T statistic in the sense of Westfall and Young [44], applied to a minimum because smaller impurity is more extreme, with the empirical null standardization of Pollard and van der Laan [34]. It has the same standardize-then-optimize form as the conditional inference split statistic of Hothorn et al. [19], with Monte Carlo column moments replacing the exact conditional moments of Strasser and Weber [37] because impurity is not a linear statistic. It is a maximally selected statistic in the sense of Lausen and Schumacher [25] and Hothorn and Zeileis [15], which is what `ctree`'s split search computes exactly for linear statistics. Our additions are the Monte Carlo standardization, which extends that construction to the impurity criterion, and

the comparison of its cost with that of the per-threshold rule. Standardization is intended to keep candidates near the tails of X_{t,j_t^*} , which isolate few observations and have wide null distributions, from dominating the minimum on heavy-tailed responses; we did not run an unstandardized arm to test this.

Validity of the max-type rule needs only about $1/\alpha_{\text{split}}$ permutations, and the implementation uses $B = 999$ under every budget rule, so testing all K candidates costs on the order of BK impurity evaluations against $K^2/\alpha_{\text{split}}$ for the per-threshold rule under the minimum budget. These counts are the worst case in which every candidate is tested. With threshold scanning, the realized cost of the per-threshold rule is the number of candidates scanned times $\lceil K/\alpha_{\text{split}} \rceil$. The max-type rule needs fewer permutations per node only when $K > \alpha_{\text{split}}B \approx 50$: at 16 bins, which yield 17 candidates, the per-threshold rule needs $\lceil 17/0.05 \rceil = 340$ permutations per candidate against the 999 of the max-type rule. A per-threshold rule held at a fixed B also costs BK , but it cannot reject once $\alpha_{\text{split}}/K < 1/(B + 1)$, which at $B = 999$ is every node with more than about 50 candidates. The benchmark configurations use the per-threshold rule, the library default, and Section 5.3 reports the measured calibration and cost of both rules and the max-type rerun of the CIT and CIF configurations.

2.2 Monte Carlo permutation p -values

Let T_{obs} be the observed statistic and $T_1, \dots, T_B$ the same statistic computed on B random label permutations. For a right tail test we use the $+1$ p -value of Phipson and Smyth [31, 33], where $\mathbf{1}\{\cdot\}$ denotes the indicator function:

$$p_{\text{MC}}^{\geq} := \frac{1 + \sum_{b=1}^B \mathbf{1}\{T_b \geq T_{\text{obs}}\}}{B + 1}. \quad (4)$$

For a left tail test we analogously define

$$p_{\text{MC}}^{\leq} := \frac{1 + \sum_{b=1}^B \mathbf{1}\{T_b \leq T_{\text{obs}}\}}{B + 1}. \quad (5)$$

Stage A uses the right tail convention and Stage B the left tail convention; ties count as exceedances in both cases.

Algorithm 1 Conditional inference tree training skeleton (Stage A $\rightarrow$ Stage B)

Require: Training data (X, Y) , hyperparameters θ

Ensure: Trained tree $\mathcal{T}$

```
1:  $p \leftarrow$  number of columns of  $X$ 
2: return GROWNODE( $X, Y, 1, \{1, \dots, p\}, \theta$ )
3: function GROWNODE( $X_t, Y_t, d, F_{\text{avail}}, \theta$ )
4:   if STOP( $X_t, Y_t, d, \theta$ ) then
5:     return LEAF( $Y_t$ )
6:   end if
7:    $(j_t^*, q_t^{\text{feat}}, m_t, F'_{\text{avail}}) \leftarrow$  STAGEA( $X_t, Y_t, F_{\text{avail}}, \theta$ )
8:   if  $j_t^* = \perp$  then
9:     return LEAF( $Y_t$ )
10:  end if
11:   $(c_t^*, q_t^{\text{split}}) \leftarrow$  STAGEB( $X_t, Y_t, j_t^*, \theta$ )
12:  if  $c_t^* = \perp$  then
13:    return LEAF( $Y_t$ )
14:  end if
15:   $(X_t^L, Y_t^L, X_t^R, Y_t^R) \leftarrow$  PARTITION( $X_t, Y_t, j_t^*, c_t^*$ )
16:   $\Delta_t \leftarrow$  IMPURITYDECREASE( $Y_t, Y_t^L, Y_t^R, \theta$ )
17:  if  $\Delta_t$  is below the minimum required impurity decrease then
18:    return LEAF( $Y_t$ )
19:  end if
20:  Add  $\Delta_t$  to the feature-importance accumulator for  $j_t^*$ 
21:   $u \leftarrow$  internal node with split  $(j_t^*, c_t^*)$  and stored scores  $(q_t^{\text{feat}}, q_t^{\text{split}})$ 
22:   $u.\text{left} \leftarrow$  GROWNODE( $X_t^L, Y_t^L, d + 1, F'_{\text{avail}}, \theta$ )
23:   $u.\text{right} \leftarrow$  GROWNODE( $X_t^R, Y_t^R, d + 1, F'_{\text{avail}}, \theta$ )
24:  return  $u$ 
25: end function
```

2.3 Forests and runtime hyperparameters

CIF combines bootstrap trees and averages their predictions. Each CIF tree uses the same Stage A and Stage B node rules as CIT [3, 17]. For feature ranking, CIF sums each fitted tree’s normalized split importances and renormalizes the forest vector (Section 2.4). CIF-all disables feature subsampling: every nonconstant available feature can enter Stage A at each node. This changes the Stage A feature set, the feature correction, and the per-node computational cost. The fixed-node results of Section 3 apply to the node tests of each tree with the scope stated in Appendix A.1; that scope covers subsampled and unsampled fits, and not bootstrap samples, whose duplicated rows break the exchangeability the results assume.

Across the CIT and CIF benchmark configurations, we hold fixed the feature and threshold corrections, the per-threshold rule, the minimum budget with adaptive stopping (which therefore never stops early), feature muting, feature scanning, threshold scanning, the histogram method with 256 bins, and bootstrap sampling for CIF. The settings that vary are the selector statistic and honesty. Honesty grows the structure of each tree on one part of its training sample and re-estimates the leaf values on the held-out remainder [43]; the benchmark uses an even split when honesty is on.

Runtime depends on the realized work at each node: features tested in Stage A, thresholds generated and retained in Stage B, permutations evaluated before stopping, and features carried

into the node. Adaptive stopping can reduce the number of permutations evaluated for each test when the budget exceeds the minimum budget [2, 9]. The histogram method reduces the Stage B candidate set from all midpoints to at most $h + 1$ bin edges. Feature scanning orders features by the observed selector statistic and threshold scanning orders thresholds by the observed weighted child impurity; both stop at the first rejection, independently of the stopping rule inside each permutation test. Feature muting can reduce the feature pool inherited by descendants. Appendix D gives algorithm and reproducibility details, Appendix E gives runtime and memory accounting, and Section 5.2 reports the measured timing effects.

2.4 Feature rankings

The experiments evaluate each method through the ranking it produces on the training fold. CIT and CIF rankings are fitted split-importance rankings, not rankings of Stage A p -values. For a fitted CIT, the importance of feature j is the sum, over the internal nodes t whose accepted split is on j , of the impurity decrease

$$\text{Imp}(Y_t) - \frac{|Y_t^L|}{|Y_t|} \text{Imp}(Y_t^L) - \frac{|Y_t^R|}{|Y_t|} \text{Imp}(Y_t^R),$$

the parent impurity minus the weighted child impurity at the accepted threshold, with no further weight for the node’s share $|Y_t|/n$ of the sample. If the total importance is positive, the vector is normalized to sum to one; if the tree contributes no positive impurity decrease, the vector remains zero. CIF sums these tree importance vectors over trees and then normalizes the forest vector in the same way. Stage A determines which features enter threshold optimization, and the importance scores only the accepted splits by their local reduction in impurity.

This unweighted sum differs from scikit-learn’s impurity importance, which multiplies each decrease by the node share so that root splits dominate. It counts a deep split on a small node as much as a root split, and because every accepted split has passed both the Stage A and the Stage B test, the ranking behaves like a gain-weighted count of accepted splits; the ranking ablation (Table 5) compares it with a split-count ranking. Larger importances are ranked earlier. Features never used by a split receive zero importance, so beyond a tree’s support the order of the ranking is the tie order of the implementation, which leaves the zero-importance features in roughly ascending column order. Every synthetic generator shuffles its planted columns, so that order carries no information about which features are planted; the high-cardinality and correlated-noise designs append their noise columns after the others, so those columns fall toward the end of the tail.

This split-importance ranking differs from standard random-forest impurity importance in how a feature enters threshold search. In CART-style trees, the feature and threshold are chosen together by an impurity search, so a feature with more possible thresholds has more chances to produce a large apparent impurity decrease [39]. In CIT and CIF, Stage A first selects a feature by a permutation test; Stage B then searches thresholds only for that feature. This is designed to reduce the advantage that high-cardinality features get from having more possible thresholds. The threshold correction of the per-threshold rule works in the opposite direction: more candidates mean a stricter level α_{split}/K for each candidate and a lower probability of any split, a reverse cardinality bias against features with many candidate thresholds. The max-type rule tests the candidates jointly at α_{split} , so its level does not depend on K ; Section 5.3 and Table 13 report how each rule behaves. We use these fitted split-importance scores as rankings and evaluate them through downstream top- k prediction and synthetic feature recovery.

3 Fixed-node control

This section analyzes the full-scan fixed- B Stage A feature test at a fixed node and then the two Stage B threshold tests for a fixed feature. The lemma states the standard superuniformity of a single +1 Monte Carlo permutation p -value. The corollaries apply the feature correction across the fixed-node Stage A tests and the threshold correction across the candidate thresholds, and establish fixed-node control of the max-type rule; the proposition gives the exact size of adaptive stopping. In the notation of Section 2.1, this is the reference case where every feature in F_t is tested with the same fixed nodewise budget B . All probabilities below condition on (X_t, U) , where U collects label-independent auxiliary randomness other than the Monte Carlo permutation draws. The assumptions of Appendix A.2 fix the node and its sample (A0.1), make the node responses exchangeable given (X_t, U) under the complete nodewise null (A0.2), fix the tested features and the budget as functions of (X_t, U) alone (A0.3), require exactly B permutations with no optional stopping (A0.4), and count ties conservatively (A0.5); Appendix A.1 states the scope of each result.

The fixed-node results assume that the node sample is exchangeable in the sense of A0.2, and bootstrap resampling does not satisfy that assumption: duplicated rows carry the same response, so the node responses are not exchangeable given the node covariates and the resampling indices. Strobl et al. [39] show that sampling with replacement biases variable selection in conditional inference forests, while subsampling without replacement does not. The guarantees below therefore cover the node tests of subsampled or unsampled fits.

Lemma 1 (+1 permutation p -values are superuniform; 14). *Assume A0.1 through A0.5 from Appendix A.2. Under the nodewise complete permutation null at the fixed node t , let T_{obs} be the observed statistic of one feature and $T_1, \dots, T_B$ its values under B independent uniform random permutations of Y_t , and define the right-tail +1 Monte Carlo p -value*

$$p_{\text{MC}}^{\geq} := \frac{1 + \sum_{b=1}^B \mathbf{1}\{T_b \geq T_{\text{obs}}\}}{B + 1}. \quad (6)$$

Then for every $\alpha \in [0, 1]$,

$$\mathbb{P}(p_{\text{MC}}^{\geq} \leq \alpha \mid X_t, U) \leq \alpha. \quad (7)$$

This is the standard exchangeable-rank result for Monte Carlo permutation tests [8, 14, 31]. The proof derives the exchangeability it uses: Lemma 2 shows that replacing T_{obs} by the statistic of one more random permutation leaves the law of the p -value unchanged, and the $B + 1$ statistics so obtained are exchangeable, so the inclusive rank of the first is superuniform (Appendices B and C). The left-tail version follows by applying the same result to $-T$.

Corollary 1 (Stage A complete null control at a fixed node). *Assume A0.1 through A0.5 from Appendix A.2. Under the nodewise complete null at t , let F_t be nonempty and write $m_t = |F_t| \geq 1$. Let Stage A reject when*

$$\min_{j \in F_t} p_{t,j} \leq \alpha_{\text{sel}}/m_t. \quad (8)$$

Then

$$\mathbb{P}(\exists j \in F_t : p_{t,j} \leq \alpha_{\text{sel}}/m_t \mid X_t, U) \leq \alpha_{\text{sel}}. \quad (9)$$

Combining Lemma 1 with the Bonferroni union bound over the m_t Stage A tests gives fixed-node Stage A control under the complete null. The tree-growing rule uses a strict comparison, so its rejection event is a subset of the nonstrict event above. The result is local: it does not cover partial-null familywise error control, p -values for selected features, or error control for fitted trees and forests.

Corollary 2 (Stage B per-threshold rule at a fixed node). *Assume A0.1 through A0.5 from Appendix A.2 at a fixed node t , with the tested feature and the finite candidate set C , $K = |C| \geq 1$, fixed as functions of (X_t, U) alone, and a fixed budget B with no optional stopping. For $c \in C$ let $p_{t,c}$ be the left-tail +1 Monte Carlo p -value of the child impurity at threshold c , with ties counted with $\leq$. Under the nodewise complete permutation null, conditional on (X_t, U) ,*

$$\mathbb{P}(\exists c \in C : p_{t,c} \leq \alpha_{\text{split}}/K \mid X_t, U) \leq \alpha_{\text{split}}. \quad (10)$$

Each $p_{t,c}$ is a +1 p -value of a statistic that is a fixed function of the permuted response vector, so Lemma 1, applied in its left-tail form, covers it. The union bound over the K candidates then gives the claim, as in Corollary 1 with K in place of m_t ; the bound does not need the K p -values to be independent, although they share the permutations. Threshold scanning, which tests candidates in order of the observed impurity and stops at the first rejection, leaves the rejection event unchanged. The scope is weak familywise control over the K candidates for a feature fixed without reference to Y_t ; it is not a post-selection guarantee for a feature that Stage A chose from the same responses. Its cost is the budget: a +1 p -value cannot fall below $1/(B+1)$, so the rule can reject only when $B \geq K/\alpha_{\text{split}} - 1$.

Corollary 3 (Stage B max-type control at a fixed node). *Assume A0.1 through A0.5 from Appendix A.2 at a fixed node t , with the tested feature and the finite candidate set C fixed as functions of (X_t, U) alone, a fixed budget B with no optional stopping, and left-tail ties counted with $\leq$. Let $p_t^{\max}$ be the max-type Stage B p -value of Equation (3) with column moments computed over all $B+1$ rows. Under the nodewise complete permutation null, conditional on (X_t, U) , $\mathbb{P}(p_t^{\max} \leq \alpha \mid X_t, U) \leq \alpha$ for every $\alpha \in [0, 1]$.*

The argument reduces to Lemma 1 in four steps. (1) Under the complete null, the $B+1$ rows of the impurity matrix $(S_{b,c})$, computed from the observed response and from B independent uniform permutations of it, are exchangeable [14]. This is Lemma 2 applied to the vector-valued statistic $c \mapsto S_{b,c}$ in $\mathbb{R}^K$. That lemma holds for a statistic with values in any measurable space: its proof establishes the joint law of the permuted response vectors and applies the statistic only afterwards, as one fixed measurable function of each vector, so it never uses that the statistic is scalar. (2) Column standardization uses the mean and standard deviation of all $B+1$ entries of each column, which are symmetric functions of the rows, so the standardized matrix has exchangeable rows as well; the exclusion of candidates with an empty child or zero column variance is likewise a function of the whole column. (3) The row minimum is one fixed function applied to every row, so $T_0, \dots, T_B$ are exchangeable. (4) The inclusive-rank p -value of an exchangeable tuple is superuniform by the proof of Lemma 1, applied to $-T$ for the left tail.

The moments must include row 0: estimating them from the permuted rows alone singles out the observed row, breaks the symmetry the argument uses, and can be anti-conservative. The guarantee is weak familywise control over the K candidates, the probability of declaring any split under the complete nodewise null, and its scope is that of Corollary 2. It is a fixed- B statement and does not cover the max-type rule with adaptive stopping, whose column moments and chosen threshold move with the stopping time.

3.1 Size of the default adaptive stopping rule

Adaptive stopping applies to one permutation test at level α with budget B , confidence c , and batch size s . It draws permutations independently and uniformly, with replacement, in batches of s . At each batch boundary m that is a multiple of s with $m \geq \lceil 1/\alpha \rceil$, and at $m = B$, it stops

when the $\text{Beta}(1 + k, 1 + m - k)$ posterior places mass at least c on either side of α , where k counts permuted statistics at least as extreme as the observed one. It then reports $(k + 1)/(m + 1)$, and the tree rejects when the reported value is strictly below α . Let $\rho(\alpha, c, s, B)$ be the probability of rejection when the same rule is applied to a Pólya urn started from one ball of each colour. The library default is $c = 0.95$ and $s = 32$.

Proposition 1 (Size of the adaptive stopping rule, exact under A0.1 to A0.3 at fixed B). *Assume A0.1 through A0.3 at a fixed node for one permutation test whose statistic is a fixed function of each permuted response vector (a Stage A test or a per-threshold Stage B test), run with adaptive stopping at level α , confidence c , batch size s , and fixed budget B . Suppose that at every reachable stopping state a significance stop reports a value strictly below α and a futility stop reports a value at least α . Under the complete nodewise null, conditional on (X_t, U) , three statements hold. (i) Continuous mixing: if the per-draw probability that a permuted statistic is at least as extreme as the observed one is uniform on $(0, 1)$, the size equals $\rho(\alpha, c, s, B)$ exactly. (ii) Finite orbit: for a statistic without ties on the $N = n_t!$ permutations, that probability is uniform on $\{1/N, 2/N, \dots, 1\}$, and the size lies in $[\rho - 1/N, \rho]$. (iii) Ties: counting ties as exceedances can only lower the size, so with ties the size is at most the value in (ii); for a discrete response, where permutations tie, only this bound applies.*

Reduction to a function of the exceedance probability. Write θ for the per-draw exceedance probability given the observed statistic and the node data. Given θ , the draws are independent, so the exceedance count after m draws is $\text{Binomial}(m, \theta)$. The stop and report decisions are deterministic functions of (m, k) at the batch boundaries, so the rejection probability $g(\theta)$ is a fixed function of θ .

Monotonicity. The function g is nonincreasing. Flipping one indicator from zero to one raises k at every later boundary. A futility stop (posterior mass at least c above α) can then only come earlier, and a significance stop (mass at least c below α) only later. At a significance stop or at the full budget, the reported value $(k + 1)/(m + 1)$ is at least as large on the flipped path. The remaining step, that a significance stop reports a value strictly below α and a futility stop a value at least α , is the hypothesis of the proposition.

From g to statements (i) to (iii). Under the complete null the observed statistic is exchangeable with the N orbit values, so without ties its rank from the top is uniform on $\{1, \dots, N\}$ and θ is uniform on $\{1/N, \dots, 1\}$, which is (ii). The continuous idealization (i) replaces that grid by the uniform distribution on $(0, 1)$. Under it the binomial mixture is the Pólya urn started from one ball of each colour, whose next indicator is one with probability $(k + 1)/(m + 2)$, and $\rho = \int_0^1 g$ by a finite recursion over the stopping states. For nonincreasing g the grid average $N^{-1} \sum_{j=1}^N g(j/N)$ is at most $\int_0^1 g$ and at least $\int_0^1 g - (g(0) - g(1))/N \geq \rho - 1/N$, which is the interval in (ii). Counting ties as exceedances raises θ , and given θ the same nonincreasing g gives (iii).

Remark 1 (Values at the default settings). An exact enumeration¹ verifies the hypothesis on stopping reports at $c = 0.95$ and $s = 32$ for every budget from 20 to 3,000 at $\alpha = 0.05$ and at every budget quoted in this remark. At $\alpha = 0.05$, $\rho(0.05, 0.95, 32, 999) = 0.0488$, $\rho(0.05, 0.95, 32, 52) = 0.0377$ at the auto budget of 52 from Equation (2), and $\rho \leq 0.0496$ for every B from 20 to 3,000, a numerical statement whose largest value is at $B = 140$; at confidence 0.80, $\rho(0.05, 0.80, 32, 999) = 0.0522$. At the corrected levels the tree tests, ρ stays below the level. At $\alpha/20$, the feature correction for 20 features, ρ is 0.00249 at the minimum budget of 400 and 0.00221 at the auto budget of 3,144. At $\alpha/257$, the threshold correction for 257 candidates, ρ is 0.000195 at the minimum budget of 5,140 and 0.000181 at the auto budget of 64,669. These values are for the strict rule the implementation uses.

¹The script `paper/theory/adaptive_stopping_size.py` in the replication materials regenerates the values of ρ , and the accompanying test verifies that the implementation's Beta distribution function makes the same stopping decision as a reference implementation at every reachable state.

Under the nonstrict convention, rejecting when the reported value is at most α , the corresponding values are 0.0495 at $B = 999$ and 0.0523 at $c = 0.80$, and the bound $\rho \leq \alpha$ fails at $B = 79$, where $\rho = 0.05001$.

Remark 2. Under the minimum budget with the feature or threshold correction, the first stopping check at $\lceil 1/\alpha_{\text{adj}} \rceil$ (Section 2.1) coincides with the full budget, and the rule reduces to the fixed- B test of Lemma 1. This is the benchmark configuration: every Stage A and per-threshold Stage B p -value in the benchmark is a fixed- $B + 1$ permutation p -value. The max-type rule with adaptive stopping recomputes its column moments over all permutations drawn so far at each check, so its exceedance path is not a Pólya urn and Proposition 1 does not cover it; its calibration rests on the null simulations of Section 5.3.

4 Experimental design

The experiments compare the rankings produced by CIT and CIF with established feature rankers and measure what the conditional-inference controls cost. For each training fold, a method produces a feature ranking, and fixed downstream learners evaluate the selected features on the held-out fold. Section 5 reports the real-data benchmark with its robustness checks and CIF ranking ablations, the runtime ablations, and the Stage B construction comparison with its extension to the benchmark; Section 5.4 reports high-dimensional behavior, recovery on synthetic data with known informative features, and the mechanism studies.

4.1 Benchmark setup

The benchmark uses 5 random seeds, with 5-fold cross-validation within each seed. Classification fits logistic regression (LR), support vector machine (SVM), and k-nearest neighbors (KNN) as downstream models and reports balanced accuracy, defined as mean recall across classes. Regression fits ridge regression, support vector regression (SVR), and KNN and reports R^2 . The main tables use the standard values $k \in \{5, 10, 25, 50, 100\}$. Downstream learner settings are fixed. Logistic regression uses balanced class weights and a 1,000-iteration limit; SVM uses an RBF kernel with unit regularization, $\gamma = \text{scale}$, and balanced class weights; KNN uses 5 distance-weighted neighbors; ridge uses unit penalty strength; and SVR uses an RBF kernel with unit regularization, $\epsilon = 0.1$, and $\gamma = \text{scale}$.

For each seed and fold, feature-standardization parameters are estimated on the training fold and then applied to the held-out fold. The ranking method uses only the standardized training fold and produces the ordered feature list described in Section 2.4. For each k , we take the top- k features from that ranking, refit standardization on the selected training columns, apply the same transform to the selected held-out columns, fit the downstream model on the selected training data, and evaluate it on the held-out fold.

The downstream evaluation also records performance using the full feature set, $k = p$, for every dataset. For datasets with more than 100 features, the separate high- p analysis adds fixed values $k \in \{150, 200, 300, 500, 750, 1,000\}$ and fractional values $\lceil 0.25p \rceil$, $\lceil 0.5p \rceil$, $\lceil 0.75p \rceil$, keeping only values no larger than p . The main tables average only the standard k values.

4.2 Benchmark comparisons

The benchmark averages scores in three steps. First, for each (dataset, downstream model, k) combination, scores are averaged over folds and seeds. Second, each dataset score averages those

fold-and-seed means over downstream models and over the standard k values available for the methods in that comparison. Third, the tables average dataset scores over datasets.

The real-data classification benchmark contains 23 datasets. Some method runs on `gisette`, `isolet`, and `orlraws10P` were excluded (Appendix D lists them with their reasons), so the all-method rank summary uses the 21 datasets with results for every method, which omit `gisette` and `isolet`, and each pairwise comparison uses the datasets where both methods are present. Regression contains 8 datasets with every method present. Two smaller complete-case panels, used for bootstrap intervals, omnibus rank tests, and LODO configuration checks, retain only datasets with every method, every downstream learner, and all five standard values of k : 13 classification datasets and 6 regression datasets. By- k results are reported separately for $k = 5, 10, 25, 50, 100$; the corresponding classification dataset counts are 21, 20, 14, 14, 13 and the regression counts are 8, 8, 7, 7, 6, because a dataset with fewer than k features does not enter the column for k .

Table 1 names the dataset panels used below so that each claim can be tied to one of them.

Panel	Definition	Clf.	Reg.	Used for
All-method	every method present	21	8	main rank table, max-type rankings, breadth counts, LODO
Pairwise	both compared methods present	21–23	8	direct CIF comparisons
Complete-case	every method, learner, and k present	13	6	bootstrap intervals, omnibus tests, LODO, constant-panel k trajectory
High- p	real datasets with more than 100 features	15	6	high- p analysis
Synthetic	synthetic datasets with known informative features	8	8	feature recovery, support measurement
Ablation	real datasets except isolet	22	8	CIF ranking ablation
Runtime	9 real and 14 synthetic datasets	15	8	runtime ablations
Benchmark-size	classification datasets with at least 500 observations except madelon; regression datasets with at least 200 observations	9	5	wide-dataset runtime check
Mechanism-matched	cforest pairwise panel without the excluded RDC runs	20	8	CIF ranked by out-of-bag permutation importance
Max-type extension	every real and synthetic benchmark dataset	31	16	max-type ranking runs
Head-to-head	Benchmark-size classification datasets and madelon	10	0	forest timing of the two Stage B rules
Stage B real	vowel, spam, page-blocks; imports-85, residential, face-book	3	3	threshold-test comparison

Table 1: Dataset panels. Counts are datasets per task; the runtime panel’s 23 datasets are 15 classification and 8 regression. The Benchmark-size panel is the set of performance datasets of Milletich et al. [30]. The max-type extension ranks on the all-method panel; the head-to-head timing adds a synthetic classification grid (Section 4.8).

4.3 Datasets

The real-data benchmark includes 23 classification datasets and 8 regression datasets. The separate high- p analysis restricts attention to the 15 classification datasets and 6 regression datasets with more than 100 features. The full inventories of the real and synthetic datasets are listed in Appendix F, which also summarizes the synthetic designs and their parameter choices.

Feature recovery uses 8 synthetic classification datasets and 8 synthetic regression datasets with known informative features and controlled noise structure. The simulation designs of the mechanism studies are described in Section 4.10.

4.4 Compared methods

The benchmark includes three types of feature selectors: permutation-test filters, embedded tree or ensemble methods, and wrapper baselines. Permutation-test filters compute univariate dependence statistics and rank features by their permutation p -values: multiple correlation (MC) and randomized dependence coefficient (RDC) for classification, and Pearson correlation (PC), distance correlation (DC), and RDC for regression. The RDC filter keeps the empirical-CDF random feature map from Lopez-Paz et al. [29] but replaces the canonical-correlation solve with the maximum absolute pairwise correlation across projected columns. It uses 10 random projections (20 sine and cosine columns); the sensitivity of the rankings to that count is reported in Section 5.1. Distance correlation follows Székely et al. [41].

Embedded methods rank features using tree or ensemble importance scores. These methods are CART decision trees (DT), single randomized trees with random split thresholds (RT), CIT, CIF, random forests (RF) [3], ExtraTrees [11], XGBoost [5], LightGBM [21], CatBoost [35], and the partykit reference implementations ctree and cforest [16, 19, 20]. Wrapper baselines score features through auxiliary random-forest fits: Boruta [24], permutation importance (PI), which permutes the columns of a 20 percent held-out split of the training fold [3, 39], conditional permutation importance (CPI) [6], and random-forest recursive feature elimination (RF-RFE) [12, 32].

In this benchmark, CPI uses stratified conditional permutation with correlation-based strata. For each target feature, it trains a 100-tree random forest on a training split and scores a 20 percent validation split. It then identifies validation-set features with absolute correlation at least 0.5 with the target feature, forms five-bin percentile strata from those conditioning features, and permutes the target feature within strata. If no conditioning feature meets the correlation threshold, the target feature is permuted globally. PI and CPI therefore score a 20 percent split rather than every training row, which makes them noisier than an out-of-bag estimate; the random forest ranked by out-of-bag permutation importance (Table 4) is the comparator that uses every row.

Ranking rules use each method’s natural score direction. Embedded tree and ensemble baselines rank features by decreasing fitted importance: DT, RT, RF, ExtraTrees, XGBoost, LightGBM, and CatBoost. Permutation-test filters rank by increasing p -value, with dependence score as the secondary key. The ctree reference ranks features by split-use counts. For cforest, we use partykit’s unconditional out-of-bag permutation importance at its default of one permutation per tree, averaged over the 100 trees, which is the only importance the package provides for forests; CIF uses split-importance rankings from accepted conditional-inference splits. The two conditional-inference forests therefore differ in importance mechanism as well as in how their trees are grown (candidate thresholds, the Stage B rule, stopping, honesty, and muting), so the CIF-versus-cforest margins below compare the two packages’ rankings; the mechanism-matched check of Section 4.10 separates the two. Boruta and recursive feature elimination rank by their fitted rank variables, with smaller ranks first. PI and CPI rank by decreasing importance; the CPI row uses the stratified conditional-permutation procedure described above. Ties are broken by a deterministic order for reproducibility; for the importance-based rankers, including CIT and CIF, that order is the reversed NumPy sort of Section 2.

4.5 Configuration selection

Six methods were evaluated under several candidate configurations per task: four each for CIT and CIF, five for XGBoost, four for cforest, and two each for LightGBM and ctree. Permutation-test filters used one configuration per statistic, and methods with one configuration are treated as fixed. For each task, the paper reports one configuration per method, selected by mean score over real datasets, downstream models, and the standard values $k \in \{5, 10, 25, 50, 100\}$, and holds it fixed across the datasets of that task. The four selected conditional-inference configurations (Table 15) are the MC selector for CIT in classification and the RDC selector for CIT in regression, and for CIF the RDC selector in both tasks with 100 bootstrap trees and square-root feature sampling, without honesty in classification and with honesty at an honesty fraction of 0.5 in regression. Every CIT and CIF candidate uses the minimum budget, under which adaptive stopping is inert (Proposition 1); the feature correction and the threshold correction; the per-threshold rule; feature scanning, threshold scanning, and feature muting; and a 256-bin histogram, which yields up to 257 candidate thresholds per node. The candidates differ in selector and, for CIF, in honesty.

Because configuration selection and reporting use the same real-data benchmark, the reported scores, intervals, and rank summaries are descriptive. As a sensitivity check, we repeat configuration selection in leave-one-dataset-out (LODO) form for both tasks, on the complete-case panels and on the all-method panels of the main table. Each dataset in the panel is evaluated using configurations chosen from the other datasets in that panel (12 of 13 and 20 of 21 in classification, 5 of 6 and 7 of 8 in regression). The downstream models, k values, and averaging within each dataset are unchanged.

For the synthetic analysis, configurations are selected separately from the real-data benchmark. Each method is assigned the configuration with the highest average recovery of the true informative features over $k = 5, 10, 25, 50$, and 100.

4.6 Ablations

The runtime ablation refits the selected CIT and CIF configurations on the runtime panel with one control changed at a time: adaptive stopping, feature scanning, threshold scanning, and feature muting are switched off; the feature and threshold corrections are removed together; the 256-bin histogram is replaced by exact thresholds or, for CIF, by a 32-bin histogram; and, for CIF, bootstrap sampling is switched off and the max-type rule replaces the per-threshold rule. Both estimators are also refitted at the auto budget, with adaptive stopping and with no stopping, because the minimum budget leaves the stopping rule no room to act. Scanning and stopping are independent switches, so each row measures one mechanism. Each dataset is fitted at five seeds; every time is the second of two identical fits, so compilation is excluded. Single trees use the full thread pool, and forests fit 100 trees with one worker per tree and one Numba thread per worker, all on one 32-core machine.

Two further runs test whether the stopping result depends on how the work is scheduled or on dataset size. A single-worker forest, with the full thread pool inside each tree, switches adaptive stopping off on 21 of the 23 runtime datasets, all except the real waveform and california datasets. On the 14 Benchmark-size datasets, the tree is refitted with adaptive stopping off, with threshold scanning off, and without the two corrections, and the forest with adaptive stopping off.

To isolate which parts of the CIF ranking matter, a ranking ablation on the ablation panel (22 classification and 8 regression datasets) holds the selected CIF configuration fixed and changes one component at a time: replacing fitted split importance with split counts, disabling feature muting, disabling bootstrap sampling, or reducing the forest to one tree. Each variant is evaluated with the same downstream learners, folds, seeds, and standard top- k values as the main benchmark, and every comparison is paired with the reference configuration within seed and fold.

4.7 Stage B construction comparison

This study compares the per-threshold rule and the max-type rule of Equation (3) under the MC and PC selectors, with adaptive stopping and with no stopping; each part was fixed in advance and run at five seeds unless stated otherwise. Both rules run at the auto budget, which exceeds the $\lceil 1/\alpha \rceil$ floor, so adaptive stopping can act here, unlike at the benchmark’s minimum budget; the max-type rule uses 999 permutations under every budget rule. Candidate thresholds come from the histogram method at settings of 16, 64, and 256 bins, which yields one more candidate than the setting, capped at the number of distinct values in the node, so the 256-bin setting yields 100 and 200 candidates at $n = 100$ and $n = 200$.

Null calibration. The first part estimates the false-split rate of a depth-one tree under the global null, with five independent Gaussian predictors and an independent response, at $n \in \{100, 200, 500\}$ and the three bin settings, with 2,000 replicates per cell and seed. The rate measures the complete node decision, the Stage A feature test over five predictors followed by the Stage B threshold test, and is therefore below the level of the Stage B test alone.

Stage-B-only study. To measure the threshold test by itself, the Stage-B-only study uses one Gaussian predictor, disables the Stage A feature test (`alpha_selector = 1`), and fits a depth-one tree at nominal Stage B levels 0.02, 0.05, 0.10, 0.20, 0.35, and 0.50, at the same n and bin settings, with 500 null replicates per cell, level, and seed over three seeds. It repeats the planted step of the power part below with 200 replicates per cell, level, and seed and reports power at matched realized size: within each cell, power is interpolated against realized size to a common size of 0.05, or to the largest realized size both rules reach when the per-threshold rule does not reach 0.05 within the nominal grid. Two reruns bound the Monte Carlo error of that comparison: a fourth seed with 1,500 null and 1,000 alternative replicates per cell and level, and an off-centre design that moves the planted step from the median to the 85th percentile of the predictor.

Scaling. The second part times one tree on ten Gaussian predictors with a planted linear signal in three of them, at $n \in \{1,000, 4,000, 16,000\}$ and the same bin settings, as the median of three fits with a 1,200-second cap; a fit exceeding the cap is reported as censored. A fixed-budget control arm, timed in the same run, holds the per-threshold rule at 999 permutations per candidate (Appendix I).

Real-data fits. The third part fits one tree on the six Stage B real datasets of Table 1 at the 256-bin setting with five-fold cross-validation, recording held-out score, tree depth, fitting time, and the Spearman agreement of the two rules’ feature importances within each fold.

Planted-effect power. The fourth part measures the split rate under a planted effect: a depth-one tree on five Gaussian predictors whose response depends on the first through a step at zero, with the class-probability shift $\delta \in \{0.05, 0.10, 0.20\}$ in classification and the mean shift $\delta \in \{0.2, 0.4, 0.8\}$ in regression, at the same sample sizes and bin settings, with 500 replicates per cell and seed. It records the rate of any split, the rate of a split on the planted predictor, and the absolute error of the chosen threshold. All parts of this study run on the same machine as the runtime ablations.

4.8 Head-to-head forest timing

The head-to-head timing compares the two Stage B rules in full forests. It fits 100-tree classification forests in the configuration recommended by Milletich et al. [30] (MC selector, minimum budget,

adaptive stopping, the feature and threshold corrections, scanning, muting, and the 256-bin histogram, with depth at most 3), once with the per-threshold rule and once with the max-type rule, in one run on one machine. The cells are the ten datasets of the head-to-head panel and a synthetic grid of Gaussian predictors with a weak or strong planted signal at $n \in \{500, 2,000, 8,000\}$ with $p \in \{20, 100\}$, at $p = 500$ with $n \in \{500, 2,000\}$, and at $n = 32,000$ with $p \in \{20, 100\}$. Each time is the second of two identical fits, so compilation is excluded.

4.9 Max-type extension

The max-type extension asks what the max-type rule does to the benchmark rankings. It reruns the four CIT and four CIF candidate configurations with the max-type rule in place of the per-threshold rule and nothing else changed, on every real and synthetic benchmark dataset (the max-type panel of Table 1) at the five benchmark seeds. The downstream evaluation, configuration selection, and ranking follow Sections 4.1, 4.2 and 4.5 unchanged, with the max-type family standing in for its per-threshold counterpart.

4.10 Mechanism studies

Five studies examine why the forest rankings behave as they do; their results are in Sections 5 and 5.4.

Mechanism-matched check. CIF ranks by split importance and cforest by out-of-bag permutation importance. The mechanism-matched check (Appendix D.8) refits CIF on the mechanism-matched panel and ranks it by cforest’s own out-of-bag permutation importance, so that the comparison with cforest holds the importance mechanism fixed.

Out-of-bag random forest. A further comparator ranks the same 100-tree random forest as the RF ranker by out-of-bag permutation importance, which, unlike PI and CPI, scores every training row (Table 4).

Feature use in sampled forests. A study of feature sampling uses $n = 250$ and varies $p \in \{100, 500, 1,000\}$ and $n_{\text{informative}} \in \{1, 2, 5, 10\}$. It compares CIT, DT, RT, CIF, CIF-all, RF, and ExtraTrees, using 1,000 trees for the forest methods. CIF-all denotes the CIF variant that evaluates all nonconstant features at each split.

Weak-signal cardinality designs. These designs test whether high-cardinality noise features displace weak informative ones. Each has $n = 1,000$ and 10 informative Gaussian features among 60 noise features (25 with 500 levels, 25 binary, and 10 Gaussian) in shuffled order, at signal strengths 0.05, 0.10, and 0.20. The top-ten composition is scored over 25 fits, and the downstream score at $k \in \{5, 10, 25\}$. The rankers are CIF, CIF with the max-type rule, CIF without the threshold correction, CIT, RF impurity, RF out-of-bag permutation importance, XGBoost, and LightGBM; CIF and CIT use the MC selector in classification and the PC selector in regression.

Support measurement. The support measurement counts, on each of the 16 synthetic datasets and over 25 fits, the features that win at least one split in CIF, CIT, and RF, and how many of them are informative.

5 Results

5.1 Real-data benchmark

Table 2 reports the main real-data comparison. Classification uses the 21 datasets with results for every method; the full classification collection has 23 datasets, and `gisette` and `isolet` enter only the comparisons whose methods completed there (Appendix D lists the excluded runs). Regression uses all 8 datasets. Within each dataset, scores are first averaged over downstream learners and the standard k values shared by the compared methods, then converted to ranks. Lower mean rank is better.

Classification		Regression	
Method	Mean rank	Method	Mean rank
RF-RFE	4.19	ExtraTrees	5.00
XGBoost	5.81	CIF	6.25
CIF	5.86	CatBoost	6.75
RF	5.86	RF-RFE	6.88
LightGBM	6.05	RF	7.63
Boruta	6.62	RT	8.25
CatBoost	6.76	cforest	8.75
ExtraTrees	7.33	DT	9.38
cforest	8.33	Boruta	9.50
DT	8.62	PC filter	9.88
RDC filter	11.05	LightGBM	10.13
PI	11.67	XGBoost	10.13
MC filter	11.86	RDC filter	11.00
RT	12.81	CIT	11.13
ctree	12.86	ctree	11.38
CIT	13.14	PI	11.75
CPI	14.19	DC filter	12.25
		CPI	15.00

Table 2: Main real-data comparison. Ranks are computed within each dataset after scores are averaged over downstream learners and the standard k values shared by the compared methods, then averaged across datasets. Classification uses the 21 datasets with results for every method; regression uses all 8 datasets. Mean ranks carry no interval here; bootstrap intervals for the paired differences and the omnibus tests are in Appendix G.

With the selected configurations fixed, CIF ties RF for 3rd of 17 classification methods, 0.05 in mean rank behind XGBoost, and ranks 2nd of 18 regression methods; on the smaller complete-case panels it is tied 6th of 17 and tied 5th of 18. The regression ordering is descriptive, because the complete-case Friedman test does not reject at the 0.05 level ($p = 0.072$). Table 3 compares CIF directly with `ctree`, `cforest`, and `CIT`. Appendix G gives the learner-by- k tables (Tables 27 and 28), pairwise CIF-comparison heatmaps (Figures 6 and 7), and seed-sensitivity tables (Tables 29 and 30); each analysis reports its dataset count.

Task	Compared with	Datasets	Median diff.	Mean diff.	W-L
Classification	ctree	21	0.025	0.037	19-2
Classification	cforest	22	0.008	0.010	17-5
Classification	CIT	23	0.022	0.032	22-1
Regression	ctree	8	0.031	0.157	6-2
Regression	cforest	8	0.009	0.021	6-2
Regression	CIT	8	0.015	0.234	7-1

Table 3: Direct CIF comparisons against ctree, cforest, and CIT. Differences are CIF minus the compared method after averaging within each dataset over supported downstream learners and standard values of k , summarized over datasets by their median and mean; classification uses balanced accuracy and regression uses R^2 , for which the median is the primary summary because R^2 is unbounded below. W-L reports wins and losses over datasets where both methods were run.

Table 3 shows CIF ahead in all six direct pairings by both the median and the mean over datasets. In regression the median is the primary summary: R^2 is unbounded below, and on the three *coepra* datasets (76 to 133 observations, about 5,000 features) the comparators reach large negative values, so the CIF-minus-ctree and CIF-minus-CIT means of 0.157 and 0.234 are set by those three datasets while the medians are 0.031 and 0.015. On the complete-case datasets, CIF is also ahead of ctree, cforest, and CIT in both tasks. The 95% bootstrap CIs for the mean CIF-minus-comparator differences are as follows. Classification (13 datasets): ctree [+0.026, +0.073], cforest [+0.002, +0.024], CIT [+0.027, +0.062]. Regression (6 datasets): ctree [+0.029, +0.421], cforest [-0.032, +0.090], CIT [-0.002, +0.766]. The classification intervals and the regression ctree interval exclude zero; the regression intervals for cforest and CIT cross it, and all three are wide for the same reason the means are large: six datasets, three of them with unstable R^2 .

Mechanism-matched check. The CIF margin over cforest mixes the importance mechanism with the way the trees are grown. Ranked by cforest’s own out-of-bag permutation importance (Section 4.10 and Table 17), CIF leads cforest in classification by +0.012 mean and +0.006 median balanced accuracy with 15 wins in 20 datasets, against +0.011 for split-ranked CIF, and the two CIF rankings differ by +0.001, so the classification margin does not come from the importance mechanism. In regression the medians agree, while the means move with one unstable dataset (Appendix D.8).

Random forest ranked by out-of-bag permutation importance. In the clinical application of Milletich et al. [30], an ordinary random forest loses its high-cardinality preference once it is ranked by out-of-bag permutation importance rather than by impurity; on the weak-signal designs of Section 5.6 the same ranking keeps it, with a 500-level noise share of 0.47 against 0.38 for impurity at the weakest signal. Table 4 adds this permutation-importance forest to the benchmark: the benchmark’s 100-tree random forest is refit on every fold and ranked by one permutation of each column on each tree’s out-of-bag rows, the mechanism cforest uses, and the ranking is scored exactly as the others. It ranks 8th of 18 in classification and 6th of 19 in regression, below the impurity-ranked forest and below CIF on both panels (median differences of -0.003 and -0.007 against CIF), and above cforest in classification. With it present, CIF moves from tied 3rd of 17 to 4th of 18 in classification (mean rank 6.38, behind RF at 6.19 and XGBoost at 6.24) and stays 2nd in regression. Ranking the same forest by out-of-bag permutation importance instead of impurity therefore does not improve its downstream score: the permutation-importance forest scores below the impurity-ranked one in both tasks. The permutation step also costs time at high dimension: a median 29 seconds per fold in classification and 127 in regression against 0.2 seconds for the forest

fit, and 43 and 32 minutes per fold on gisette and dexter, because its work grows with the number of features times the number of trees. On a low-dimensional cohort such as the clinical one it is cheap; on the wide datasets it is not.

Task	Compared with	Datasets	Position	Median diff.	Mean diff.	W-L
Classification	CIF	23	8 of 18	-0.003	-0.002	11-12
Classification	RF	23		-0.004	-0.004	8-15
Classification	cforest	22		0.005	0.009	16-6
Regression	CIF	8	6 of 19	-0.007	-0.028	3-5
Regression	RF	8		-0.002	-0.032	3-5
Regression	cforest	8		0.002	-0.007	5-3

Table 4: Random forest ranked by out-of-bag permutation importance as an added comparator. Position is its mean-rank position when it joins the all-method panels of 21 and 8 datasets (18 classification and 19 regression families); differences are the new ranker minus the compared method after averaging within each dataset over downstream learners and standard k , summarized by median and mean over the datasets both completed; balanced accuracy in classification, R^2 in regression. W-L counts datasets where the new ranker is higher or lower. Full ranks and deltas are in `paper_rf_oobperm_method_aggregate.csv` and `paper_rf_oobperm_pairwise.csv` of the reference release.

CIF ablations. Table 5 compares the selected CIF configuration with four targeted changes on the real-data benchmark datasets: split-count ranking, disabling bootstrap sampling, disabling feature muting, and using one tree. Each changed variant is paired with the reference in the same seed and fold. In classification, reducing CIF to one tree lowers balanced accuracy on every dataset, by 0.071 on average, while split-count ranking, disabling bootstrap sampling, and disabling feature muting change it by at most 0.001 on average, with intervals that include zero. Regression is heterogeneous and the negligible-effect statement does not carry over: the one tree loses on all eight datasets, by 0.66 R^2 on average and 0.06 at the median; split-count ranking and disabling bootstrap sampling lower the mean R^2 by 0.053 and 0.064 with intervals that exclude zero, although their medians are within 0.007 of zero and the win-loss counts are 2-6 and 4-4; and disabling feature muting lowers the mean by 0.157 with a median of zero and an interval that includes it. The means are pulled down by the three small `coepira` datasets, where R^2 is unstable across folds: in regression the mean differences are set by a few datasets while the medians stay near zero, so the table reports both statistics.

Task	CIF change	Mean diff.	Median diff.	95% CI	W-L
Classification	Split-count ranking	-0.001	0.000	[-0.005, +0.002]	12-9
Classification	Disable bootstrap	-0.001	0.000	[-0.004, +0.003]	9-12
Classification	Disable feature muting	0.001	0.000	[-0.001, +0.002]	13-5
Classification	Use one tree	-0.071	-0.043	[-0.101, -0.045]	0-22
Regression	Split-count ranking	-0.053	-0.003	[-0.142, -0.002]	2-6
Regression	Disable bootstrap	-0.064	-0.007	[-0.128, -0.010]	4-4
Regression	Disable feature muting	-0.157	0.000	[-0.468, +0.001]	4-4
Regression	Use one tree	-0.658	-0.059	[-1.692, -0.054]	0-8

Table 5: CIF ablations on the real-data benchmark. Differences compare each changed variant with the selected CIF configuration using split-importance ranking, paired within seed and fold. Scores are averaged within each dataset over downstream learners, supported standard values of k , and the 25 paired fold $\times$ seed replicates. Classification uses balanced accuracy; regression uses R^2 . The confidence intervals are percentile bootstrap intervals for the mean over dataset-level differences from 20,000 replicates. Positive values favor the changed CIF variant. W-L counts datasets where the changed variant is higher or lower than the reference; exact ties are omitted. The classification rows use 22 datasets and the regression rows use 8 datasets.

RDC projections. The RDC rankings are insensitive to the number of random projections. In a 5-seed, 5-fold analysis on four small classification datasets, 20 instead of 10 projections required more than three times the median selector time, changed mean balanced accuracy by at most 0.0052, and kept at least 95.4 percent mean overlap between the selected feature sets.

The complete-case Friedman tests use dataset-level method means. Classification: $\chi^2(16) = 140.46$, $p < 0.001$, Kendall’s $W = 0.68$. Regression: $\chi^2(17) = 26.15$, $p = 0.072$, Kendall’s $W = 0.26$, which does not reach the 0.05 level, so the regression rank ordering is a descriptive summary of the 6-dataset panel rather than evidence of method differences.

The paired bootstrap intervals of CIF against every other method on the same panels, computed as in Table 24, which reports those against ctree, cforest, and CIT, are unadjusted post-hoc contrasts, 16 in classification and 17 in regression with no familywise correction, and are read as descriptive. In classification they exclude zero in CIF’s favor against CIT, ctree, cforest, the single trees, the permutation filters, PI, and CPI; they exclude zero against CIF for RF-RFE, XGBoost, and LightGBM; and they include zero for RF, ExtraTrees, CatBoost, and Boruta, so the data do not resolve the order of CIF among these four. In regression, where the omnibus test does not reject, no interval excludes zero against CIF, and CIF’s intervals exclude zero only against the filters, PI, CPI, LightGBM, and ctree. These intervals and rank summaries describe the benchmark-selected configurations. The LODO analysis below checks whether those configurations are stable under one-dataset holdout.

The complete-case panels rank CIF lower than the main table does, and the LODO reselection accounts for little of the difference. On the 13-dataset classification panel, the benchmark-selected CIF configuration has mean rank 6.38 (tied 6th of 17); LODO reselection moves it to 6.85 (8th) and reselects the main-benchmark configuration in 11 of 13 holdouts. On the 6-dataset regression panel, the fixed configuration has mean rank 7.00 (tied 5th of 18) and LODO moves it to 7.33 (6th), behind ExtraTrees, CatBoost, RF-RFE, RF, and RT, reselecting the global configuration in 4 of 6 holdouts. The 3rd and 2nd places in Table 2 are therefore properties of the 21- and 8-dataset panels: the smaller complete-case panels move CIF from tied 3rd to tied 6th in classification and from 2nd to tied 5th in regression, and configuration reselection adds less than half a rank.

On the 21- and 8-dataset panels themselves, reselection moves CIF from 5.86 (tied 3rd) to 6.10 (5th) in classification and from 6.25 to 6.50 (2nd in both) in regression, reselecting the benchmark

configuration in 20 of 21 and 7 of 8 holdouts, with held-out scores lower by 0.002 balanced accuracy and 0.008 R^2 (Table 26). Every single-configuration family keeps its score, and its rank moves only through the reselection of others, by at most 0.05 in classification and 0.125 (one place on eight datasets) in regression. Tables 24 and 25 give the confidence intervals and LODO details.

Table 6 reports how often CIF appears in the top half or top 3 and how often it beats tree baselines.

Summary	Classification	Regression
Main rank	3.5/17	2/18
Top half	17/21	5/8
Top 3	4/21	2/8
Win vs ctrees	19/21	6/8
Win vs cforest	17/22	6/8
Win vs CIT	22/23	7/8
Win vs DT	16/23	5/8
Win vs RT	21/23	5/8

Table 6: Dataset breadth for the selected CIF configuration. Top half and Top 3 counts use the datasets from Table 2. Direct win rows use datasets where both methods were run. The fractional classification main rank reflects a tie with RF. Counts carry no interval; paired intervals for CIF against ctrees, cforest, and CIT on the complete-case panels are in Table 24.

CIF’s position rests on breadth rather than on a few strong datasets: it is in the top half on 17 of 21 classification and 5 of 8 regression datasets but in the top 3 on only 4 of 21 and 2 of 8, and it beats DT on 16 of 23 and RT on 21 of 23 classification datasets, while in regression both single-tree comparisons are close (5 of 8 each, with a mean difference near zero against RT).

Figures 1 and 2 report mean rank separately by k . Because the dataset count falls as k grows, the trend is read on the constant complete-case panels of 13 classification and 6 regression datasets: in classification CIF improves with k , from 7th and 8th of 17 at $k \leq 10$ to 4th at $k = 100$ (mean ranks 7.8, 7.7, 6.5, 6.2, and 5.7), and in regression its position varies between 3rd and 7th of 18 with no monotone trend in k (mean ranks 8.2, 8.3, 6.3, 7.0, and 7.0).

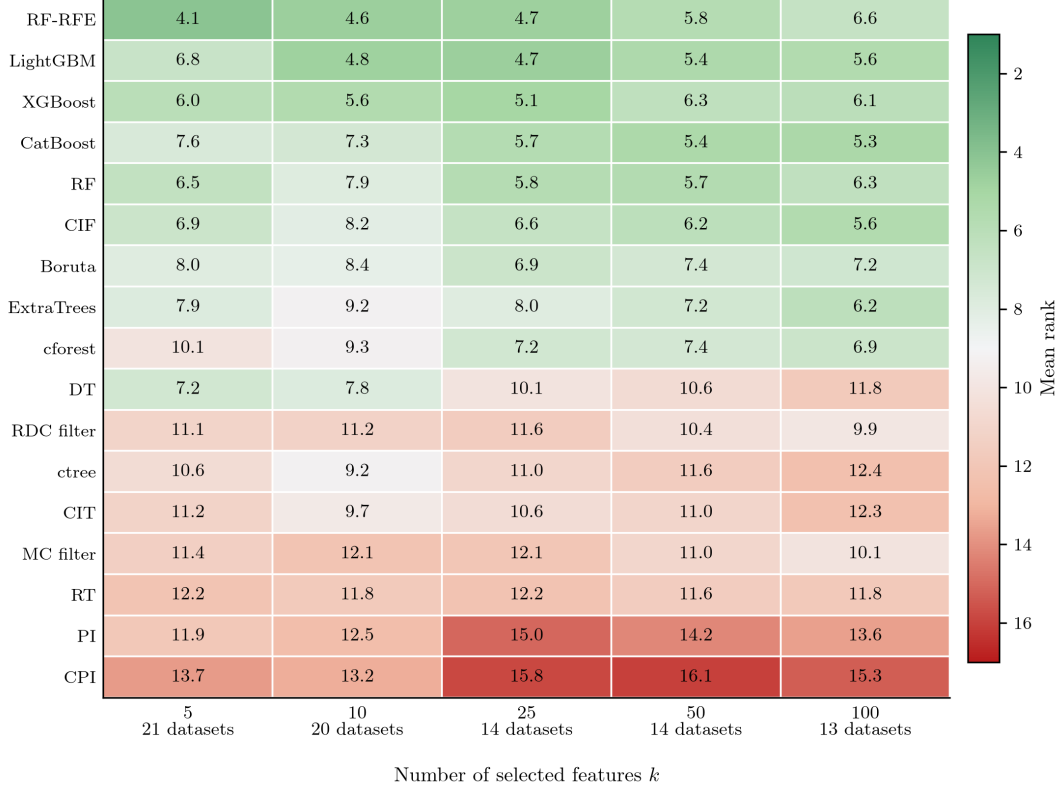


Figure 1: Classification mean rank by number of selected features. Rows show all 17 feature selection methods in the classification benchmark, averaged across downstream models at each value of k . Lower ranks are better. The columns for $k = 5, 10, 25, 50, 100$ use 21, 20, 14, 14, and 13 datasets, respectively. Each cell is a mean over the datasets in that column with no interval; the seed and learner sensitivity tables in Appendix G bound its variation.

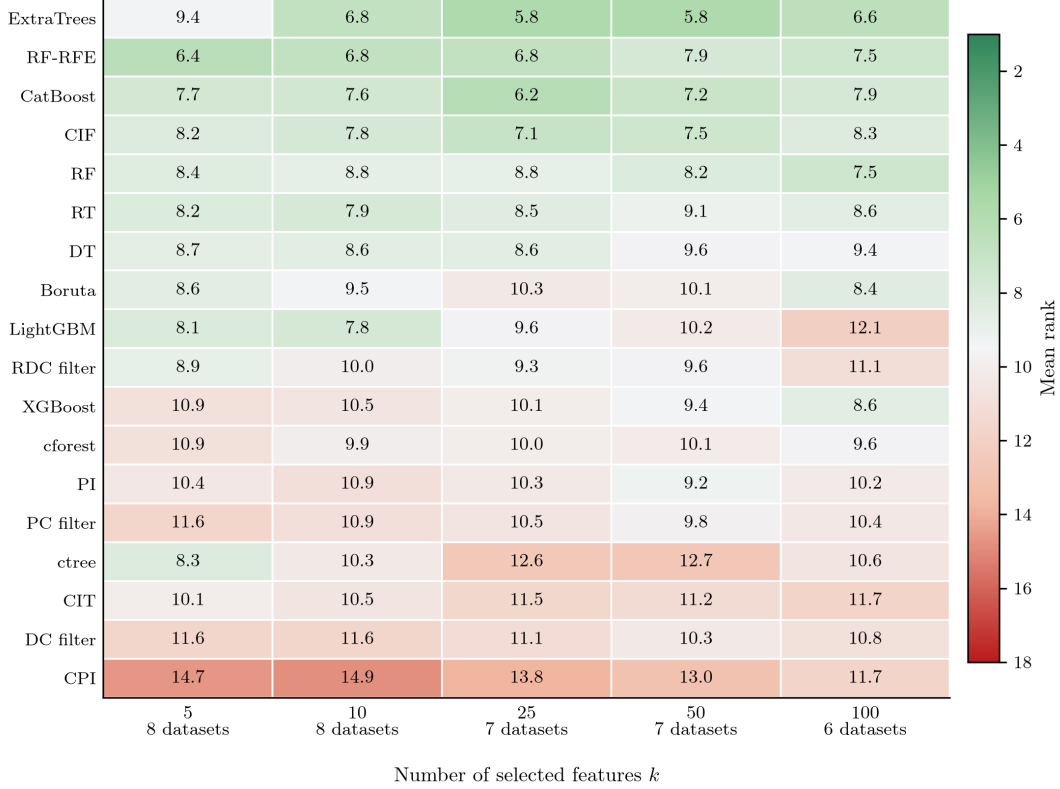


Figure 2: Regression mean rank by number of selected features. Rows show all 18 feature selection methods in the regression benchmark, averaged across downstream models at each value of k . Lower ranks are better. The columns for $k = 5, 10, 25, 50, 100$ use 8, 8, 7, 7, and 6 datasets, respectively. Each cell is a mean over the datasets in that column with no interval; the seed and learner sensitivity tables in Appendix G bound its variation.

5.2 Runtime ablations

The runtime ablations identify which benchmark settings have the largest effect on fitting time and report how much the ranking scores move when those settings change. Each row switches one control off and reports elapsed wall-clock fit time relative to the selected configuration for the same estimator, as the median over datasets of the per-dataset ratio, in each of the four task groups (classification and regression, real and synthetic). Ratios above 1 are slower than the reference and ratios below 1 are faster. Scanning and early stopping are independent switches, so each row measures one mechanism. CIT and CIF are shown separately because the CIT run records fit time and synthetic top-10 feature recovery, while the CIF runs also record downstream score changes. Appendix E links each ablation to the affected work terms.

CIT change	Runtime ratio	Largest top-10
		F1 change
Disable adaptive stopping (minimum budget)	0.88–0.99×	0
Auto budget, adaptive stopping	1.18–1.56×	≤ 0.016
Auto budget, no early stopping	3.8–8.2×	≤ 0.016
Disable threshold scanning	2.7–34×	≤ 0.033
Disable feature scanning	0.81–3.0×	≤ 0.058
Exact threshold search	0.91–1.10×	≤ 0.004
Disable feature muting	0.97–0.98×	0
Remove feature and threshold corrections	0.52–1.8×	≤ 0.063

Table 7: CIT runtime ablations. Runtime ratios are medians over datasets of the per-dataset ratio to the selected CIT configuration, given as the range over the four task groups; five seeds per dataset on 23 datasets (15 classification and 8 regression; 9 real and 14 synthetic). The F1 column is the largest change in mean top-10 F1 on the synthetic datasets across the task groups. Fits ran on one 32-core machine with the full thread pool per tree; every time is the second of two identical fits, so compilation is excluded. The two auto-budget rows use the auto budget, which exceeds the $\lceil 1/\alpha \rceil$ floor, so the stopping rule can act.

CIT runtime ablations. Table 7 separates the permutation budget from the stopping rule. At the benchmark’s minimum budget, adaptive stopping is inert by construction (Proposition 1): the budget equals the floor below which the rule cannot stop, so switching it off changes fitting time by 0.88–0.99× and leaves every tree, and therefore every recovery score, unchanged. Where the rule can act it earns its place: at the auto budget the adaptive tree costs 1.18–1.56× the selected configuration at the minimum budget, while the same budget with no stopping costs 3.8–8.2×, so within each task group adaptive stopping brings the larger budget’s tree to 0.14–0.37 of its no-stopping time at a recovery change of at most 0.016.

The control that matters for a single tree is the threshold scan: testing candidate thresholds in order of promise and stopping at the first rejection makes fits 2.7–34× faster than testing every candidate, with the largest ratio on the real regression datasets, where predictors admit the full 257 candidates. Feature scanning matters less for a single tree (0.81–3.0×, faster in one group because the prescan itself has a cost), and exact threshold search and feature muting are within a few percent of the selected configuration. Removing the feature and threshold corrections changes the statistical rule: trees grow from a mean depth of 6.5 and 7.2 to 10.7 and 13.4 levels and top-10 recovery moves by up to 0.063, so the corrections are not a runtime control.

The pattern holds on the 14 Benchmark-size datasets (up to 20,000 observations and 5,000 features; five seeds each): switching adaptive stopping off changes single-tree time by 0.80–1.01× (medians 0.97 in classification and 0.88 in regression), threshold scanning saves a median 17× in classification and up to 45× on spam, and removing the two corrections runs in 0.01–1.26× the time of the selected configuration. The largest single-tree time is gisette at 29 minutes, where the feature correction over 5,000 features sets a large minimum budget for each feature test.

CIF change	Runtime ratio	Downstream score change	Synthetic feature recovery change
Disable adaptive stopping	0.96–1.00×	0	0
Auto budget, adaptive stopping	1.30–2.0×	–	≤ 0.030
Auto budget, no early stopping	5.8–15×	–	≤ 0.025
Disable threshold scanning	7.9–30×	≤ 0.003	≤ 0.010
Disable feature scanning	1.0–5.2×	≤ 0.003	≤ 0.008
Exact threshold search	1.3–19×	≤ 0.009	≤ 0.018
Histogram with 32 bins	0.05–0.14×	≤ 0.008	≤ 0.013
Disable feature muting	0.91–1.00×	≤ 0.001	≤ 0.003
Disable bootstrap sampling	0.94–1.69×	≤ 0.012	≤ 0.011
Max-type Stage B test	0.14–0.61×	≤ 0.005	≤ 0.007
Remove feature and threshold corrections	0.03–0.34×	≤ 0.004	≤ 0.011

Table 8: CIF runtime ablations with score changes. Runtime ratios are medians over datasets of the per-dataset ratio to the selected CIF configuration, given as the range over the four task groups; five seeds per dataset on 23 datasets. The exact-threshold and 32-bin rows come from the threshold-search ablation and compare with the 256-bin histogram reference. The score columns give the largest absolute change in the dataset-mean downstream score and in synthetic feature recovery across the task groups; inequality entries are rounded upward to the nearest 0.001. The auto-budget rows come from the CIT/CIF runtime ablation, which records synthetic recovery but no downstream score. Forests fit 100 trees with one worker per tree and one Numba thread per worker on a 32-core machine; every time is the second of two identical fits.

CIF runtime ablations. Table 8 shows the same pattern for forests. Adaptive stopping is inert at the minimum budget (0.96–1.00×, no score change). The result does not depend on how trees are scheduled: a forest with one worker and the full thread pool inside each tree changes fitting time by 0.95–1.01× when the rule is switched off, on the 21 runtime datasets other than waveform and california. Where the rule can act, at the auto budget, the adaptive forest costs 1.30–2.0× the selected configuration at the minimum budget and the same budget with no stopping 5.8–15×, so the adaptive forest runs in 0.11–0.25 of its no-stopping time within each task group, with synthetic recovery changes of at most 0.030.

The threshold scan is again the dominant control, at 7.9–30× by group medians, and the number of candidates is the next: exact threshold search is 1.3–19× slower than the 256-bin histogram and a 32-bin histogram is 7–21× faster, with downstream score changes of at most 0.009 and recovery changes of at most 0.018. Feature scanning costs 1.0–5.2×, with its largest effect on the real regression datasets. The max-type rule fits in 0.14–0.61 of the selected configuration’s time with downstream changes of at most 0.005; Section 5.3 reports its calibration, power, and ranking effect. Removing the feature and threshold corrections gives the largest speedup for CIF, and is faster for CIT in three of the four groups, but it changes the statistical rule and yields deeper trees with more selected features, so the selected configuration keeps both corrections. On the 14 Benchmark-size datasets the forest’s adaptive-stopping ratio is 0.99–1.34× (medians 1.00 and 1.03).

5.3 Stage B construction comparison

Both Stage B rules control the false-split rate. At matched realized size the max-type rule is about 0.006 less powerful, with per-cell differences within the Monte Carlo error of the design (Table 10), while at a common nominal level it splits more often because its size is closer to that level (Table 34); it is also cheaper on continuous predictors and slightly less precise in where it places the threshold.

The complete-node false-split rate is below 0.05 for both rules in all 36 design cells, 72 measurements pooled over five seeds (Table 9); the rules differ in how far below. Under the per-threshold rule the rate falls as the bin setting grows, from 0.0196 at 16 bins to 0.0070 at 256 in classification with

$n = 500$ and no stopping, because adjacent thresholds induce nearly identical splits and the union bound charges for each. Under the max-type rule it stays between 0.028 and 0.038 in every cell and rises slightly with the bin setting, with cell means of 0.032, 0.034, and 0.034. These complete-node rates are dominated by the Stage A feature test, which must first reject over five independent predictors, so they bound the Stage B threshold test from below rather than measure it.

The Stage-B-only study (Table 10), which fixes the tested predictor without the response and disables the Stage A feature test, measures the threshold test itself. At nominal level 0.05 the per-threshold rule has size 0.000–0.027, with means of 0.018, 0.011, and 0.006 at 16, 64, and 256 bins, and the max-type rule 0.023–0.044, with means of 0.033, 0.035, and 0.035; every 95% Clopper–Pearson upper limit is below 0.056, and the cells whose intervals include 0.05 are max-type cells at 64 and 256 bins. Both rules are therefore valid at a fixed node for a predictor fixed without the response, and the reverse cardinality bias of Section 2 appears as the per-threshold size falling by a factor of three across the bin settings while the max-type size does not move.

Task	n	Bins	Per-threshold		Max-type	
			Adaptive	No stopping	Adaptive	No stopping
Classification	100	16	0.0182	0.0183	0.0342	0.0352
	100	64	0.0127	0.0130	0.0353	0.0370
	100	256	0.0091	0.0096	0.0360	0.0384
	200	16	0.0200	0.0203	0.0326	0.0342
	200	64	0.0144	0.0147	0.0333	0.0344
	200	256	0.0086	0.0092	0.0329	0.0345
	500	16	0.0196	0.0196	0.0295	0.0314
	500	64	0.0142	0.0142	0.0322	0.0332
	500	256	0.0072	0.0070	0.0319	0.0339
	500	256	0.0072	0.0070	0.0319	0.0339
Regression	100	16	0.0272	0.0269	0.0315	0.0328
	100	64	0.0174	0.0185	0.0337	0.0348
	100	256	0.0138	0.0145	0.0335	0.0347
	200	16	0.0282	0.0287	0.0323	0.0347
	200	64	0.0234	0.0237	0.0351	0.0368
	200	256	0.0124	0.0127	0.0356	0.0380
	500	16	0.0262	0.0264	0.0286	0.0295
	500	64	0.0198	0.0202	0.0288	0.0311
	500	256	0.0106	0.0108	0.0285	0.0315
	500	256	0.0106	0.0108	0.0285	0.0315

Table 9: False-split rate of a depth-one tree under the global null at level 0.05, by Stage B rule and stopping mode, over 10,000 replicates per cell (five seeds of 2,000) with five independent Gaussian predictors and an independent response. Bins is the histogram threshold setting; the realized candidate count is one more than the setting, capped at the number of distinct values. Every 95% Clopper–Pearson interval lies below 0.05 (largest upper limit 0.042); the widest half-width is below 0.004.

The cost difference is where the rules separate (Table 31, Appendix I; all three arms timed in one run). With no stopping, one tree at the 256-bin setting takes 3.5 seconds at $n = 1,000$, 14 seconds at $n = 4,000$, and 59 seconds at $n = 16,000$ under the per-threshold rule in classification (0.8, 8.8, and 54 seconds in regression); the max-type rule takes 0.3, 1.4, and 6.3 seconds at the same settings. The ratio grows with the bin setting as the K^2/α against BK accounting predicts: at 16 bins the max-type rule is 1.1–1.3 times slower, because its 999 permutations exceed the 340 the per-threshold rule needs for 17 candidates, while the no-stopping ratio is 1.5–2.1 at 64 bins and 2.8–13 at 256. Adaptive stopping shortens the per-threshold test once its budget exceeds the $\lceil 1/\alpha \rceil$ floor, by 1.2–1.6 $\times$ at 16 bins, 2.2–3.2 $\times$ at 64, and 3.8–7.8 $\times$ at 256, so with adaptive stopping the max-type advantage is 1.0–1.3 at 16 bins, 1.4–2.1 at 64, and 2.2–7.7 at 256.

The fixed-budget control arm shows why the per-threshold rule needs its scaled budget. Held at

999 permutations per candidate, the rule still splits at 16 bins and is faster than the scaled rule (0.55 and 0.65 seconds against 0.75 and 0.82 at $n = 16,000$). At 64 and 256 bins it is cheaper still (0.84 to 0.89 and 3.3 to 3.5 seconds at $n = 16,000$, against 3.3 to 3.6 and 55 to 59 for the scaled rule and 2.1 to 2.2 and 6.3 for the max-type rule), but it never splits (size 0, power 0, depth 0 in every cell; Table 32), because α/K falls below the resolution $1/(B + 1)$. The K^2/α budget is therefore what the per-threshold rule needs in order to reject, and the max-type rule is the construction that resolves the level at $999K$ permutation statistics.

Depth barely separates the rules on these data: over the grid the max-type trees have 5.0–10.7 levels and the per-threshold trees 4.0–10.0 under either stopping mode. The planted signal is linear in three of the ten predictors, so depth reflects both power at small nodes and splits on noise; the real-data scores are the measure of which trees predict better.

On the six Stage B real datasets (Table 33, Appendix I), with scores taken as the median over five seeds of the fold assignment, the max-type rule exceeded the per-threshold rule in 8 of the 12 dataset and stopping-mode cells and equalled it in one: by 0.016 and 0.026 balanced accuracy on vowel, 0.049 and 0.026 R^2 on facebook, 0.060 and 0.033 on imports-85, and 0.008 and 0.005 on residential; on page-blocks it was lower by 0.018 and 0.020, and on spam lower by 0.006 with adaptive stopping and equal with no stopping. Its fitting time was 1.2 to 2.4 times shorter with adaptive stopping and 1.0 to 8.3 times shorter with no stopping on the four datasets whose predictors admit many candidates per node, with the largest savings on page-blocks and facebook. It was slower on residential, by 16 percent with adaptive stopping and 10 percent with no stopping, and equal on imports-85, whose nodes admit few candidates. The fitted depths agree within about one level (per-threshold 5.4–11.4, max-type 4.8–12.4). The Spearman agreement of the two rules' feature importances ranges from 0.36 to 0.88, so the max-type rule produces a different ranking rather than a faster route to the same one.

In the head-to-head forest timing (Section 4.8), the max-type rule is $10\text{--}27\times$ faster than the per-threshold rule on the synthetic Gaussian cells at $n \leq 8,000$ and $21\text{--}36\times$ faster at $n = 32,000$ ($13\text{--}36\times$ on the $p \in \{20, 100\}$ cells that Milletich et al. [30] tabulate). The smaller ratios on the mixed runtime panel of Table 8, $1.6\text{--}7\times$, arise where nodes admit few candidates. On the ten real datasets it reduces madelon from 21 to 2.6 seconds, gamma from 44 to 21 seconds, and isolet from 18 to 9.1 seconds, and changes the other seven by at most 1.6 seconds.

The power study plants a step in one of five Gaussian predictors and records how often a depth-one tree splits at all and how often on the planted predictor; Table 34 (Appendix I) reports the split rate at a common nominal level, and Table 10 the comparison at matched size. At a common nominal level of 0.05 the max-type rule splits more often than the per-threshold rule in every cell short of saturation, by 0.03 on average and up to 0.12 in the complete-node design and by 0.10 on average in the Stage-B-only study. The gap grows with the candidate count, from 0.015 at 16 bins to 0.029 at 64 and 0.049 at 256 in the complete-node design, because the max-type power is flat in the bin setting while the per-threshold power falls as the threshold correction tightens. That nominal-level gap is a size gap, not a power gap.

Matching the two rules at the same realized size in the Stage-B-only study (Table 10) removes it: the max-type minus per-threshold difference in size-matched power ranges from -0.054 to $+0.034$ over the 108 cell and effect combinations, with mean -0.006 and no trend in the bin setting (-0.005 , -0.008 , and -0.006 at 16, 64, and 256 bins). In four of the nine classification cells (64 bins at $n = 100$ and 256 bins at every n) and one regression cell ($n = 500$, 256 bins) the per-threshold rule does not reach realized size 0.05 within the nominal grid, its size at nominal 0.50 being 0.031–0.046, so the match in those cells is at that largest realized size; the other 13 cells match at 0.05. Adaptive stopping and no stopping agree within 0.014 in every cell.

The two reruns of Section 4.7, whose results are in `paper_stageb_power_replicates.csv` of

the reference release, bound the Monte Carlo error of that comparison. With the larger replicate counts of the fourth seed, the size-matched difference is -0.006 on average across the 96 cell and effect combinations completed (range -0.040 to $+0.018$); the 12 combinations of the 256-bin cells at $n = 500$, the K^2/α worst case, were not completed at this replicate count. A parametric bootstrap of the whole matching procedure, resampling every null and alternative count and redoing the interpolation, puts a standard error of about 0.017 on each difference, so the smallest difference the design could detect is about 0.03, and one of the 96 exceeds two standard errors.

With the off-centre step, the difference is -0.004 on average (range -0.051 to $+0.039$, bootstrap standard error about 0.038, detectable difference about 0.08), and none of the 108 exceeds two standard errors. The Stage-B-only sizes at nominal 0.05 stay at 0.000–0.026 for the per-threshold rule and 0.018–0.046 for the max-type rule.

The cost of the joint test is precision, measured on each rule’s own detections, which are not the same replicates. The max-type threshold sits a median 0.19 standard deviations from the planted cut, against 0.15 for the per-threshold rule, and 87 rather than 90 percent of its detections fall on the planted predictor.

Pooled over cells, the size-matched power loss is small and consistent: the max-type rule is lower in 67 of the 108 cell and effect combinations and higher in 25. The mean difference is -0.006 , with a 95 percent bootstrap interval of -0.011 to -0.002 that resamples the 18 cells, keeping the effects and stopping modes of a cell together, and -0.005 (-0.009 to -0.002) over the 13 cells matched at size 0.05. The fourth-seed and off-centre reruns give -0.006 (-0.008 to -0.003) and -0.004 (-0.008 to 0.000), the second interval reaching zero. What the max-type rule gains at a fixed nominal level is the size that the threshold correction gives up.

Task	n	Bins	Size at nominal 0.05				Size-matched power		
			Per-threshold		Max-type		Match size	Per-thr.	Max-type
			Adapt.	None	Adapt.	None			
Classification	100	16	0.013	0.013	0.032	0.033	0.050	0.390	0.379
	100	64	0.007	0.007	0.036	0.039	0.044	0.385	0.354
	100	256	0.007	0.007	0.036	0.042	0.034	0.335	0.318
	200	16	0.010	0.011	0.037	0.039	0.050	0.643	0.618
	200	64	0.008	0.009	0.035	0.039	0.050	0.630	0.615
	200	256	0.003	0.003	0.039	0.039	0.031	0.562	0.538
	500	16	0.015	0.015	0.032	0.037	0.050	0.958	0.953
	500	64	0.007	0.007	0.029	0.035	0.050	0.961	0.964
	500	256	0.000	0.001	0.023	0.032	0.034	0.958	0.952
Regression	100	16	0.019	0.019	0.023	0.031	0.050	0.292	0.281
	100	64	0.013	0.013	0.029	0.035	0.050	0.305	0.285
	100	256	0.011	0.010	0.031	0.037	0.050	0.317	0.299
	200	16	0.027	0.026	0.033	0.038	0.050	0.591	0.581
	200	64	0.017	0.017	0.033	0.043	0.050	0.619	0.598
	200	256	0.008	0.009	0.041	0.044	0.050	0.632	0.579
	500	16	0.026	0.026	0.031	0.032	0.050	0.947	0.942
	500	64	0.015	0.016	0.029	0.033	0.050	0.966	0.952
	500	256	0.005	0.006	0.026	0.034	0.046	0.963	0.951

Table 10: Stage-B-only study: the threshold test in isolation, with one Gaussian predictor fixed without the response and the Stage A gate disabled. Size is the false-split rate of a depth-one tree at nominal level 0.05 over 1,500 null replicates per cell (three seeds of 500) under adaptive stopping (Adapt.) and no stopping (None); every 95% Clopper–Pearson upper limit is below 0.056. Size-matched power, shown for adaptive stopping at the middle effect ($\delta = 0.10$ in classification, 0.4 in regression), is interpolated against realized size over the nominal grid 0.02–0.50 (600 replicates per cell and level) to the match size: 0.05, or the largest realized size both rules reach where the per-threshold (Per-thr.) rule does not reach 0.05. All effects, both stopping modes, and the intervals are in `paper_stageb_only_pooled.csv` and `paper_stageb_only_size_matched.csv` of the reference release; the fourth-seed rerun with 1,500 null and 1,000 alternative replicates and the 85th-percentile-step rerun, with standard errors on every size-matched difference, are in `paper_stageb_power_replicates.csv`.

The max-type extension (Section 4.9) shows what the rule does to the rankings (Table 11). Of its 1,880 possible ranking runs (eight configurations over 23 real and 8 synthetic classification datasets and 8 real and 8 synthetic regression datasets, at five seeds), 88 were not run because their per-threshold counterpart had no completed run when the extension was fixed, leaving 1,792, of which 1,785 completed. The seven that did not are CIF with the RDC selector and honesty off on isolet, gisette, and letter, which fail on the compute host in the same way as the RDC exclusions of the per-threshold benchmark (Appendix D); their sibling seeds and honesty-on twins completed, so on letter the max-type CIF score averages the three seeds that completed.

Selecting one configuration per family and ranking on the all-method panels of 21 and 8 datasets exactly as in Section 5.1, the max-type forest moves from position 3.5 to 5 of 17 in classification (mean rank 5.86 to 6.31, a change of 0.45) and from 2 to 4 of 18 in regression (6.25 to 7.50, a change of 1.25), and the max-type tree keeps its position in both tasks (16 of 17 and 14 of 18). Paired on the cells both rules completed, the per-threshold rule scores higher by 0.0014 (CIF) and 0.0022 (CIT) balanced accuracy in classification and by 0.0001 (CIF) and 0.0085 (CIT) R^2 in regression, and is the higher of the two on 59 to 63 percent of datasets. The max-type rule is therefore a cost and calibration choice rather than a ranking gain: it changes which features the trees rank, as the importance agreement above shows, while the downstream scores of its rankings differ from the per-threshold ones by 0.0001 to 0.0085 on average and its forest drops one to two places in mean rank.

Task	Method	Per-threshold		Max-type		Paired difference	
		Mean rank	Position	Mean rank	Position	Score	Datasets
Classification	CIF	5.86	3.5	6.31	5	-0.0014	22
	CIT	13.14	16	13.00	16	-0.0022	23
Regression	CIF	6.25	2	7.50	4	-0.0001	8
	CIT	11.13	14	10.88	14	-0.0085	8

Table 11: Benchmark rankings under the two Stage B rules. Mean rank and position are ranks among the 17 classification and 18 regression method families on the all-method panels of 21 and 8 datasets (not the 13- and 6-dataset complete-case panels), with the max-type family standing in for its per-threshold counterpart; the per-threshold columns repeat Table 2. The paired difference is the max-type score minus the per-threshold score (balanced accuracy in classification, R^2 in regression) averaged over the datasets, downstream learners, and budgets $k \in \{5, 10, 25, 50, 100\}$ that both rules completed; Datasets is the number of datasets in that average. Paired differences are means over dataset, learner, and k cells; their dataset-level sign shares are in `paper_maxt_extension_pairwise.csv` of the reference release.

5.4 Where CIF loses: high p and small k

The introduction asks where CIF recovery is weaker, and on real data the answer has two parts: at small k , where Figures 1 and 2 place it 7th or 8th of 17 in classification on the complete-case panel, and on wide datasets, where its scores peak before the full feature set. Across the 15 classification datasets with more than 100 features, CIF first reaches its best score at an intermediate value of k ($100 < k < p$) in 29 of 45 dataset-learner combinations. It first reaches its best score at the full feature set ($k = p$) in only 7 of 45 combinations. Figure 3 shows this pattern by downstream learner. Classification scores most often peak at intermediate k : 8 of 15 LR datasets, 12 of 15 SVM datasets, and 9 of 15 KNN datasets. The full feature set is mainly an LR exception. Moving from $k=100$ to $k=p$ gives a mean $k=p$ minus $k=100$ score change of +0.026 for LR, and LR first reaches its best score at $k = p$ in 5 of 15 datasets. For SVM and KNN, the corresponding mean changes are -0.053 and -0.071, and $k = p$ is first-best in only 1 of 15 datasets for each learner; the three counts sum to the 7 of 45 above.

In the 6 high- p regression datasets, full-feature evaluation is rarely best. Across the 18 dataset-learner combinations, 12 peak at or below $k=100$, only 2 peak at $k = p$, and the $k=p$ minus $k=100$ score change has a mean of -0.270 and a median of -0.076.

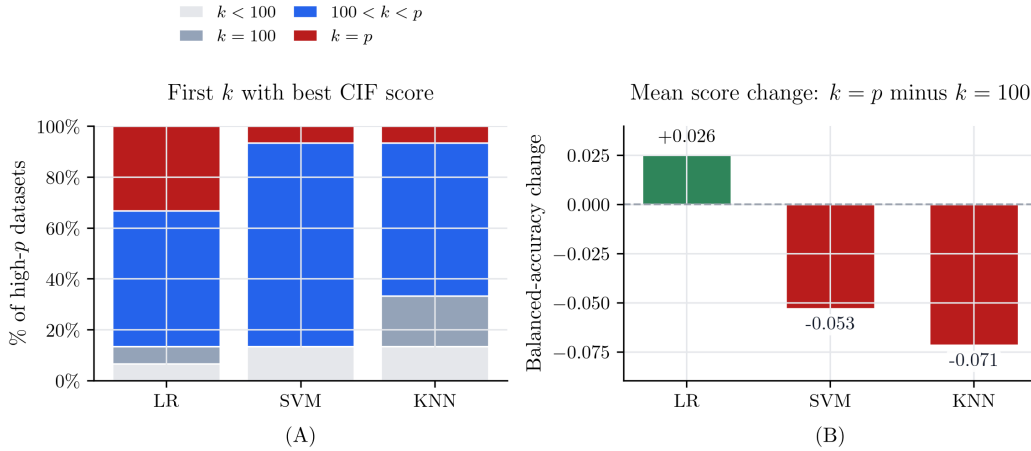


Figure 3: Where CIF’s classification scores peak as k increases, by downstream learner. (A) shows, for each learner, the percentage of 15 datasets where the first evaluated k attaining the best observed CIF score falls below 100, at 100, between 100 and p , or at $k=p$. (B) shows the mean balanced accuracy change from $k=100$ to $k=p$.

5.5 Synthetic recovery

Synthetic designs with known informative features answer the recovery part of the same question, and on them CIF sits at or below the median position of the methods run on each task (Table 12): 8th of 15 in classification and 11th of 16 in regression on the share of its top- k list that is informative, and 10th in both tasks on the top-1 hit rate. On the redundant-feature designs, where correlated copies of informative features count as hits, CIF ranks 1st of 16 in regression and tied 7th of 15 in classification. Figure 4 shows recovery as k grows for single trees, forests, and boosted trees.

Metric	Classification		Regression	
	Value	Rank	Value	Rank
Selected features that are informative	35.3%	8/15	39.1%	11/16
Top-1 hit rate	65.5%	10/15	84.5%	10/16
True or redundant (redundant design only)	82.4%	7.5/15	83.8%	1/16

Table 12: Synthetic feature recovery for CIF. The first row averages, over $k = 5, 10, 25, 50$, and 100, the percentage of selected features that are truly informative. The top-1 hit rate is computed at $k = 1$. The final row is computed and ranked only on the redundant-feature design for each task and counts true informative plus redundant features. Ranks are among the 15 classification and 16 regression methods with synthetic runs; fractional ranks indicate averaged ties.

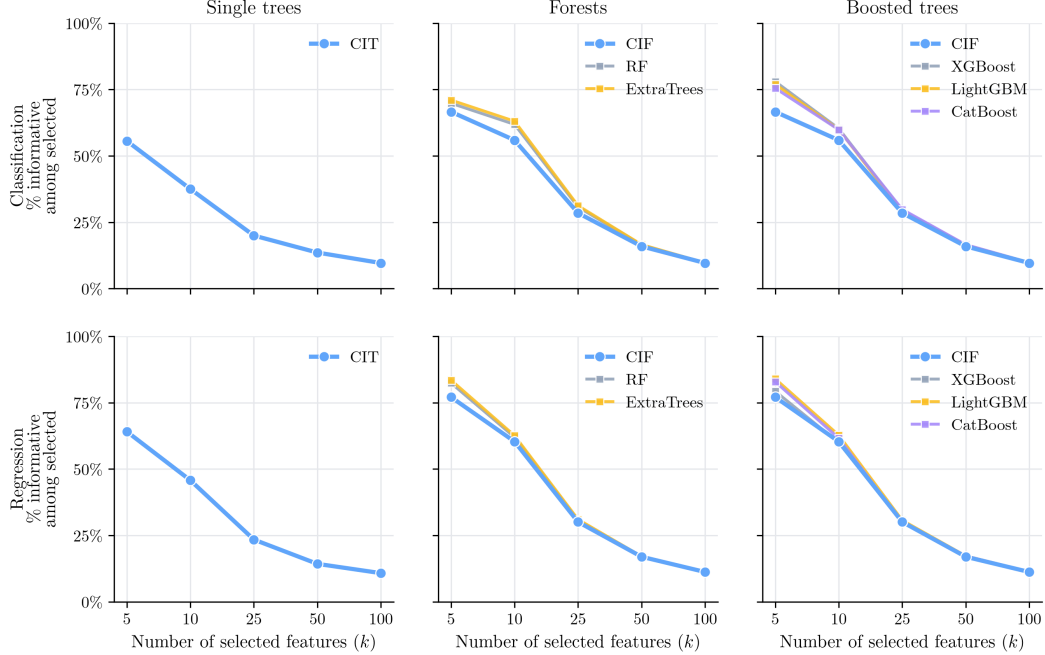


Figure 4: Synthetic top- k recovery curves. Columns compare single trees, forests, and boosted trees; rows show classification and regression. Each value is the percentage of selected features that are truly informative.

5.6 Mechanism: cardinality and feature use

The paper’s central question, whether the multiplicity-corrected split rule improves a ranking, has a mechanism side: whether the rule changes which kinds of features a ranking favors, and whether that change improves recovery. The measurements below address it through cardinality preference in the ranking, the size of each ranker’s support, and the limit that feature sampling places on which features a forest can split on.

Cardinality in the ranking. Two designs, one per task, measure cardinality preference directly in the ranking (Table 13; every ranker and cell is in the reference release). Ten standard normal features carry a common linear signal whose marginal correlation with the response is set to 0.05, 0.10, or 0.20, and they sit among 25 noise columns of integer codes on 500 levels, 25 binary noise columns, and 10 Gaussian noise columns, with the column order shuffled; each ranker is scored by the composition of its top ten over 25 fits. CIF here is the selected benchmark configuration with RDC replaced by MC in classification and PC in regression, so the measurement concerns the linear selectors, and the RDC selector of the benchmark configuration was not run on these designs. The reference for each noise type is the share that a ranker indifferent to cardinality would give it: 25 of the 60 noise columns are 500-level and 25 are binary, so each type would receive 25/60 of the top-ten places not taken by informative features, 0.24 to 0.31 across the four rankers at signal 0.05. The two biases in question are the preference of impurity importance for features with more possible thresholds and the reverse cardinality penalty of the per-threshold Stage B rule, which lowers the probability of any split on a feature with many candidate thresholds (Section 2). Both appear against that reference. At the weakest signal random forest impurity importance fills 0.38 of its top ten with 500-level noise in both tasks, against a reference of 0.24, and none with binary noise. Per-threshold CIF is close to the reference in classification (0.31 binary and 0.26 500-level against 0.29) and leans toward binary noise in regression (0.40 binary and 0.24 500-level against

Task	Signal	Ranking	Share of the top ten				Support	Score
			Informative	500-level noise	Binary noise			
Classification	0.05	CIF	0.31	0.26	0.31		37	0.52
		CIF, max-type	0.34	0.28	0.26		46	0.51
		RF impurity	0.42	0.38	0.00		70	0.52
		RF permutation	0.30	0.47	0.06		34	0.51
	0.10	CIF	0.64	0.16	0.13		45	0.56
		CIF, max-type	0.66	0.20	0.06		53	0.55
		RF impurity	0.72	0.19	0.00		70	0.56
		RF permutation	0.49	0.36	0.02		36	0.56
	0.20	CIF	0.95	0.04	0.01		59	0.68
		CIF, max-type	0.96	0.04	0.00		65	0.69
		RF impurity	0.99	0.01	0.00		70	0.69
		RF permutation	0.87	0.09	0.00		39	0.67
Regression	0.05	CIF	0.26	0.24	0.40		17	-0.11
		CIF, max-type	0.34	0.22	0.30		21	-0.11
		RF impurity	0.43	0.38	0.00		70	-0.11
		RF permutation	0.37	0.43	0.05		34	-0.10
	0.10	CIF	0.64	0.11	0.20		24	-0.05
		CIF, max-type	0.65	0.13	0.15		28	-0.04
		RF impurity	0.73	0.17	0.00		70	-0.04
		RF permutation	0.57	0.27	0.01		37	-0.06
	0.20	CIF	0.95	0.03	0.02		36	0.28
		CIF, max-type	0.95	0.02	0.02		44	0.28
		RF impurity	0.99	0.01	0.00		70	0.29
		RF permutation	0.95	0.03	0.00		39	0.28

Table 13: Weak-signal designs with mixed-cardinality noise: $n = 1,000$; 10 informative standard normal features whose marginal correlation with the response is the Signal column; 25 noise columns of integer codes drawn from 500 levels (500-level noise), 25 binary noise columns, and 10 Gaussian noise columns, which are continuous and so have the most distinct values. Shares are the mean composition of each ranking’s top ten over 25 fits (5 seeds by 5 folds; standard errors 0.01 to 0.03); the remainder of each top ten is Gaussian noise. A cardinality-neutral ranker would give each of the 500-level and binary types 25/60 of the top-ten places not taken by informative features: about 0.29 at the informative share of the classification CIF row at signal 0.05, and 0.24 to 0.31 across the rows at that signal. Support is the mean number of features with nonzero importance (70 for the random forest); Score is the held-out balanced accuracy or R^2 of the downstream learners on the top ten. CIF is the selected configuration with RDC replaced by MC (classification) and PC (regression); CIF, max-type is that configuration with the max-type Stage B rule; RF permutation is the same random forest ranked by out-of-bag permutation importance. XGBoost, LightGBM, CIT, and CIF without the threshold correction are in the reference release.

0.31), and the max-type rule brings the binary share to 0.26 in classification and 0.30 in regression, against references of 0.28 and 0.27.

Reducing the preference does not buy recovery. Random forest impurity importance places the most informative features in its top ten at every signal strength (0.42 to 0.43 at 0.05, 0.72 to 0.73 at 0.10, 0.99 at 0.20) against 0.26 to 0.34 for the CIF variants at the weakest signal and 0.64 to 0.66 at 0.10, with standard errors of 0.01 to 0.03, and the downstream scores of all rankers are within 0.02 of each other at every signal. The same random forest ranked by out-of-bag permutation importance keeps the preference: its 500-level share at the two weaker signals is 0.47 and 0.36 in classification and 0.43 and 0.27 in regression, above impurity importance in both tasks. In classification its recovery is the lowest of the four rankers at every signal; in regression it is the lowest only at 0.10, exceeds per-threshold CIF at 0.05 (0.37 against 0.26), and ties CIF at 0.20. On these designs, then, per-threshold conditional inference replaces the impurity preference for many-valued noise with a

smaller preference for binary noise, close to neutral in classification and 0.09 above the reference in regression, while keeping a 0.22 to 0.28 share of 500-level noise at the weakest signal, and it recovers fewer weak features than impurity importance. The benefit of a ranking closer to cardinality-neutral shows on predictors whose cardinality carries no signal, as in the clinical application of Milletich et al. [30], rather than in recovery of weak marginal effects.

Support. A second measurement, on the synthetic benchmark datasets, records each ranker’s support, the features that win at least one split. Random forests give every feature nonzero importance on 15 of the 16 designs, and 800 of 1,000 on the 1,000-feature classification design. On 13 of the 16 designs CIF’s support keeps 90 to 100 percent of the planted features while excluding 1 to 93 percent of all features (under 5 percent on the two redundant designs, where the correlated copies all win splits; 41 of 100 features with 9.0 of 10 planted in the standard regression design); on the weak-signal classification, heteroscedastic regression, and 1,000-feature classification designs it keeps 41 to 47 percent of the planted features (4.1 of 10 inside a support of 35 of 100, 4.7 of 10 inside 14 of 50, and 2.1 of 5 inside 91 of 1,000), so the support is a shortlist rather than an estimate of the number of informative features. Beyond the support, a ranking orders the remaining zero-importance features by the tie rule of Section 2, and these features are the filler of the ranking. For a single tree the filler is most of any top- k list: CIT supports hold 0 to 10 features on average, so filler is 52, 81, and 90 percent of the top 10, 25, and 50 features on the synthetic designs, against 0, 3, and 14 percent for CIF and none for random forests, which is consistent with single trees ranking near the bottom of the benchmark.

Feature use in sampled forests. A sparse simulation measures how often forest splits use informative features when each node samples a subset of features (Figure 5; Appendix H gives the classification and regression results over $p \in \{100, 500, 1,000\}$). In the single-tree simulations, CIT uses informative features in 100.0% of classification splits and 93.5% of regression splits. Averaged over the 12 classification forest designs with 1,000 trees, CIF uses informative features in 33.2% of splits, compared with 91.7% for CIF-all, 8.4% for RF, and 6.5% for ET. This measurement counts split usage only, and two qualifications bound it. The gap between CIF and RF or ET is confounded by tree size: RF and ET grow to purity, so most of their splits are deep splits on noise, while CIF stops at the permutation gate. The CIF-all comparison reflects the combinatorics of feature sampling rather than a property of conditional inference: with 32 of 1,000 features sampled at a node and two informative, an informative feature is a candidate at 6.3 percent of nodes, and in that design CIF uses one in 9.0% of splits, RF in 2.7% and ET in 2.0%, while CIF-all uses one in 100.0%. When the sampled subset holds no informative feature, Stage A selects from the noise it was given. Evaluating every feature at every node lifts that floor; the downstream ranking of CIF-all was not scored, so the measurement identifies the mechanism and leaves its effect on ranking quality open.

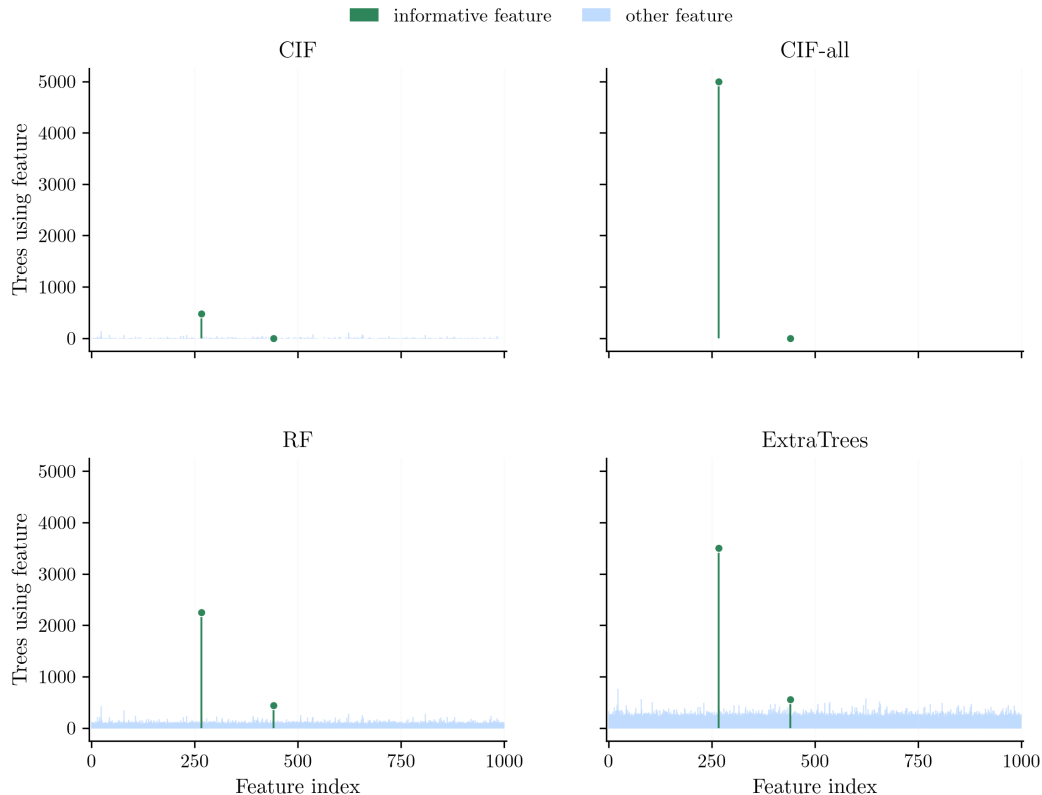


Figure 5: Tree-level feature use in one sparse classification forest design ($n=250$, $p=1,000$, two informative features). Counts are the number of trees using each feature in at least one split, pooled over five fits of 1,000 trees each (5,000 trees), so the y-axis, shared by the four subplots, runs to 5,000. CIF samples a subset of features at each node; CIF-all evaluates all nonconstant features.

6 Discussion

In these experiments, CIF is best supported as a top- k feature-selection method for a downstream model. The benchmark asks whether a ranking places predictive features early enough for fixed downstream learners, and CIF does so at the level of random forests in classification. It is weaker as a method for identifying the informative features: its synthetic recovery is in the lower half and its rankings are weakest at small k , so the support is strongest when the downstream model uses a moderate number of features. Classification gives the clearest support; the regression ordering is descriptive. The fixed-node results (Lemma 1, Corollaries 1 to 3, and Proposition 1, with their scope in Appendix A.1) provide the local guarantee; fitted tree and forest rankings are assessed empirically.

Guidance. A CIF ranking should be judged through the downstream model that will use the selected features. In practice, choose k on held-out data over a small set of values that includes the intended feature budget and, when feasible, the full feature set as a sanity check. When prediction accuracy is the main target, tree-ensemble baselines such as random forests, ExtraTrees, and boosted trees should remain in the comparison set. When the target is variable screening or a ranked feature list for later modeling, CIF should also be compared with `ctree`, `cforest`, and forest-based screening methods such as Boruta, permutation or conditional permutation importance, and RF-RFE [10].

The ablations locate most of the runtime of both estimators in the threshold search: scanning candidate thresholds in order of promise and bounding their number with the 256-bin histogram account for the largest measured changes, without a material change in downstream scores (Section 5.2). On wide data the Stage A feature test also matters, because the minimum budget gives every feature a budget scaled by the feature correction. Adaptive stopping is inert at the benchmark’s minimum budget, as Proposition 1 predicts, and earns its place only when the budget exceeds that floor, so every Stage A and per-threshold Stage B test in the benchmark is a fixed-budget permutation test. The feature and threshold corrections are part of the testing rule rather than runtime shortcuts: removing them changes the trees that are grown. For ranking quality, forest size matters more than the split-count and feature-muting variants tested here, so the selected CIF configuration is the relevant ranking reference when ranking quality is the priority. The Stage B threshold test is a further control, and Section 5.3 reports it. Its interpretation is narrow: the per-threshold rule controls the false-split rate at a fixed node for a feature chosen without the response, and in a fitted tree the tested feature is the Stage A winner, so the stored Stage B score is a screening statistic rather than a post-selection p -value (Section 2). The max-type rule reduces the reverse cardinality bias of the per-threshold rule and costs less once a node has more than about 50 candidates. It changes which features the trees rank and moves the downstream results only slightly, with paired score differences of 0.0001 to 0.0022 except 0.0085 for CIT in regression, and CIF mean-rank changes of 0.45 in classification and 1.25 in regression (Table 11). It is an opt-in alternative, and the benchmark rankings use the default per-threshold rule.

In sparse high- p settings, feature use should be monitored directly. The simulations show that CIF feature sampling can leave informative features out of many forest split decisions, especially in sparse classification designs. Useful diagnostics include top- k stability across seeds, the share of splits using the final top- k features or any prespecified positive control features, the number of distinct low-ranked or known null features used in splits, and sensitivity to larger sampled feature sets or to a small CIF-all run with fewer seeds or trees.

Limitations. The fixed-node results cover one node with its sample, tested features, and permutation budget fixed independently of the node responses, for subsampled or unsampled fits (Appendix A.2). The benchmarked trees and forests add response-dependent choice of nodes, the Stage A winner as the tested feature at Stage B, feature muting, bootstrap samples, and forest aggregation, so their behavior is assessed through the ranking benchmark. The design compares the selected configurations of each method; no configuration removes the association test while holding the rest of the procedure fixed, so the benchmark measures how the implemented procedure compares rather than the effect of the correction in isolation. The cardinality measurements use the linear selectors, while three of the four selected configurations use RDC, so the reverse cardinality bias is established for the linear selectors only. Four further limits bound the benchmark claims. Configurations were selected on the reporting datasets with unequal grid sizes (four for CIF, five for XGBoost, one for RF, ExtraTrees, CatBoost, and RF-RFE), so the selection optimism is larger for the tuned families and the CIF-versus-RF ordering within the bunched group is not resolved; LODO on the all-method panels measures the observed sensitivity rather than a bound: 0.002 balanced accuracy and 0.008 R^2 for CIF, and a move from tied 3rd to 5th in the classification order (Appendix G). The cforest comparator is ranked by permutation importance and CIF by split importance, so their margin is a package comparison rather than a test of the split procedure; ranking CIF by cforest’s own out-of-bag permutation importance leaves the classification margin unchanged (Table 17), so in classification the margin is not a mechanism effect, and in regression the medians agree. CPI ranks last in both tasks after a correction to its correlation threshold, and

we did not run an independent sanity check of its configuration, so its position should be read as provisional. The downstream suite is three untuned distance- or margin-based learners, and the comparator set omits Lasso and mutual-information filters; both restrict the scope of the ranking claims.

The benchmark coverage is uneven across analyses. Some comparisons use broader panels where both methods are available, while complete-case rank and interval summaries use smaller panels that include every method. These summaries are therefore descriptive rather than confirmatory.

The sampled-forest analysis isolates a sparse high- p setting in which forest feature sampling can limit how often splits use informative features: larger sampled feature sets increase informative-feature use, but they also change runtime and the mix of noise features used by splits. Track how often splits use informative features alongside downstream performance and runtime before changing the number of features sampled at each split.

7 Conclusion

The question was how conditional inference trees and forests compare with established feature rankers, and what the Bonferroni corrections in their split tests cost and change. On 31 real datasets CIF is the strongest conditional inference ranker in the study, ahead of cforest, ctree, and single CIT. CIF ranks tied 3rd of 17 in classification, behind RF-RFE and XGBoost and level with RF; 2nd of 18 in regression, behind ExtraTrees. On the complete-case panels it is tied 6th of 17 and tied 5th of 18, and the regression ordering is descriptive; with the out-of-bag permutation forest added it is 4th of 18 in classification. The negative answers are as clear. On the synthetic designs CIF sits in the lower half on recovery of the informative features (8th of 15 and 11th of 16), it is weakest at small k , and in sparse high-dimensional simulations forest feature sampling keeps informative features out of most splits. The corrections change which features are ranked more than how well the rankings predict: on the weak-signal designs, run with the linear selectors, the per-threshold rule trades the high-cardinality preference of CART-style splitting for a low-cardinality preference of comparable size, and the random forest ranked by out-of-bag permutation importance keeps the high-cardinality preference there and ranks below CIF on the benchmark (8th of 18 and 6th of 19), with a permutation step that grows with the number of features.

The cost of the corrections has two terms. Under the minimum budget the Stage A feature test needs of order m_t^2/α permutations per node and the per-threshold rule of the Stage B threshold test of order K^2/α , which it needs in order to reject at all; the threshold term dominates on most datasets and the feature term on the widest. The max-type rule is an opt-in alternative that reaches the nominal level with about $999K$ evaluations, has realized size closer to nominal, loses about 0.006 in power at equal realized size, and moves CIF to 5th of 17 and 4th of 18; its fixed-node guarantee covers a fixed budget and a feature fixed without the response, and its calibration under adaptive stopping in fitted trees rests on the simulations. Each split test is calibrated at a fixed node conditional on the node sample, for subsampled or unsampled fits; the benchmarked forests draw bootstrap samples, and their rankings are assessed empirically. For a practitioner choosing a ranking method for downstream prediction, CIF delivers a ranking level with random forests in classification, and the max-type rule lowers its cost at nodes with many candidate thresholds.

References

- [1] Susan Athey, Julie Tibshirani, and Stefan Wager. Generalized random forests. *The Annals of Statistics*, 47(2):1148–1178, 2019. doi: 10.1214/18-AOS1709.

- [2] Julian Besag and Peter Clifford. Sequential Monte Carlo p-values. *Biometrika*, 78(2):301–304, 1991. doi: 10.1093/biomet/78.2.301.
- [3] Leo Breiman. Random forests. *Machine Learning*, 45(1):5–32, 2001. doi: 10.1023/A:1010933404324.
- [4] Leo Breiman, Jerome H. Friedman, Charles J. Stone, and Richard A. Olshen. *Classification and Regression Trees*. Wadsworth International Group, Belmont, CA, 1984. ISBN 9780412048418.
- [5] Tianqi Chen and Carlos Guestrin. A scalable tree boosting system. In *Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, pages 785–794, 2016. doi: 10.1145/2939672.2939785.
- [6] Dries Debeer and Carolin Strobl. Conditional permutation importance revisited. *BMC Bioinformatics*, 21(1):307, 2020. doi: 10.1186/s12859-020-03622-2.
- [7] Ozgur Demir-Kavuk, Henning Riedesel, and Ernst-Walter Knapp. Exploring classification strategies with the CoEPrA 2006 contest. *Bioinformatics*, 26(5):603–609, 2010. doi: 10.1093/bioinformatics/btq021.
- [8] Michael D. Ernst. Permutation methods: A basis for exact inference. *Statistical Science*, 19(4): 676–685, 2004. doi: 10.1214/088342304000000396.
- [9] Axel Gandy. Sequential implementation of Monte Carlo tests with uniformly bounded resampling risk. *Journal of the American Statistical Association*, 104(488):1504–1511, 2009. doi: 10.1198/jasa.2009.tm08368.
- [10] Robin Genuer, Jean-Michel Poggi, and Christine Tuleau-Malot. Variable selection using random forests. *Pattern Recognition Letters*, 31(14):2225–2236, 2010. doi: 10.1016/j.patrec.2010.03.014.
- [11] Pierre Geurts, Damien Ernst, and Louis Wehenkel. Extremely randomized trees. *Machine Learning*, 63(1):3–42, 2006. doi: 10.1007/s10994-006-6226-1.
- [12] Isabelle Guyon, Jason Weston, Stephen Barnhill, and Vladimir Vapnik. Gene selection for cancer classification using support vector machines. *Machine Learning*, 46(1-3):389–422, 2002. doi: 10.1023/A:1012487302797.
- [13] Isabelle Guyon, Steve Gunn, Asa Ben-Hur, and Gideon Dror. Result analysis of the NIPS 2003 feature selection challenge. In *Advances in Neural Information Processing Systems*, volume 17, 2004. URL https://proceedings.neurips.cc/paper_files/paper/2004/hash/5e751896e527c862bf67251a474b3819-Abstract.html.
- [14] Jesse Hemerik and Jelle Goeman. Exact testing with random permutations. *TEST*, 27(4): 811–825, 2018. doi: 10.1007/s11749-017-0571-1.
- [15] Torsten Hothorn and Achim Zeileis. Generalized maximally selected statistics. *Biometrics*, 64(4):1263–1269, 2008. doi: 10.1111/j.1541-0420.2008.00995.x.
- [16] Torsten Hothorn and Achim Zeileis. partykit: A modular toolkit for recursive partytioning in R. *Journal of Machine Learning Research*, 16(118):3905–3909, 2015. URL <https://jmlr.org/papers/v16/hothorn15a.html>.
- [17] Torsten Hothorn, Peter Bühlmann, Sandrine Dudoit, Annette Molinaro, and Mark J. van der Laan. Survival ensembles. *Biostatistics*, 7(3):355–373, 2006. doi: 10.1093/biostatistics/kxj011.

- [18] Torsten Hothorn, Kurt Hornik, Mark A. van de Wiel, and Achim Zeileis. A lego system for conditional inference. *The American Statistician*, 60(3):257–263, 2006. doi: 10.1198/000313006X118430.
- [19] Torsten Hothorn, Kurt Hornik, and Achim Zeileis. Unbiased recursive partitioning: A conditional inference framework. *Journal of Computational and Graphical Statistics*, 15(3):651–674, 2006. doi: 10.1198/106186006X133933.
- [20] Torsten Hothorn, Heidi Seibold, and Achim Zeileis. *partykit: A Toolkit for Recursive Partitioning*, 2026. URL <https://CRAN.R-project.org/package=partykit>. R package version 1.2-27.
- [21] Guolin Ke, Qi Meng, Thomas Finley, Taifeng Wang, Wei Chen, Weidong Ma, Qiwei Ye, and Tie-Yan Liu. A highly efficient gradient boosting decision tree. In *Advances in Neural Information Processing Systems*, volume 30, pages 3146–3154, 2017. URL <https://papers.nips.cc/paper/6907-a-highly-efficient-gradient-boosting-decision-tree>.
- [22] Markelle Kelly, Rachel Longjohn, and Kolby Nottingham. UCI machine learning repository. <https://archive.ics.uci.edu>, n.d. URL <https://archive.ics.uci.edu/>. Accessed 2026-05-04.
- [23] Hyunjoong Kim and Wei-Yin Loh. Classification trees with unbiased multiway splits. *Journal of the American Statistical Association*, 96(454):589–604, 2001. doi: 10.1198/016214501753168271.
- [24] Miron B. Kursa and Witold R. Rudnicki. Feature selection with the Boruta package. *Journal of Statistical Software*, 36(11):1–13, 2010. doi: 10.18637/jss.v036.i11.
- [25] Berthold Lausen and Martin Schumacher. Maximally selected rank statistics. *Biometrics*, 48(1):73–85, 1992. doi: 10.2307/2532740.
- [26] Jundong Li, Kewei Cheng, Suhang Wang, Fred Morstatter, Robert P. Trevino, Jiliang Tang, and Huan Liu. Feature selection: A data perspective. *ACM Computing Surveys*, 50(6):94:1–94:45, 2018. doi: 10.1145/3136625.
- [27] Wei-Yin Loh. Regression trees with unbiased variable selection and interaction detection. *Statistica Sinica*, 12(2):361–386, 2002. URL <https://www3.stat.sinica.edu.tw/statistica/j12n2/j12n21/j12n21.htm>.
- [28] Wei-Yin Loh and Yu-Shan Shih. Split selection methods for classification trees. *Statistica Sinica*, 7(4):815–840, 1997. URL <https://www3.stat.sinica.edu.tw/statistica/j7n4/j7n41/j7n41.htm>.
- [29] David Lopez-Paz, Philipp Hennig, and Bernhard Schölkopf. The randomized dependence coefficient, 2013. arXiv:1304.7717.
- [30] Robert Milletich, Justin Downes, and Newel Hirst. citrees: Conditional inference trees and forests for Python. Submitted to the Journal of Statistical Software, 2026.
- [31] B. V. North, David Curtis, and Pak C. Sham. A note on the calculation of empirical P values from Monte Carlo procedures. *American Journal of Human Genetics*, 71(2):439–441, 2002. doi: 10.1086/341527.

- [32] Fabian Pedregosa, Gaël Varoquaux, Alexandre Gramfort, Vincent Michel, Bertrand Thirion, Olivier Grisel, Mathieu Blondel, Peter Prettenhofer, Ron Weiss, Vincent Dubourg, Jake VanderPlas, Alexandre Passos, David Cournapeau, Matthieu Brucher, Matthieu Perrot, and Édouard Duchesnay. Scikit-learn: Machine learning in Python. *Journal of Machine Learning Research*, 12(85):2825–2830, 2011. URL <https://jmlr.org/papers/v12/pedregosa11a.html>.
- [33] Belinda Phipson and Gordon K. Smyth. Permutation P-values should never be zero: Calculating exact P-values when permutations are randomly drawn. *Statistical Applications in Genetics and Molecular Biology*, 9(1):1–12, 2010. doi: 10.2202/1544-6115.1585.
- [34] Katherine S. Pollard and Mark J. van der Laan. Choice of a null distribution in resampling-based multiple testing. *Journal of Statistical Planning and Inference*, 125(1–2):85–100, 2004. doi: 10.1016/j.jspi.2003.07.019.
- [35] Liudmila Ostroumova Prokhorenkova, Gleb Gusev, Aleksandr Vorobev, Anna Veronika Dorogush, and Andrey Gulin. Unbiased boosting with categorical features. In *Advances in Neural Information Processing Systems*, volume 31, pages 6639–6649, 2018. URL <https://papers.nips.cc/paper/7898-catboost-unbiased-boosting-with-categorical-features>.
- [36] Yu-San Shih. A note on split selection bias in classification trees. *Computational Statistics & Data Analysis*, 45(3):457–466, 2004. doi: 10.1016/S0167-9473(03)00064-1.
- [37] Helmut Strasser and Christian Weber. The asymptotic theory of permutation statistics. *Mathematical Methods of Statistics*, 8(2):220–250, 1999.
- [38] Carolin Strobl, Anne-Laure Boulesteix, and Thomas Augustin. Unbiased split selection for classification trees based on the Gini index. *Computational Statistics & Data Analysis*, 52(1):483–501, 2007. doi: 10.1016/j.csda.2006.12.030.
- [39] Carolin Strobl, Anne-Laure Boulesteix, Achim Zeileis, and Torsten Hothorn. Bias in random forest variable importance measures: Illustrations, sources and a solution. *BMC Bioinformatics*, 8(1):25, 2007. doi: 10.1186/1471-2105-8-25.
- [40] Carolin Strobl, Anne-Laure Boulesteix, Thomas Kneib, Thomas Augustin, and Achim Zeileis. Conditional variable importance for random forests. *BMC Bioinformatics*, 9(1):307, 2008. doi: 10.1186/1471-2105-9-307.
- [41] Gábor J. Székely, Maria L. Rizzo, and Nail K. Bakirov. Measuring and testing dependence by correlation of distances. *The Annals of Statistics*, 35(6):2769–2794, 2007. doi: 10.1214/009053607000000505.
- [42] Joaquin Vanschoren, Jan N. van Rijn, Bernd Bischl, and Luis Torgo. OpenML: Networked science in machine learning. *ACM SIGKDD Explorations Newsletter*, 15(2):49–60, 2013. doi: 10.1145/2641190.2641198. URL <https://doi.org/10.1145/2641190.2641198>.
- [43] Stefan Wager and Susan Athey. Estimation and inference of heterogeneous treatment effects using random forests. *Journal of the American Statistical Association*, 113(523):1228–1242, 2018. doi: 10.1080/01621459.2017.1319839.
- [44] Peter H. Westfall and S. Stanley Young. *Resampling-Based Multiple Testing: Examples and Methods for P-Value Adjustment*. Wiley, New York, 1993. ISBN 0471557617.

Appendix A Setup and assumptions

A.1 Fixed-node setup

Let $(X_i, Y_i)_{i=1}^n$ be the training data. Fix a node t with sample index set I_t and size $n_t := |I_t|$. Write $X_t := (X_i)_{i \in I_t}$ and $Y_t := (Y_i)_{i \in I_t}$ for the data restricted to that node. Stage A tests features F_t with $m_t := |F_t|$.

For the Stage A feature test the reference case is exhaustive and fixed- B . Conditional on the node covariates and label-independent auxiliary randomness U , F_t and B are fixed, and every feature in F_t is tested with exactly B permutations.

Notation

Table 14 lists the notation used in the proof.

Symbol	Meaning
t	Node index, held fixed in the lemma.
I_t, n_t	Node sample index set and size $n_t := I_t $.
X_t, Y_t	Covariates and labels restricted to node t .
U	Label-independent auxiliary randomness conditioned on in the proof; it excludes node responses, Monte Carlo permutation draws, permutation statistics, and p -values.
F_t, m_t	Stage A features and size $m_t := F_t $.
$X_{t,j}$	Values of feature j on the node samples.
B	Number of random label permutations per tested feature in the fixed- B reference test.
T_j^{sel}	Stage A selector statistic for feature j : $T_j^{\text{sel}}(X_{t,j}, Y_t; U)$.
$T(\cdot, \cdot; U)$	Generic test statistic used in the exchangeability proof, real-valued or taking values in any measurable space.
Π_b	Random label permutation used for Monte Carlo replicate b .
$T_{\text{obs}}, T_1, \dots, T_B$	Observed and permuted statistics for one fixed feature test.
R	Right-tail rank numerator $1 + \sum_{b=1}^B \mathbf{1}\{T_b \geq T_{\text{obs}}\}$.
$p_{\text{MC}}^{\geq}$	Right-tail +1 Monte Carlo permutation p -value for one fixed feature test.
$p_{t,j}$	Fixed- B +1 Monte Carlo permutation p -value for feature j .
α_{sel}	Stage A nominal level; the corollary tests at α_{sel}/m_t .

Table 14: Notation used in the fixed-node Stage A lemma and proof.

Scope of the fixed-node results. Every result holds at a fixed node t , conditional on (X_t, U) , under the complete nodewise permutation null. Lemma 1 (A0.1 to A0.5) gives the superuniformity of one +1 Monte Carlo permutation p -value computed with a fixed budget B . Corollary 1 (A0.1 to A0.5) gives complete-null control at level α_{sel} for the Stage A feature test with the feature correction α_{sel}/m_t , for a feature set F_t fixed as a function of (X_t, U) . Corollary 2 (A0.1 to A0.5) gives the same control at level α_{split} for the per-threshold Stage B rule with the threshold correction α_{split}/K , for a tested feature and a finite candidate set C fixed as functions of (X_t, U) ; this includes the exact, random, percentile, and histogram candidate sets and threshold scanning, which leaves the rejection event unchanged. Corollary 3 (A0.1 to A0.5) gives complete-null control for the max-type Stage B rule under the same conditions, with column moments computed over all $B+1$ rows and no stopping. Proposition 1 (A0.1 to A0.3) gives the null size of adaptive stopping for one Stage A feature test or one per-threshold Stage B test whose statistic is a fixed function of the permuted response vector:

exact for a continuous null, within $1/N$ of that value for a finite orbit of N permutations, and bounded above by it with ties; it does not cover the adaptive max-type kernel. The results do not extend to response-dependent feature muting, to nodes reached through response-dependent splits, to a Stage B test of a feature that Stage A chose from the same responses, to honesty, or to p -values reported after selection (Section 2 and Appendices D and E). Bootstrap fits are outside the guarantee, because a bootstrap sample duplicates rows and permuting the responses over duplicated rows does not reproduce the null law of the node sample, so A0.2 fails; fits on subsamples drawn without replacement, or on the full sample, keep it.

A.2 Assumptions and lemma scope

A0.1 (Fixed node). Assumptions A0.1 to A0.5 define the fixed-node setting of the results listed in Appendix A.1. The node t and its sample index set I_t are held fixed for the result. They are not chosen using node responses or earlier response-dependent splits.

A0.2 (Complete nodewise permutation null). Under the complete null at node t , Y_t is exchangeable conditional on (X_t, U) : its conditional law is unchanged by permuting the node responses. This complete nodewise permutation null does not cover a null feature when any tested or untested node covariate remains associated with Y_t .

A0.3 (Features fixed before seeing node responses). The features in F_t and the effective nodewise budget B are measurable functions of (X_t, U) only. They do not depend on Y_t , other training responses used to reach the node, Monte Carlo permutation draws or statistics, p -values, or sequential stopping decisions.

A0.4 (Fixed- B computation). Each $p_{t,j}$ is computed with exactly B random permutations, with no optional stopping. The Monte Carlo permutation draws used to compute the p -values are additional randomness, independent of (X_t, Y_t, U) , and are not included in U .

A0.5 (Conservative ties). For right-tail tests, the Stage A +1 Monte Carlo p -value counts ties conservatively using $\mathbf{1}\{T_b \geq T_{\text{obs}}\}$; left-tail tests, including the max-type Stage B test, use $\mathbf{1}\{T_b \leq T_{\text{obs}}\}$. If several features tie after testing, any random tie break is label-independent and does not affect the Stage A reject/no-reject event.

A.3 Results using these assumptions

Lemma 1 and Corollaries 1, 2, and 3 in Section 3 use Assumptions A0.1 to A0.5. Lemma 1 states +1 Monte Carlo permutation p -value superuniformity. Corollary 1 gives Stage A complete-null control, Corollary 2 gives it for the per-threshold Stage B rule, and Corollary 3 gives it for the max-type Stage B rule. Proposition 1 uses A0.1 to A0.3: it replaces the fixed budget of A0.4 by the adaptive stopping rule it analyzes, and its statement (iii) treats ties.

Appendix B Monte Carlo permutation exchangeability

The proof separates two facts. First, statistics computed from i.i.d. random permutations are exchangeable. Second, under A0.2 to A0.4, the usual “observed statistic + B random permutations” computation has the same null rank distribution as a construction with a randomized baseline.

The superuniformity proof then uses the conservative tie convention in A0.5; see also Hemerik and Goeman [14] for a broader treatment of exact random permutation testing.

First consider a fully randomized tuple. Fix a node t , feature j , and a statistic $T(\cdot, \cdot; U)$ taking values in a measurable space $(\mathcal{S}, \mathcal{A})$, where U denotes label-independent auxiliary randomness. The space may be the real line, as for a Stage A score or a single threshold score, or a space of vectors, as for the vector of scores over a candidate threshold set that the max-type rule standardizes. When T is real-valued, larger values are more extreme. Let $\Pi_0, \Pi_1, \dots, \Pi_B$ be i.i.d. uniform random permutations of $\{1, \dots, n_t\}$, independent of the data (and of U), and define

$$T_b := T(X_{t,j}, \Pi_b(Y_t); U) \quad (b = 0, 1, \dots, B). \quad (11)$$

Conditional on (X_t, Y_t, U) , each T_b is a measurable function of Π_b , and $(\Pi_0, \dots, \Pi_B)$ are i.i.d., so the vector $(T_0, T_1, \dots, T_B)$ is exchangeable: permuting the indices $b \in \{0, \dots, B\}$ leaves its joint law unchanged. Averaging over Y_t preserves exchangeability, so the vector is also exchangeable conditional on (X_t, U) .

Lemma 2 (The observed statistic has the same null rank distribution). *Assume A0.2 to A0.4 (Appendix A.2), and let T take values in the measurable space $(\mathcal{S}, \mathcal{A})$. Let $\Pi_1, \dots, \Pi_B$ be i.i.d. uniform random permutations of $\{1, \dots, n_t\}$, independent of (X_t, Y_t, U) . Define the observed statistic and permuted statistics by*

$$T_{\text{obs}} := T(X_{t,j}, Y_t; U), \quad T_b := T(X_{t,j}, \Pi_b(Y_t); U) \quad (b = 1, \dots, B), \quad (12)$$

Let Π_0 be an additional independent uniform random permutation and set $T_0 := T(X_{t,j}, \Pi_0(Y_t); U)$ (keeping $T_1, \dots, T_B$ as above). Under the null, conditional on (X_t, U) ,

$$(T_{\text{obs}}, T_1, \dots, T_B) \stackrel{d}{=} (T_0, T_1, \dots, T_B). \quad (13)$$

When T is real-valued, define the standard +1 Monte Carlo p -value (right tail) by

$$p_{\text{id}} := \frac{1 + \sum_{b=1}^B \mathbf{1}\{T_b \geq T_{\text{obs}}\}}{B + 1}. \quad (14)$$

and its randomized-baseline counterpart by

$$p_{\text{rnd}} := \frac{1 + \sum_{b=1}^B \mathbf{1}\{T_b \geq T_0\}}{B + 1}. \quad (15)$$

Both quantities use the same conservative right-tail tie convention: ties with the baseline statistic are counted as exceedances. Under the null, conditional on (X_t, U) , p_{id} and p_{rnd} have the same distribution with this convention. It is enough to prove the rank bound for the exchangeable construction p_{rnd} and apply the same conclusion to the standard “observed statistic + B random permutations” computation.

Proof. Fix (X_t, U) and work under the null. By A0.2, permuting the node labels does not change the conditional distribution of Y_t . Use the permutation-action convention under which $(\Pi_b \circ \Pi_0^{-1})(\Pi_0(Y_t)) = \Pi_b(Y_t)$. Let Π_0 be an independent uniform permutation and set $Y'_t := \Pi_0(Y_t)$. Then $Y'_t \stackrel{d}{=} Y_t$ conditional on (X_t, U) .

For $b = 1, \dots, B$, define $\Pi'_b := \Pi_b \circ \Pi_0^{-1}$, so $\Pi'_b(Y'_t) = \Pi_b(Y_t)$. Conditional on (Y_t, Π_0) , right composition by Π_0^{-1} maps the independent uniform permutations Π_b to independent uniform

permutations Π'_b . This conditional law does not depend on the conditioning values. Because Y'_t is a function of (Y_t, Π_0) , the transformed permutations are independent of (Y'_t, Π_0) . Therefore,

$$\begin{aligned} (T_{\text{obs}}, T_1, \dots, T_B) &= (T(X_{t,j}, Y_t; U), T(X_{t,j}, \Pi_1(Y_t); U), \dots, T(X_{t,j}, \Pi_B(Y_t); U)) \\ &\stackrel{d}{=} (T(X_{t,j}, Y'_t; U), T(X_{t,j}, \Pi'_1(Y'_t); U), \dots, T(X_{t,j}, \Pi'_B(Y'_t); U)) \\ &= (T_0, T_1, \dots, T_B), \end{aligned} \quad (16)$$

where $\stackrel{d}{=}$ is conditional on (X_t, U) . Applying the same $\geq$ comparison map to these equal-in-distribution vectors gives the same conditional distribution for p_{id} and p_{rnd} when T is real-valued. No step uses the order structure of $\mathcal{S}$, so the distributional identity holds for a statistic in any measurable space. $\square$

Appendix C Proof of Lemma 1

Appendix B reduces the usual computation with one observed statistic and B random permutations to the exchangeable rank construction. We prove Lemma 1 under A0.1 to A0.5 (Appendix A.2).

Fix (X_t, U) , fix one feature $j \in F_t$, and work under the nodewise complete permutation null at the fixed node t . Under A0.2 to A0.4, the standard fixed- B computation has the same conditional p -value distribution as the randomized exchangeable construction; see Lemma 2 in Appendix B and Hemerik and Goeman [14]. It is enough to prove the rank bound for an exchangeable tuple, which we denote by $(T_{\text{obs}}, T_1, \dots, T_B)$.

Define the conservative right-tail rank numerator

$$R := 1 + \sum_{b=1}^B \mathbf{1}\{T_b \geq T_{\text{obs}}\}, \quad p_{\text{MC}}^{\geq} = \frac{R}{B+1}. \quad (17)$$

The left-tail version replaces the exceedance check by $\mathbf{1}\{T_b \leq T_{\text{obs}}\}$; equivalently, apply the right-tail argument below to $-T$. Stage B uses this left-tail convention for split scores.

No ties. If the statistics almost surely have no ties, then the $\geq$ indicator is the same as $>$, and R is the descending rank of T_{obs} among $(T_{\text{obs}}, T_1, \dots, T_B)$, with rank 1 assigned to the largest statistic. Exchangeability implies

$$\mathbb{P}(R = r \mid X_t, U) = \frac{1}{B+1}, \quad r = 1, \dots, B+1, \quad (18)$$

so for any $\alpha \in [0, 1]$,

$$\mathbb{P}(p_{\text{MC}}^{\geq} \leq \alpha \mid X_t, U) = \mathbb{P}(R \leq (B+1)\alpha \mid X_t, U) = \frac{\lfloor (B+1)\alpha \rfloor}{B+1} \leq \alpha. \quad (19)$$

Ties. If ties can occur, A0.5 uses conservative tie handling: the right-tail $+1$ p -value uses $\mathbf{1}\{T_b \geq T_{\text{obs}}\}$, so ties with the observed statistic are counted in the numerator. To compare this rule with a no-ties rank, let $V_{\text{obs}}, V_1, \dots, V_B \stackrel{\text{i.i.d.}}{\sim} \text{Unif}(0, 1)$ be independent of all other randomness and define augmented statistics $\tilde{T}_{\text{obs}} := (T_{\text{obs}}, V_{\text{obs}})$ and $\tilde{T}_b := (T_b, V_b)$ for $b = 1, \dots, B$. Order the augmented pairs lexicographically for the right tail: $\tilde{T}_b$ exceeds $\tilde{T}_{\text{obs}}$ exactly when $T_b > T_{\text{obs}}$, or

when $T_b = T_{\text{obs}}$ and $V_b > V_{\text{obs}}$. Then $(\tilde{T}_{\text{obs}}, \tilde{T}_1, \dots, \tilde{T}_B)$ is exchangeable and almost surely has no ties, so the no-ties argument gives a superuniform p -value

$$\tilde{p}_{\text{MC}}^{\geq} := \frac{1 + \sum_{b=1}^B \mathbf{1}\{T_b > T_{\text{obs}} \text{ or } (T_b = T_{\text{obs}} \text{ and } V_b > V_{\text{obs}})\}}{B + 1}. \quad (20)$$

Moreover, each tie-broken indicator in $\tilde{p}_{\text{MC}}^{\geq}$ is bounded by the corresponding conservative indicator $\mathbf{1}\{T_b \geq T_{\text{obs}}\}$. Thus $p_{\text{MC}}^{\geq} \geq \tilde{p}_{\text{MC}}^{\geq}$, and

$$\mathbb{P}(p_{\text{MC}}^{\geq} \leq \alpha \mid X_t, U) \leq \mathbb{P}(\tilde{p}_{\text{MC}}^{\geq} \leq \alpha \mid X_t, U) \leq \alpha. \quad (21)$$

Taking expectations over (X_t, U) gives the unconditional bound, $\mathbb{P}(p_{\text{MC}}^{\geq} \leq \alpha) \leq \alpha$. The fixed-node Stage A corollary applies this single-test bound to the m_t feature tests with threshold α_{sel}/m_t and uses the Bonferroni union bound; no independence among feature tests is required.

Appendix D Algorithm and reproducibility notes

Algorithm settings, benchmark configuration, and coverage rules determine how the main results should be read. Section 2 describes the tree-growing loop, the setup and proof appendices state the fixed-node results, and Appendix E gives runtime and memory details for the benchmarked tree-growing algorithm.

D.1 Scope relative to the theory

Appendix A.1 states which fixed-node result covers which test and under which conditions. The results cover the Stage A feature test, the per-threshold and max-type Stage B threshold tests on any finite candidate set fixed as a function of the node covariates (exact, random, percentile, or histogram), threshold scanning, and adaptive stopping for Stage A and per-threshold Stage B tests. The benchmarked tree-growing algorithm also uses settings outside those results:

- response-dependent feature muting,
- a Stage B test of the feature that Stage A chose from the same responses, and nodes reached through earlier response-dependent splits,
- bootstrap resampling and forest aggregation,
- optional honesty.

Stage A and split scores from fitted trees are therefore tree-construction scores.

D.2 Node-level choices

Stage A. At each node, the tree-growing rule removes features that are constant on the node before any feature subsampling. Stage A computes +1 Monte Carlo p -values. With feature scanning it tests features in order of their observed statistic and stops at the first that meets the nodewise threshold, independently of the stopping rule inside each permutation test. With feature muting, features with non-rejecting Stage A values can be removed from descendant feature pools in the same subtree. These shortcuts reduce computation. When they are active, the returned q_t^{feat} is the feature-selection score used to grow the tree; the exhaustive fixed- B reference value is defined over the full feature pool.

Stage B. After Stage A selects a feature, Stage B builds thresholds from midpoints between consecutive unique feature values. Exact search tests all midpoints. Random sampling tests a bounded subset; percentile and histogram rules test bounded representative thresholds from the midpoint distribution. With sequential stopping, Stage B may scan thresholds in a reordered sequence. Because Stage B tests thresholds only after a response-selected feature is chosen, q_t^{split} is a split-selection score.

Split statistics. For permutation split testing, Stage B uses weighted child impurity as the tested statistic and a left tail convention. The final minimum impurity-decrease filter uses the corresponding weighted impurity decrease. These quantities support split construction.

D.3 Permutation budgets and early stopping

Both stages use Phipson and Smyth +1 Monte Carlo tail estimates [33]: right-tailed in Stage A and left-tailed in Stage B. For the benchmarked CIT and CIF configurations, the resampling budget is set from the Bonferroni-adjusted nodewise threshold and is large enough for rejection to be possible on the discrete +1 scale.

Sequential stopping. The benchmarked CIT and CIF configurations request adaptive sequential stopping, whose rule monitors permutation exceedances and stops once a Beta posterior places the configured confidence on one side of the nodewise threshold. Under the `minimum` budget the first check coincides with exhaustion, so the rule never acts and every benchmark p -value is a fixed-budget +1 permutation p -value (Proposition 1 and the remark following it); the rule acts only at the larger budgets of the runtime ablations and at the `auto` budget of the Stage B construction study.

D.4 Forests, resampling, and honesty

CIF fits bootstrap trees and forms feature rankings by aggregating tree split-importance vectors. The benchmark uses stratified bootstrap sampling for classification and standard bootstrap sampling for regression. These forest-level choices affect the fitted rankings, while the fixed-node results cover only the nodewise reference tests.

D.5 Selected configurations

Table 15 lists the configuration each method family entered the benchmark with, after the selection rule of Section 4.5 picked one configuration per family by its mean real-data score over the downstream learners and standard k values (synthetic recovery uses its own selection, described there). Candidates is the size of the family’s configuration grid. Settings not listed are the library defaults recorded in the benchmark manifests; the seed schedule is fixed by the benchmark configuration.

Family	Task	Candidates	Selected configuration
CIT	clf.	4	selector MC; minimum budgets with adaptive stopping; histogram with 256 bins (257 candidates); Bonferroni; no honesty
CIT	reg.	4	selector RDC; otherwise as classification
CIF	clf.	4	selector RDC; 100 trees; stratified bootstrap; square-root feature sampling; no honesty; otherwise as CIT
CIF	reg.	4	selector RDC; 100 trees; bootstrap; square-root feature sampling; honesty with a 0.5 split
RF, ET	both	1	100 trees, library defaults, impurity importance
XGBoost	both	5	500 rounds, depth 6, learning rate 0.1; importance total gain (clf.) or total cover (reg.)
LightGBM	both	2	500 rounds, depth 6, learning rate 0.1; gain importance
CatBoost	both	1	500 iterations, depth 6, learning rate 0.1
partykit ctree	both	2	quadratic statistic, Monte Carlo test with 9,999 resamples
partykit cforest	both	4	as ctree; 100 trees, square-root mtry, unconditional out-of-bag permutation importance, partykit default (one permutation per tree over 100 trees)
Permutation filters	both	1	one permutation test per feature (MC, RDC; PC, DC, RDC)
Boruta	both	1	200 iterations on an auto-sized random forest
PI, CPI	both	1	10 permutation repeats on a random forest
RF-RFE	both	1	step 1 on a random forest

Table 15: Configurations entered in the benchmark, one per family and task, with the size of the grid the selection rule chose from. The minimum budget is $\lceil 1/\alpha_{\text{adj}} \rceil$ permutations at the Bonferroni-adjusted level; the histogram search with 256 bins offers at most 257 candidate thresholds per feature, so the per-threshold rule needs a budget of at least $\lceil 257/0.05 \rceil = 5,140$ to reject. Full parameter values are in `paper_benchmark.selected_config_details.csv` of the reference release.

D.6 Benchmark coverage

Sections 4.1 and 4.5 define the benchmark protocol and configuration-selection rule. The benchmark compares 17 classification methods and 18 regression methods, including permutation-test filters, embedded tree and ensemble methods, R ctree/cforest, and wrapper methods. The rules below define which runs enter the appendix tables.

For per-method and direct pairwise summaries, each comparison uses the datasets, downstream learners, and standard values of k where the methods in that comparison are present. Analyses that compare all methods restrict to datasets with every method, downstream learner, and standard value of k present. These rules give 13 classification and 6 regression datasets for complete-case analyses. On `gisette`, `isolet`, and `orlraws10P`, 34 classification runs were excluded from the benchmark for operational reasons. Fifteen partykit ctree and cforest runs did not complete on those datasets. Nineteen RDC-selector CIT and CIF runs were excluded: 18 host-fault exclusions, in which the containers running the largest RDC fits terminated without a Python exception because of a confirmed host fault on the compute instances, while the other seeds of the same cells completed; and one exclusion on `orlraws10P` by author decision. The locked cells are listed in `paper/benchmark/config/locked_cells.csv`, which also lists the locked cells of the max-type extension; the file records the cells locked at the time of writing, so its entries do not correspond one to one with the seed runs of Table 16. Comparisons that involve an affected method on an affected dataset use the remaining datasets. Table 16 lists the excluded runs.

D.7 Randomness and reproducibility

The benchmark configuration fixes the seed schedule used for all reported runs. Pure Python permutation routines use local `numpy` generators. Numba parallel permutation paths assign one seed per resample, which avoids sharing a mutable generator across parallel loop iterations.

Dataset	Method	Configurations	Seed runs	Basis
gisette	CIT with selector rdc	2	8	host fault
gisette	R ctree	1	5	incomplete
isolet	CIF with selector rdc	2	4	host fault
isolet	CIT with selector rdc	2	6	host fault
isolet	R cforest	1	5	incomplete
isolet	R ctree	1	5	incomplete
orlraws10P	CIT with selector rdc	1	1	author directed

Table 16: Classification benchmark exclusions. Each seed run is one method configuration on one dataset with one seed; 34 runs are excluded in total, and all are operational exclusions. Incomplete rows are partykit **ctree** and **cforest** runs that did not complete; the 18 host-fault runs are RDC-selector CIT and CIF runs lost to a confirmed host fault on the compute instances; the single **orlraws10P** run was excluded by author decision. No regression runs are excluded.

D.8 Mechanism-matched CIF check

The benchmark ranks **cforest** by partykit’s out-of-bag permutation importance and CIF by split importance, so the CIF-versus-**cforest** margin of Table 3 mixes the importance mechanism with the split procedure. To separate them, the selected CIF configuration of each task was refit on every Stage 1 fold of 20 classification and 8 regression real datasets, ranked by the mechanism **cforest** uses, one permutation of each feature on each tree’s out-of-bag rows with the error increase averaged over the 100 trees, and scored with the Stage 2 protocol. The 20 classification datasets are the 22 on which CIF and **cforest** are paired in Table 3 less **gisette** and **letter**, which carry locked cells and were not refit; **isolet** has no **cforest** run. Table 17 reports the directed pairwise aggregate of Section 5.1. Ranking CIF by out-of-bag permutation importance leaves the classification margin over **cforest** where it was: +0.012 mean and +0.006 median balanced accuracy with 15 wins of 20, against +0.011 and +0.008 for split-ranked CIF on the same datasets; the two CIF rankings differ by +0.001 on average and split wins 12 of 20. In regression the medians agree (+0.006 over **cforest**, −0.002 against split-ranked CIF) and the negative means come from one dataset, **coepra2** ($n = 76, 5,144$ predictors), on which every method has negative R^2 and the ridge and k -NN learners swing by whole units. In classification the margin is therefore not an importance-mechanism effect; in regression the medians agree and the mean is a single-dataset artifact, so the conclusion is stated for classification. Two notes on the check itself. Permutation importance computed on the training rows instead of out-of-bag (scikit-learn’s default) is the wrong comparator: on the 16 datasets that completed it sits 0.10 below **cforest** and 0.12 below split-ranked CIF, the loss concentrated on the small- n , high- p sets, while on spam it equals split-ranked CIF (0.900 against 0.901 at $k = 10$). And the refit’s split ranking overlaps the stored Stage 1 ranking poorly in the top ten on the high- p sets (mean Jaccard 0.38 in classification), because most features never split there, their importances tie at zero, and the tie order is arbitrary; on the low- p sets the overlap is complete.

Comparison	Datasets	Mean	Median	Wins/losses
<i>Classification (balanced accuracy)</i>				
CIF (OOB permutation) vs cforest	20	+0.012	+0.006	15/5
CIF (OOB permutation) vs CIF (split)	20	+0.001	-0.001	8/12
CIF (split) vs cforest	20	+0.011	+0.008	16/4
CIF (training-row permutation) vs cforest	16	-0.100	-0.055	6/10
<i>Regression (R^2)</i>				
CIF (OOB permutation) vs cforest	8	-0.115	+0.006	6/2
CIF (OOB permutation) vs CIF (split)	8	-0.136	-0.002	4/4
CIF (split) vs cforest	8	+0.021	+0.009	6/2
CIF (training-row permutation) vs cforest	6	-0.016	+0.006	4/2

Table 17: Mechanism-matched CIF check. Directed differences in dataset-mean score (balanced accuracy or R^2 over downstream learners and standard k) between the first and second method, summarized over datasets: mean, median, and the number of datasets on which the first method scores higher or lower. OOB permutation is partykit-style out-of-bag permutation importance computed on the refit CIF; training-row permutation is scikit-learn permutation importance on the training rows (16 and 6 datasets completed). pendigits enters the OOB rows with four of its five seeds. Source: `paper_cif_permutation_importance_check.csv`.

Appendix E Runtime and memory accounting

The runtime terms behind the ablations in Section 5.2 are counted node by node: the scans, copies, and feature or threshold tests actually reached. A node-by-node sum is needed because feature pools, node sizes, threshold counts, and stopping times vary across the tree.

Let n be the training sample count and let p be the number of features. At node t , let n_t be the number of samples reaching the node. Using the notation of Section 2.1, write $a_t = |F_{t,\text{avail}}|$ and $d_t^{\text{const}} = |F_{t,\text{avail}} \setminus F_{t,\text{nonconst}}|$. After constant feature pruning and any feature subsampling, Stage A considers F_t , with $m_t = |F_t|$. Let d_t^{mute} be the number of tested Stage A features removed from the descendant feature pool by feature muting; if feature muting is disabled, $d_t^{\text{mute}} = 0$.

Stage B is reached only when Stage A returns a selected feature j_t^* : either the Stage A permutation feature test rejects or selector permutation testing is disabled. If Stage B is reached, let $\tilde{h}_t$ be the number of thresholds generated for j_t^* before any minimum leaf size filtering. Let $h_t = |C_{t,j_t^*}| \leq \tilde{h}_t$ be the number of valid thresholds that remain after this filtering; if no filtering is applied, $h_t = \tilde{h}_t$.

Let $C_j^{\text{sel}}(n_t)$ be the cost of the Stage A statistic for feature j at node size n_t , excluding the label copies and shuffles counted separately below. For a list of selectors, this denotes the cost of evaluating the selector statistics for one observed or permuted draw and taking their common-scale maximum. Let $C^{\text{split}}(n_t)$ be the cost of one Stage B impurity statistic after the threshold mask and child-label slices have been formed; the mask, slice, label shuffle, and copy overhead is counted separately below. For the multiple-correlation selector with Gini splitting in classification and the Pearson-correlation selector with MSE splitting in regression, these statistic evaluations are linear in n_t for a fixed number of classes. The randomized dependence coefficient (RDC) is $O(n_t \log n_t)$ for fixed random-projection and class counts. For distance correlation and mutual information, the cost depends on the backend used by $C_j^{\text{sel}}(n_t)$: distance correlation may cost $O(n_t \log n_t)$ or $O(n_t^2)$, and mutual information is delegated to scikit-learn.

How runtime hyperparameters enter the accounting.

- **Feature subsampling.** This caps m_t and therefore the Stage A testing width. It does not cap the constant feature preprocessing pass over all a_t available features. Feature-set

construction and random ordering add at most linear overhead in the local available feature count.

- **Feature muting.** This can shrink a_u and m_u at descendant nodes u . It can also add $O(a_t d_t^{\text{mute}})$ feature index updates at the current node when tested features whose Stage A p -values do not reject are removed.
- **Threshold-search method and threshold cap.** Non-exact threshold methods can reduce the returned pre-filter threshold set $\tilde{h}_t$ when the configured cap is active. Exact search and the fallback for features with at most four unique values use all midpoints.
- **Adaptive stopping, feature scanning, and threshold scanning.** These reduce work only when they shorten the actual stopping path. They may change feature or threshold order and reduce the number of tested features, tested thresholds, or permutation draws, but the worst case is still all features or thresholds and the full budget. Feature and threshold scanning pay for a prescan so that likely features or thresholds are tried earlier, which shortens realized runtime only when the shorter stopping path offsets the prescan. Bonferroni is separate because it changes the statistical rule.
- **Bonferroni correction and resampling presets.** When Bonferroni correction is enabled, the nodewise threshold is divided by the number of tests in that stage. Write r_{tests} for this count (m_t in Stage A and h_t in Stage B) and $\alpha_{\text{stage}} \in \{\alpha_{\text{sel}}, \alpha_{\text{split}}\}$ for the corresponding nominal level. Named resampling presets compute the permutation budget at the stricter threshold $\alpha_{\text{stage}}/r_{\text{tests}}$: the *minimum* budget scales like $r_{\text{tests}}/\alpha_{\text{stage}}$, the *maximum* budget is $\lceil r_{\text{tests}}^2/(4\alpha_{\text{stage}}^2) \rceil$ up to rounding, and the *auto* budget at the adjusted level $\alpha_{\text{adj}} = \alpha_{\text{stage}}/r_{\text{tests}}$ is $\max\{\lceil 1/\alpha_{\text{adj}} \rceil, \lceil z^2(1 - \alpha_{\text{adj}})/\alpha_{\text{adj}} \rceil\}$ with z the upper α_{adj} quantile of the standard normal, which gives 52 permutations at $\alpha_{\text{adj}} = 0.05$, 3,144 at $0.05/20$, and 64,669 at $0.05/257$. For an explicit integer budget, the budget is multiplied by r_{tests} .
- **Bootstrap sample size, forest size, and worker count.** The bootstrap sample-size control affects the requested or capped bootstrap sample size, the forest size sets the number of tree fits, and the worker count affects parallel scheduling and memory pressure.

Per-node accounting. At each node, the tree builder first checks whether it must stop, including whether all labels are equal, and computes the leaf value if it stops. This costs $O(n_t)$ at every node. If the node can split, the builder scans all available features and removes features that are constant at the node. This costs $O(a_t n_t)$ for the data scan. Updating the array of available feature indices costs another $O(a_t d_t^{\text{const}})$ for constant feature removals in the dense matrix algorithm, with worst case $O(a_t^2)$ if many available features are constant at the same node. This pruning occurs before feature subsampling, so subsampling caps Stage A width but not the initial constant feature scan.

Let $\mathcal{J}_t$ be the Stage A features whose score or permutation test is evaluated before any feature-level early stop. With Stage A permutation tests, this is the evaluated subset E_t from Section 2.1. It does not include the optional feature-scanning prescan, which is counted separately. Let $b_{t,j}^{\text{sel}}$ be the number of permutation draws actually used for feature j ; when permutation tests are not run, take $b_{t,j}^{\text{sel}} = 0$. The Stage A testing work is

$$S_t^A = O\left(\sum_{j \in \mathcal{J}_t} (b_{t,j}^{\text{sel}} + 1)(C_j^{\text{sel}}(n_t) + n_t)\right), \quad (22)$$

where the $+1$ accounts for the observed statistic and the n_t term accounts for label copies, shuffles, and other per-draw linear overhead inside the permutation test. Feature scanning, when enabled, computes prescan scores and sorts features (it does not depend on early stopping), adding

$$G_t^A = O\left(\sum_{j \in F_t} C_j^{\text{scan}}(n_t) + m_t \log m_t\right), \quad (23)$$

where C_j^{scan} is the selector-score cost used for ordering. If feature muting removes tested features whose Stage A p -values do not reject, updating the descendant available feature array adds $O(a_t d_t^{\text{mute}})$ work at the current node.

Stage B first builds thresholds for the selected feature. An upper bound is $O(n_t \log n_t)$, because unique values are computed and sorted before threshold caps are applied. If the minimum leaf size is greater than one, filtering adds $O(n_t \log n_t + \tilde{h}_t \log n_t)$ for the feature sort and threshold lookups. Bounded non-exact methods reduce $\tilde{h}_t$ only when the effective cap is below the number of available midpoints; with few unique values or no effective cap, all available midpoints can remain in the threshold set. They do not remove the initial unique-value pass.

Let $\mathcal{C}_t^{\text{eval}} \subseteq \mathcal{C}_{t,j_t^*}$ be the retained Stage B thresholds whose permutation test or non-permutation split score is evaluated before any threshold-level early stop. Let $b_{t,c}^{\text{split}}$ be the corresponding realized permutation count; when splitter permutation tests are not run, take $b_{t,c}^{\text{split}} = 0$. The Stage B testing work is

$$S_t^B = O\left(\sum_{c \in \mathcal{C}_t^{\text{eval}}} (b_{t,c}^{\text{split}} + 1)(C^{\text{split}}(n_t) + n_t)\right). \quad (24)$$

In S_t^B , the added n_t term accounts for forming or applying threshold masks, child-label slices, label copies, and shuffles for each observed or permuted draw. The two Stage B rules differ in how the budget enters this sum. The per-threshold rule tests each evaluated threshold at the threshold correction $\alpha_{\text{split}}/h_t$, so at the minimum budget each test uses at most $\lceil h_t/\alpha_{\text{split}} \rceil$ permutations and

$$S_t^B = O\left(|\mathcal{C}_t^{\text{eval}}| \lceil h_t/\alpha_{\text{split}} \rceil (C^{\text{split}}(n_t) + n_t)\right),$$

which grows with the square of the candidate count when every threshold is evaluated. The max-type rule draws one set of B permutations shared by all h_t candidates and evaluates every candidate on each of the $B + 1$ response vectors, so

$$S_t^B = O\left((B + 1) h_t (C^{\text{split}}(n_t) + n_t)\right),$$

which is linear in the candidate count at a fixed B . Under splitter early stopping, threshold ordering has two paths. If threshold scanning is enabled, it uses weighted child impurity as an ordering score and adds $O(h_t(C^{\text{split}}(n_t) + n_t) + h_t \log h_t)$. If threshold scanning is disabled, the retained thresholds are still randomly permuted, adding $O(h_t)$. These ordering steps are separate from the permutation p -value computation.

Finally, if Stage B accepts a split and the impurity decrease is large enough, the dense matrix tree builder creates left and right child matrices with all p columns. This copy costs $O(n_t p)$. Nodes that reach Stage A but become leaves because Stage A or Stage B does not reject still incur the work already described. Terminal leaves can also occur when constant feature pruning leaves no available feature, threshold generation or leaf size filtering leaves no valid threshold, or an accepted threshold fails the minimum impurity-decrease gate. These leaves contribute the costs incurred up to that point but do not allocate child matrices.

From nodes to trees and forests. Let W_t be the cost paid at node t : the stopping checks, any Stage A work, any Stage B work, and any child-copy work reached by the builder. Tree training cost is the sum over all realized tree nodes, not only over internal split nodes:

$$T_{\text{tree}} = \sum_{t \in \mathcal{V}(\mathcal{T})} W_t. \quad (25)$$

Here $\mathcal{V}(\mathcal{T})$ and $\mathcal{I}(\mathcal{T})$ are the realized node set and internal split-node set. Leaves stopped by the initial checks contribute only the stopping and value computation term at that node, while leaves that fail after Stage A or Stage B contribute the corresponding testing terms. A binary tree has $|\mathcal{V}(\mathcal{T})| = 2|\mathcal{I}(\mathcal{T})| + 1$. A depth cap gives a coarse exponential node count bound, but n_t , a_t , m_t , $\tilde{h}_t$, h_t , and the realized permutation counts usually change with depth.

If honesty is enabled, the node sum is computed on the structure building subsample. Training also pays $O(np)$ for the dense split/estimation partition and a leaf re-estimation pass. If e is the estimation-sample size and ℓ_i is the fitted-tree path length for estimation sample i , the current tuple-based path representation gives worst-case routing cost $O(\sum_{i=1}^e \ell_i^2)$, followed by a stored-path tree walk of $O(\sum_{v \in \mathcal{V}(\mathcal{T})} d_v + e)$, where d_v is node depth.

For a forest of M trees, let s_r be the number of samples used to fit tree r after bootstrap and classifier sampling. Let C_r^{sample} be the cost of constructing those sample indices. Row selection and per-tree dense validation/copy add $O(s_r p)$ before tree growth. The forest fit first validates the full input and then fits the trees. Write $T_{\text{tree},r}$ for the node-sum cost of tree r computed as above. The total computational work of the forest fit, before parallel wall-clock scheduling effects, can be summarized as

$$T_{\text{forest}} = O(np) + \sum_{r=1}^M \left(C_r^{\text{sample}} + O(s_r p) + T_{\text{tree},r} + \mathbf{1}_{\text{honest}} H_{\text{honest},r} \right) + O(Mp) + \mathbf{1}_{\text{oob}} T_{\text{oob}}, \quad (26)$$

where $\mathbf{1}_{\text{honest}}$ is one when honesty is enabled and zero otherwise, $H_{\text{honest},r}$ denotes the honesty partition and leaf re-estimation cost just described for tree r , $\mathbf{1}_{\text{oob}}$ is one when OOB scoring is requested and zero otherwise, and T_{oob} is the optional post-fit OOB scoring cost, separate from the tree-building sum. With joblib parallelism, wall-clock time depends on the effective worker count, load balance across trees, process overhead, and memory bandwidth; the expression above is a work accounting.

Without bootstrap sampling, each tree starts with root size n and the bootstrap cap is unused. With bootstrap sampling, the configured bootstrap sample-size parameter sets the requested sample size or an upper bound, and classifier sampling can reduce s_r further. If honesty is enabled, the root size for structure building is the splitting subsample size.

Memory accounting. At a node, feature index arrays and scanning arrays use $O(a_t + m_t)$ space, and threshold construction uses $O(n_t + \tilde{h}_t + h_t)$ auxiliary space. Permutation tests add workspaces for statistics, masks, labels, permutation outputs, and selector-specific arrays. Fixed-budget non-adaptive tests may store an $O(B_{\text{stage}})$ vector of permuted statistics, where B_{stage} is the configured fixed budget for the selector or splitter test being run. Adaptive paths can keep constant-size counters apart from copied or shuffled labels and selector-specific arrays.

The dense matrix terms dominate in many fits. Validation materializes a dense $O(np)$ feature matrix. Each accepted split materializes dense left and right child matrices with all p columns and combined size $O(n_t p)$. During depth-first recursion, parent frames retain sibling child arrays while one child is being grown. If $\mathcal{P}$ is the set of accepted split nodes whose child matrices are live on the

active recursion stack, the dense-array part of peak single-tree training memory is bounded by

$$O\left(np + p \sum_{u \in \mathcal{P}} n_u\right),$$

plus node-local auxiliary workspaces. This is a live-path bound: it is $O(np)$ for balanced growth but can be larger for highly unbalanced recursion.

Honesty adds memory during fitting for the dense split and estimation partitions. It also stores estimation-sample groups by leaf path, giving $O(e + \sum_{q \in \mathcal{Q}} |q|)$ path-index workspace for the set $\mathcal{Q}$ of retained leaf-path keys, bounded by $O(eD)$ when all estimation samples have path length at most D . This is in addition to the tree-building memory above.

Forest peak training memory grows with concurrent tree fits. Let $w = \min(M, n_{\text{jobs}})$, where n_{jobs} is the number of parallel jobs used by the joblib backend after parameter normalization. Peak memory includes the validated forest input, returned estimators, and up to w concurrently executing per-tree workspaces: bootstrap indices, dense row-selected matrices, validation copies, and peak memory terms for each tree. Depending on joblib serialization or memmap behavior, workers may also hold shared memmaps or copies of the validated input.

For the same M -tree forest, fitted storage includes stored node records for all trees, the estimator list, $O(Mp)$ per-tree arrays such as feature names and feature importances, and $O(p)$ forest-level metadata arrays. If OOB scoring is enabled, fitted storage also includes $O(nK)$ classifier OOB decision values for K classes or $O(n)$ regressor OOB predictions, plus the scalar OOB score. OOB scoring also uses temporary workspace during fitting for the OOB count vector, recomputed bootstrap and unsampled indices, prediction slices X_{oob} , and per-tree predictions or class-probability arrays.

E.1 Measured scaling in n and p

Table 18 reports fit-only wall-clock time for one CIT and one 100-tree CIF (32 workers, one Numba thread each) on Gaussian predictors with a weak planted signal, with and without adaptive stopping, on one 32-core cloud instance. The configuration is the MC selector with Gini splitting in classification and the PC selector with MSE splitting in regression, $\alpha_{\text{sel}} = \alpha_{\text{split}} = 0.05$ with the feature and threshold corrections, `minimum` budgets, the per-threshold rule, histogram search with 256 bins, feature and threshold scanning, and feature muting; the forest adds bootstrap sampling and square-root feature sampling. For the single tree the histogram search caps the candidate set at 257 thresholds, the `minimum` budget fixes the permutation count at $\lceil h_t/0.05 \rceil$ per threshold, at most $\lceil 257/0.05 \rceil = 5,140$, so the per-node cost is linear in n_t and the tree’s time grows about linearly in n : a 64-fold increase in n at $p = 20$ costs about $68\times$ in classification and $110\times$ in regression (from the unrounded times). It also grows with p , by $21\times$ and $44\times$ for a 25-fold increase at $n = 2,000$, because every predictor’s statistic is computed at the root before scanning orders them and muting only removes failed predictors from descendants. The forest is bounded by its 100 trees on full bootstrap samples, so its time grows about linearly in n (65 to $75\times$ for the 64-fold increase) and is flat or falling in p under square-root feature sampling. Adaptive stopping is statistically inert at the minimum budget (Proposition 1) but not free for a single tree: the adaptive-to-no-stopping time ratio is 1.02 to 1.28 for the tree (median 1.07) and 0.95 to 1.18 for the forest (median 0.99). At the floor the rule performs a single posterior check at exhaustion, so the difference is not the check itself; it is that the adaptive path evaluates permutations through the chunked sequential kernel, which replays the stopping rule over each chunk and carries a fixed per-test overhead that the no-stopping kernel does not. The tree overhead grows with the predictor count, 1.02 to 1.07 at $p = 20$ and 1.15 to 1.28 at $p = 500$, because a single tree runs one Stage A test per predictor

at every node while a forest tree tests a square-root sample of them and amortizes the overhead across trees. The forest ratios agree with the runtime ablations (Section 5.2). For the tree, the adaptive-to-no-stopping ratios here, 1.02 to 1.28, sit beside the no-stopping-to-adaptive ratios of 0.88 to 0.99 that the ablations report for switching the rule off: in both, the rule is statistically inert at the floor but not free.

Task	n	p	CIT		CIF	
			Adaptive	No stopping	Adaptive	No stopping
Classification	500	20	0.17	0.16	13.1	13.2
	500	100	0.21	0.19	13.0	13.3
	500	500	4.2	3.5	13.8	13.4
	2,000	20	0.61	0.57	53.7	54.8
	2,000	100	0.87	0.81	45.6	46.1
	2,000	500	12.6	11.0	48.6	49.7
	8,000	20	2.8	2.7	216	211
	8,000	100	3.2	3.0	180	182
	32,000	20	11.3	10.7	988	1,015
	32,000	100	11.3	10.7	655	688
Regression	500	20	0.08	0.08	12.2	12.2
	500	100	0.25	0.22	12.5	12.3
	500	500	4.3	3.3	12.2	12.1
	2,000	20	0.38	0.36	54.9	46.3
	2,000	100	1.0	0.92	42.9	43.0
	2,000	500	16.4	13.2	45.5	45.7
	8,000	20	1.7	1.6	191	193
	8,000	100	3.9	3.5	163	163
	32,000	20	8.5	8.1	788	797
	32,000	100	13.2	12.1	705	685

Table 18: Fit-only wall-clock seconds for one CIT and one 100-tree CIF in the configuration of Appendix E.1, with adaptive stopping (Adaptive) and without stopping (No stopping), on Gaussian predictors with a weak planted signal in five of them. Timing protocol: each entry is the median of two timed fits, each preceded by one untimed identical fit, on one 32-core cloud instance. The 32,000-by-500 cell exceeds the head-to-head grid and was not run. The head-to-head scaling table of Milletich et al. [30] times the forest with trees of depth at most 3 in a separate run (666 s at 32,000 by 20 against 988 s here, where depth is unbounded); the two runs differ in tree depth and are not interchangeable.

Appendix F Datasets

F.1 Benchmark datasets

The dataset inventory covers the real-data benchmark and the synthetic feature-recovery analyses. For each real-data benchmark dataset, the tables report the number of samples n , the number of features p , and the source collection. Source labels refer to UCI Machine Learning Repository [22], the NIPS 2003 feature selection challenge [13], ASU/scikit-feature [26], OpenML [42], and CoEPrA molecular-property benchmarks [7]. ASU/SF abbreviates ASU/scikit-feature. Slash-separated labels indicate original benchmark provenance and OpenML availability or hosting.

Dataset	n	p	Source
gamma	19,020	9	UCI
glass	214	10	UCI
page-blocks	5,473	10	UCI
vowel-context	990	10	UCI
wine	178	13	UCI
letter	20,000	16	UCI
pendigits	10,992	16	UCI
spam	4,601	57	UCI
musk	6,597	166	UCI
madelon	2,000	500	NIPS 2003
isolet	7,797	616	UCI
ORL	400	1,024	ASU/SF
Yale	165	1,024	ASU/SF
warpAR10P	130	2,400	ASU/SF
warpPIE10P	210	2,420	ASU/SF
gisette	6,000	5,000	NIPS 2003
TOX_171	171	5,748	ASU/SF
ALLAML	72	7,129	ASU/SF
arcene	100	10,000	NIPS 2003
pixraw10P	100	10,000	ASU/SF
orlraws10P	100	10,304	ASU/SF
CLL_SUB_111	111	11,340	ASU/SF
dexter	300	20,000	NIPS 2003

Table 19: Classification benchmark datasets.

Dataset	n	p	Source
facebook	500	21	UCI/OpenML
imports-85	205	76	UCI
residential	372	107	UCI/OpenML
community_crime	1,994	1,954	UCI/OpenML
comm_violence	2,215	2,210	UCI/OpenML
coepra2	76	5,144	CoEPrA/OpenML
coepra1	89	5,787	CoEPrA/OpenML
coepra3	133	5,787	CoEPrA/OpenML

Table 20: Regression benchmark datasets.

F.2 Synthetic datasets

These tables report n , p , and key settings for each synthetic feature-recovery design. In the classification table, **sep** denotes class separation and **flip** denotes label-flip probability. In the regression table, **noise** denotes the response-noise scale; for the heteroscedastic row, **scale** controls the feature-dependent noise multiplier.

The synthetic datasets are controlled recovery problems with known informative features. The classification designs cover redundant features, high-cardinality noise, nonlinear signal, standard and weak signal, Toeplitz correlation, correlated-noise features, and sparse high- p structure. The regression designs cover heteroscedastic noise, redundant features, Friedman 1, standard and weak signal, Toeplitz correlation, correlated-noise features, and sparse high- p structure. The settings keep the examples compact while including one high-dimensional, small-sample case for each task.

Design	Setting	n	p
Redundant features	10 informative, 20 redundant features	1,000	50
High-cardinality noise	10 informative, 50 high-cardinality noise features, 500 levels	1,000	100
Nonlinear signal	binarized Friedman 1, 5 informative	1,000	100
Standard classification	10 informative, sep = 2.0	1,000	100
Toeplitz correlation	10 informative, $\rho = 0.95$	1,000	100
Weak signal classification	10 informative, sep = 0.1, flip = 0.1	1,000	100
Correlated noise	10 informative, 20 added correlated-noise features, $\rho = 0.9$	1,000	120
Sparse high- p classification	5 informative, sep = 0.5	200	1,000

Table 21: Synthetic classification designs used in the feature-recovery analysis.

Design	Setting	n	p
Heteroscedastic regression	heteroscedastic scale = 4.0, noise = 5.0	1,000	50
Redundant features	10 informative, 20 redundant features	1,000	50
Friedman 1	5 informative, noise = 1.0	1,000	100
Standard regression	10 informative, noise = 1.0	1,000	100
Toeplitz correlation	10 informative, $\rho = 0.95$	1,000	100
Weak signal regression	10 informative, noise = 50.0	1,000	100
Correlated noise	10 informative, 20 added correlated-noise features, $\rho = 0.9$	1,000	120
Sparse high- p regression	5 informative, noise = 10.0	200	500

Table 22: Synthetic regression designs used in the feature-recovery analysis.

Appendix G Benchmark stability

The benchmark-stability checks report dataset counts, complete-case CIF comparisons, leave-one-dataset-out (LODO) configuration sensitivity, and sensitivity checks by downstream learner, standard values of k , and seed. Table 23 summarizes the dataset counts used by the benchmark analyses. Counts differ because each analysis is restricted to the datasets, downstream learners, and standard top- k values available for that comparison. The main real-data counts are unique datasets with at least one complete learner-by- k combination for all methods; the complete-case analyses below use the stricter set with every standard learner-by- k combination present.

Analysis	Classification datasets	Regression datasets	Purpose
Main real-data comparison	21	8	Primary rank summary on real datasets
Complete-case CIF and rank checks	13	6	Bootstrap intervals and omnibus rank summaries
LODO configuration sensitivity	13	6	Held-out-dataset configuration checks
Learner $\times k$ sensitivity	21, 20, 14, 14, 13	8, 8, 7, 7, 6	Method ordering by downstream learner and value of k
Seed sensitivity	13	6	Seed variation on datasets complete across seeds

Table 23: Dataset counts for benchmark analyses. The learner-by- k row lists counts at $k = 5, 10, 25, 50, 100$; each summary uses the datasets, downstream learners, and standard top- k values available for its comparison.

G.1 Bootstrap and rank checks

Table 24 gives complete-case CIF comparisons against ctree, cforest, and CIT after restricting to datasets with all methods, downstream learners, and all five standard top- k values available. Within each task, all comparisons use the same datasets, the same downstream learners, and $k \in \{5, 10, 25, 50, 100\}$.

Task	Compared method	Mean Δ	95% CI	W/L
Classification	ctree	0.049	[0.026, 0.073]	11–2
Classification	cforest	0.013	[0.002, 0.024]	9–4
Classification	CIT	0.044	[0.027, 0.062]	13–0
Regression	ctree	0.202	[0.029, 0.421]	4–2
Regression	cforest	0.027	[-0.032, 0.090]	5–1
Regression	CIT	0.308	[-0.002, 0.766]	5–1

Table 24: Complete-case CIF differences against ctree, cforest, and CIT. Mean Δ is CIF minus comparator after averaging each dataset over the same downstream learners and values of k . Intervals resample dataset-level paired deltas with 20,000 percentile-bootstrap replicates. W/L gives dataset-level wins and losses; no exact ties occurred.

The metric is balanced accuracy for classification and R^2 for regression. Positive differences favor CIF. The intervals summarize dataset-level paired deltas after configuration selection. Large positive regression differences can reflect negative mean R^2 for the comparator. Paired bootstrap intervals for CIF against every other method on these panels, 16 comparisons in classification and 17 in regression, are in the benchmark tables of the reference release.

The Friedman checks use dataset-level method means after averaging the 15 learner-by- k combinations. Classification (13 datasets): $\chi^2(16) = 140.46$, $p < 0.001$, Kendall’s $W = 0.68$. Regression (6 datasets): $\chi^2(17) = 26.15$, $p = 0.072$, Kendall’s $W = 0.26$, which does not reach the 0.05 level; the regression rank ordering is therefore a descriptive summary of this panel.

G.2 LODO configuration sensitivity

Table 25 reports LODO configuration selection for each task next to the fixed-configuration rank on the same panel. Each LODO run selects configurations on all but one complete-case dataset in that task, evaluates the held-out dataset, and averages scores and ranks over downstream learners and standard top- k values. In classification, CIF reselects the main-benchmark configuration in 11 of the 13 holdouts, using 2 distinct configurations; its mean rank moves from 6.38 (tied 6th) under the fixed configuration to 6.85 (8th) under LODO. In regression, CIF also uses two configurations, reselects the global configuration in 4 of 6 holdouts, and moves from 7.00 (tied 5th) to 7.33 (6th). The gap between these panel ranks and the main-table ranks of 3rd and 2nd comes from the panel: on the 13- and 6-dataset panels the fixed configuration already ranks CIF 6th and 5th, and reselection adds less than half a rank. Table 26 repeats the analysis on the all-method panels of 21 and 8 datasets that the main table uses. Every single-configuration family keeps its held-out score exactly, which checks the reselection code, and its mean rank moves only as CIF and the other tuned families are reselected around it, by at most 0.05 in classification and 0.125 in regression; CIF moves from 5.86 (tied 3rd) to 6.10 (5th) in classification, reselecting the global configuration in 20 of 21 holdouts with a held-out balanced accuracy lower by 0.002, and from 6.25 (2nd) to 6.50 (2nd) in regression, reselecting it in 7 of 8 holdouts with R^2 lower by 0.008. The one large reselection effect is cforest in regression, whose alternative configuration is chosen on one holdout and scores far lower there (mean R^2 0.30 to 0.20). The observed sensitivity of the tuned families to reselection is: 0.002 balanced

accuracy and 0.008 R^2 for CIF, 0.03 R^2 for XGBoost (0.270 under the fixed configuration against 0.241 under LODO on the all-method regression panel), and one place in the classification order.

Classification						Regression					
Method	LODO	Fixed	Score	Settings	Main	Method	LODO	Fixed	Score	Settings	Main
RF-RFE	2.54	2.54	0.825	1	13/13	ExtraTrees	4.67	4.67	0.292	1	6/6
LightGBM	4.31	4.46	0.813	1	13/13	CatBoost	6.17	6.33	0.229	1	6/6
RF	5.08	5.23	0.802	1	13/13	RF-RFE	6.67	6.67	0.333	1	6/6
CatBoost	5.54	5.69	0.801	1	13/13	RF	6.83	7.00	0.260	1	6/6
XGBoost	5.69	4.92	0.808	2	11/13	RT	7.00	7.00	0.266	1	6/6
Boruta	6.23	6.38	0.791	1	13/13	CIF	7.33	7.00	0.240	2	4/6
ExtraTrees	6.62	6.77	0.792	1	13/13	XGBoost	8.50	8.67	0.149	2	5/6
CIF	6.85	6.38	0.793	2	11/13	DT	8.67	8.83	0.124	1	6/6
cforest	8.23	8.46	0.785	1	13/13	Boruta	9.17	9.33	0.118	1	6/6
DT	9.38	9.46	0.763	1	13/13	LightGBM	10.50	10.50	-0.214	1	6/6
RDC filter	10.69	10.85	0.764	1	13/13	CIT	10.67	10.50	-0.206	2	5/6
ctree	11.77	11.77	0.749	1	13/13	cforest	10.67	9.67	0.092	2	5/6
CIT	12.15	12.15	0.754	1	13/13	PI	11.00	11.00	-0.024	1	6/6
MC filter	12.69	12.69	0.737	1	13/13	ctree	11.33	11.50	0.051	1	6/6
RT	13.00	13.00	0.737	1	13/13	PC filter	11.67	11.83	0.099	1	6/6
PI	15.73	15.73	0.676	1	13/13	RDC filter	12.50	12.67	-0.082	1	6/6
CPI	16.50	16.50	0.600	1	13/13	DC filter	13.50	13.67	-0.009	1	6/6
						CPI	14.17	14.17	-0.554	1	6/6

Table 25: LODO configuration sensitivity on the complete-case panels (13 classification and 6 regression datasets). LODO is the mean rank when each held-out dataset is scored with configurations selected on the other datasets; Fixed is the mean rank on the same panel under the configuration selected on the full benchmark. Lower rank is better; rows are ordered by LODO rank within each task. Score is the mean held-out metric under LODO selection. Settings reports the number of distinct selected configurations; Main reports how often the main benchmark configuration is reselected. Ranks are computed within held-out datasets before averaging, so score order need not match rank order. Entries are mean ranks over the panel datasets; the difference between the fixed and LODO columns is the reported sensitivity; no interval is given.

Classification						Regression					
Method	LODO	Fixed	Score	Settings	Main	Method	LODO	Fixed	Score	Settings	Main
RF-RFE	4.19	4.19	0.837	1	21/21	ExtraTrees	5.00	5.00	0.353	1	8/8
XGBoost	5.81	5.81	0.828	1	21/21	CIF	6.50	6.25	0.315	2	7/8
RF	5.86	5.86	0.823	1	21/21	CatBoost	6.62	6.75	0.304	1	8/8
LightGBM	6.05	6.05	0.829	1	21/21	RF-RFE	6.88	6.88	0.382	1	8/8
CIF	6.10	5.86	0.820	2	20/21	RF	7.50	7.63	0.327	1	8/8
Boruta	6.57	6.62	0.816	1	21/21	RT	8.25	8.25	0.330	1	8/8
CatBoost	6.71	6.76	0.822	1	21/21	DT	9.25	9.38	0.225	1	8/8
ExtraTrees	7.29	7.33	0.817	1	21/21	Boruta	9.38	9.50	0.221	1	8/8
cforest	8.29	8.33	0.812	1	21/21	cforest	9.50	8.75	0.202	2	7/8
DT	8.62	8.62	0.799	1	21/21	PC filter	9.75	9.88	0.207	1	8/8
RDC filter	11.00	11.05	0.794	1	21/21	XGBoost	10.00	10.13	0.241	2	7/8
PI	11.67	11.67	0.745	1	21/21	LightGBM	10.12	10.13	-0.028	1	8/8
MC filter	11.86	11.86	0.778	1	21/21	RDC filter	10.88	11.00	0.071	1	8/8
RT	12.81	12.81	0.780	1	21/21	CIT	11.25	11.13	-0.023	2	7/8
ctree	12.86	12.86	0.785	1	21/21	ctree	11.25	11.38	0.167	1	8/8
CIT	13.14	13.14	0.788	1	21/21	PI	11.75	11.75	0.112	1	8/8
CPI	14.19	14.19	0.694	1	21/21	DC filter	12.12	12.25	0.126	1	8/8
						CPI	15.00	15.00	-0.292	1	8/8

Table 26: LODO configuration sensitivity on the all-method panels (21 classification and 8 regression datasets) used by the main table. Columns as in Table 25; the Fixed column repeats the main-table mean ranks.

G.3 Breakdowns by downstream learner, top- k value, and seed

The main benchmark averages over downstream learners, standard values of k , folds, and seeds. The next tables show how method ordering changes when results are split by downstream learner, value of k , and seed. They use the same selected method configurations as the main benchmark.

For the learner and k checks, one unit is one downstream learner paired with one standard value of k . Within each unit, methods are ordered by mean rank among datasets where every benchmark method is available for that learner-by- k combination; ties use average ranks. Tables 27 and 28 show all 15 learner-by- k combinations for each task. Rows follow the main benchmark order. The learner columns report mean position over the five standard values of k for that learner; lower positions are better. Mean position averages the positions obtained after ordering methods within each learner-by- k combination; mean rank averages the dataset-level ranks directly. Top 3 of 15 and Top 5 of 15 count the learner-by- k combinations where the method ranks in the top 3 or top 5.

Method	KNN	LR	SVM	Mean position	Mean rank	Best/worst	Top 3 of 15	Top 5 of 15
RF-RFE	1.7	5.0	1.8	2.8	5.2	1.0/8.0	10/15	13/15
XGBoost	5.4	2.7	3.4	3.8	5.8	2.0/8.0	9/15	11/15
CIF	4.2	4.4	5.7	4.8	6.7	2.0/7.0	3/15	10/15
RF	3.6	5.1	5.1	4.6	6.4	1.5/7.0	3/15	10/15
LightGBM	4.2	2.2	2.0	2.8	5.5	1.0/6.0	11/15	13/15
Boruta	5.2	8.6	7.8	7.2	7.5	1.0/9.0	2/15	2/15
CatBoost	6.1	3.4	4.1	4.5	6.3	1.0/8.0	5/15	10/15
ExtraTrees	6.8	7.6	8.8	7.7	7.7	2.0/12.0	1/15	1/15
cforest	9.5	7.6	9.3	8.8	8.2	5.0/11.0	0/15	1/15
DT	10.4	9.2	8.4	9.3	9.5	4.0/13.5	0/15	2/15
RDC filter	11.2	12.0	12.6	11.9	10.8	10.0/15.0	0/15	0/15
PI	15.3	15.8	15.8	15.6	13.4	13.5/16.0	0/15	0/15
MC filter	12.0	13.6	13.8	13.1	11.3	10.0/17.0	0/15	0/15
RT	15.0	13.0	13.5	13.8	11.9	10.0/16.0	0/15	0/15
ctree	12.1	13.0	12.4	12.5	11.0	10.0/15.0	0/15	0/15
CIT	13.3	12.8	11.7	12.6	11.0	9.0/16.0	0/15	0/15
CPI	17.0	17.0	16.8	16.9	14.8	16.0/17.0	0/15	0/15

Table 27: Classification sensitivity by downstream learner and value of k . Lower values are better. KNN, LR, and SVM denote downstream learners; Top 3 of 15 and Top 5 of 15 count the learner-by- k combinations where the method ranks in the top 3 or top 5. The learner columns and mean position average the method’s ordinal position among the methods over learner-by- k combinations (the five values of k for one learner, or all 15 combinations); best and worst are its extreme positions over the 15 combinations; mean rank averages its dataset-level rank over datasets and combinations. The dataset counts at $k = 5, 10, 25, 50, 100$ are 21, 20, 14, 14, and 13. The spread across learner and k columns is the reported sensitivity; no interval is given.

In the classification learner-by- k sensitivity table, CIF is top five in 10 of the 15 learner-by- k combinations and top three in 3 of 15. Its mean position is close to RF’s and is better than the single-tree and filter baselines in the mean-position summary. RF-RFE, LightGBM, XGBoost, and CatBoost have lower mean positions.

Method	KNN	Ridge	SVR	Mean position	Mean rank	Best/worst	Top 3 of 15	Top 5 of 15
ExtraTrees	6.2	2.4	2.6	3.7	6.8	1.0/11.0	9/15	11/15
CIF	4.6	9.9	2.4	5.6	7.8	1.0/12.0	7/15	8/15
CatBoost	2.0	8.9	3.2	4.7	7.3	1.0/15.0	6/15	12/15
RF-RFE	3.2	3.0	5.9	4.0	7.1	1.0/9.0	7/15	11/15
RF	7.8	4.2	10.0	7.3	8.3	2.0/13.0	2/15	4/15
RT	4.4	10.0	6.1	6.8	8.5	2.0/17.0	3/15	7/15
cforest	11.4	11.7	9.9	11.0	10.1	6.0/16.0	0/15	0/15
DT	6.7	9.4	9.1	8.4	9.0	4.0/16.0	0/15	2/15
Boruta	12.5	4.4	11.9	9.6	9.4	2.0/16.0	2/15	2/15
PC filter	12.8	12.0	11.0	11.9	10.7	8.0/16.0	0/15	0/15
LightGBM	9.2	10.4	9.8	9.8	9.6	1.0/17.0	3/15	3/15
XGBoost	6.5	15.9	9.3	10.6	9.9	1.5/18.0	1/15	4/15
RDC filter	14.3	10.1	6.5	10.3	9.8	3.0/16.0	1/15	2/15
CIT	14.7	12.4	14.7	13.9	11.0	8.5/18.0	0/15	0/15
ctree	8.2	9.2	17.4	11.6	10.9	1.0/18.0	2/15	4/15
PI	12.3	7.1	14.4	11.3	10.2	3.0/16.0	1/15	2/15
DC filter	16.4	13.9	9.6	13.3	11.1	7.0/17.0	0/15	0/15
CPI	17.8	16.1	17.2	17.0	13.6	9.5/18.0	0/15	0/15

Table 28: Regression sensitivity by downstream learner and value of k . Lower values are better. KNN, Ridge, and SVR denote downstream learners; Top 3 of 15 and Top 5 of 15 count the learner-by- k combinations where the method ranks in the top 3 or top 5. The learner columns and mean position average the method’s ordinal position among the methods over learner-by- k combinations (the five values of k for one learner, or all 15 combinations); best and worst are its extreme positions over the 15 combinations; mean rank averages its dataset-level rank over datasets and combinations. The dataset counts at $k = 5, 10, 25, 50, 100$ are 8, 8, 7, 7, and 6. The spread across learner and k columns is the reported sensitivity; no interval is given.

CIF has the fourth-lowest regression mean position in this breakdown, after ExtraTrees, RF-RFE, and CatBoost, and remains ahead of ctree, cforest, CIT, and most filter and wrapper methods in this summary. The pairwise figures use the datasets available for each comparator; the complete-case panels above use the 13/6 all-method dataset sets.

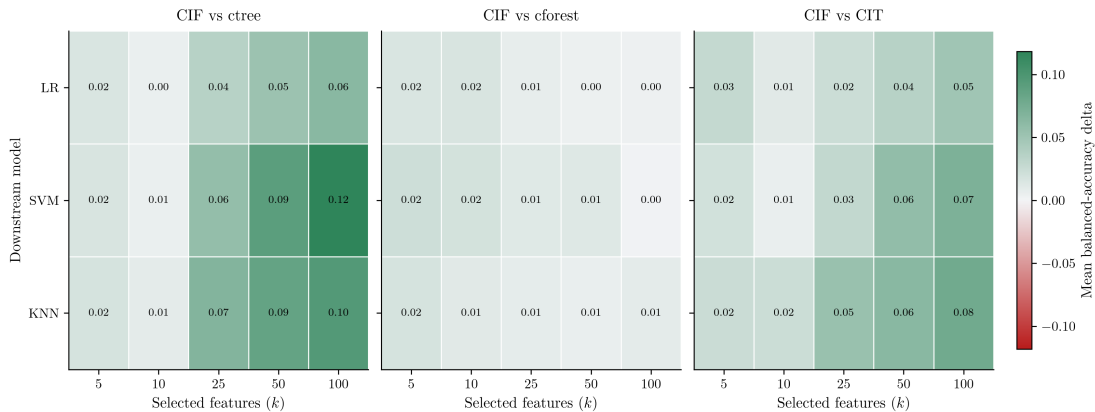


Figure 6: Classification CIF margins against ctree, cforest, and CIT by downstream learner and value of k . Each plotted value is the mean balanced-accuracy difference, CIF minus comparator, for one downstream learner and one value of k ; positive values favor CIF. Dataset counts by k are 21, 20, 14, 14, and 13 for ctree, 22, 21, 15, 15, and 14 for cforest, and 23, 22, 16, 16, and 15 for CIT. Values are means over datasets; the bootstrap intervals for the pooled differences are in Table 24.

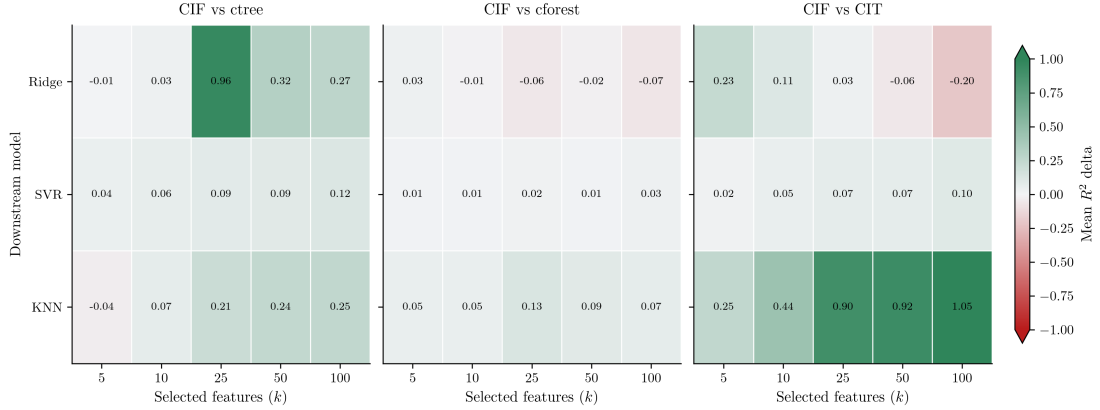


Figure 7: Regression CIF margins against ctrees, cforest, and CIT by downstream learner and value of k . Each plotted value is the mean R^2 difference, CIF minus comparator, for one downstream learner and one value of k ; positive values favor CIF. Dataset counts by k are 8, 8, 7, 7, and 6 for each comparison. Large positive plotted values can reflect negative mean R^2 for the comparator. Numeric labels show the unclipped values; the color scale is clipped at ± 1 for readability. Values are means over datasets; the bootstrap intervals for the pooled differences are in Table 24.

For the seed checks, each method is ranked separately within each fixed seed. Keeping only datasets with results for every method, downstream learner, standard top- k value, and seed leaves 13 classification datasets and 6 regression datasets complete across all five seeds. These tables summarize seed variation by rank without intervals or tests. In these tables, a seed column is the method’s ordinal position after sorting that seed’s averaged dataset-level ranks, while mean rank is the averaged dataset-level rank value itself. Rows follow the main benchmark order.

Method	Seed 1	Seed 2	Seed 3	Seed 4	Seed 5	Mean position	Mean rank
RF-RFE	1	1	1	1	1	1.0	4.9
XGBoost	2	4	2	3	3	2.8	5.8
CIF	6	5	6	5	7	5.8	6.9
RF	5	6	4	6	4	5.0	6.6
LightGBM	3	2	3	2	2	2.4	5.6
Boruta	7	7	8	7	8	7.4	7.6
CatBoost	4	3	5	4	5	4.2	6.4
ExtraTrees	8	8	7	8	6	7.4	7.5
cforest	9	9	9	9	9	9.0	8.3
DT	10	10	11	10	10	10.2	9.6
RDC filter	11	11	12	13	12	11.8	10.4
PI	16	16	16	16	16	16.0	14.2
MC filter	13	14	14	14	15	14.0	11.1
RT	15	15	15	15	14	14.8	11.6
ctree	14	12	10	12	11	11.8	10.4
CIT	12	13	13	11	13	12.4	10.5
CPI	17	17	17	17	17	17.0	15.7

Table 29: Classification seed sensitivity on the 13 datasets complete across all five seeds. Each seed column is the method’s ordinal position after sorting methods by their averaged dataset-level ranks for that seed. Mean position averages those five ordinal positions; mean rank reports the averaged dataset-level rank value itself. Lower values are better. The spread across seed columns is the reported sensitivity; no interval is given.

Method	Seed 1	Seed 2	Seed 3	Seed 4	Seed 5	Mean position	Mean rank
ExtraTrees	3	2	3	3	3	2.8	7.4
CIF	6	5	8	8	4	6.2	8.6
CatBoost	2	7	4	1	1	3.0	7.4
RF-RFE	1	1	1.5	4	2	1.9	7.2
RF	5	3	5	7	7	5.4	8.5
RT	4	4	1.5	5	6	4.1	8.2
cforest	15	13	13	12	11	12.8	10.2
DT	14	6	7	2	5	6.8	8.6
Boruta	9	10	10	11	8	9.6	9.3
PC filter	16	16	15	14	16	15.4	11.3
LightGBM	8	9	9	10	10	9.2	9.3
XGBoost	7	8	11	6	12	8.8	9.2
RDC filter	10	14	14	13	14	13.0	10.4
CIT	12	12	17	17	9	13.4	10.7
ctree	13	15	12	15	13	13.6	10.6
PI	11	11	6	9	15	10.4	9.7
DC filter	17	17	16	16	17	16.6	11.9
CPI	18	18	18	18	18	18.0	12.8

Table 30: Regression seed sensitivity on the 6 datasets complete across all five seeds. Each seed column is the method’s ordinal position after sorting methods by their averaged dataset-level ranks for that seed; fractional positions indicate ties. Mean position averages those five ordinal positions; mean rank reports the averaged dataset-level rank value itself. Lower values are better. The spread across seed columns is the reported sensitivity; no interval is given.

Appendix H Feature use in sampled forests

Figures 8 and 9 extend the feature-use measurement of Section 5.6 to $p \in \{100, 500, 1,000\}$, for classification and regression separately. Each forest uses 1,000 trees per fit. For each method and feature dimension p , each point is the mean over $n_{\text{informative}} \in \{1, 2, 5, 10\}$, and the capped bar spans the minimum and maximum over those four sparse settings. The values quoted below for designs with one, two, or five informative features are single-design values from the same runs, not read from the plotted means.

In classification, evaluating all nonconstant features at each split gives the largest informative-feature gains in sparse high- p settings. CIF-all keeps feature muting and the other tree settings unchanged while removing feature subsampling. Averaged over the 12 classification designs, CIF uses informative features in 33.2% of splits and CIF-all in 91.7%, and CIF uses more distinct uninformative features, a mean of 265.1 against 93.4, where each count is the number of distinct uninformative features used anywhere in the five pooled fits of a design. With two informative features and $p=100$, CIF uses informative features in 40.0% of splits, while CIF-all does so in 100.0%. The corresponding values are 12.2% versus 90.2% at $p=500$ and 9.0% versus 100.0% at $p=1,000$, and in those three designs CIF-all uses 70, 264, and 439 fewer distinct uninformative features than CIF (totals over the pooled fits). With five informative features, the CIF-all minus CIF differences are 25.1, 56.4, and 54.3 percentage points at $p=100$, $p=500$, and $p=1,000$.

Regression shows a similar informative-feature use pattern in the one- and two-informative-feature settings, and there CIF-all uses more distinct uninformative features than CIF. Averaged over the regression designs, CIF-all uses informative features in 42.3% of splits against 27.8% for CIF, and a mean of 528.8 distinct uninformative features against 367.7. With two informative features and $p=100$, CIF uses informative features in 39.9% of splits, while CIF-all does so in 58.8%.

The corresponding values are 19.7% versus 46.7% at $p=500$ and 11.6% versus 35.9% at $p=1,000$. With one informative feature, the CIF-all minus CIF differences are 29.8, 18.9, and 42.1 percentage points.

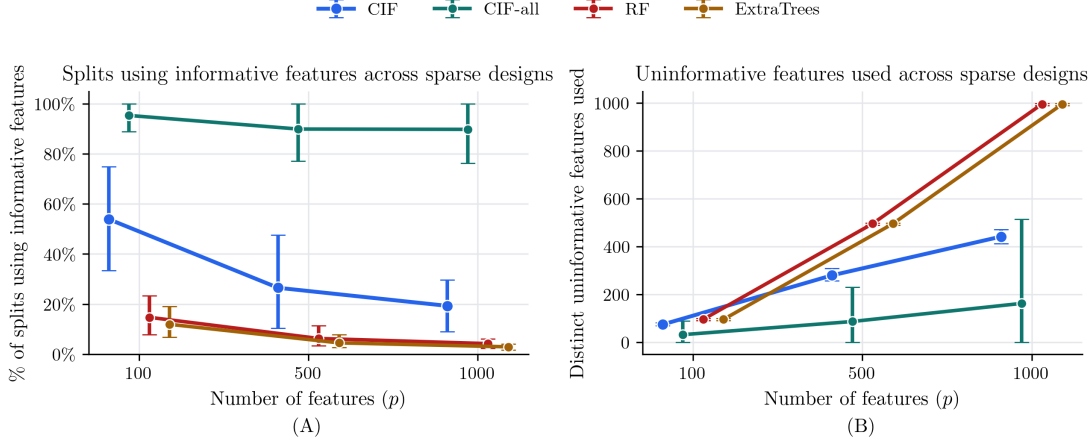


Figure 8: Classification forest feature sampling by feature dimension p with 1,000 trees per fit. Points are means over $n_{\text{informative}} \in \{1, 2, 5, 10\}$; capped bars span the minimum-to-maximum values across those four sparse designs. (A) shows % of splits using informative features; (B) shows the number of distinct uninformative features used.

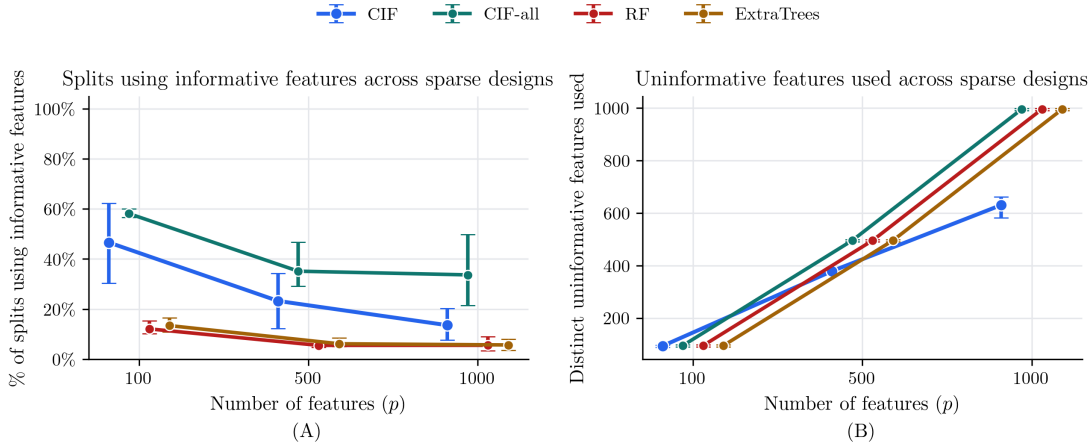


Figure 9: Regression forest feature sampling by feature dimension p with 1,000 trees per fit. Points are means over $n_{\text{informative}} \in \{1, 2, 5, 10\}$; capped bars span the minimum-to-maximum values across those four sparse designs. (A) shows % of splits using informative features; (B) shows the number of distinct uninformative features used.

Appendix I Stage B construction: cost and real-data tables

Tables 31 to 34 give the fitting-time, fixed-budget control, real-data, and nominal-level split-rate results for the Stage B construction comparison summarized in Section 5.3; the design is in Section 4.7 and the size-matched comparison is Table 10 in the main text. The entries of Tables 31 and 33 are medians over five seeds; Table 32 is a single pass with 500 null and 200 alternative replicates per cell; Table 34 pools 2,500 replicates per cell, five seeds of 500, and reports rates, not medians.

Task	n	Bins	Adaptive		No stopping			
			Per-threshold	Max-type	Per-threshold	Fixed	Max-type	Fixed depth
Classification	1,000	16	0.04	0.04	0.05	0.04	0.06	5
	1,000	64	0.07	0.04	0.20	0.06	0.11	0
	1,000	256	0.45	0.09	3.52	0.24	0.28	0
	4,000	16	0.12	0.11	0.19	0.14	0.22	6
	4,000	64	0.31	0.15	0.99	0.22	0.47	0
	4,000	256	1.83	0.31	14.2	0.86	1.35	0
	16,000	16	0.47	0.37	0.75	0.55	0.93	8
	16,000	64	1.11	0.59	3.57	0.89	2.10	0
Regression	16,000	256	9.36	1.22	59.0	3.46	6.28	0
	1,000	16	0.06	0.05	0.07	0.06	0.08	6
	1,000	64	0.10	0.07	0.22	0.06	0.15	0
	1,000	256	0.22	0.10	0.84	0.22	0.30	0
	4,000	16	0.17	0.15	0.22	0.18	0.26	8
	4,000	64	0.37	0.22	1.10	0.20	0.54	0
	4,000	256	1.29	0.40	8.77	0.79	1.39	0
	16,000	16	0.59	0.50	0.82	0.65	1.03	10
	16,000	64	1.12	0.71	3.31	0.84	2.15	0
	16,000	256	7.51	1.39	54.5	3.26	6.27	0

Table 31: Fitting time in seconds of one tree on ten Gaussian predictors with a planted linear signal, by Stage B construction and stopping mode, on a 32-core cloud instance. Timing protocol: all three arms are timed in one run of five seeds; each entry is the median over seeds of the median of three timed fits, and each timed fit follows an untimed identical fit so that compilation is excluded. Bins is the histogram threshold setting as in Table 9. Fixed is the per-threshold rule held at 999 permutations per candidate; it exists only with no stopping because the sequential path raises any budget to the floor $\lceil K/\alpha \rceil$, and Fixed depth is its fitted depth (0 where it never splits, because $\alpha/K < 1/1000$). No fit reached the 1,200-second cap.

Task	n	Bins	Size	Power
Classification	100	16	0.008	0.150
	100	64	0.000	0.000
	100	256	0.000	0.000
	200	16	0.010	0.425
	200	64	0.000	0.000
	200	256	0.000	0.000
	500	16	0.008	0.900
	500	64	0.000	0.000
	500	256	0.000	0.000
Regression	100	16	0.012	0.130
	100	64	0.000	0.000
	100	256	0.000	0.000
	200	16	0.020	0.445
	200	64	0.000	0.000
	200	256	0.000	0.000
	500	16	0.022	0.845
	500	64	0.000	0.000
	500	256	0.000	0.000

Table 32: Fixed-budget control arm: the per-threshold rule held at 999 permutations per candidate with no stopping, in the Stage-B-only design. Size is the false-split rate at nominal 0.05 and Power the split rate at the middle planted effect ($\delta = 0.10$ classification, 0.4 regression), with 500 null and 200 alternative replicates per cell; at 64 and 256 bins the rule never splits because $\alpha/K < 1/1000$. Its fitting time and depth on the scaling grid are the Fixed columns of Table 31.

Dataset	n	p	Adaptive						No stopping					
			Score		Seconds		Depth		Score		Seconds		Depth	
			PT	MT	PT	MT	PT	MT	PT	MT	PT	MT	PT	MT
vowel	990	10	0.689	0.705	0.23	0.15	10.0	11.2	0.691	0.717	0.57	0.40	10.0	11.4
spam	4,601	57	0.908	0.902	0.86	0.71	11.2	12.4	0.908	0.908	3.03	3.01	11.4	11.4
page-blocks	5,473	10	0.768	0.750	0.69	0.29	10.0	11.2	0.768	0.748	5.85	1.45	10.0	10.0
imports-85	205	76	0.638	0.698	0.07	0.07	5.4	4.8	0.638	0.671	0.17	0.18	5.4	5.2
residential	372	107	0.925	0.933	0.49	0.57	6.4	7.2	0.926	0.931	2.30	2.53	6.4	6.6
facebook	500	21	0.754	0.803	0.33	0.15	9.0	9.8	0.754	0.780	2.09	0.25	9.0	8.6

Table 33: Five-fold held-out score (balanced accuracy for the three classification datasets, R^2 for the three regression datasets), fitting time in seconds, and fitted depth of one tree at the 256-bin histogram setting, by Stage B construction (PT is the per-threshold rule, MT the max-type rule) and stopping mode, on a 32-core cloud instance. Each entry is the median over five seeds of the fold assignment. Timing protocol: each time is the second of two identical fits, so that compilation is excluded.

Task	Effect	n	Per-threshold			Max-type		
			16	64	256	16	64	256
Classification	0.05	100	0.036	0.025	0.020	0.058	0.060	0.061
	0.05	200	0.058	0.047	0.033	0.084	0.088	0.088
	0.05	500	0.159	0.148	0.107	0.192	0.193	0.193
	0.10	100	0.126	0.104	0.092	0.170	0.170	0.172
	0.10	200	0.315	0.296	0.247	0.362	0.360	0.364
	0.10	500	0.820	0.813	0.786	0.828	0.830	0.832
	0.20	100	0.698	0.676	0.658	0.727	0.729	0.730
	0.20	200	0.971	0.972	0.968	0.972	0.972	0.972
Regression	0.20	500	1.000	1.000	1.000	1.000	1.000	1.000
	0.2	100	0.040	0.031	0.026	0.050	0.051	0.054
	0.2	200	0.079	0.066	0.045	0.086	0.091	0.090
	0.2	500	0.178	0.167	0.118	0.184	0.189	0.189
	0.4	100	0.126	0.104	0.092	0.137	0.143	0.144
	0.4	200	0.326	0.297	0.246	0.332	0.338	0.340
	0.4	500	0.809	0.797	0.774	0.809	0.814	0.811
	0.8	100	0.634	0.617	0.602	0.643	0.647	0.651
	0.8	200	0.962	0.962	0.955	0.963	0.964	0.963
	0.8	500	1.000	1.000	1.000	1.000	1.000	1.000

Table 34: Split rate at nominal level 0.05 of a depth-one tree with adaptive stopping when the response depends on one of five Gaussian predictors through a step at zero, by Stage B construction and bin setting (columns 16, 64, 256), over 2,500 replicates per cell (five seeds of 500). The two rules have different realized sizes at this level (Table 9), so the columns are not a power comparison; Table 10 matches them at equal size. Effect is the class-probability shift $\pm\delta$ around one half in classification and the mean shift in standard-deviation units in regression. No stopping agrees within 0.014 in every cell.

Appendix J Version note

This version corrects five defects in the benchmark harness: the feature-index mapping used when passing data to the R `ctree` and `cforest` implementations, the seeding of cross-validation folds, the rank ordering returned by RF-RFE, the rank ordering returned by Boruta, and the correlation threshold used by conditional permutation importance. All benchmark results were regenerated from the corrected runs. The corrections move several comparators, most visibly RF-RFE, which now leads the classification comparison, while the position of CIF in the bunched group behind RF-RFE

is unchanged. The corrected R bridge was checked by refitting one published `ctree` example inside R and through the harness with identical splits; the seed schedule, rank directions, and the CPI threshold are pinned by tests in the repository.