

# Conditional Inference Trees and Forests for Feature Selection

Robert Milletich, Justin Downes, Steve Goley, Newel Hirst  
Amazon Web Services  
{rmilleti,jusdow,sgoley,nhirst}@amazon.com

## Abstract

Conditional inference trees (CIT) and conditional inference forests (CIF) reduce split-selection bias by testing features before choosing split thresholds, but repeated permutation tests and threshold searches can make these methods computationally expensive. We study CIT and CIF as top- $k$  feature-ranking methods for downstream prediction using real-data benchmarks, runtime ablations, and synthetic feature-recovery experiments. Each split passes a Stage A feature test and a Stage B threshold test, each under a Bonferroni correction. At a fixed node, if the features and permutation budget do not depend on the node responses, Bonferroni-corrected +1 Monte Carlo permutation  $P$ -values control nodewise rejection under the complete permutation null. We benchmark them against 15 classification and 16 regression rankers, among them partykit’s ctree and cforest, random forests (RF), recursive feature elimination with random forests (RF-RFE), ExtraTrees, and gradient boosting, on 31 real datasets, scoring each ranking by the held-out accuracy of fixed learners fitted to its top- $k$  features. CIF ranks tied 3rd of 17 in classification, behind RF-RFE and XGBoost and level with RF; 2nd of 18 in regression, behind ExtraTrees. On the smaller panels where every method completed it ranks tied 6th and tied 5th, and the regression ordering is descriptive. On synthetic designs with known informative features CIF sits in the lower half on recovery (8th of 15 and 11th of 16), and it is weakest at small  $k$ . Sparse high- $p$  simulations indicate that forest feature sampling can leave informative features out of many split decisions. At the minimum permutation budget the corrections cost of order  $m^2/\alpha$  permutations per node in the feature test over  $m$  features and  $K^2/\alpha$  in the threshold test over  $K$  candidate thresholds. A max-type threshold test, an opt-in alternative, reaches the nominal level with about  $999K$  statistic evaluations, loses 0.006 in power at equal realized size, and moves CIF to 5th of 17 and 4th of 18. The adaptive stopping rule has exact null size 0.0488 at its default budget of 999 permutations. Overall, the results support CIF as a top- $k$  feature-ranking method in the evaluated downstream prediction benchmarks, level with random forests in classification.

## 1 Introduction

Conditional inference separates feature selection from threshold optimization to reduce split selection bias. Classical CART trees choose both a feature and a threshold from the same label-dependent search, which helps explain the well-documented preference for features with many admissible cutpoints [4, 23, 27, 28, 36, 38, 39]. In the conditional inference framework [18, 19], Stage A tests features for association with the response at the current node and selects among them; Stage B then optimizes a threshold within the selected feature. That separation addresses split selection bias, but the classical approach can require substantial computation through large permutation budgets and exhaustive threshold scans at every node. The same conditional inference framework also motivated later work on conditional variable importance [40]. A related line of work uses forests directly for variable screening and ranking, rather than only for final prediction [10].

This paper evaluates conditional inference trees (CIT) and conditional inference forests (CIF), as implemented in the software of Milletich et al. [30], as feature selection methods. It asks how

their rankings compare with established rankers, and what the Bonferroni corrections inside their split tests cost and change. For each seed and cross-validation fold, a method produces a ranking from the training fold. Fixed downstream learners are then fit on top- $k$  prefixes of that ranking and evaluated on held-out data, with results summarized across datasets. The benchmark asks whether tree- and forest-derived rankings put predictive variables early enough to improve fixed downstream models. We also ask whether CIT/CIF runtime hyperparameters reduce computation while preserving ranking quality, and where CIF recovery is weaker in high- $p$  or synthetic settings. This feature-selection benchmark is separate from work on trees and forests as direct predictors or causal estimators [1, 3, 43]. Because several methods have tunable configurations, the benchmark chooses one configuration per method and task. As a sensitivity check, leave-one-dataset-out (LODO) analyses repeat the configuration choice after holding out each dataset, using the complete-case and all-method panels defined in Section 4.2.

The theory studies each split test at a fixed node. It assumes that the features tested at the node and the resample budget are fixed independently of the node responses, so fixed- $B$   $P$ -values have a clear permutation reference distribution under the nodewise complete permutation null. Under the minimum budget every rejecting candidate returns the smallest attainable  $P$ -value, so the benchmarked procedure selects features and thresholds by the order of the observed statistics behind the two corrections (Section 2). The benchmarks then evaluate the tree and forest feature rankings empirically.

**Contributions.** This paper contributes a real-data benchmark of conditional-inference feature rankings for top- $k$  downstream prediction, against 15 classification and 16 regression rankers on 31 datasets, among them random forests (RF) and recursive feature elimination with random forests (RF-RFE) (Section 5.1). The benchmark compares CIF with ctrees, cforest, CIT, and other baselines in classification and regression analyses, and includes ablations of the main CIT/CIF runtime hyperparameters. CIF is the strongest conditional inference ranker in the study, ahead of cforest, ctrees, and single CIT. CIF ranks tied 3rd of 17 in classification, behind RF-RFE and XGBoost and level with RF; 2nd of 18 in regression, behind ExtraTrees. On the complete-case panels it is tied 6th of 17 and tied 5th of 18, and the regression ordering is descriptive. The paper also states the fixed-node, full-scan fixed- $B$  Stage A and Stage B guarantees (Lemma 1 and Corollaries 1 and 2); the full tree and forest rankings are evaluated in the benchmarks. It accounts for the cost of the corrections: under the minimum budget the Stage A feature test costs of order  $m_t^2/\alpha$  permutations per node over  $m_t$  features, and the per-threshold Stage B rule of order  $K^2/\alpha$  over  $K$  candidate thresholds (Section 5.2). It adds a max-type Stage B rule that reaches the nominal level with about  $999K$  statistic evaluations (Corollary 3 and Section 5.3). It gives the exact null size of the adaptive stopping rule (Proposition 1), which is inert at the minimum budget the benchmark uses. Finally, the high- $p$  and synthetic analyses show cases with weaker top- $k$  recovery and how forest feature sampling can reduce how often forest splits use informative features (Sections 5.4 and 5.5): CIF sits in the lower half on synthetic recovery, 8th of 15 and 11th of 16, and it is weakest at small  $k$ .

## 2 Tree-growing method

At each internal node, conditional inference trees make two decisions. Stage A tests features for association with the response and chooses a feature to split. Stage B then searches thresholds only for that selected feature; if no valid split is accepted, the node becomes terminal. In this paper, CIT denotes the resulting single-tree feature selection method. CIF denotes a bootstrap ensemble of such trees with feature sampling at each node and feature rankings formed by aggregating split

importances across trees. CIF-all disables feature subsampling: every nonconstant available feature can enter Stage A at each node. This changes the Stage A feature set, the Stage A multiplicity correction, and the per-node computational cost.

## 2.1 Stage A and Stage B

At a node  $t$ , write  $(X_t, Y_t)$  for the samples reaching that node. Let  $F_{t,\text{avail}}$  be the feature set carried into the node by the tree-growing algorithm, including any feature muting inherited from ancestors. Let  $F_{t,\text{nonconst}} \subseteq F_{t,\text{avail}}$  be the features that are nonconstant on the node samples. After any feature subsampling, Stage A considers a set  $F_t \subseteq F_{t,\text{nonconst}}$ ; its size  $m_t = |F_t|$  is the denominator of the feature correction, the Bonferroni correction over the Stage A tests at the node. Any label-independent auxiliary randomness used by a selector, such as the random projections of the randomized dependence coefficient, is denoted by  $U$  and is held fixed in the fixed-node guarantee.

When feature scanning is enabled during tree growing, Stage A can evaluate features sequentially, in order of their observed selector statistic, and stop at the first rejection before every feature in  $F_t$  has been tested. Let  $E_t \subseteq F_t$  denote the evaluated subset; in the full-scan fixed- $B$  reference rule,  $E_t = F_t$ . The fixed-node results in Section 3 apply to that reference rule: the features in  $F_t$  and the budget  $B$  are fixed independently of the node responses, and every  $P_{t,j}$  for  $j \in F_t$  uses that budget. The implemented tree-growing rule adds response-dependent node selection, inherited feature muting, and scores from scans that stop at the first rejection.

**Stage A feature test.** In the full-scan fixed- $B$  setting, Stage A follows the feature-selection and threshold-search separation of conditional inference trees [19]. The original conditional inference tests use the permutation-statistic framework of Strasser and Weber [37]; here, Monte Carlo label permutations calibrate the configured selector statistic. Stage A computes a selector statistic  $T_j^{\text{sel}}(X_{t,j}, Y_t; U)$  and permutation  $P$ -value  $P_{t,j}$  for every feature  $j \in F_t$ , then selects

$$P_t^* := \min_{j \in F_t} P_{t,j}, \quad M_t^* := \{j \in F_t : P_{t,j} = P_t^*\}. \quad (1)$$

Let  $\tau_t = \alpha_{\text{sel}}/m_t$  when the feature correction is enabled and  $\tau_t = \alpha_{\text{sel}}$  otherwise. If  $P_t^* \geq \tau_t$ , Stage A returns no feature and the node becomes terminal. If  $P_t^* < \tau_t$ , the selected feature  $j_t^*$  is drawn uniformly from  $M_t^*$  using reservoir sampling, and the node enters Stage B.

During tree growing, Stage A uses the same decision structure but can order features by a preliminary score and evaluate only the subset  $E_t$ . The returned score  $q_t^{\text{feat}}$  is used to grow the tree; it is not a full-scan fixed- $B$   $P$ -value covered by Lemma 1. Under the full-scan reference rule with the feature correction,  $\min(1, m_t P_t^*)$  is a conservative complete-null  $P$ -value for the fixed-node Stage A test. When feature muting is enabled, features with non-rejecting Stage A  $P$ -values can be removed from descendant feature pools. When muting is disabled, descendants keep  $F_{t,\text{avail}}$  except for deterministic constant feature pruning.

**Stage B threshold test.** Stage B guards against a spurious split on a feature that passed Stage A. The ctree reference implementation instead places the split at the maximum of a standardized two-sample statistic, without a second test [19]. Given a selected feature  $j_t^*$ , Stage B starts from midpoints between ordered unique values of  $X_{t,j_t^*}$ . The exact method uses all such midpoints. The random method samples a bounded subset of midpoints, while the percentile and histogram methods choose bounded representative thresholds derived from the midpoint distribution. The histogram method with  $h$  bins returns at most  $h + 1$  bin edges, so the 256-bin setting of the benchmark yields

up to 257 candidates. Thresholds that would leave either child below the minimum leaf size are filtered out. If no threshold remains, Stage B returns no split.

For the remaining finite threshold set  $C_{t,j_t^*}$ , Stage B selects the threshold used by the tree; write  $K = |C_{t,j_t^*}|$ . The tested statistic at threshold  $c$  is the weighted child impurity

$$\frac{|Y_t^L(c)|}{|Y_t|} H(Y_t^L(c)) + \frac{|Y_t^R(c)|}{|Y_t|} H(Y_t^R(c)),$$

where  $H$  is the chosen node impurity measure. This statistic is used in a left-tail test, and the full-scan fixed- $B$  rule chooses the threshold with the smallest Stage B  $P$ -value, with uniform tie breaking. During tree growing, threshold scanning may reorder thresholds by weighted child impurity and stop after the first rejecting threshold, so the returned Stage B score is a tree-construction score rather than a global minimum over all retained thresholds. Let  $\tau_t^{\text{split}} = \alpha_{\text{split}}/K$  when the threshold correction, the Bonferroni correction over the candidate thresholds, is enabled and  $\tau_t^{\text{split}} = \alpha_{\text{split}}$  otherwise. Testing each candidate at  $\tau_t^{\text{split}}$  is the per-threshold rule. If no evaluated Stage B  $P$ -value is below  $\tau_t^{\text{split}}$ , the node becomes terminal. After a threshold passes the Stage B test, the final minimum required-improvement check uses the corresponding weighted impurity decrease. Stage B chooses the split used by the tree; the returned Stage B score is not a valid post-selection  $P$ -value. The training skeleton in Algorithm 1 summarizes this flow and, for the benchmarked CIT and CIF configurations, stores two values at each split: the Stage A score  $q_t^{\text{feat}}$  for the selected feature and the Stage B score  $q_t^{\text{split}}$  for the selected threshold.

**Permutation budgets.** Write  $\alpha_{\text{adj}}$  for the level of a single permutation test:  $\alpha_{\text{sel}}/m_t$  in Stage A and  $\alpha_{\text{split}}/K$  in the per-threshold rule when the corrections are enabled. The minimum budget gives each test  $B = \lceil 1/\alpha_{\text{adj}} \rceil$  permutations, the smallest budget at which a +1  $P$ -value can fall below  $\alpha_{\text{adj}}$ . The auto budget, the library default, gives each test

$$B = \max\left(\left\lceil \frac{1}{\alpha_{\text{adj}}} \right\rceil, \left\lceil \frac{z^2(1 - \alpha_{\text{adj}})}{\alpha_{\text{adj}}} \right\rceil\right), \quad z = \Phi^{-1}(1 - \alpha_{\text{adj}}), \quad (2)$$

permutations, where  $\Phi$  is the standard normal distribution function. The benchmark uses  $\alpha_{\text{sel}} = \alpha_{\text{split}} = 0.05$  with the minimum budget, so a Stage A test at a node with 20 features receives 400 permutations and a per-threshold test over 257 candidates receives 5,140. Adaptive stopping, the default stopping rule, checks a Beta posterior for the exceedance probability every 32 permutations once  $\lceil 1/\alpha_{\text{adj}} \rceil$  permutations have been drawn (Proposition 1). Under the minimum budget the first check coincides with the full budget, so adaptive stopping never stops early.

Under the minimum budget a test rejects only when no permuted statistic is as extreme as the observed one, so every rejecting feature and every rejecting threshold returns the floor  $P$ -value  $1/(B + 1)$ . The  $P$ -values then do not order the passing candidates, and with scanning the first rejecting candidate in scan order is chosen. At the minimum budget the Stage A and Stage B decisions are therefore an ordering by the raw statistics behind the Bonferroni gate formed by the two corrections.

**Max-type rule for Stage B.** Under the minimum budget the per-threshold rule gives each candidate  $\lceil K/\alpha_{\text{split}} \rceil$  permutations, so a scan of all  $K$  candidates costs of order  $K^2/\alpha_{\text{split}}$  impurity evaluations. The implementation also provides the max-type rule, an opt-in alternative that tests the candidates jointly. Write  $S_{b,c}$  for the weighted child impurity at candidate  $c$  under the observed response ( $b = 0$ ) and under permutation  $b = 1, \dots, B$ . Each column is standardized by the mean

$\mu_c$  and standard deviation  $\sigma_c$  of its  $B + 1$  entries, candidates with  $\sigma_c = 0$  or an empty child are dropped, and

$$T_b := \min_c \frac{S_{b,c} - \mu_c}{\sigma_c}, \quad P_t^{\max} := \frac{1 + \sum_{b=1}^B \mathbf{1}\{T_b \leq T_0\}}{B + 1}. \quad (3)$$

The split is placed at  $\arg \min_c (S_{0,c} - \mu_c) / \sigma_c$ , so the two rules can accept different thresholds on the same feature. Stage B rejects when  $P_t^{\max} < \alpha_{\text{split}}$ , without division by  $K$ ; when every candidate is dropped, it returns no split. The implementation uses  $B = 999$ , so a full scan costs of order  $BK$  evaluations, fewer than the per-threshold rule once  $K > \alpha_{\text{split}} B \approx 50$ . Corollary 3 gives the fixed-node guarantee.

This is the single-step max-T statistic of Westfall and Young [44], with the empirical null standardization of Pollard and van der Laan [34]. It has the standardize-then-optimize form of the ctree split statistic [15, 19, 25], with Monte Carlo column moments in place of the exact conditional moments of Strasser and Weber [37], because impurity is not a linear statistic.

## 2.2 Monte Carlo permutation $P$ -values

Let  $T_{\text{obs}}$  be the observed statistic and  $T_1, \dots, T_B$  the same statistic computed on  $B$  random label permutations. For a right tail test we use the Phipson and Smyth +1  $P$ -value [31, 33], where  $\mathbf{1}\{\cdot\}$  denotes the indicator function:

$$P_{\text{MC}}^{\geq} := \frac{1 + \sum_{b=1}^B \mathbf{1}\{T_b \geq T_{\text{obs}}\}}{B + 1}. \quad (4)$$

For a left tail test we analogously define

$$P_{\text{MC}}^{\leq} := \frac{1 + \sum_{b=1}^B \mathbf{1}\{T_b \leq T_{\text{obs}}\}}{B + 1}. \quad (5)$$

Stage A uses the right tail convention and Stage B the left tail convention; ties count as exceedances in both cases.

## 2.3 Forests and runtime hyperparameters

CIF combines bootstrap trees and averages their predictions. For feature selection, it sums each fitted tree’s normalized split importances and renormalizes the forest vector. Each CIF tree uses the same Stage A and Stage B node rules as CIT [3, 17]. The fixed-node results cover subsampled and unsampled fits, and not bootstrap samples, whose duplicated rows break the exchangeability they assume (Appendix A.1). Across the CIT/CIF benchmark configurations, we hold the feature and threshold corrections, the per-threshold rule, the minimum budget with adaptive stopping, feature muting, feature scanning, threshold scanning, the 256-bin histogram method, and CIF bootstrap sampling fixed. The varying settings are selector choice and honesty. Honesty grows each tree on one half of its training sample and re-estimates the leaf values on the other half [43].

Runtime depends on the realized work at each node: features tested in Stage A, thresholds generated and retained in Stage B, permutations evaluated before stopping, and features carried into the node. Adaptive stopping changes the number of permutations evaluated for each test when the budget exceeds the minimum budget [2, 9]. Histogram thresholding reduces the Stage B threshold set by replacing exhaustive cutpoints with binned thresholds. Feature and threshold scanning change the order in which features or thresholds are tested, by their observed statistic, and stop at the first rejection; feature muting can reduce the feature pool inherited by descendants. Appendix C gives reproducibility details, Appendix E gives runtime and memory accounting, and Section 5.2 reports the measured timing effects.

---

**Algorithm 1** Conditional inference tree training skeleton (Stage A  $\rightarrow$  Stage B)

---

**Require:** Training data  $(X, Y)$ , hyperparameters  $\lambda$

**Ensure:** Trained tree  $\mathcal{T}$

```
1:  $p \leftarrow$  number of columns of  $X$ 
2: return GROWNODE( $X, Y, 1, \{1, \dots, p\}, \lambda$ )
3: function GROWNODE( $X_t, Y_t, d, F_{\text{avail}}, \lambda$ )
4:   if STOP( $X_t, Y_t, d, \lambda$ ) then
5:     return LEAF( $Y_t$ )
6:   end if
7:    $(j_t^*, q_t^{\text{feat}}, m_t, F'_{\text{avail}}) \leftarrow$  STAGEA( $X_t, Y_t, F_{\text{avail}}, \lambda$ )
8:   if  $j_t^* = \perp$  then
9:     return LEAF( $Y_t$ )
10:  end if
11:   $(c_t^*, q_t^{\text{split}}) \leftarrow$  STAGEB( $X_t, Y_t, j_t^*, \lambda$ )
12:  if  $c_t^* = \perp$  then
13:    return LEAF( $Y_t$ )
14:  end if
15:   $(X_t^L, Y_t^L, X_t^R, Y_t^R) \leftarrow$  PARTITION( $X_t, Y_t, j_t^*, c_t^*$ )
16:   $\Delta_t \leftarrow$  IMPURITYDECREASE( $Y_t, Y_t^L, Y_t^R, \lambda$ )
17:  if  $\Delta_t$  is below the minimum required impurity decrease then
18:    return LEAF( $Y_t$ )
19:  end if
20:  Add  $\Delta_t$  to the feature-importance accumulator for  $j_t^*$ 
21:   $u \leftarrow$  internal node with split  $(j_t^*, c_t^*)$  and stored scores  $(q_t^{\text{feat}}, q_t^{\text{split}})$ 
22:   $u.\text{left} \leftarrow$  GROWNODE( $X_t^L, Y_t^L, d + 1, F'_{\text{avail}}, \lambda$ )
23:   $u.\text{right} \leftarrow$  GROWNODE( $X_t^R, Y_t^R, d + 1, F'_{\text{avail}}, \lambda$ )
24:  return  $u$ 
25: end function
```

---

## 2.4 Feature rankings

The experiments evaluate each method through the ranking it produces on the training fold. CIT and CIF rankings are fitted split-importance rankings, not rankings of Stage A  $P$ -values. For a fitted CIT, feature  $j$  receives the sum, over internal nodes that split on  $j$ , of the impurity decrease at that node: parent impurity minus the weighted child impurity,

$$H(Y_t) - \frac{|Y_t^L|}{|Y_t|}H(Y_t^L) - \frac{|Y_t^R|}{|Y_t|}H(Y_t^R),$$

This sum is the importance  $\text{Imp}_j$ . It carries no weight for the node’s share of the sample, so a deep split counts as much as a root split. If the total importance is positive, the vector is normalized to sum to one; if the tree contributes no positive impurity decrease, the vector remains zero. CIF sums these tree importance vectors over trees and then normalizes the forest vector in the same way. Stage A determines which features enter threshold optimization, while impurity decrease scores only the accepted splits by their local reduction in impurity. Larger importances are ranked earlier, and features never used by a split receive zero importance. Those features follow in the tie order of the implementation, roughly ascending column order; every synthetic generator shuffles its planted columns, so that order carries no information.

This split-importance ranking differs from standard random-forest impurity importance in how a feature enters threshold search. In CART-style trees, the feature and threshold are chosen together by an impurity search, so a feature with more possible thresholds has more chances to produce a large apparent impurity decrease [39]. In CIT and CIF, Stage A first selects a feature by a permutation test; Stage B then searches thresholds only for that feature. This is designed to reduce the advantage that high-cardinality features get from having more possible thresholds. The per-threshold rule works in the opposite direction: more candidates mean a stricter level  $\alpha_{\text{split}}/K$  and a lower probability of any split, a reverse cardinality bias. The max-type rule tests at  $\alpha_{\text{split}}$  whatever  $K$  is. We use these fitted split-importance scores as rankings and evaluate them through downstream top- $k$  prediction and synthetic feature recovery.

## 3 Fixed-node control

This section analyzes the full-scan fixed- $B$  Stage A feature test and the two Stage B threshold tests at a fixed node. The lemma states superuniformity of a single +1 Monte Carlo permutation  $P$ -value. The corollaries apply the feature correction across the Stage A tests and the threshold correction across the candidate thresholds, and give fixed-node control of the max-type rule. The proposition gives the exact size of adaptive stopping. In the notation of Section 2.1, this is the reference case where every feature in  $F_t$  is tested with the same fixed nodewise budget  $B$ . All probabilities below condition on  $(X_t, U)$ , where  $U$  collects label-independent auxiliary randomness other than the Monte Carlo permutation draws. The assumptions A0.1 to A0.5 and the scope of each result are in Appendices A.1 and A.2.

The results assume that the node responses are exchangeable (A0.2), and bootstrap resampling breaks that assumption, because duplicated rows carry the same response. Strobl et al. [39] show that sampling with replacement biases variable selection in conditional inference forests, while subsampling without replacement does not. The guarantees below therefore cover the node tests of subsampled or unsampled fits.

**Lemma 1** (+1 permutation  $P$ -values are superuniform; 14). *Assume A0.1 through A0.5 from Appendix A.2. Under the nodewise complete permutation null at the fixed node  $t$ , let  $T_{\text{obs}}$  be the*

observed statistic of one feature and  $T_1, \dots, T_B$  its values under  $B$  independent uniform random permutations of  $Y_t$ . Define the right-tail +1 Monte Carlo  $P$ -value

$$P_{\text{MC}}^{\geq} := \frac{1 + \sum_{b=1}^B \mathbf{1}\{T_b \geq T_{\text{obs}}\}}{B + 1}. \quad (6)$$

Then for every  $\alpha \in [0, 1]$ ,

$$\mathbb{P}(P_{\text{MC}}^{\geq} \leq \alpha \mid X_t, U) \leq \alpha. \quad (7)$$

This is the standard exchangeable-rank result for Monte Carlo permutation tests [8, 14, 31]. Appendix B states the exchangeability condition and gives the proof. The left-tail version follows by applying the same result to  $-T$ .

**Corollary 1** (Stage A complete null control at a fixed node). *Assume A0.1 through A0.5 from Appendix A.2. Under the nodewise complete null at  $t$ , let  $F_t$  be nonempty and write  $m_t = |F_t| \geq 1$ . Let Stage A reject when*

$$\min_{j \in F_t} P_{t,j} \leq \alpha_{\text{sel}}/m_t. \quad (8)$$

Then

$$\mathbb{P}(\exists j \in F_t : P_{t,j} \leq \alpha_{\text{sel}}/m_t \mid X_t, U) \leq \alpha_{\text{sel}}. \quad (9)$$

Combining Lemma 1 with the Bonferroni union bound over the  $m_t$  Stage A tests gives fixed-node Stage A control under the complete null. The tree-growing rule uses a strict comparison, so its rejection event is a subset of the event above. The result is local: it does not cover partial-null familywise error control,  $P$ -values for selected features, or error control for fitted trees and forests.

**Corollary 2** (Stage B per-threshold rule at a fixed node). *Assume A0.1 through A0.5 from Appendix A.2 at a fixed node  $t$ , with the tested feature and the finite candidate set  $C$ ,  $K = |C| \geq 1$ , fixed as functions of  $(X_t, U)$  alone. For  $c \in C$  let  $P_{t,c}$  be the left-tail +1 Monte Carlo  $P$ -value of the child impurity at threshold  $c$ , with ties counted with  $\leq$ . Under the nodewise complete permutation null,*

$$\mathbb{P}(\exists c \in C : P_{t,c} \leq \alpha_{\text{split}}/K \mid X_t, U) \leq \alpha_{\text{split}}. \quad (10)$$

Each  $P_{t,c}$  is covered by Lemma 1 in its left-tail form, and the union bound over the  $K$  candidates gives the claim; it does not need the  $P_{t,c}$  to be independent. Threshold scanning leaves the rejection event unchanged. The scope is weak familywise control for a feature fixed without reference to  $Y_t$ ; it is not a post-selection guarantee for the Stage A winner. A +1  $P$ -value cannot fall below  $1/(B + 1)$ , so the rule can reject only when  $B \geq K/\alpha_{\text{split}} - 1$ .

**Corollary 3** (Stage B max-type control at a fixed node). *Assume A0.1 through A0.5 from Appendix A.2 at a fixed node  $t$ , with the tested feature and the finite candidate set  $C$  fixed as functions of  $(X_t, U)$  alone and left-tail ties counted with  $\leq$ . Let  $P_t^{\text{max}}$  be the max-type Stage B  $P$ -value of Equation (3) with column moments computed over all  $B + 1$  rows. Under the nodewise complete permutation null,  $\mathbb{P}(P_t^{\text{max}} \leq \alpha \mid X_t, U) \leq \alpha$  for every  $\alpha \in [0, 1]$ .*

The proof is in Appendix B.3. The moments must include the observed row: estimating them from the permuted rows alone singles out that row and can be anti-conservative. The scope is that of Corollary 2. It is a fixed- $B$  statement and does not cover the max-type rule with adaptive stopping, whose column moments move with the stopping time.

### 3.1 Size of the default adaptive stopping rule

Adaptive stopping applies to one permutation test at level  $\alpha$  with budget  $B$ , confidence  $\gamma$ , and batch size  $s$ . It draws permutations independently and uniformly, with replacement, in batches of  $s$ . At each batch boundary  $r$  that is a multiple of  $s$  with  $r \geq \lceil 1/\alpha \rceil$ , and at  $r = B$ , it stops when the  $\text{Beta}(1 + e, 1 + r - e)$  posterior places mass at least  $\gamma$  on either side of  $\alpha$ , where  $e$  counts permuted statistics at least as extreme as the observed one. It then reports  $(e + 1)/(r + 1)$ , and the tree rejects when the reported value is strictly below  $\alpha$ . Let  $\rho(\alpha, \gamma, s, B)$  be the probability of rejection when the same rule is applied to a Pólya urn started from one ball of each colour. The library default is  $\gamma = 0.95$  and  $s = 32$ .

**Proposition 1** (Size of the adaptive stopping rule, exact under A0.1 to A0.3 at fixed  $B$ ). *Assume A0.1 through A0.3 at a fixed node for one permutation test whose statistic is a fixed function of each permuted response vector (a Stage A test or a per-threshold Stage B test), run with adaptive stopping at level  $\alpha$ , confidence  $\gamma$ , batch size  $s$ , and fixed budget  $B$ . Suppose that at every reachable stopping state a significance stop reports a value strictly below  $\alpha$  and a futility stop reports a value at least  $\alpha$ . Under the complete nodewise null, conditional on  $(X_t, U)$ , three statements hold. (i) Continuous mixing: if the per-draw probability that a permuted statistic is at least as extreme as the observed one is uniform on  $(0, 1)$ , the size equals  $\rho(\alpha, \gamma, s, B)$  exactly. (ii) Finite orbit: for a statistic without ties on the  $N = n_t!$  permutations, that probability is uniform on  $\{1/N, 2/N, \dots, 1\}$ , and the size lies in  $[\rho - 1/N, \rho]$ . (iii) Ties: counting ties as exceedances can only lower the size, so with ties the size is at most the value in (ii); for a discrete response, where permutations tie, only this bound applies.*

The proof, in Appendix B.4, writes the rejection probability as a nonincreasing function of the per-draw exceedance probability and averages it over the uniform law of that probability. An exact enumeration verifies the hypothesis on stopping reports at  $\gamma = 0.95$  and  $s = 32$  for every budget from 20 to 3,000 at  $\alpha = 0.05$ . At  $\alpha = 0.05$ ,  $\rho(0.05, 0.95, 32, 999) = 0.0488$ ,  $\rho(0.05, 0.95, 32, 52) = 0.0377$  at the auto budget of 52 from Equation (2), and  $\rho \leq 0.0496$  for every  $B$  from 20 to 3,000; at  $\gamma = 0.80$ ,  $\rho(0.05, 0.80, 32, 999) = 0.0522$ . At the corrected levels  $\rho$  stays below the level: at  $\alpha/20$  it is 0.00249 at the minimum budget of 400 and 0.00221 at the auto budget of 3,144, and at  $\alpha/257$  it is 0.000195 at the minimum budget of 5,140 and 0.000181 at the auto budget of 64,669. These values are for the strict rule the implementation uses; under the nonstrict convention the bound  $\rho \leq \alpha$  fails at  $B = 79$ , where  $\rho = 0.05001$ .

Under the minimum budget the first stopping check coincides with the full budget, and the rule reduces to the fixed- $B$  test of Lemma 1. Every Stage A and per-threshold Stage B  $P$ -value in the benchmark is therefore a fixed- $B + 1$  permutation  $P$ -value. The max-type rule with adaptive stopping recomputes its column moments at each check, so Proposition 1 does not cover it; its calibration rests on the null simulations of Section 5.3.

## 4 Experimental design

The experiments ask whether rankings produced by CIT and CIF place predictive features early enough for fixed downstream learners, and what the conditional-inference controls cost. For each training fold, a method produces a feature ranking, and fixed downstream learners evaluate the selected features on the held-out fold. We then summarize overall ranks, how often CIF performs well across datasets, high-dimensional behavior, recovery on synthetic data with known informative features, CIF ranking ablations, and feature sampling in forests.

## 4.1 Benchmark setup

The benchmark uses 5 random seeds, with 5-fold cross-validation within each seed. Classification fits logistic regression (LR), support vector machine (SVM), and k-nearest neighbors (KNN) as downstream models and reports balanced accuracy, defined as mean recall across classes. Regression fits ridge regression, support vector regression (SVR), and KNN and reports  $R^2$ . The main tables use the standard values  $k \in \{5, 10, 25, 50, 100\}$ . Downstream learner settings are fixed. Logistic regression uses balanced class weights and a 1,000-iteration limit; SVM uses an RBF kernel with unit regularization, kernel scale set by the `scale` rule, and balanced class weights; KNN uses 5 distance-weighted neighbors; ridge uses unit penalty strength; and SVR uses an RBF kernel with unit regularization,  $\epsilon = 0.1$ , and the same kernel scale rule.

For each seed and fold, feature-standardization parameters are estimated on the training fold and then applied to the held-out fold. The ranking method uses only the standardized training fold and produces the ordered feature list described in Section 2.4. For each  $k$ , we take the top- $k$  features from that ranking, refit standardization on the selected training columns, apply the same transform to the selected held-out columns, fit the downstream model on the selected training data, and evaluate it on the held-out fold.

The downstream evaluation also records performance using the full feature set,  $k = p$ , for every dataset. For datasets with more than 100 features, the separate high- $p$  analysis adds fixed values  $k \in \{150, 200, 300, 500, 750, 1,000\}$  and fractional values  $\lceil 0.25p \rceil$ ,  $\lceil 0.5p \rceil$ ,  $\lceil 0.75p \rceil$ , keeping only values no larger than  $p$ . The main tables average only the standard  $k$  values.

## 4.2 Benchmark comparisons

The benchmark averages scores in three steps. First, for each (dataset, downstream model,  $k$ ) combination, scores are averaged over folds and seeds. Second, each dataset score averages those fold-and-seed means over downstream models and over the standard  $k$  values available for the methods in that comparison. Third, the tables average dataset scores over datasets.

The real-data classification benchmark contains 23 datasets. Some method runs on `gisette`, `isolet`, and `orlraws10P` were excluded (Appendix C), so the all-method classification panel has 21 of the 23 datasets, and each pairwise comparison uses the datasets where both methods are present. The complete-case classification analysis, used for bootstrap intervals and omnibus rank testing, contains 13 datasets with all 17 methods, all three downstream learners, and all five standard values of  $k$ . Regression contains 8 datasets; the analogous rank summary uses the 6 complete-case datasets with all methods, downstream learners, and standard  $k$  values available.

By- $k$  results are reported separately for  $k = 5, 10, 25, 50, 100$ , and a dataset with fewer than  $k$  features does not enter the column for  $k$ . The corresponding classification dataset counts are 21, 20, 14, 14, 13; the regression counts are 8, 8, 7, 7, 6. Pairwise CIF comparisons stratified by  $k$  use the dataset counts reported with the corresponding rows. The 13-dataset classification and 6-dataset regression summaries are complete-case analyses, retaining only datasets with every method, downstream learner, and standard  $k$  value. Table 1 names the panels.

## 4.3 Datasets

The real-data benchmark includes 23 classification datasets and 8 regression datasets. The separate high- $p$  analysis restricts attention to the 15 classification datasets and 6 regression datasets with more than 100 features. The full inventories of the real and synthetic datasets are listed in Appendix D, which also summarizes the synthetic designs and their parameter choices.

| Panel              | Definition                                                                                                                | Classification | Regression | Used for                                        |
|--------------------|---------------------------------------------------------------------------------------------------------------------------|----------------|------------|-------------------------------------------------|
| All-method         | every method present                                                                                                      | 21             | 8          | main rank table, LODO                           |
| Pairwise           | both compared methods present                                                                                             | 21 to 23       | 8          | direct CIF comparisons                          |
| Complete-case      | every method, learner, and $k$ present                                                                                    | 13             | 6          | bootstrap intervals, omnibus tests, LODO        |
| High- $p$          | real datasets with more than 100 features                                                                                 | 15             | 6          | high- $p$ analysis                              |
| Synthetic          | datasets with known informative features                                                                                  | 8              | 8          | feature recovery, support                       |
| Ablation           | real datasets except isolet                                                                                               | 22             | 8          | CIF ranking ablation                            |
| Runtime            | 9 real and 14 synthetic datasets                                                                                          | 15             | 8          | runtime ablations                               |
| Benchmark-size     | classification datasets with at least 500 observations except madelon; regression datasets with at least 200 observations | 9              | 5          | wide-dataset runtime check                      |
| Mechanism-matched  | cforest pairwise panel without the excluded RDC runs                                                                      | 20             | 8          | CIF ranked by out-of-bag permutation importance |
| Max-type extension | every real and synthetic benchmark dataset                                                                                | 31             | 16         | max-type ranking runs                           |
| Head-to-head       | Benchmark-size classification datasets and madelon                                                                        | 10             | 0          | forest timing of the two Stage B rules          |
| Stage B real       | vowel, spam, page-blocks; imports-85, residential, face-book                                                              | 3              | 3          | threshold-test comparison                       |

**Table 1:** Dataset panels, with the number of datasets per task. The Benchmark-size panel is the set of performance datasets of Milletich et al. [30]. The max-type extension runs on every benchmark dataset and is ranked on the all-method panel.

Feature recovery uses 8 synthetic classification datasets and 8 synthetic regression datasets with known informative features and controlled noise structure. A separate study of feature sampling uses  $n = 250$  and varies  $p \in \{100, 500, 1,000\}$  and  $n_{\text{informative}} \in \{1, 2, 5, 10\}$ . That study compares CIT, a CART decision tree (DT), a random threshold tree (RT), CIF, CIF-all, random forests (RF), and ExtraTrees, using 1,000 trees for forest methods. CIF-all denotes the CIF variant that evaluates all nonconstant features at each split.

#### 4.4 Compared methods

The benchmark includes three types of feature selectors: permutation-test filters, embedded tree or ensemble methods, and wrapper baselines. Permutation-test filters compute univariate dependence statistics and rank features by their permutation  $P$ -values: multiple correlation (MC) and randomized dependence coefficient (RDC) for classification, and Pearson correlation (PC), distance correlation (DC), and RDC for regression. The RDC filter keeps the empirical-CDF random feature map from Lopez-Paz et al. [29] but replaces the canonical-correlation solve with the maximum absolute pairwise correlation across 10 random projections. Distance correlation follows Székely et al. [41]. CIT and CIF use the same MC, PC, and RDC statistics as Stage A selectors.

Embedded methods rank features using tree or ensemble importance scores. These methods are CART decision trees (DT), randomized trees (RT) with random split thresholds, CIT, CIF, random forests (RF) [3], ExtraTrees [11], XGBoost [5], LightGBM [21], CatBoost [35], and the partykit reference implementations ctree and cforest [16, 19, 20]. Wrapper baselines score features through auxiliary random-forest fits: Boruta [24], permutation importance (PI) on a 20% held-out split of the training fold [3, 39], conditional permutation importance (CPI) [6], and random-forest recursive feature elimination (RF-RFE) [12, 32]. A further comparator ranks the RF by out-of-bag permutation importance, which scores every training row.

In this benchmark, CPI uses stratified conditional permutation with correlation-based strata. It trains one 100-tree random forest on a training split, scores a 20% validation split, and treats each feature in turn as the target feature. It then identifies validation-set features with absolute correlation at least 0.5 with the target feature, forms five-bin percentile strata from those conditioning features, and permutes the target feature within strata. If no conditioning feature meets the correlation threshold, the target feature is permuted globally.

Ranking rules use each method’s natural score direction. Embedded tree and ensemble baselines rank features by decreasing fitted importance: DT, RT, RF, ExtraTrees, XGBoost, LightGBM, and CatBoost. Permutation-test filters rank by increasing  $P$ -value, with dependence score as the secondary key. The ctree reference ranks features by split-use counts. For cforest, we use partykit’s unconditional variable-importance scores with one permutation, an out-of-bag permutation importance and the only importance the package provides for forests; CIF uses split-importance rankings from accepted conditional-inference splits. The cforest results therefore refer to this benchmarked partykit importance setting. The two forests thus differ in importance mechanism as well as in how their trees are grown, and the mechanism-matched check (Appendix F.2) ranks CIF by cforest’s own importance to separate the two. Boruta and recursive feature elimination rank by their fitted rank variables, with smaller ranks first. PI and CPI rank by decreasing importance; the CPI row uses the stratified conditional-permutation procedure described above. Ties are broken by deterministic, method-specific order for reproducibility.

## 4.5 Configuration selection

Several methods, including CIT, CIF, XGBoost, LightGBM, ctree, and cforest, were evaluated under multiple configurations: four each for CIT and CIF, five for XGBoost, four for cforest, and two each for LightGBM and ctree. Permutation-test filters used one configuration per statistic. For each task, the paper reports one configuration per method, selected by mean score over real datasets, downstream models, and the standard values  $k \in \{5, 10, 25, 50, 100\}$ . Methods with only one configuration are treated as fixed. The selected configuration is then held fixed across datasets for that task. The selected CIT configurations use the MC selector in classification and the RDC selector in regression; the selected CIF configurations use RDC in both tasks with 100 trees and square-root feature sampling, with honesty in regression only (Table 12).

Because configuration selection and reporting use the same real-data benchmark, the reported scores, intervals, and rank summaries are descriptive. As a sensitivity check, we repeat configuration selection in leave-one-dataset-out (LODO) form for both tasks. In classification, each of the 13 complete-case datasets is evaluated using configurations chosen from the other 12 datasets. In regression, each of the 6 complete-case datasets is evaluated using configurations chosen from the other 5 datasets. The same check is repeated on the all-method panels. The downstream models,  $k$  values, and averaging within each dataset are unchanged.

For the synthetic analysis, configurations are selected separately from the real-data benchmark. Each method is assigned the configuration with the highest average recovery of the true informative features over  $k = 5, 10, 25, 50$ , and 100. The benchmarked CIT and CIF configurations use adaptive sequential stopping at the minimum budget, the feature and threshold corrections with the per-threshold rule, feature muting, feature scanning, threshold scanning, and 256-bin histogram thresholding. The benchmarked CIT and CIF variants differ in selector and honesty; CIF is run as a bootstrap forest.

## 4.6 Ablations

The runtime ablation refits the selected CIT and CIF configurations on the runtime panel with one control changed at a time: adaptive stopping, feature scanning, threshold scanning, and feature muting are switched off; the two corrections are removed together; the 256-bin histogram is replaced by exact thresholds or, for CIF, by a 32-bin histogram; and, for CIF, bootstrap sampling is switched off and the max-type rule replaces the per-threshold rule. Both estimators are also refitted at the auto budget, with adaptive stopping and with no stopping, because the minimum budget leaves the stopping rule no room to act. Each dataset is fitted at five seeds, and every time is the second of two identical fits, so compilation is excluded. On the Benchmark-size panel the tree is refitted with adaptive stopping off, with threshold scanning off, and without the two corrections, and the forest with adaptive stopping off.

To isolate which parts of the CIF ranking matter, we run a ranking ablation on the real datasets of the ablation panel. The ablation holds the selected CIF configuration fixed and changes one component at a time: replacing fitted split importance with split counts, disabling feature muting, disabling bootstrap sampling, or reducing the forest to one tree. Each variant is evaluated with the same downstream learners, folds, seeds, and standard top- $k$  values as the main benchmark, paired with the reference configuration within seed and fold.

## 4.7 Stage B comparison

This study compares the per-threshold rule and the max-type rule under the MC and PC selectors, with adaptive stopping and with no stopping, at five seeds unless stated otherwise. Both rules

run at the auto budget, so adaptive stopping can act; the max-type rule uses 999 permutations. Candidate thresholds come from the histogram method at 16, 64, and 256 bins, capped at the number of distinct values in the node. The study has five parts.

The null calibration estimates the false-split rate of a depth-one tree with five independent Gaussian predictors and an independent response, at  $n \in \{100, 200, 500\}$ , with 2,000 replicates per cell and seed. The rate covers the whole node decision, Stage A followed by Stage B.

The Stage-B-only study measures the threshold test by itself. It uses one Gaussian predictor, sets the Stage A level to 1, and fits a depth-one tree at nominal Stage B levels from 0.02 to 0.50, with 500 null replicates per cell, level, and seed over three seeds. It repeats the planted step of the power part with 200 replicates and compares power at matched realized size: within each cell, power is interpolated to a common size of 0.05, or to the largest size both rules reach. Two reruns check that comparison: a fourth seed with 1,500 null and 1,000 alternative replicates, and a design that moves the planted step from the median to the 85th percentile of the predictor.

The scaling part times one tree on ten Gaussian predictors with a planted linear signal in three of them, at  $n \in \{1,000, 4,000, 16,000\}$ , as the median of three fits with a 1,200-second cap.

The real-data part fits one tree on the six Stage B real datasets at 256 bins with five-fold cross-validation, recording held-out score, tree depth, fitting time, and the Spearman agreement of the two rules' feature importances.

The power part fits a depth-one tree on five Gaussian predictors whose response depends on the first through a step at zero, with class-probability shift  $\delta \in \{0.05, 0.10, 0.20\}$  in classification and mean shift  $\delta \in \{0.2, 0.4, 0.8\}$  in regression, with 500 replicates per cell and seed. It records the rate of any split, the rate of a split on the planted predictor, and the error of the chosen threshold.

## 4.8 Head-to-head timing and max-type extension

The head-to-head timing fits 100-tree classification forests in the configuration recommended by Milletich et al. [30], once with each Stage B rule. That configuration uses the MC selector, the minimum budget, the two corrections, scanning, muting, the 256-bin histogram, and depth at most 3. The cells are the ten head-to-head datasets and a synthetic grid of Gaussian predictors with a weak or strong planted signal, from  $n = 500$  to 32,000 and  $p = 20$  to 500.

The max-type extension reruns the four CIT and four CIF candidate configurations with the max-type rule in place of the per-threshold rule and nothing else changed, on every benchmark dataset at the five benchmark seeds. Evaluation, configuration selection, and ranking are unchanged, with the max-type family standing in for its per-threshold counterpart.

## 4.9 Mechanism studies

Three studies examine why the forest rankings behave as they do: the feature-sampling study of Section 4.3, the weak-signal cardinality designs, and the support measurement. The weak-signal cardinality designs place 10 informative Gaussian features among 25 noise features with 500 levels, 25 binary noise features, and 10 Gaussian noise features, at  $n = 1,000$  and signal strengths 0.05, 0.10, and 0.20; CIF and CIT use the MC selector in classification and the PC selector in regression. The support measurement counts, on each synthetic dataset over 25 fits, the features that win at least one split, and how many of them are informative.

## 5 Results

### 5.1 Real-data benchmark

Table 2 reports the main real-data comparison. Classification uses the 21 datasets with results for every method; the full classification collection has 23 datasets, and `gisette` and `isolet` enter only the comparisons whose methods completed there (Appendix C). Regression uses all 8 datasets. Within each dataset, scores are first averaged over downstream learners and the standard  $k$  values shared by the compared methods, then converted to ranks. Lower mean rank is better.

| Classification |           | Regression |           |
|----------------|-----------|------------|-----------|
| Method         | Mean rank | Method     | Mean rank |
| RF-RFE         | 4.19      | ExtraTrees | 5.00      |
| XGBoost        | 5.81      | CIF        | 6.25      |
| CIF            | 5.86      | CatBoost   | 6.75      |
| RF             | 5.86      | RF-RFE     | 6.88      |
| LightGBM       | 6.05      | RF         | 7.63      |
| Boruta         | 6.62      | RT         | 8.25      |
| CatBoost       | 6.76      | cforest    | 8.75      |
| ExtraTrees     | 7.33      | DT         | 9.38      |
| cforest        | 8.33      | Boruta     | 9.50      |
| DT             | 8.62      | PC filter  | 9.88      |
| RDC filter     | 11.05     | LightGBM   | 10.13     |
| PI             | 11.67     | XGBoost    | 10.13     |
| MC filter      | 11.86     | RDC filter | 11.00     |
| RT             | 12.81     | CIT        | 11.13     |
| ctree          | 12.86     | ctree      | 11.38     |
| CIT            | 13.14     | PI         | 11.75     |
| CPI            | 14.19     | DC filter  | 12.25     |
|                |           | CPI        | 15.00     |

**Table 2:** Main real-data comparison. Ranks are computed within each dataset after scores are averaged over downstream learners and the standard  $k$  values shared by the compared methods, then averaged across datasets. Classification uses the 21 datasets with results for every method; regression uses all 8 datasets.

With the selected configurations fixed, CIF ranks tied 3rd of 17 in classification, behind RF-RFE and XGBoost and level with RF; 2nd of 18 in regression, behind ExtraTrees. The complete-case Friedman test rejects equal ranks in classification ( $\chi^2(16) = 140.46$ ,  $P < 0.001$ , Kendall’s  $W = 0.68$ ) and does not reject in regression ( $\chi^2(17) = 26.15$ ,  $P = 0.072$ ,  $W = 0.26$ ), so the regression ordering is descriptive. The complete-case Friedman tests use dataset-level method means. The regression panel has 6 datasets, so the  $P$ -value should be read with the effect sizes, intervals, and LODO results. Table 3 compares CIF directly with `ctree`, `cforest`, `CIT`, and the single trees. Appendix F gives the learner-by- $k$  tables (Tables 22 and 23), pairwise CIF-comparison heatmaps (Figures 6 and 7), and seed-sensitivity tables (Tables 24 and 25); each analysis reports its dataset count.

Table 3 shows CIF ahead on average in all six conditional-inference pairings, by both the median and the mean. On the complete-case datasets, CIF is also ahead of `ctree`, `cforest`, and `CIT` in both tasks. The regression intervals for CIF versus `cforest` and `CIT` cross zero; the other complete-case intervals are positive. The regression intervals are wider because fewer datasets are available and some comparator mean  $R^2$  values are negative. On the three `coepra` datasets (76 to 133 observations, about 5,000 features) the comparators reach large negative  $R^2$ , and those three datasets set the `ctree` and `CIT` means, so in regression the median is the primary summary.

**Mechanism-matched check.** The margin over `cforest` mixes the importance mechanism with the way the trees are grown. Ranked by `cforest`’s own out-of-bag permutation importance (Appendix F.2),

| Task           | Compared with | Pairwise panel |        |        |             | Complete-case panel |                 |             |
|----------------|---------------|----------------|--------|--------|-------------|---------------------|-----------------|-------------|
|                |               | Datasets       | Median | Mean   | Wins-losses | Mean                | 95% interval    | Wins-losses |
| Classification | ctree         | 21             | 0.025  | 0.037  | 19–2        | 0.049               | [0.026, 0.073]  | 11–2        |
|                | cforest       | 22             | 0.008  | 0.010  | 17–5        | 0.013               | [0.002, 0.024]  | 9–4         |
|                | CIT           | 23             | 0.022  | 0.032  | 22–1        | 0.044               | [0.027, 0.062]  | 13–0        |
|                | DT            | 23             | 0.006  | 0.017  | 16–7        |                     |                 |             |
|                | RT            | 23             | 0.019  | 0.036  | 21–2        |                     |                 |             |
| Regression     | ctree         | 8              | 0.031  | 0.157  | 6–2         | 0.202               | [0.029, 0.421]  | 4–2         |
|                | cforest       | 8              | 0.009  | 0.021  | 6–2         | 0.027               | [−0.032, 0.090] | 5–1         |
|                | CIT           | 8              | 0.015  | 0.234  | 7–1         | 0.308               | [−0.002, 0.766] | 5–1         |
|                | DT            | 8              | 0.008  | 0.099  | 5–3         |                     |                 |             |
|                | RT            | 8              | 0.005  | −0.007 | 5–3         |                     |                 |             |

**Table 3:** Direct comparisons of CIF with the conditional-inference and single-tree baselines. Mean differences are CIF minus the compared method after averaging within each dataset over supported downstream learners and standard values of  $k$ ; classification uses balanced accuracy and regression uses  $R^2$ , and medians are taken over the same dataset-level differences. The pairwise panel uses every dataset where both methods were run. The complete-case panel uses the 13 classification and 6 regression datasets with every method, learner, and standard  $k$ ; its interval is a percentile bootstrap interval over dataset-level differences from 20,000 replicates, computed for the conditional-inference comparisons. Wins and losses are reported over datasets where both methods were run; no exact ties occurred.

CIF leads cforest in classification by +0.012 mean and +0.006 median balanced accuracy, with 15 wins in 20 datasets, against +0.011 for split-ranked CIF. The two CIF rankings differ by +0.001. The classification margin therefore does not come from the importance mechanism.

**Random forest ranked by out-of-bag permutation importance.** Table 4 adds the benchmark’s 100-tree random forest ranked by one permutation of each column on each tree’s out-of-bag rows, the mechanism cforest uses. It ranks 8th of 18 in classification and 6th of 19 in regression, below the impurity-ranked forest and below CIF in both tasks, and above cforest in classification. With it present, CIF ranks 4th of 18 in classification (mean rank 6.38, behind RF at 6.19 and XGBoost at 6.24) and stays 2nd in regression. The permutation step is expensive at high dimension: a median 29 seconds per fold in classification and 127 in regression against 0.2 seconds for the forest fit, and 43 and 32 minutes per fold on gisette and dexter.

| Task           | Compared with | Datasets | Position | Median difference | Mean difference | Wins-losses |
|----------------|---------------|----------|----------|-------------------|-----------------|-------------|
| Classification | CIF           | 23       | 8 of 18  | −0.003            | −0.002          | 11–12       |
| Classification | RF            | 23       |          | −0.004            | −0.004          | 8–15        |
| Classification | cforest       | 22       |          | 0.005             | 0.009           | 16–6        |
| Regression     | CIF           | 8        | 6 of 19  | −0.007            | −0.028          | 3–5         |
| Regression     | RF            | 8        |          | −0.002            | −0.032          | 3–5         |
| Regression     | cforest       | 8        |          | 0.002             | −0.007          | 5–3         |

**Table 4:** Random forest ranked by out-of-bag permutation importance as an added comparator. Position is its mean-rank position when it joins the all-method panels of 21 and 8 datasets (18 classification and 19 regression methods). Differences are the new ranker minus the compared method after averaging within each dataset over downstream learners and standard  $k$ , summarized by median and mean over the datasets both completed; balanced accuracy in classification,  $R^2$  in regression. Wins and losses count datasets where the new ranker is higher or lower.

**CIF ablations.** Table 5 compares the selected CIF configuration with four targeted changes: split-count ranking, disabling bootstrap sampling, disabling feature muting, and using one tree. Each change is paired with the reference in the same seed and fold.

| Task           | CIF change             | Mean difference | Median difference | 95% interval     | Wins-losses |
|----------------|------------------------|-----------------|-------------------|------------------|-------------|
| Classification | Split-count ranking    | −0.001          | 0.000             | [−0.005, +0.002] | 12–9        |
| Classification | Disable bootstrap      | −0.001          | 0.000             | [−0.004, +0.003] | 9–12        |
| Classification | Disable feature muting | 0.001           | 0.000             | [−0.001, +0.002] | 13–5        |
| Classification | Use one tree           | −0.071          | −0.043            | [−0.101, −0.045] | 0–22        |
| Regression     | Split-count ranking    | −0.053          | −0.003            | [−0.142, −0.002] | 2–6         |
| Regression     | Disable bootstrap      | −0.064          | −0.007            | [−0.128, −0.010] | 4–4         |
| Regression     | Disable feature muting | −0.157          | 0.000             | [−0.468, +0.001] | 4–4         |
| Regression     | Use one tree           | −0.658          | −0.059            | [−1.692, −0.054] | 0–8         |

**Table 5:** CIF ablations on the real-data benchmark. Mean differences compare each changed variant with the selected CIF configuration using split-importance ranking, paired within seed and fold, and median differences summarize the same dataset-level differences. Scores are averaged within each dataset over downstream learners, supported standard values of  $k$ , and the 25 paired fold and seed replicates. Classification uses balanced accuracy; regression uses  $R^2$ . The confidence intervals are percentile bootstrap intervals for the mean over dataset-level differences from 20,000 replicates. Positive values favor the changed CIF variant. Wins and losses count datasets where the changed variant is higher or lower than the reference; exact ties are omitted. The classification rows use 22 datasets and the regression rows use 8 datasets.

Reducing CIF to one tree has the largest effect: −0.071 balanced accuracy in classification and −0.658  $R^2$  in regression, with a loss on every dataset. Replacing fitted split importance with split counts changes the mean score by −0.001 in classification, with an interval that includes zero, and by −0.053 in regression, with an interval that excludes it. Disabling feature muting changes classification by +0.001 and regression by −0.157, while disabling bootstrap sampling changes classification by −0.001 and regression by −0.064. The regression medians stay within 0.007 of zero, and the three *coepra* datasets set those means.

The RDC rankings are insensitive to the number of random projections: on four small classification datasets, 20 instead of 10 projections took more than three times the selector time, changed mean balanced accuracy by at most 0.0052, and kept at least 95.4% mean overlap between the selected sets.


**Stability of the ranking.** The paired bootstrap intervals of CIF against every other method on the complete-case panels are unadjusted post-hoc contrasts, 16 in classification and 17 in regression. In classification they favor CIF against CIT, ctrees, cforest, the single trees, the permutation filters, PI, and CPI; they favor RF-RFE, XGBoost, and LightGBM against CIF; and they include zero for RF, ExtraTrees, CatBoost, and Boruta, so the data do not order CIF among these four. In regression no interval favors another method over CIF, and CIF’s intervals exclude zero against the filters, PI, CPI, LightGBM, and ctrees. These intervals and rank tests summarize the benchmark-selected configurations. The LODO analysis below checks whether those configurations are stable under one-dataset holdout.

The complete-case panels rank CIF lower than the main table, tied 6th of 17 and tied 5th of 18. In the 13-dataset classification panel, LODO ranks CIF 8th of 17 on average (mean rank 6.85), and CIF reselects the main-benchmark configuration in 11 of 13 holdouts. In the 6-dataset regression panel, LODO ranks CIF 6th of 18 on average (mean rank 7.33), behind ExtraTrees; CIF reselects the global regression configuration in 4 of 6 holdouts. On the all-method panels, reselection moves


CIF to 5th in classification and keeps it 2nd in regression, reselecting the benchmark configuration in 20 of 21 and 7 of 8 holdouts. Tables 19 and 20 give the LODO details. The 3rd and 2nd places of Table 2 are therefore properties of the 21- and 8-dataset panels, and configuration reselection moves them by less than half a rank.

In classification, CIF is in the top half on 17 of the 21 datasets with results for every method, and in the top 3 on 4 of 21. In regression, CIF is in the top half on 5 of 8 datasets and in the top 3 on 2 of 8. Against the single-tree baselines, CIF beats DT on 16/23 classification datasets and 5/8 regression datasets, and beats RT on 21/23 classification datasets. The RT regression comparison is close: CIF is ahead on 5/8 datasets, with a mean difference near zero.

Figures 1 and 2 report mean rank separately by  $k$ . These by- $k$  results add context to Table 2: CIF is strongest at larger displayed  $k$  values in classification and shows no monotone trend in regression. On the constant complete-case panels it moves in classification from 7th and 8th of 17 at  $k \leq 10$  to 4th at  $k = 100$  (mean ranks 7.8, 7.7, 6.5, 6.2, and 5.7), and in regression it varies between 3rd and 7th of 18 (mean ranks 8.2, 8.3, 6.3, 7.0, and 7.0).

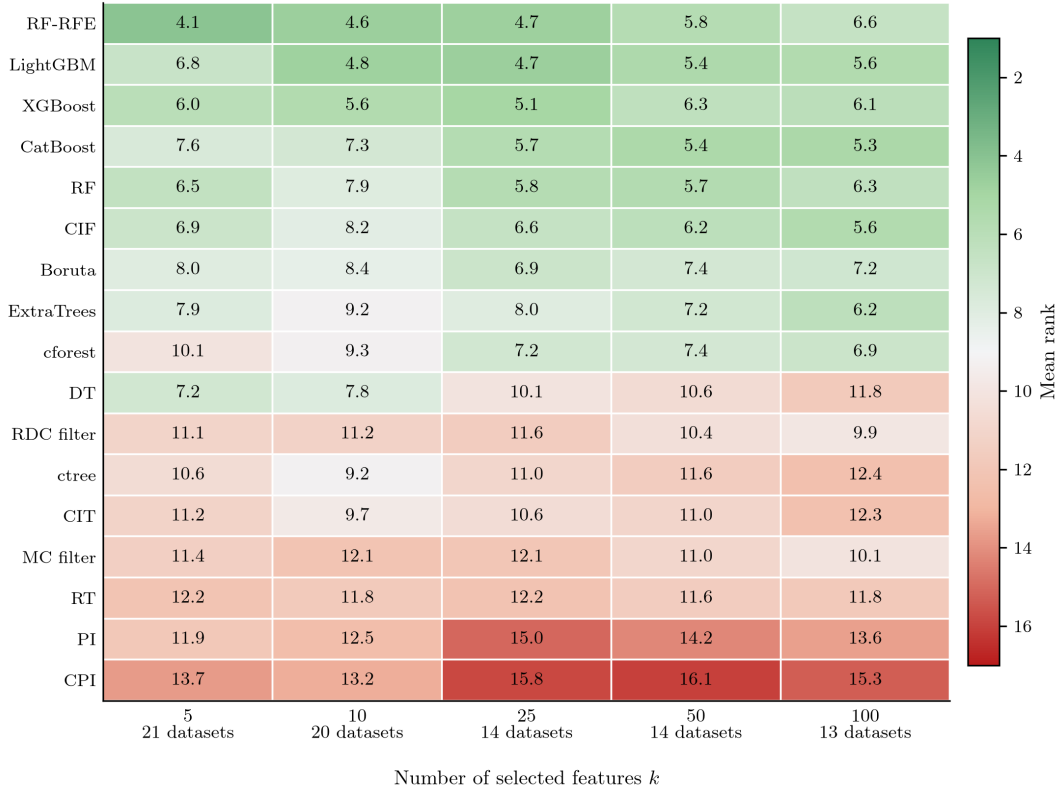

**Figure 1:** Classification mean rank by number of selected features. Rows show all 17 feature selection methods in the classification benchmark, averaged across downstream models at each value of  $k$ . Lower ranks are better. The columns for  $k = 5, 10, 25, 50, 100$  use 21, 20, 14, 14, and 13 datasets, respectively.

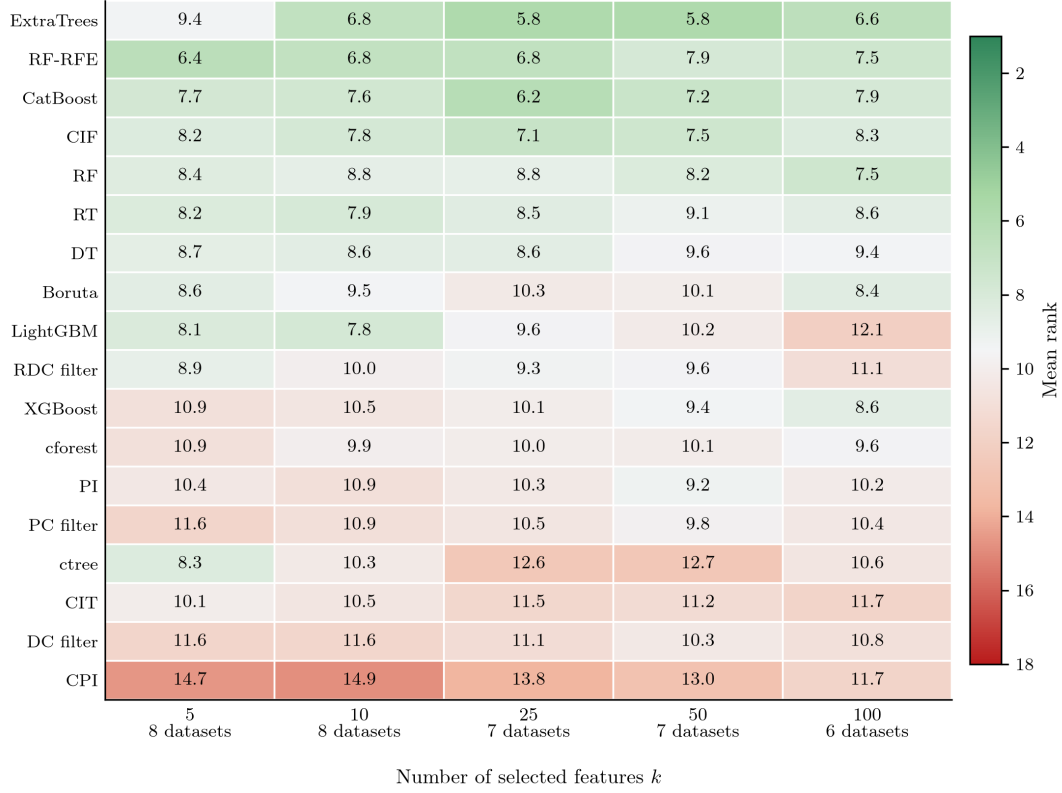

**Figure 2:** Regression mean rank by number of selected features. Rows show all 18 feature selection methods in the regression benchmark, averaged across downstream models at each value of  $k$ . Lower ranks are better. The columns for  $k = 5, 10, 25, 50, 100$  use 8, 8, 7, 7, and 6 datasets, respectively.

## 5.2 Runtime ablations

The runtime ablations identify which benchmark settings have the largest effect on fitting time and report how much the ranking scores move when those settings change. Each row changes one setting and reports elapsed wall-clock fit time relative to the selected configuration for the same estimator. Each ratio in Table 6 is the median over datasets of the per-dataset ratio, given as the range over the four task groups (classification and regression, real and synthetic). Ratios above 1 are slower than that reference, and ratios below 1 are faster. CIT and CIF are shown separately because the CIT run records fit time and synthetic top-10 feature recovery, while the CIF runs also record downstream score changes. Appendix E links each ablation to the affected work terms.

| Change                         | CIT          |                  | CIF          |                   |                 |
|--------------------------------|--------------|------------------|--------------|-------------------|-----------------|
|                                | Time ratio   | Top-10 F1 change | Time ratio   | Downstream change | Recovery change |
| Disable adaptive stopping      | 0.88 to 0.99 | 0                | 0.96 to 1.00 | 0                 | 0               |
| Auto budget, adaptive stopping | 1.18 to 1.56 | $\leq 0.016$     | 1.30 to 2.0  |                   | $\leq 0.030$    |
| Auto budget, no stopping       | 3.8 to 8.2   | $\leq 0.016$     | 5.8 to 15    |                   | $\leq 0.025$    |
| Disable threshold scanning     | 2.7 to 34    | $\leq 0.033$     | 7.9 to 30    | $\leq 0.003$      | $\leq 0.010$    |
| Disable feature scanning       | 0.81 to 3.0  | $\leq 0.058$     | 1.0 to 5.2   | $\leq 0.003$      | $\leq 0.008$    |
| Exact threshold search         | 0.91 to 1.10 | $\leq 0.004$     | 1.3 to 19    | $\leq 0.009$      | $\leq 0.018$    |
| Histogram with 32 bins         |              |                  | 0.05 to 0.14 | $\leq 0.008$      | $\leq 0.013$    |
| Disable feature muting         | 0.97 to 0.98 | 0                | 0.91 to 1.00 | $\leq 0.001$      | $\leq 0.003$    |
| Disable bootstrap sampling     |              |                  | 0.94 to 1.69 | $\leq 0.012$      | $\leq 0.011$    |
| Max-type Stage B rule          |              |                  | 0.14 to 0.61 | $\leq 0.005$      | $\leq 0.007$    |
| Remove both corrections        | 0.52 to 1.8  | $\leq 0.063$     | 0.03 to 0.34 | $\leq 0.004$      | $\leq 0.011$    |

**Table 6:** Runtime ablations of CIT and CIF on the runtime panel of 23 datasets (15 classification and 8 regression; 9 real and 14 synthetic), five seeds per dataset. Time ratios are medians over datasets of the per-dataset ratio to the selected configuration, given as the range over the four task groups. Top-10 F1 changes are absolute changes on synthetic datasets with known informative features, where top-10 F1 is the harmonic mean of precision and recall for recovering informative features among the first 10 ranked features. The score columns give the largest absolute downstream score change and synthetic feature-recovery change for CIF, and the largest absolute change in mean top-10 F1 for CIT, across the task groups used for each row. Inequality entries are rounded upward to the nearest 0.001. The auto-budget runs record recovery but no downstream score. Empty cells are settings that do not apply to, or were not ablated for, that estimator. Every time is the second of two identical fits, so compilation is excluded.

At the benchmark’s minimum budget, adaptive stopping is inert by construction (Section 3.1). Switching it off leaves every tree unchanged, and the time ratios near 1 measure only the cost of the check. The result does not depend on how forest trees are scheduled: a forest with one worker and the full thread pool inside each tree gives 0.95 to 1.01. Where the rule can act, at the auto budget, it earns its place. Adaptive stopping brings the tree to 0.14 to 0.37 and the forest to 0.11 to 0.25 of their no-stopping time, with recovery changes of at most 0.030.

The threshold scan is the control that matters most. Testing candidate thresholds in order of weighted child impurity and stopping at the first rejection makes trees 2.7 to 34 times and forests 7.9 to 30 times faster than testing every candidate. The candidate count is next: for the forest, exact threshold search is 1.3 to 19 times slower than the 256-bin histogram, and a 32-bin histogram is 7 to 21 times faster, with downstream changes of at most 0.009. Feature scanning matters most on the real regression datasets. The max-type rule fits the forest in 0.14 to 0.61 of the reference time. Downstream score changes and synthetic feature-recovery changes are at most 0.012 and 0.030 across the CIF rows.

Removing both corrections is faster for CIF, and not consistently for CIT, but it changes the statistical rule and yields deeper trees, from a mean of 6.5 and 7.2 levels to 10.7 and 13.4, with top-10 recovery changes of up to 0.063; the selected setting keeps both corrections.

The pattern holds on the 14 Benchmark-size datasets, with up to 20,000 observations and 5,000 features. Switching adaptive stopping off changes tree time by 0.80 to 1.01 (medians 0.97 in classification and 0.88 in regression) and forest time by 0.99 to 1.34 (medians 1.00 and 1.03). Threshold scanning saves a median 17 times in classification and 45 times on spam, and removing the corrections runs in 0.01 to 1.26 of the reference time. The slowest single tree is gisette at 29 minutes, where the feature correction over 5,000 features sets a large minimum budget for each feature test.

### 5.3 Stage B construction comparison

Both Stage B rules control the false-split rate. At matched realized size the max-type rule is 0.006 less powerful. It is cheaper once a node has many candidates, and it places the threshold slightly less precisely.

The complete-node false-split rate is below 0.05 for both rules in all 36 design cells (Table 26, Appendix G). These rates include the Stage A test over five predictors, so they bound the threshold test from below rather than measure it.

The Stage-B-only study measures the threshold test itself (Table 7). At nominal level 0.05 the per-threshold rule has size 0.000 to 0.027, with means 0.018, 0.011, and 0.006 at 16, 64, and 256 bins. The max-type rule has size 0.023 to 0.044, with means 0.033, 0.035, and 0.035. Every 95% Clopper-Pearson upper limit is below 0.056. Both rules are valid at a fixed node for a predictor fixed without the response. The reverse cardinality bias of Section 2.4 appears as a threefold fall in per-threshold size across bin settings, while the max-type size does not move.

Matched at the same realized size, the max-type minus per-threshold difference in power ranges from  $-0.054$  to  $+0.034$  over the 108 cell and effect combinations. The max-type rule is lower in 67 and higher in 25. The mean difference is  $-0.006$ , with a 95% bootstrap interval of  $-0.011$  to  $-0.002$  that resamples the 18 cells, and  $-0.005$  ( $-0.009$  to  $-0.002$ ) over the 13 cells matched at size 0.05. It has no trend in the bin setting. In the other five cells the per-threshold rule does not reach size 0.05 even at nominal 0.50, and the match is at the largest size both rules reach.

Two reruns bound the Monte Carlo error. With larger replicate counts at a fourth seed, the mean difference is  $-0.006$  ( $-0.008$  to  $-0.003$ ); a parametric bootstrap of the whole matching procedure puts a standard error of about 0.017 on each difference, so the smallest detectable difference is about 0.03. With the planted step moved to the 85th percentile, the mean difference is  $-0.004$  ( $-0.008$  to 0.000), with a standard error of about 0.038 and a detectable difference of about 0.08. The Stage-B-only sizes stay in the ranges above.

At a common nominal level of 0.05, the max-type rule splits more often, by 0.03 on average and up to 0.12 in the complete-node design (Table 29) and by 0.10 in the Stage-B-only study. The gap grows with the candidate count, 0.015 at 16 bins, 0.029 at 64, and 0.049 at 256, because the per-threshold power falls as the threshold correction tightens. That gap is a size gap, not a power gap. What the max-type rule gains at a fixed nominal level is the size that the threshold correction gives up.

The cost of the joint test is precision. On each rule’s own detections, the max-type threshold sits a median 0.19 standard deviations from the planted cut against 0.15 for the per-threshold rule, and 87% of its detections fall on the planted predictor against 90%.

The rules separate on cost (Table 27). With no stopping and 256 bins, one classification tree under the per-threshold rule takes 3.5, 14, and 59 seconds at  $n = 1,000, 4,000, \text{ and } 16,000$  (0.8,

| Task           | n   | Bins | Size at nominal 0.05 |       |          |       | Match<br>size | Size-matched power |          |
|----------------|-----|------|----------------------|-------|----------|-------|---------------|--------------------|----------|
|                |     |      | Per-threshold        |       | Max-type |       |               | Per-threshold      | Max-type |
|                |     |      | Adaptive             | None  | Adaptive | None  |               |                    |          |
| Classification | 100 | 16   | 0.013                | 0.013 | 0.032    | 0.033 | 0.050         | 0.390              | 0.379    |
|                | 100 | 64   | 0.007                | 0.007 | 0.036    | 0.039 | 0.044         | 0.385              | 0.354    |
|                | 100 | 256  | 0.007                | 0.007 | 0.036    | 0.042 | 0.034         | 0.335              | 0.318    |
|                | 200 | 16   | 0.010                | 0.011 | 0.037    | 0.039 | 0.050         | 0.643              | 0.618    |
|                | 200 | 64   | 0.008                | 0.009 | 0.035    | 0.039 | 0.050         | 0.630              | 0.615    |
|                | 200 | 256  | 0.003                | 0.003 | 0.039    | 0.039 | 0.031         | 0.562              | 0.538    |
|                | 500 | 16   | 0.015                | 0.015 | 0.032    | 0.037 | 0.050         | 0.958              | 0.953    |
|                | 500 | 64   | 0.007                | 0.007 | 0.029    | 0.035 | 0.050         | 0.961              | 0.964    |
|                | 500 | 256  | 0.000                | 0.001 | 0.023    | 0.032 | 0.034         | 0.958              | 0.952    |
| Regression     | 100 | 16   | 0.019                | 0.019 | 0.023    | 0.031 | 0.050         | 0.292              | 0.281    |
|                | 100 | 64   | 0.013                | 0.013 | 0.029    | 0.035 | 0.050         | 0.305              | 0.285    |
|                | 100 | 256  | 0.011                | 0.010 | 0.031    | 0.037 | 0.050         | 0.317              | 0.299    |
|                | 200 | 16   | 0.027                | 0.026 | 0.033    | 0.038 | 0.050         | 0.591              | 0.581    |
|                | 200 | 64   | 0.017                | 0.017 | 0.033    | 0.043 | 0.050         | 0.619              | 0.598    |
|                | 200 | 256  | 0.008                | 0.009 | 0.041    | 0.044 | 0.050         | 0.632              | 0.579    |
|                | 500 | 16   | 0.026                | 0.026 | 0.031    | 0.032 | 0.050         | 0.947              | 0.942    |
|                | 500 | 64   | 0.015                | 0.016 | 0.029    | 0.033 | 0.050         | 0.966              | 0.952    |
|                | 500 | 256  | 0.005                | 0.006 | 0.026    | 0.034 | 0.046         | 0.963              | 0.951    |

**Table 7:** Stage-B-only study: the threshold test in isolation, with one Gaussian predictor fixed without the response and the Stage A test disabled. Size is the false-split rate of a depth-one tree at nominal level 0.05 over 1,500 null replicates per cell (three seeds of 500) under adaptive stopping and no stopping (None); every 95% Clopper-Pearson upper limit is below 0.056. Size-matched power, shown for adaptive stopping at the middle effect ( $\delta = 0.10$  in classification, 0.4 in regression), is interpolated against realized size over the nominal grid from 0.02 to 0.50 (600 replicates per cell and level) to the match size: 0.05, or the largest realized size both rules reach where the per-threshold rule does not reach 0.05.

8.8, and 54 in regression); the max-type rule takes 0.3, 1.4, and 6.3 seconds. The ratio grows with the bin setting as the  $K^2/\alpha$  against  $BK$  accounting predicts. At 16 bins the max-type rule is 1.1 to 1.3 times slower, because its 999 permutations exceed the 340 the per-threshold rule needs for 17 candidates. At 64 bins it is 1.5 to 2.1 times faster, and at 256 bins 2.8 to 13 times. Adaptive stopping shortens the per-threshold test by 1.2 to 1.6, 2.2 to 3.2, and 3.8 to 7.8 times at the three bin settings, so with adaptive stopping the max-type advantage is 1.0 to 1.3, 1.4 to 2.1, and 2.2 to 7.7. Held at 999 permutations per candidate instead, the per-threshold rule never splits at 64 or 256 bins, because  $\alpha/K$  falls below the resolution  $1/(B+1)$ . Fitted depths barely differ: 5.0 to 10.7 levels for the max-type rule against 4.0 to 10.0.

On the six Stage B real datasets (Table 28), the max-type rule scores higher in 8 of the 12 dataset and stopping-mode cells and equal in one. It is higher by 0.016 and 0.026 balanced accuracy on vowel, 0.049 and 0.026  $R^2$  on facebook, 0.060 and 0.033 on imports-85, and 0.008 and 0.005 on residential. It is lower by 0.018 and 0.020 on page-blocks, and on spam lower by 0.006 with adaptive stopping and equal with no stopping. Its fitting time is 1.2 to 2.4 times shorter with adaptive stopping and 1.0 to 8.3 times shorter with no stopping on the four datasets whose nodes admit many candidates. It is 16% and 10% slower on residential. Fitted depths agree within about one level (5.4 to 11.4 for the per-threshold rule, 4.8 to 12.4 for the max-type rule). The Spearman agreement of the two rules’ feature importances is 0.36 to 0.88, so the max-type rule produces a different ranking, not a faster route to the same one.

In the head-to-head forest timing, the max-type rule is 10 to 27 times faster than the per-threshold rule on the synthetic cells at  $n \leq 8,000$  and 21 to 36 times faster at  $n = 32,000$  (13 to 36 times on the cells that Milletich et al. [30] tabulate). The runtime panel of Table 6 shows smaller ratios, 1.6 to 7 times, because its nodes admit fewer candidates. On the ten real datasets the max-type rule reduces madelon from 21 to 2.6 seconds, gamma from 44 to 21, and isolet from 18 to 9.1, and changes the other seven by at most 1.6 seconds.

The max-type extension shows what the rule does to the rankings (Table 8). Of its 1,880 possible ranking runs, 88 were not run because their per-threshold counterpart had not completed, and 1,785 of the remaining 1,792 completed. The seven that did not are CIF with the RDC selector and honesty off on isolet, gisette, and letter, the same cells excluded from the per-threshold benchmark (Appendix C). Ranked on the all-method panels, the max-type forest moves from 3.5 to 5 of 17 in classification and from 2 to 4 of 18 in regression, and the max-type tree keeps its position in both tasks. The per-threshold rule is the higher of the two on 59 to 63% of datasets. The max-type rule is therefore a cost and calibration choice, not a ranking gain.

| Task           | Method | Per-threshold |          | Max-type  |          | Paired difference |          |
|----------------|--------|---------------|----------|-----------|----------|-------------------|----------|
|                |        | Mean rank     | Position | Mean rank | Position | Score             | Datasets |
| Classification | CIF    | 5.86          | 3.5      | 6.31      | 5        | −0.0014           | 22       |
|                | CIT    | 13.14         | 16       | 13.00     | 16       | −0.0022           | 23       |
| Regression     | CIF    | 6.25          | 2        | 7.50      | 4        | −0.0001           | 8        |
|                | CIT    | 11.13         | 14       | 10.88     | 14       | −0.0085           | 8        |


**Table 8:** Benchmark rankings under the two Stage B rules. Mean rank and position are among the 17 classification and 18 regression methods on the all-method panels of 21 and 8 datasets, with the max-type family standing in for its per-threshold counterpart; the per-threshold columns repeat Table 2. The paired difference is the max-type score minus the per-threshold score (balanced accuracy in classification,  $R^2$  in regression), averaged over the datasets, downstream learners, and standard  $k$  that both rules completed; Datasets is the number of datasets in that average.

## 5.4 High-dimensional datasets and small $k$

CIF is weakest in two places on real data. At small  $k$  it ranks 7th or 8th of 17 in classification on the complete-case panel (Figure 1). On wide datasets its scores peak before the full feature set. Across the 15 classification datasets with more than 100 features, CIF first reaches its best score at an intermediate value of  $k$  ( $100 < k < p$ ) in 29 of 45 dataset-learner combinations. It first reaches its best score at the full feature set ( $k = p$ ) in only 7 of 45 combinations.

Figure 3 shows this pattern by downstream learner. Classification scores most often peak at intermediate  $k$ : 8 of 15 LR datasets, 12 of 15 SVM datasets, and 9 of 15 KNN datasets. The full feature set is mainly an LR exception. Moving from  $k = 100$  to  $k = p$  gives a mean  $k = p$  minus  $k = 100$  score change of +0.026 for LR, and  $k = p$  matches the best observed LR score in 7 of 15 datasets. For SVM and KNN, the corresponding mean changes are −0.053 and −0.071, and  $k = p$  is best in only 1 of 15 datasets for each learner.

In the 6 high- $p$  regression datasets, full-feature evaluation is rarely best. Across the 18 dataset-learner combinations, 12 peak at or below  $k = 100$ , only 2 peak at  $k = p$ , and the mean  $k = p$  minus  $k = 100$  score change is −0.270, with a median of −0.076.

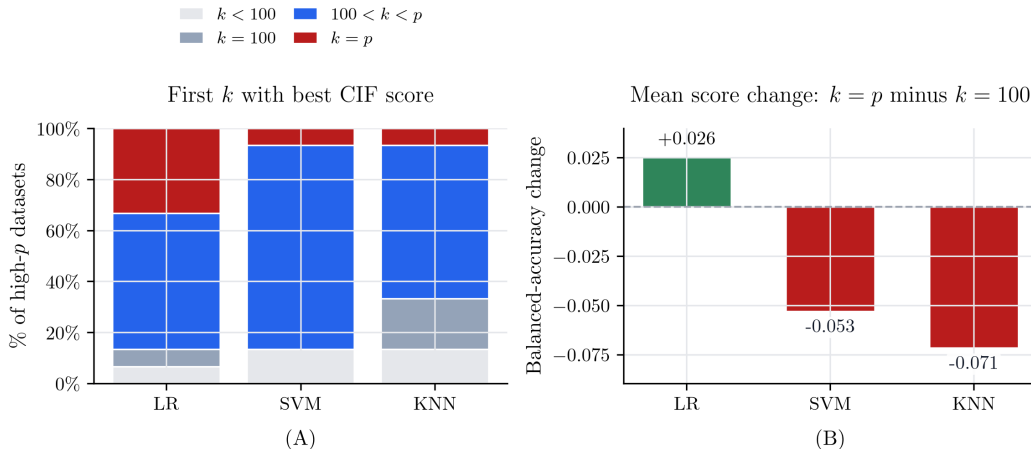


**Figure 3:** Where CIF’s classification scores peak as  $k$  increases, by downstream learner. (A) shows, for each learner, the percentage of 15 datasets where the first evaluated  $k$  attaining the best observed CIF score falls below 100, at 100, between 100 and  $p$ , or at  $k = p$ . (B) shows the mean balanced accuracy change from  $k = 100$  to  $k = p$ .

## 5.5 Synthetic recovery

On synthetic datasets with known informative features, CIF sits at or below the median position of the methods run on each task (Table 9). In classification, CIF recovers true features within the top- $k$  list more reliably than it places one first. Figure 4 shows recovery as  $k$  grows. The percentage of selected features that are informative falls as  $k$  grows. On redundant-feature synthetic designs, most selected features correspond to true signals or redundant proxies: 82% for classification and 84% for regression. On that measure, where correlated copies of informative features count as hits, CIF ranks 1st of 16 in regression and tied 7th of 15 in classification.

| Metric                                    | Classification |        | Regression |       |
|-------------------------------------------|----------------|--------|------------|-------|
|                                           | Value          | Rank   | Value      | Rank  |
| Selected features that are informative    | 35.3%          | 8/15   | 39.1%      | 11/16 |
| Top-1 hit rate                            | 65.5%          | 10/15  | 84.5%      | 10/16 |
| True or redundant (redundant design only) | 82.4%          | 7.5/15 | 83.8%      | 1/16  |

**Table 9:** Synthetic feature recovery for CIF. The first row averages, over  $k = 5, 10, 25, 50$ , and 100, the percentage of selected features that are truly informative. The top-1 hit rate is computed at  $k = 1$ . The final row is computed and ranked only on the redundant-feature design for each task and counts true informative plus redundant features. Ranks are among the 15 classification and 16 regression methods with synthetic runs. Fractional ranks indicate averaged ties.

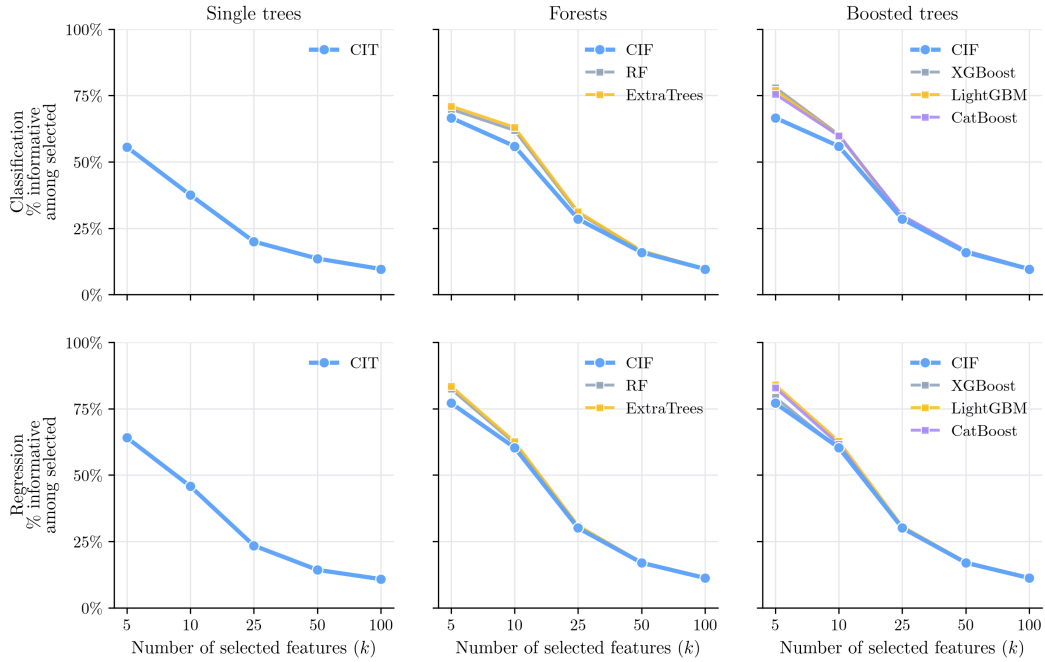

**Figure 4:** Synthetic top- $k$  recovery curves. Columns compare single trees, forests, and boosted trees; rows show classification and regression. Each value is the percentage of selected features that are truly informative.

## 5.6 Mechanism: cardinality and feature use

Three measurements examine how the split rule shapes a ranking: the preference for high-cardinality features, the size of each ranker’s support, and the limit that feature sampling places on which features a forest can split on.

**Cardinality in the ranking.** The weak-signal designs place 10 informative Gaussian features among 500-level, binary, and Gaussian noise columns (Table 10). A ranker indifferent to cardinality would give each of the 500-level and binary noise types 25/60 of the top-ten places not taken by informative features. Two biases are in question: the preference of impurity importance for features with many possible thresholds, and the reverse cardinality bias of the per-threshold rule (Section 2.4). Both appear. At the weakest signal, random forest impurity importance fills 0.38 of its top ten with 500-level noise in both tasks, against a reference of 0.24, and none with binary noise. Per-threshold CIF is close to the reference in classification (0.31 binary and 0.26 500-level against 0.29) and leans toward binary noise in regression (0.40 binary and 0.24 500-level against 0.31). The max-type rule brings the binary share to 0.26 in classification and 0.30 in regression, against references of 0.28 and 0.27.

Reducing the preference does not buy recovery. Random forest impurity importance places the most informative features in its top ten at every signal strength, and the downstream scores of all rankers are within 0.02 of each other at every signal. The same forest ranked by out-of-bag permutation importance keeps the preference: its 500-level share is above that of impurity importance at the two weaker signals in both tasks. The benefit of a ranking closer to cardinality-neutral appears on predictors whose cardinality carries no signal, as in the clinical application of Millettich et al. [30], rather than in recovery of weak marginal effects.


**Support.** The support of a ranker is the set of features that win at least one split. On the synthetic datasets, random forests give every feature nonzero importance on 15 of the 16 designs, and 800 of 1,000 on the 1,000-feature classification design. On 13 of the 16 designs, CIF’s support keeps 90 to 100% of the planted features, so the support is a shortlist. Beyond it, a ranking orders the zero-importance features by the tie rule of Section 2.4. For a single tree these filler features are most of any top- $k$  list: they are 52, 81, and 90% of the CIT top 10, 25, and 50 features, against 0, 3, and 14% for CIF and none for random forests. This is consistent with single trees ranking near the bottom of the benchmark.

**Feature use in sampled forests.** A sparse simulation asks whether forest feature sampling makes splits less likely to use informative features in classification and regression settings. Figure 5 shows one sparse classification design comparing CIF with CIF-all, and Appendix H gives the classification and regression results over  $p \in \{100, 500, 1,000\}$ . In the single-tree simulations, CIT uses informative features in 100.0% of classification splits and 93.5% of regression splits. In forests, sampling a subset of features reduces how often informative features are used for splits. Across the classification forest simulations with 1,000 trees, CIF uses informative features in 33.2% of splits, compared with 91.7% for CIF-all, 8.4% for RF, and 6.5% for ExtraTrees. RF and ExtraTrees grow to purity, so most of their splits are deep splits on noise, while CIF stops at the permutation test. The CIF-all gap reflects feature sampling: with 32 of 1,000 features sampled at a node and two informative, an informative feature is a candidate at 6.3% of nodes. For the  $p = 1,000$  classification setting with two informative features, CIF uses informative features in 9.0% of splits, RF in 2.7%, and ExtraTrees in 2.0%, while CIF-all uses them in 100.0%. In these sparse high- $p$  simulations, splits use informative features most often when every nonconstant feature can enter Stage A. When

| Task           | Signal | Ranking        | Share of the top ten |                 |              | Support | Score |
|----------------|--------|----------------|----------------------|-----------------|--------------|---------|-------|
|                |        |                | Informative          | 500-level noise | Binary noise |         |       |
| Classification | 0.05   | CIF            | 0.31                 | 0.26            | 0.31         | 37      | 0.52  |
|                |        | CIF, max-type  | 0.34                 | 0.28            | 0.26         | 46      | 0.51  |
|                |        | RF impurity    | 0.42                 | 0.38            | 0.00         | 70      | 0.52  |
|                |        | RF permutation | 0.30                 | 0.47            | 0.06         | 34      | 0.51  |
|                | 0.10   | CIF            | 0.64                 | 0.16            | 0.13         | 45      | 0.56  |
|                |        | CIF, max-type  | 0.66                 | 0.20            | 0.06         | 53      | 0.55  |
|                |        | RF impurity    | 0.72                 | 0.19            | 0.00         | 70      | 0.56  |
|                |        | RF permutation | 0.49                 | 0.36            | 0.02         | 36      | 0.56  |
|                | 0.20   | CIF            | 0.95                 | 0.04            | 0.01         | 59      | 0.68  |
|                |        | CIF, max-type  | 0.96                 | 0.04            | 0.00         | 65      | 0.69  |
|                |        | RF impurity    | 0.99                 | 0.01            | 0.00         | 70      | 0.69  |
|                |        | RF permutation | 0.87                 | 0.09            | 0.00         | 39      | 0.67  |
| Regression     | 0.05   | CIF            | 0.26                 | 0.24            | 0.40         | 17      | -0.11 |
|                |        | CIF, max-type  | 0.34                 | 0.22            | 0.30         | 21      | -0.11 |
|                |        | RF impurity    | 0.43                 | 0.38            | 0.00         | 70      | -0.11 |
|                |        | RF permutation | 0.37                 | 0.43            | 0.05         | 34      | -0.10 |
|                | 0.10   | CIF            | 0.64                 | 0.11            | 0.20         | 24      | -0.05 |
|                |        | CIF, max-type  | 0.65                 | 0.13            | 0.15         | 28      | -0.04 |
|                |        | RF impurity    | 0.73                 | 0.17            | 0.00         | 70      | -0.04 |
|                |        | RF permutation | 0.57                 | 0.27            | 0.01         | 37      | -0.06 |
|                | 0.20   | CIF            | 0.95                 | 0.03            | 0.02         | 36      | 0.28  |
|                |        | CIF, max-type  | 0.95                 | 0.02            | 0.02         | 44      | 0.28  |
|                |        | RF impurity    | 0.99                 | 0.01            | 0.00         | 70      | 0.29  |
|                |        | RF permutation | 0.95                 | 0.03            | 0.00         | 39      | 0.28  |

**Table 10:** Weak-signal designs with mixed-cardinality noise,  $n = 1,000$ . Ten informative standard normal features have marginal correlation with the response given by the Signal column; the noise is 25 columns of integer codes on 500 levels, 25 binary columns, and 10 Gaussian columns. Shares are the mean composition of each ranking’s top ten over 25 fits (5 seeds by 5 folds; standard errors 0.01 to 0.03); the remainder is Gaussian noise. Support is the mean number of features with nonzero importance; Score is the held-out balanced accuracy or  $R^2$  of the downstream learners on the top ten. CIF is the selected configuration with the MC selector in classification and the PC selector in regression; CIF, max-type adds the max-type Stage B rule; RF permutation is the same random forest ranked by out-of-bag permutation importance.

the sampled feature subset rarely includes an informative feature at a node, Stage A selects from that subset. The downstream ranking of CIF-all was not scored, so its effect on ranking quality remains open.

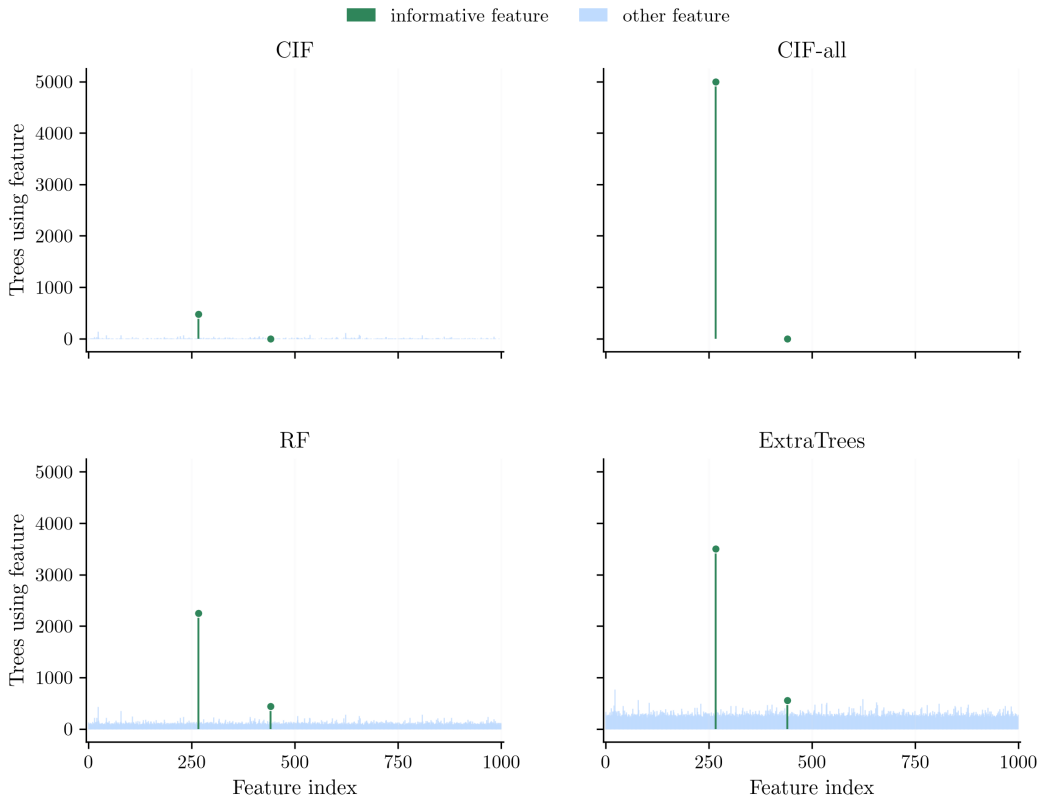

**Figure 5:** Tree-level feature use in one sparse classification forest design ( $n = 250$ ,  $p = 1,000$ , two informative features). Counts are the number of trees using each feature in at least one split, pooled over five fits of 1,000 trees each, so the shared vertical axis runs to 5,000. CIF samples a subset of features; CIF-all evaluates all nonconstant features.

## 6 Discussion

In these experiments, CIF is best supported as a top- $k$  feature-selection method for a downstream model. The benchmark asks whether a ranking places predictive features early enough for fixed downstream learners, and CIF does so at the level of random forests in classification. It is weaker at identifying the informative features themselves: its synthetic recovery is in the lower half, and its rankings are weakest at small  $k$ . Classification gives the clearest support; the smaller regression panel is positive but less precise, and its ordering is descriptive. The fixed-node results provide the local guarantee; fitted tree and forest rankings are assessed empirically.

**Guidance.** A CIF ranking should be judged through the downstream model that will use the selected features. In practice, choose  $k$  on held-out data over a small set of values that includes the intended feature budget and, when feasible, the full feature set as a sanity check. When prediction accuracy is the main target, tree-ensemble baselines such as random forests, ExtraTrees, and boosted trees should remain in the comparison set. When the target is variable screening or a ranked feature

list for later modeling, CIF should also be compared with ctree, cforest, and forest-based screening methods such as Boruta, permutation or conditional permutation importance, and RF-RFE [10].

The ablations locate most of the runtime in the threshold search. The ablations show that threshold scanning and the 256-bin histogram account for the largest measured CIF runtime changes, with small downstream score changes in these experiments. On wide data the Stage A test also matters, because the feature correction scales every feature’s budget. Adaptive stopping is inert at the minimum budget and pays off only above it. The two corrections are part of the testing rule and are not runtime shortcuts: removing them changes the trees that are grown. For ranking quality, forest size matters more than the split-count and feature-muting variants tested here, so the selected CIF configuration is the relevant ranking reference when ranking quality is the priority.

The max-type rule is an opt-in alternative to the per-threshold rule. It reduces the reverse cardinality bias and costs less once a node has more than about 50 candidates. It changes which features the trees rank but moves the downstream scores only slightly (Table 8). The benchmark rankings use the default per-threshold rule.

In sparse high- $p$  settings, feature use should be monitored directly. The simulations show that CIF feature sampling can leave informative features out of many forest split decisions, especially in sparse classification designs. Useful diagnostics include top- $k$  stability across seeds, the share of splits using the final top- $k$  features or any prespecified positive control features, the number of distinct low-ranked or known null features used in splits, and sensitivity to larger sampled feature sets or to a small CIF-all run with fewer seeds or trees.

**Limitations.** The fixed-node results cover one node whose sample, tested features, and permutation budget are fixed independently of the node responses, for subsampled or unsampled fits. The benchmarked trees and forests add adaptive stopping, feature and threshold ordering, feature muting, bounded threshold sets, response-dependent choice of nodes, the Stage A winner as the feature tested at Stage B, bootstrap samples, and forest aggregation, so their behavior is assessed through the ranking benchmark. In a fitted tree the stored Stage B score is a screening statistic, not a post-selection  $P$ -value.

The benchmark coverage is uneven across analyses. Some comparisons use broader panels where both methods are available, while complete-case rank and interval summaries use smaller panels that include every method. These summaries are therefore descriptive rather than confirmatory.

Configurations were selected on the reporting datasets with unequal grid sizes (four for CIF, five for XGBoost, one for RF, ExtraTrees, CatBoost, and RF-RFE). Selection optimism is therefore larger for the tuned families, and the order of CIF and RF within the bunched group is not resolved. LODO measures the observed sensitivity rather than bounding it.

The cardinality measurements use the linear selectors, while three of the four selected configurations use RDC, so the reverse cardinality bias is established for the linear selectors only. CPI ranks last in both tasks after a correction to its correlation threshold, and its position should be read as provisional. The three downstream learners are untuned, and the comparator set omits Lasso and mutual-information filters.

The sampled-forest analysis isolates a sparse high- $p$  setting in which forest feature sampling can limit how often splits use informative features: larger sampled feature sets increase informative-feature use, but they also change runtime and the mix of noise features used by splits. Track how often splits use informative features alongside downstream performance and runtime before changing the number of features sampled at each split.

## 7 Conclusion

This paper evaluates conditional-inference tree and forest rankings for top- $k$  downstream prediction and proves fixed-node guarantees for the Stage A and Stage B permutation tests. The experiments support CIF as a top- $k$  feature-ranking method, especially in classification: its rankings compare favorably with ctree, cforest, and CIT, and they remain competitive among stronger tree-ensemble baselines. CIF ranks tied 3rd of 17 in classification, behind RF-RFE and XGBoost and level with RF; 2nd of 18 in regression, behind ExtraTrees. On the complete-case panels it is tied 6th and tied 5th, and the regression ordering is descriptive.

The negative results are as clear. On the synthetic designs CIF sits in the lower half on recovery of the informative features, it is weakest at small  $k$ , and in sparse high-dimensional simulations forest feature sampling keeps informative features out of most splits. The high- $p$  and synthetic analyses add two diagnostic cautions: sparse forests should be checked for whether informative features are used in enough splits to enter the top- $k$  ranking, and CIF should not be treated as a first-feature discovery method when the goal is to identify a single driver. The corrections change which features are ranked more than how well the rankings predict. On the weak-signal designs the per-threshold rule replaces the high-cardinality preference of impurity importance with a smaller preference for binary features, close to neutral in classification and 0.09 above the reference in regression.

The ablations separate runtime and ranking effects. Threshold scanning and bounded threshold search avoid large runtime increases, while the one-tree ablation has the largest ranking-quality loss. The cost of the corrections has two terms. Under the minimum budget the Stage A test needs of order  $m_t^2/\alpha$  permutations per node and the per-threshold rule of order  $K^2/\alpha$ , which it needs in order to reject at all. The max-type rule reaches the nominal level with about  $999K$  evaluations, loses 0.006 in power at equal realized size, and moves CIF to 5th of 17 and 4th of 18. Overall, these results support CIF as a feature-ranking method for downstream prediction, level with random forests in classification, backed by fixed-node results and benchmark evidence.

## References

- [1] Susan Athey, Julie Tibshirani, and Stefan Wager. Generalized random forests. *The Annals of Statistics*, 47(2):1148–1178, 2019. doi: 10.1214/18-AOS1709.
- [2] Julian Besag and Peter Clifford. Sequential Monte Carlo p-values. *Biometrika*, 78(2):301–304, 1991. doi: 10.1093/biomet/78.2.301.
- [3] Leo Breiman. Random forests. *Machine Learning*, 45(1):5–32, 2001. doi: 10.1023/A:1010933404324.
- [4] Leo Breiman, Jerome H. Friedman, Charles J. Stone, and Richard A. Olshen. *Classification and Regression Trees*. Wadsworth International Group, Belmont, CA, 1984. ISBN 9780412048418.
- [5] Tianqi Chen and Carlos Guestrin. A scalable tree boosting system. In *Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, pages 785–794, 2016. doi: 10.1145/2939672.2939785.
- [6] Dries Debeer and Carolin Strobl. Conditional permutation importance revisited. *BMC Bioinformatics*, 21(1):307, 2020. doi: 10.1186/s12859-020-03622-2.

- [7] Ozgur Demir-Kavuk, Henning Riedesel, and Ernst-Walter Knapp. Exploring classification strategies with the CoEPrA 2006 contest. *Bioinformatics*, 26(5):603–609, 2010. doi: 10.1093/bioinformatics/btq021.
- [8] Michael D. Ernst. Permutation methods: A basis for exact inference. *Statistical Science*, 19(4): 676–685, 2004. doi: 10.1214/088342304000000396.
- [9] Axel Gandy. Sequential implementation of Monte Carlo tests with uniformly bounded resampling risk. *Journal of the American Statistical Association*, 104(488):1504–1511, 2009. doi: 10.1198/jasa.2009.tm08368.
- [10] Robin Genuer, Jean-Michel Poggi, and Christine Tuleau-Malot. Variable selection using random forests. *Pattern Recognition Letters*, 31(14):2225–2236, 2010. doi: 10.1016/j.patrec.2010.03.014.
- [11] Pierre Geurts, Damien Ernst, and Louis Wehenkel. Extremely randomized trees. *Machine Learning*, 63(1):3–42, 2006. doi: 10.1007/s10994-006-6226-1.
- [12] Isabelle Guyon, Jason Weston, Stephen Barnhill, and Vladimir Vapnik. Gene selection for cancer classification using support vector machines. *Machine Learning*, 46(1-3):389–422, 2002. doi: 10.1023/A:1012487302797.
- [13] Isabelle Guyon, Steve Gunn, Asa Ben-Hur, and Gideon Dror. Result analysis of the NIPS 2003 feature selection challenge. In *Advances in Neural Information Processing Systems*, volume 17, 2004. URL [https://proceedings.neurips.cc/paper\\_files/paper/2004/hash/5e751896e527c862bf67251a474b3819-Abstract.html](https://proceedings.neurips.cc/paper_files/paper/2004/hash/5e751896e527c862bf67251a474b3819-Abstract.html).
- [14] Jesse Hemerik and Jelle Goeman. Exact testing with random permutations. *TEST*, 27(4): 811–825, 2018. doi: 10.1007/s11749-017-0571-1.
- [15] Torsten Hothorn and Achim Zeileis. Generalized maximally selected statistics. *Biometrics*, 64(4):1263–1269, 2008. doi: 10.1111/j.1541-0420.2008.00995.x.
- [16] Torsten Hothorn and Achim Zeileis. partykit: A modular toolkit for recursive partytioning in R. *Journal of Machine Learning Research*, 16(118):3905–3909, 2015. URL <https://jmlr.org/papers/v16/hothorn15a.html>.
- [17] Torsten Hothorn, Peter Bühlmann, Sandrine Dudoit, Annette Molinaro, and Mark J. van der Laan. Survival ensembles. *Biostatistics*, 7(3):355–373, 2006. doi: 10.1093/biostatistics/kxj011.
- [18] Torsten Hothorn, Kurt Hornik, Mark A. van de Wiel, and Achim Zeileis. A lego system for conditional inference. *The American Statistician*, 60(3):257–263, 2006. doi: 10.1198/000313006X118430.
- [19] Torsten Hothorn, Kurt Hornik, and Achim Zeileis. Unbiased recursive partitioning: A conditional inference framework. *Journal of Computational and Graphical Statistics*, 15(3):651–674, 2006. doi: 10.1198/106186006X133933.
- [20] Torsten Hothorn, Heidi Seibold, and Achim Zeileis. *partykit: A Toolkit for Recursive Partytioning*, 2026. URL <https://CRAN.R-project.org/package=partykit>. R package version 1.2-27.

- [21] Guolin Ke, Qi Meng, Thomas Finley, Taifeng Wang, Wei Chen, Weidong Ma, Qiwei Ye, and Tie-Yan Liu. A highly efficient gradient boosting decision tree. In *Advances in Neural Information Processing Systems*, volume 30, pages 3146–3154, 2017. URL <https://papers.nips.cc/paper/6907-a-highly-efficient-gradient-boosting-decision-tree>.
- [22] Markelle Kelly, Rachel Longjohn, and Kolby Nottingham. UCI machine learning repository. <https://archive.ics.uci.edu>, n.d. URL <https://archive.ics.uci.edu/>. Accessed 2026-05-04.
- [23] Hyunjoong Kim and Wei-Yin Loh. Classification trees with unbiased multiway splits. *Journal of the American Statistical Association*, 96(454):589–604, 2001. doi: 10.1198/016214501753168271.
- [24] Miron B. Kursu and Witold R. Rudnicki. Feature selection with the Boruta package. *Journal of Statistical Software*, 36(11):1–13, 2010. doi: 10.18637/jss.v036.i11.
- [25] Berthold Lausen and Martin Schumacher. Maximally selected rank statistics. *Biometrics*, 48(1):73–85, 1992. doi: 10.2307/2532740.
- [26] Jundong Li, Kewei Cheng, Suhang Wang, Fred Morstatter, Robert P. Trevino, Jiliang Tang, and Huan Liu. Feature selection: A data perspective. *ACM Computing Surveys*, 50(6):94:1–94:45, 2018. doi: 10.1145/3136625.
- [27] Wei-Yin Loh. Regression trees with unbiased variable selection and interaction detection. *Statistica Sinica*, 12(2):361–386, 2002. URL <https://www3.stat.sinica.edu.tw/statistica/j12n2/j12n21/j12n21.htm>.
- [28] Wei-Yin Loh and Yu-Shan Shih. Split selection methods for classification trees. *Statistica Sinica*, 7(4):815–840, 1997. URL <https://www3.stat.sinica.edu.tw/statistica/j7n4/j7n41/j7n41.htm>.
- [29] David Lopez-Paz, Philipp Hennig, and Bernhard Schölkopf. The randomized dependence coefficient, 2013. arXiv:1304.7717.
- [30] Robert Milletich, Justin Downes, and Newel Hirst. citrees: Conditional inference trees and forests for Python. Submitted to the Journal of Statistical Software, 2026.
- [31] B. V. North, David Curtis, and Pak C. Sham. A note on the calculation of empirical P values from Monte Carlo procedures. *American Journal of Human Genetics*, 71(2):439–441, 2002. doi: 10.1086/341527.
- [32] Fabian Pedregosa, Gaël Varoquaux, Alexandre Gramfort, Vincent Michel, Bertrand Thirion, Olivier Grisel, Mathieu Blondel, Peter Prettenhofer, Ron Weiss, Vincent Dubourg, Jake VanderPlas, Alexandre Passos, David Cournapeau, Matthieu Brucher, Matthieu Perrot, and Édouard Duchesnay. Scikit-learn: Machine learning in Python. *Journal of Machine Learning Research*, 12(85):2825–2830, 2011. URL <https://jmlr.org/papers/v12/pedregosa11a.html>.
- [33] Belinda Phipson and Gordon K. Smyth. Permutation P-values should never be zero: Calculating exact P-values when permutations are randomly drawn. *Statistical Applications in Genetics and Molecular Biology*, 9(1):1–12, 2010. doi: 10.2202/1544-6115.1585.
- [34] Katherine S. Pollard and Mark J. van der Laan. Choice of a null distribution in resampling-based multiple testing. *Journal of Statistical Planning and Inference*, 125(1–2):85–100, 2004. doi: 10.1016/j.jspi.2003.07.019.

- [35] Liudmila Ostroumova Prokhorenkova, Gleb Gusev, Aleksandr Vorobev, Anna Veronika Dorogush, and Andrey Gulin. Unbiased boosting with categorical features. In *Advances in Neural Information Processing Systems*, volume 31, pages 6639–6649, 2018. URL <https://papers.nips.cc/paper/7898-catboost-unbiased-boosting-with-categorical-features>.
- [36] Yu-San Shih. A note on split selection bias in classification trees. *Computational Statistics & Data Analysis*, 45(3):457–466, 2004. doi: 10.1016/S0167-9473(03)00064-1.
- [37] Helmut Strasser and Christian Weber. The asymptotic theory of permutation statistics. *Mathematical Methods of Statistics*, 8(2):220–250, 1999.
- [38] Carolin Strobl, Anne-Laure Boulesteix, and Thomas Augustin. Unbiased split selection for classification trees based on the Gini index. *Computational Statistics & Data Analysis*, 52(1):483–501, 2007. doi: 10.1016/j.csda.2006.12.030.
- [39] Carolin Strobl, Anne-Laure Boulesteix, Achim Zeileis, and Torsten Hothorn. Bias in random forest variable importance measures: Illustrations, sources and a solution. *BMC Bioinformatics*, 8(1):25, 2007. doi: 10.1186/1471-2105-8-25.
- [40] Carolin Strobl, Anne-Laure Boulesteix, Thomas Kneib, Thomas Augustin, and Achim Zeileis. Conditional variable importance for random forests. *BMC Bioinformatics*, 9(1):307, 2008. doi: 10.1186/1471-2105-9-307.
- [41] Gábor J. Székely, Maria L. Rizzo, and Nail K. Bakirov. Measuring and testing dependence by correlation of distances. *The Annals of Statistics*, 35(6):2769–2794, 2007. doi: 10.1214/009053607000000505.
- [42] Joaquin Vanschoren, Jan N. van Rijn, Bernd Bischl, and Luis Torgo. OpenML: Networked science in machine learning. *ACM SIGKDD Explorations Newsletter*, 15(2):49–60, 2013. doi: 10.1145/2641190.2641198. URL <https://doi.org/10.1145/2641190.2641198>.
- [43] Stefan Wager and Susan Athey. Estimation and inference of heterogeneous treatment effects using random forests. *Journal of the American Statistical Association*, 113(523):1228–1242, 2018. doi: 10.1080/01621459.2017.1319839.
- [44] Peter H. Westfall and S. Stanley Young. *Resampling-Based Multiple Testing: Examples and Methods for P-Value Adjustment*. Wiley, New York, 1993. ISBN 0471557617.

## Appendix A Setup and assumptions

### A.1 Fixed-node setup

Let  $(X_i, Y_i)_{i=1}^n$  be the training data. Fix a node  $t$  with sample index set  $I_t$  and size  $n_t := |I_t|$ . Write  $X_t := (X_i)_{i \in I_t}$  and  $Y_t := (Y_i)_{i \in I_t}$  for the data restricted to that node. Stage A tests features  $F_t$  with  $m_t := |F_t|$ . For the Stage A feature test the reference case is full-scan and fixed- $B$ : conditional on the node covariates and label-independent auxiliary randomness  $U$ ,  $F_t$  and  $B$  are fixed, and every feature in  $F_t$  is tested with exactly  $B$  permutations. Table 11 lists the notation used in the proofs.

| Symbol                            | Meaning                                                                                                                                                                  |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $t$                               | Node index, held fixed in the results.                                                                                                                                   |
| $I_t, n_t$                        | Node sample index set and size $n_t :=  I_t $ .                                                                                                                          |
| $X_t, Y_t$                        | Covariates and responses restricted to node $t$ .                                                                                                                        |
| $U$                               | Label-independent auxiliary randomness conditioned on in the proofs; it excludes node responses, Monte Carlo permutation draws, permutation statistics, and $P$ -values. |
| $F_t, m_t$                        | Stage A features and their number $m_t :=  F_t $ .                                                                                                                       |
| $C, K$                            | Stage B candidate thresholds and their number $K :=  C $ .                                                                                                               |
| $B$                               | Number of random permutations per test in the fixed- $B$ reference test.                                                                                                 |
| $T_j^{\text{sel}}$                | Stage A selector statistic for feature $j$ : $T_j^{\text{sel}}(X_{t,j}, Y_t; U)$ .                                                                                       |
| $T(\cdot, \cdot; U)$              | Generic test statistic in the exchangeability proof, real-valued or taking values in any measurable space.                                                               |
| $\Pi_b$                           | Random permutation used for Monte Carlo replicate $b$ .                                                                                                                  |
| $T_{\text{obs}}, T_1, \dots, T_B$ | Observed and permuted statistics for one test.                                                                                                                           |
| $P_{\text{MC}}^{\geq}$            | Right-tail +1 Monte Carlo permutation $P$ -value for one test.                                                                                                           |
| $P_{t,j}, P_{t,c}$                | Fixed- $B$ +1 $P$ -values for feature $j$ and for threshold $c$ .                                                                                                        |
| $\gamma, s$                       | Confidence and batch size of adaptive stopping.                                                                                                                          |
| $r, e$                            | Permutations drawn and exceedances counted at a stopping check.                                                                                                          |
| $\theta$                          | Per-draw exceedance probability given the observed statistic.                                                                                                            |

**Table 11:** Notation used in the fixed-node results and their proofs.

**Scope of the fixed-node results.** Every result holds at a fixed node  $t$ , conditional on  $(X_t, U)$ , under the complete nodewise permutation null. Corollary 1 covers a feature set  $F_t$  fixed as a function of  $(X_t, U)$ . Corollaries 2 and 3 cover a tested feature and a finite candidate set fixed as functions of  $(X_t, U)$ ; this includes the exact, random, percentile, and histogram candidate sets and threshold scanning. Proposition 1 covers one Stage A test or one per-threshold Stage B test, and not the adaptive max-type rule. The results do not extend to response-dependent feature muting, to nodes reached through response-dependent splits, to a Stage B test of the Stage A winner, to honesty, or to  $P$ -values reported after selection. Bootstrap fits are outside the guarantee, because permuting the responses over duplicated rows does not reproduce the null law of the node sample, so A0.2 fails; fits on subsamples drawn without replacement, or on the full sample, keep it.

### A.2 Assumptions

Lemma 1 and Corollaries 1 to 3 use A0.1 to A0.5. Proposition 1 uses A0.1 to A0.3; it replaces the fixed budget of A0.4 by the adaptive stopping rule it analyzes.

**A0.1 (Fixed node).** The node  $t$  and its sample index set  $I_t$  are held fixed. They are not chosen using node responses or earlier response-dependent splits.

**A0.2 (Complete nodewise permutation null).** Under the complete null at node  $t$ ,  $Y_t$  is exchangeable conditional on  $(X_t, U)$ : its conditional law is unchanged by permuting the node responses. This null does not cover a null feature when any tested or untested node covariate remains associated with  $Y_t$ .

**A0.3 (Features fixed before seeing node responses).** The features in  $F_t$  and the effective nodewise budget  $B$  are measurable functions of  $(X_t, U)$  only. They do not depend on  $Y_t$ , other training responses used to reach the node, Monte Carlo permutation draws or statistics,  $P$ -values, or sequential stopping decisions.

**A0.4 (Fixed- $B$  computation).** Each  $P$ -value is computed with exactly  $B$  random permutations, with no optional stopping. The Monte Carlo permutation draws are additional randomness, independent of  $(X_t, Y_t, U)$ , and are not included in  $U$ .

**A0.5 (Conservative ties).** Right-tail tests count ties as exceedances using  $\mathbf{1}\{T_b \geq T_{\text{obs}}\}$ ; left-tail tests, including both Stage B rules, use  $\mathbf{1}\{T_b \leq T_{\text{obs}}\}$ . If several features tie after testing, any random tie break is label-independent and does not affect the Stage A reject or no-reject event.

## Appendix B Proofs of the fixed-node results

### B.1 Monte Carlo permutation exchangeability

The proof of Lemma 1 separates two facts. First, statistics computed from i.i.d. random permutations are exchangeable. Second, under A0.2 to A0.4, the usual computation with one observed statistic and  $B$  random permutations has the same null rank distribution as a construction with a randomized baseline [14].

Fix a node  $t$ , feature  $j$ , and a statistic  $T(\cdot, \cdot; U)$  taking values in a measurable space  $(\mathcal{S}, \mathcal{A})$ . The space may be the real line, as for a Stage A score or a single threshold score, or a space of vectors, as for the vector of scores over a candidate set that the max-type rule standardizes. When  $T$  is real-valued, larger values are more extreme. Let  $\Pi_0, \Pi_1, \dots, \Pi_B$  be i.i.d. uniform random permutations of  $\{1, \dots, n_t\}$ , independent of the data and of  $U$ , and define

$$T_b := T(X_{t,j}, \Pi_b(Y_t); U) \quad (b = 0, 1, \dots, B). \quad (11)$$

Conditional on  $(X_t, Y_t, U)$ , each  $T_b$  is a measurable function of  $\Pi_b$ , and  $(\Pi_0, \dots, \Pi_B)$  are i.i.d., so  $(T_0, T_1, \dots, T_B)$  is exchangeable. Averaging over  $Y_t$  preserves exchangeability, so the vector is also exchangeable conditional on  $(X_t, U)$ .

**Lemma 2** (The observed statistic has the same null rank distribution). *Assume A0.2 to A0.4, and let  $T$  take values in the measurable space  $(\mathcal{S}, \mathcal{A})$ . Let  $\Pi_1, \dots, \Pi_B$  be i.i.d. uniform random permutations of  $\{1, \dots, n_t\}$ , independent of  $(X_t, Y_t, U)$ , and set*

$$T_{\text{obs}} := T(X_{t,j}, Y_t; U), \quad T_b := T(X_{t,j}, \Pi_b(Y_t); U) \quad (b = 1, \dots, B). \quad (12)$$

Let  $\Pi_0$  be an additional independent uniform random permutation and set  $T_0 := T(X_{t,j}, \Pi_0(Y_t); U)$ . Under the null, conditional on  $(X_t, U)$ ,

$$(T_{\text{obs}}, T_1, \dots, T_B) \stackrel{d}{=} (T_0, T_1, \dots, T_B). \quad (13)$$

In particular, when  $T$  is real-valued, the standard right-tail  $+1$   $P$ -value  $P_{\text{id}} := (1 + \sum_{b=1}^B \mathbf{1}\{T_b \geq T_{\text{obs}}\})/(B+1)$  and its randomized-baseline counterpart  $P_{\text{rnd}} := (1 + \sum_{b=1}^B \mathbf{1}\{T_b \geq T_0\})/(B+1)$  have the same conditional distribution.

*Proof.* Fix  $(X_t, U)$  and work under the null. By A0.2, permuting the node responses does not change the conditional distribution of  $Y_t$ . Use the permutation-action convention under which  $(\Pi_b \circ \Pi_0^{-1})(\Pi_0(Y_t)) = \Pi_b(Y_t)$ , and set  $Y'_t := \Pi_0(Y_t)$ . Then  $Y'_t \stackrel{d}{=} Y_t$  conditional on  $(X_t, U)$ .

For  $b = 1, \dots, B$ , define  $\Pi'_b := \Pi_b \circ \Pi_0^{-1}$ , so  $\Pi'_b(Y'_t) = \Pi_b(Y_t)$ . Conditional on  $(Y_t, \Pi_0)$ , right composition by  $\Pi_0^{-1}$  maps the independent uniform permutations  $\Pi_b$  to independent uniform permutations  $\Pi'_b$ , and this conditional law does not depend on the conditioning values. Because  $Y'_t$  is a function of  $(Y_t, \Pi_0)$ , the transformed permutations are independent of  $(Y'_t, \Pi_0)$ . Therefore

$$\begin{aligned} (T_{\text{obs}}, T_1, \dots, T_B) &= (T(X_{t,j}, Y_t; U), T(X_{t,j}, \Pi_1(Y_t); U), \dots, T(X_{t,j}, \Pi_B(Y_t); U)) \\ &\stackrel{d}{=} (T(X_{t,j}, Y'_t; U), T(X_{t,j}, \Pi'_1(Y'_t); U), \dots, T(X_{t,j}, \Pi'_B(Y'_t); U)) \\ &= (T_0, T_1, \dots, T_B), \end{aligned} \quad (14)$$

conditional on  $(X_t, U)$ . Applying the same comparison map to these equal-in-distribution vectors gives the claim for  $P_{\text{id}}$  and  $P_{\text{rnd}}$ . No step uses the order structure of  $\mathcal{S}$ , so the identity holds for a statistic in any measurable space.  $\square$

## B.2 Proof of Lemma 1

Fix  $(X_t, U)$  and one feature  $j \in F_t$ , and work under the nodewise complete permutation null. By Lemma 2, it is enough to prove the rank bound for an exchangeable tuple, which we denote by  $(T_{\text{obs}}, T_1, \dots, T_B)$ . Define

$$R := 1 + \sum_{b=1}^B \mathbf{1}\{T_b \geq T_{\text{obs}}\}, \quad P_{\text{MC}}^{\geq} = \frac{R}{B+1}. \quad (15)$$

The left-tail version applies the same argument to  $-T$ .

**No ties.** If the statistics almost surely have no ties,  $R$  is the descending rank of  $T_{\text{obs}}$  among  $(T_{\text{obs}}, T_1, \dots, T_B)$ . Exchangeability gives  $\mathbb{P}(R = r \mid X_t, U) = 1/(B+1)$  for  $r = 1, \dots, B+1$ , so for any  $\alpha \in [0, 1]$ ,

$$\mathbb{P}(P_{\text{MC}}^{\geq} \leq \alpha \mid X_t, U) = \mathbb{P}(R \leq (B+1)\alpha \mid X_t, U) = \frac{\lfloor (B+1)\alpha \rfloor}{B+1} \leq \alpha. \quad (16)$$

**Ties.** Let  $V_{\text{obs}}, V_1, \dots, V_B \stackrel{\text{i.i.d.}}{\sim} \text{Unif}(0, 1)$  be independent of all other randomness, and order the pairs  $(T_b, V_b)$  lexicographically. The augmented tuple is exchangeable and almost surely has no ties, so the no-ties argument gives a superuniform  $P$ -value

$$\tilde{P}_{\text{MC}}^{\geq} := \frac{1 + \sum_{b=1}^B \mathbf{1}\{T_b > T_{\text{obs}} \text{ or } (T_b = T_{\text{obs}} \text{ and } V_b > V_{\text{obs}})\}}{B+1}. \quad (17)$$

Each tie-broken indicator is bounded by  $\mathbf{1}\{T_b \geq T_{\text{obs}}\}$ , so  $P_{\text{MC}}^{\geq} \geq \tilde{P}_{\text{MC}}^{\geq}$  and

$$\mathbb{P}(P_{\text{MC}}^{\geq} \leq \alpha \mid X_t, U) \leq \mathbb{P}(\tilde{P}_{\text{MC}}^{\geq} \leq \alpha \mid X_t, U) \leq \alpha. \quad (18)$$

Taking expectations over  $(X_t, U)$  gives the unconditional bound. The corollaries apply this single-test bound with the Bonferroni union bound; no independence among the tests is required.

### B.3 Proof of Corollary 3

The argument reduces to Lemma 1 in four steps. (1) Under the complete null, the  $B + 1$  rows of the impurity matrix  $(S_{b,c})$ , computed from the observed response and from  $B$  independent uniform permutations of it, are exchangeable. This is Lemma 2 applied to the vector-valued statistic  $c \mapsto S_{b,c}$  in  $\mathbb{R}^K$ ; the lemma never uses that the statistic is scalar. (2) Column standardization uses the mean and standard deviation of all  $B + 1$  entries of each column, which are symmetric functions of the rows, so the standardized matrix has exchangeable rows as well. The exclusion of candidates with an empty child or zero column variance is likewise a function of the whole column. (3) The row minimum is one fixed function applied to every row, so  $T_0, \dots, T_B$  are exchangeable. (4) The inclusive-rank  $P$ -value of an exchangeable tuple is superuniform by the proof of Lemma 1, applied to  $-T$  for the left tail. The guarantee is weak familywise control over the  $K$  candidates, the probability of declaring any split under the complete nodewise null.

### B.4 Proof of Proposition 1

**Reduction to a function of the exceedance probability.** Write  $\theta$  for the per-draw exceedance probability given the observed statistic and the node data. Given  $\theta$ , the draws are independent, so the exceedance count after  $r$  draws is  $\text{Binomial}(r, \theta)$ . The stop and report decisions are deterministic functions of  $(r, e)$  at the batch boundaries, so the rejection probability  $g(\theta)$  is a fixed function of  $\theta$ .

**Monotonicity.** The function  $g$  is nonincreasing. Flipping one indicator from zero to one raises  $e$  at every later boundary. A futility stop (posterior mass at least  $\gamma$  above  $\alpha$ ) can then only come earlier, and a significance stop (mass at least  $\gamma$  below  $\alpha$ ) only later. At a significance stop or at the full budget, the reported value  $(e + 1)/(r + 1)$  is at least as large on the flipped path. The remaining step, that a significance stop reports a value strictly below  $\alpha$  and a futility stop a value at least  $\alpha$ , is the hypothesis of the proposition.

**From  $g$  to statements (i) to (iii).** Under the complete null the observed statistic is exchangeable with the  $N$  orbit values, so without ties  $\theta$  is uniform on  $\{1/N, \dots, 1\}$ , which is (ii). The continuous idealization (i) replaces that grid by the uniform distribution on  $(0, 1)$ . Under it the binomial mixture is the Pólya urn started from one ball of each colour, whose next indicator is one with probability  $(e + 1)/(r + 2)$ , and  $\rho = \int_0^1 g$  by a finite recursion over the stopping states. For nonincreasing  $g$  the grid average  $N^{-1} \sum_{i=1}^N g(i/N)$  is at most  $\int_0^1 g$  and at least  $\int_0^1 g - (g(0) - g(1))/N \geq \rho - 1/N$ , which is the interval in (ii). Counting ties as exceedances raises  $\theta$ , and given  $\theta$  the same nonincreasing  $g$  gives (iii).

## Appendix C Benchmark configurations and coverage

This appendix lists the configuration each method entered the benchmark with, the runs excluded from it, and the reproducibility controls. Section 2 describes the tree-growing loop, and Appendix E gives its runtime and memory accounting.

## C.1 Selected configurations

Table 12 lists the configuration each method family entered the benchmark with, after the selection rule of Section 4.5 picked one configuration per family by its mean real-data score. Candidates is the size of the family’s configuration grid. Settings not listed are the library defaults. CIF uses stratified bootstrap sampling in classification and ordinary bootstrap sampling in regression.

| Family              | Task           | Candidates | Selected configuration                                                                                                                             |
|---------------------|----------------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| CIT                 | Classification | 4          | selector MC; minimum budgets with adaptive stopping; histogram with 256 bins (257 candidates); Bonferroni; no honesty                              |
| CIT                 | Regression     | 4          | selector RDC; otherwise as classification                                                                                                          |
| CIF                 | Classification | 4          | selector RDC; 100 trees; stratified bootstrap; square-root feature sampling; no honesty; otherwise as CIT                                          |
| CIF                 | Regression     | 4          | selector RDC; 100 trees; bootstrap; square-root feature sampling; honesty with a 0.5 split                                                         |
| RF, ET              | Both           | 1          | 100 trees, library defaults, impurity importance                                                                                                   |
| XGBoost             | Both           | 5          | 500 rounds, depth 6, learning rate 0.1; importance total gain (classification) or total cover (regression)                                         |
| LightGBM            | Both           | 2          | 500 rounds, depth 6, learning rate 0.1; gain importance                                                                                            |
| CatBoost            | Both           | 1          | 500 iterations, depth 6, learning rate 0.1                                                                                                         |
| partykit ctree      | Both           | 2          | quadratic statistic, Monte Carlo test with 9,999 re-samples                                                                                        |
| partykit cforest    | Both           | 4          | as ctree; 100 trees, square-root mtry, unconditional out-of-bag permutation importance, partykit default (one permutation per tree over 100 trees) |
| Permutation filters | Both           | 1          | one permutation test per feature (MC, RDC; PC, DC, RDC)                                                                                            |
| Boruta              | Both           | 1          | 200 iterations on an auto-sized random forest                                                                                                      |
| PI, CPI             | Both           | 1          | 10 permutation repeats on a random forest                                                                                                          |
| RF-RFE              | Both           | 1          | step 1 on a random forest                                                                                                                          |

**Table 12:** Configurations entered in the benchmark, one per family and task, with the size of the grid the selection rule chose from. The minimum budget is  $\lceil 1/\alpha_{\text{adj}} \rceil$  permutations at the Bonferroni-adjusted level; the histogram search with 256 bins offers at most 257 candidate thresholds per feature, so the per-threshold rule needs a budget of at least  $\lceil 257/0.05 \rceil = 5,140$  to reject.

## C.2 Benchmark coverage

Each pairwise comparison uses the datasets, downstream learners, and standard values of  $k$  where both methods are present. Analyses that compare all methods restrict to datasets with every method, learner, and standard  $k$  present, which gives 13 classification and 6 regression complete-case datasets. On `gisette`, `isolet`, and `orlraws10P`, 34 classification runs were excluded (Table 13). Fifteen partykit ctree and cforest runs did not complete. Eighteen RDC-selector CIT and CIF runs were lost to a host fault while the other seeds of the same cells completed. One run on `orlraws10P` was excluded by author decision. No regression runs are excluded.

## C.3 Randomness and reproducibility

The benchmark configuration fixes the seed schedule used for all reported runs. Pure Python permutation routines use local generators. Numba parallel permutation paths assign one seed per resample, which avoids sharing a mutable generator across parallel loop iterations. The corrected R

| Dataset           | Method                    | Configurations | Seed runs | Basis           |
|-------------------|---------------------------|----------------|-----------|-----------------|
| <b>gisette</b>    | CIT with the RDC selector | 2              | 8         | host fault      |
| <b>gisette</b>    | R ctree                   | 1              | 5         | incomplete      |
| <b>isolet</b>     | CIF with the RDC selector | 2              | 4         | host fault      |
| <b>isolet</b>     | CIT with the RDC selector | 2              | 6         | host fault      |
| <b>isolet</b>     | R cforest                 | 1              | 5         | incomplete      |
| <b>isolet</b>     | R ctree                   | 1              | 5         | incomplete      |
| <b>orlraws10P</b> | CIT with the RDC selector | 1              | 1         | author directed |

**Table 13:** Classification benchmark exclusions. Each seed run is one method configuration on one dataset with one seed; 34 runs are excluded in total, and all are operational exclusions. Incomplete rows are partykit ctree and cforest runs that did not complete; the 18 host-fault runs are RDC-selector CIT and CIF runs lost to a host fault; the single **orlraws10P** run was excluded by author decision. No regression runs are excluded.

bridge was checked by refitting one published ctree example inside R and through the harness with identical splits; the seed schedule, rank directions, and the CPI threshold are pinned by tests in the repository.

## Appendix D Datasets

### D.1 Benchmark datasets

The dataset inventory covers the real-data benchmark and the synthetic feature-recovery analyses. For each real-data benchmark dataset, the tables report the number of samples  $n$ , the number of features  $p$ , and the source collection. Source labels refer to UCI Machine Learning Repository [22], the NIPS 2003 feature selection challenge [13], ASU/scikit-feature [26], OpenML [42], and CoEPrA molecular-property benchmarks [7]. ASU/SF abbreviates ASU/scikit-feature. Slash-separated labels indicate original benchmark provenance and OpenML availability or hosting.

| Dataset              | $n$    | $p$    | Source    |
|----------------------|--------|--------|-----------|
| <b>gamma</b>         | 19,020 | 9      | UCI       |
| <b>glass</b>         | 214    | 10     | UCI       |
| <b>page-blocks</b>   | 5,473  | 10     | UCI       |
| <b>vowel-context</b> | 990    | 10     | UCI       |
| <b>wine</b>          | 178    | 13     | UCI       |
| <b>letter</b>        | 20,000 | 16     | UCI       |
| <b>pendigits</b>     | 10,992 | 16     | UCI       |
| <b>spam</b>          | 4,601  | 57     | UCI       |
| <b>musk</b>          | 6,597  | 166    | UCI       |
| <b>madelon</b>       | 2,000  | 500    | NIPS 2003 |
| <b>isolet</b>        | 7,797  | 616    | UCI       |
| <b>ORL</b>           | 400    | 1,024  | ASU/SF    |
| <b>Yale</b>          | 165    | 1,024  | ASU/SF    |
| <b>warpAR10P</b>     | 130    | 2,400  | ASU/SF    |
| <b>warpPIE10P</b>    | 210    | 2,420  | ASU/SF    |
| <b>gisette</b>       | 6,000  | 5,000  | NIPS 2003 |
| <b>TOX_171</b>       | 171    | 5,748  | ASU/SF    |
| <b>ALLAML</b>        | 72     | 7,129  | ASU/SF    |
| <b>arcene</b>        | 100    | 10,000 | NIPS 2003 |
| <b>pixraw10P</b>     | 100    | 10,000 | ASU/SF    |
| <b>orlraws10P</b>    | 100    | 10,304 | ASU/SF    |
| <b>CLL_SUB_111</b>   | 111    | 11,340 | ASU/SF    |
| <b>dexter</b>        | 300    | 20,000 | NIPS 2003 |

**Table 14:** Classification benchmark datasets.

| Dataset         | $n$   | $p$   | Source        |
|-----------------|-------|-------|---------------|
| facebook        | 500   | 21    | UCI/OpenML    |
| imports-85      | 205   | 76    | UCI           |
| residential     | 372   | 107   | UCI/OpenML    |
| community_crime | 1,994 | 1,954 | UCI/OpenML    |
| comm_violence   | 2,215 | 2,210 | UCI/OpenML    |
| coepra2         | 76    | 5,144 | CoEPrA/OpenML |
| coepra1         | 89    | 5,787 | CoEPrA/OpenML |
| coepra3         | 133   | 5,787 | CoEPrA/OpenML |

**Table 15:** Regression benchmark datasets.

## D.2 Synthetic datasets

These tables report  $n$ ,  $p$ , and key settings for each synthetic feature-recovery design. In the classification table, **sep** denotes class separation and **flip** denotes label-flip probability. In the regression table, **noise** denotes the response-noise scale; for the heteroscedastic row, **scale** controls the feature-dependent noise multiplier.

The synthetic datasets are controlled recovery problems with known informative features. The classification designs cover redundant features, high-cardinality noise, nonlinear signal, standard and weak signal, Toeplitz correlation, correlated-noise features, and sparse high- $p$  structure. The regression designs cover heteroscedastic noise, redundant features, Friedman 1, standard and weak signal, Toeplitz correlation, correlated-noise features, and sparse high- $p$  structure. The settings keep the examples compact while including one high-dimensional, small-sample case for each task.

| Design                          | Setting                                                          | $n$   | $p$   |
|---------------------------------|------------------------------------------------------------------|-------|-------|
| Redundant features              | 10 informative, 20 redundant features                            | 1,000 | 50    |
| High-cardinality noise          | 10 informative, 50 high-cardinality noise features, 500 levels   | 1,000 | 100   |
| Nonlinear signal                | binarized Friedman 1, 5 informative                              | 1,000 | 100   |
| Standard classification         | 10 informative, sep = 2.0                                        | 1,000 | 100   |
| Toeplitz correlation            | 10 informative, $\rho = 0.95$                                    | 1,000 | 100   |
| Weak signal classification      | 10 informative, sep = 0.1, flip = 0.1                            | 1,000 | 100   |
| Correlated noise                | 10 informative, 20 added correlated-noise features, $\rho = 0.9$ | 1,000 | 120   |
| Sparse high- $p$ classification | 5 informative, sep = 0.5                                         | 200   | 1,000 |

**Table 16:** Synthetic classification designs used in the feature-recovery analysis.

| Design                      | Setting                                                          | $n$   | $p$ |
|-----------------------------|------------------------------------------------------------------|-------|-----|
| Heteroscedastic regression  | heteroscedastic scale = 4.0, noise = 5.0                         | 1,000 | 50  |
| Redundant features          | 10 informative, 20 redundant features                            | 1,000 | 50  |
| Friedman 1                  | 5 informative, noise = 1.0                                       | 1,000 | 100 |
| Standard regression         | 10 informative, noise = 1.0                                      | 1,000 | 100 |
| Toeplitz correlation        | 10 informative, $\rho = 0.95$                                    | 1,000 | 100 |
| Weak signal regression      | 10 informative, noise = 50.0                                     | 1,000 | 100 |
| Correlated noise            | 10 informative, 20 added correlated-noise features, $\rho = 0.9$ | 1,000 | 120 |
| Sparse high- $p$ regression | 5 informative, noise = 10.0                                      | 200   | 500 |

**Table 17:** Synthetic regression designs used in the feature-recovery analysis.

## Appendix E Runtime and memory accounting

The runtime of a fit is the sum, over realized nodes, of the scans, copies, and tests each node reaches. Feature pools, node sizes, candidate counts, and stopping times all vary across the tree, so the accounting is node by node.

**Notation.** Let  $n$  be the training sample count and  $p$  the number of features. At node  $t$ ,  $n_t$  samples arrive,  $a_t = |F_{t,\text{avail}}|$  features are available,  $d_t^{\text{const}}$  of them are constant at the node, and Stage A considers  $m_t = |F_t|$  features after pruning and subsampling. Feature muting removes  $d_t^{\text{mute}}$  tested features from the descendant pool. When Stage B is reached,  $\tilde{K}_t$  thresholds are generated for  $j_t^*$  and  $K_t \leq \tilde{K}_t$  remain after the minimum leaf size filter. Let  $C_j^{\text{sel}}(n_t)$  be the cost of one Stage A statistic and  $C^{\text{split}}(n_t)$  the cost of one weighted child impurity, excluding label copies, shuffles, and masks. Both are linear in  $n_t$  for the MC selector with Gini splitting and the PC selector with MSE splitting. The RDC costs  $O(n_t \log n_t)$  for fixed projection count, and distance correlation costs  $O(n_t \log n_t)$  or  $O(n_t^2)$  depending on the backend.

**Where each runtime control enters.** Feature subsampling caps  $m_t$ , the Stage A testing width, but not the constant-feature pass over all  $a_t$  available features. Feature muting shrinks  $a_u$  and  $m_u$  at descendants  $u$  at a cost of  $O(a_t d_t^{\text{mute}})$  index updates at  $t$ . Histogram and other bounded threshold methods reduce  $\tilde{K}_t$  when their cap is below the number of midpoints; exact search and features with at most four unique values use all midpoints. Adaptive stopping, feature scanning, and threshold scanning reduce work only when they shorten the realized path; the worst case is still every feature, every threshold, and the full budget, and scanning pays for a prescan. With the corrections enabled, a stage with  $n_{\text{tests}}$  tests ( $m_t$  in Stage A,  $K_t$  in Stage B) at nominal level  $\alpha_{\text{stage}}$  tests each at  $\alpha_{\text{adj}} = \alpha_{\text{stage}}/n_{\text{tests}}$ . The minimum budget is then  $\lceil n_{\text{tests}}/\alpha_{\text{stage}} \rceil$ , the maximum budget is about  $n_{\text{tests}}^2/(4\alpha_{\text{stage}}^2)$ , and the auto budget of Equation (2) is 52 at  $\alpha_{\text{adj}} = 0.05$ , 3,144 at  $0.05/20$ , and 64,669 at  $0.05/257$ . An explicit integer budget is multiplied by  $n_{\text{tests}}$ . Forest size sets the number of tree fits, and the bootstrap sample size sets the root size of each tree.

**Per-node work.** Every node pays  $O(n_t)$  for the stopping checks and leaf value. A node that can split scans the available features for constants, at  $O(a_t n_t)$ , and removes them, at  $O(a_t d_t^{\text{const}})$ . Let  $\mathcal{J}_t$  be the Stage A features whose test is evaluated before the scan stops, and  $b_{t,j}^{\text{sel}}$  the permutations drawn for feature  $j$ . The Stage A work is

$$S_t^{\text{A}} = O\left(\sum_{j \in \mathcal{J}_t} (b_{t,j}^{\text{sel}} + 1)(C_j^{\text{sel}}(n_t) + n_t)\right), \quad (19)$$

where the  $+1$  is the observed statistic and the  $n_t$  term covers label copies and shuffles. Feature scanning adds  $O(\sum_{j \in F_t} C_j^{\text{sel}}(n_t) + m_t \log m_t)$  for the prescan and sort.

Stage B builds the thresholds of the selected feature in  $O(n_t \log n_t)$ , because unique values are sorted before any cap applies. Let  $\mathcal{C}_t^{\text{eval}}$  be the thresholds tested before the scan stops, and  $b_{t,c}^{\text{split}}$  the permutations drawn at threshold  $c$ . The Stage B work is

$$S_t^{\text{B}} = O\left(\sum_{c \in \mathcal{C}_t^{\text{eval}}} (b_{t,c}^{\text{split}} + 1)(C^{\text{split}}(n_t) + n_t)\right), \quad (20)$$

where the  $n_t$  term covers masks, child-label slices, copies, and shuffles. The two Stage B rules differ in how the budget enters this sum. The per-threshold rule tests each threshold at  $\alpha_{\text{split}}/K_t$ , so at the minimum budget each test draws  $\lceil K_t/\alpha_{\text{split}} \rceil$  permutations and

$$S_t^{\text{B}} = O\left(|\mathcal{C}_t^{\text{eval}}| \lceil K_t/\alpha_{\text{split}} \rceil (C^{\text{split}}(n_t) + n_t)\right),$$

which is quadratic in the candidate count when every threshold is tested. The max-type rule draws one set of  $B$  permutations for all  $K_t$  candidates, so

$$S_t^{\text{B}} = O\left((B+1) K_t (C^{\text{split}}(n_t) + n_t)\right),$$

which is linear in the candidate count at fixed  $B$ . Threshold scanning adds  $O(K_t(C^{\text{split}}(n_t) + n_t) + K_t \log K_t)$  for ordering. An accepted split copies the node data into two child matrices with all  $p$  columns, at  $O(n_t p)$ . Nodes that become leaves after Stage A or Stage B keep the work already done and allocate no children.

**Trees and forests.** Let  $W_t$  be the work at node  $t$ . A tree costs  $T_{\text{tree}} = \sum_{t \in \mathcal{V}(\mathcal{T})} W_t$  over all realized nodes, leaves included, and a binary tree has  $|\mathcal{V}(\mathcal{T})| = 2|\mathcal{I}(\mathcal{T})| + 1$  nodes for  $|\mathcal{I}(\mathcal{T})|$  internal splits. Honesty computes the node sum on the structure subsample and adds  $O(np)$  for the partition plus a leaf re-estimation pass. For a forest of  $M$  trees, with  $s_r$  samples for tree  $r$  after bootstrap sampling,

$$T_{\text{forest}} = O(np) + \sum_{r=1}^M (O(s_r p) + T_{\text{tree},r}) + O(Mp), \quad (21)$$

plus the honesty and out-of-bag scoring passes when they are requested. This is total work; wall-clock time also depends on the worker count and load balance across trees.

**Memory.** Node-local workspaces are  $O(a_t + m_t)$  for feature indices and  $O(n_t + \tilde{K}_t)$  for thresholds, plus the permutation buffers; a fixed-budget test without stopping may store its  $B$  permuted statistics. The dense matrices dominate. Validation materializes an  $O(np)$  matrix, and each accepted split materializes children of combined size  $O(n_t p)$ . During depth-first recursion the parent keeps the sibling child alive, so with  $\mathcal{P}$  the accepted splits on the active recursion stack, peak single-tree memory is

$$O\left(np + p \sum_{u \in \mathcal{P}} n_u\right),$$

which is  $O(np)$  for balanced growth. A forest runs up to  $w = \min(M, n_{\text{jobs}})$  trees at once, so its peak memory holds  $w$  such workspaces. Fitted storage holds the node records of all trees and  $O(Mp)$  per-tree arrays.

## E.1 Measured scaling in $n$ and $p$

Table 18 reports fit-only time for one CIT and one 100-tree CIF on Gaussian predictors with a weak planted signal. The configuration uses the MC selector with Gini splitting in classification and the PC selector with MSE splitting in regression,  $\alpha_{\text{sel}} = \alpha_{\text{split}} = 0.05$  with both corrections, the minimum budget, the per-threshold rule, the 256-bin histogram, feature and threshold scanning, and feature muting. The forest adds bootstrap sampling and square-root feature sampling.

The histogram caps the candidates at 257 and the minimum budget fixes at most 5,140 permutations per threshold, so the per-node cost is linear in  $n_t$ . A 64-fold increase in  $n$  at

$p = 20$  costs the tree about 68 times in classification and 110 times in regression. A 25-fold increase in  $p$  at  $n = 2,000$  costs it 21 and 44 times, because every predictor is scored at the root and muting removes only failed predictors. The forest grows 65 to 77 times for the 64-fold increase in  $n$  and is flat or falling in  $p$  under square-root feature sampling.

Adaptive stopping is inert at the minimum budget (Proposition 1) but not free. The adaptive-to-no-stopping time ratio is 1.02 to 1.28 for the tree (median 1.07) and 0.95 to 1.18 for the forest (median 0.99). The adaptive path runs through the chunked sequential kernel, which carries a fixed per-test overhead. The tree overhead grows with  $p$ , from 1.02 to 1.07 at  $p = 20$  to 1.15 to 1.28 at  $p = 500$ , because a single tree runs one Stage A test per predictor at every node. These ratios match Table 6.

| Task           | $n$    | $p$ | CIT      |             | CIF      |             |
|----------------|--------|-----|----------|-------------|----------|-------------|
|                |        |     | Adaptive | No stopping | Adaptive | No stopping |
| Classification | 500    | 20  | 0.17     | 0.16        | 13.1     | 13.2        |
|                | 500    | 100 | 0.21     | 0.19        | 13.0     | 13.3        |
|                | 500    | 500 | 4.2      | 3.5         | 13.8     | 13.4        |
|                | 2,000  | 20  | 0.61     | 0.57        | 53.7     | 54.8        |
|                | 2,000  | 100 | 0.87     | 0.81        | 45.6     | 46.1        |
|                | 2,000  | 500 | 12.6     | 11.0        | 48.6     | 49.7        |
|                | 8,000  | 20  | 2.8      | 2.7         | 216      | 211         |
|                | 8,000  | 100 | 3.2      | 3.0         | 180      | 182         |
|                | 32,000 | 20  | 11.3     | 10.7        | 988      | 1,015       |
|                | 32,000 | 100 | 11.3     | 10.7        | 655      | 688         |
| Regression     | 500    | 20  | 0.08     | 0.08        | 12.2     | 12.2        |
|                | 500    | 100 | 0.25     | 0.22        | 12.5     | 12.3        |
|                | 500    | 500 | 4.3      | 3.3         | 12.2     | 12.1        |
|                | 2,000  | 20  | 0.38     | 0.36        | 54.9     | 46.3        |
|                | 2,000  | 100 | 1.0      | 0.92        | 42.9     | 43.0        |
|                | 2,000  | 500 | 16.4     | 13.2        | 45.5     | 45.7        |
|                | 8,000  | 20  | 1.7      | 1.6         | 191      | 193         |
|                | 8,000  | 100 | 3.9      | 3.5         | 163      | 163         |
|                | 32,000 | 20  | 8.5      | 8.1         | 788      | 797         |
|                | 32,000 | 100 | 13.2     | 12.1        | 705      | 685         |

**Table 18:** Fit-only wall-clock seconds for one CIT and one 100-tree CIF in the configuration of Appendix E.1, with adaptive stopping (Adaptive) and without stopping (No stopping), on Gaussian predictors with a weak planted signal in five of them. Each entry is the median of two timed fits, each preceded by one untimed identical fit. The cells with  $n \geq 8,000$  and  $p = 500$  were not run. Tree depth is unbounded, so the forest times are not comparable with the depth-3 forests of the head-to-head timing.

## Appendix F Benchmark stability

This appendix reports the leave-one-dataset-out (LODO) configuration checks, the mechanism-matched CIF check, and the method ordering by downstream learner, value of  $k$ , and seed. All use the selected configurations of the main benchmark.

### F.1 LODO configuration sensitivity

Each LODO run selects configurations on all but one dataset of the panel, scores the held-out dataset, and averages scores and ranks over downstream learners and standard values of  $k$ . Tables 19 and 20 report the complete-case and all-method panels. Every single-configuration family keeps its

held-out score exactly, which checks the reselection code. Its mean rank moves only as the tuned families are reselected around it, by at most 0.05 in classification and 0.125 in regression. On the all-method panels CIF loses 0.002 balanced accuracy and 0.008  $R^2$  under reselection, and XGBoost loses 0.03  $R^2$  (0.270 against 0.241). The one large reselection effect is cforest in regression, whose alternative configuration is chosen on one holdout and scores far lower there (mean  $R^2$  0.30 against 0.20).

| Classification |       |       |       |          |       | Regression |       |       |        |          |      |
|----------------|-------|-------|-------|----------|-------|------------|-------|-------|--------|----------|------|
| Method         | LODO  | Fixed | Score | Settings | Main  | Method     | LODO  | Fixed | Score  | Settings | Main |
| RF-RFE         | 2.54  | 2.54  | 0.825 | 1        | 13/13 | ExtraTrees | 4.67  | 4.67  | 0.292  | 1        | 6/6  |
| LightGBM       | 4.31  | 4.46  | 0.813 | 1        | 13/13 | CatBoost   | 6.17  | 6.33  | 0.229  | 1        | 6/6  |
| RF             | 5.08  | 5.23  | 0.802 | 1        | 13/13 | RF-RFE     | 6.67  | 6.67  | 0.333  | 1        | 6/6  |
| CatBoost       | 5.54  | 5.69  | 0.801 | 1        | 13/13 | RF         | 6.83  | 7.00  | 0.260  | 1        | 6/6  |
| XGBoost        | 5.69  | 4.92  | 0.808 | 2        | 11/13 | RT         | 7.00  | 7.00  | 0.266  | 1        | 6/6  |
| Boruta         | 6.23  | 6.38  | 0.791 | 1        | 13/13 | CIF        | 7.33  | 7.00  | 0.240  | 2        | 4/6  |
| ExtraTrees     | 6.62  | 6.77  | 0.792 | 1        | 13/13 | XGBoost    | 8.50  | 8.67  | 0.149  | 2        | 5/6  |
| CIF            | 6.85  | 6.38  | 0.793 | 2        | 11/13 | DT         | 8.67  | 8.83  | 0.124  | 1        | 6/6  |
| cforest        | 8.23  | 8.46  | 0.785 | 1        | 13/13 | Boruta     | 9.17  | 9.33  | 0.118  | 1        | 6/6  |
| DT             | 9.38  | 9.46  | 0.763 | 1        | 13/13 | LightGBM   | 10.50 | 10.50 | -0.214 | 1        | 6/6  |
| RDC filter     | 10.69 | 10.85 | 0.764 | 1        | 13/13 | CIT        | 10.67 | 10.50 | -0.206 | 2        | 5/6  |
| ctree          | 11.77 | 11.77 | 0.749 | 1        | 13/13 | cforest    | 10.67 | 9.67  | 0.092  | 2        | 5/6  |
| CIT            | 12.15 | 12.15 | 0.754 | 1        | 13/13 | PI         | 11.00 | 11.00 | -0.024 | 1        | 6/6  |
| MC filter      | 12.69 | 12.69 | 0.737 | 1        | 13/13 | ctree      | 11.33 | 11.50 | 0.051  | 1        | 6/6  |
| RT             | 13.00 | 13.00 | 0.737 | 1        | 13/13 | PC filter  | 11.67 | 11.83 | 0.099  | 1        | 6/6  |
| PI             | 15.73 | 15.73 | 0.676 | 1        | 13/13 | RDC filter | 12.50 | 12.67 | -0.082 | 1        | 6/6  |
| CPI            | 16.50 | 16.50 | 0.600 | 1        | 13/13 | DC filter  | 13.50 | 13.67 | -0.009 | 1        | 6/6  |
|                |       |       |       |          |       | CPI        | 14.17 | 14.17 | -0.554 | 1        | 6/6  |

**Table 19:** LODO configuration sensitivity on the complete-case panels (13 classification and 6 regression datasets). LODO is the mean rank when each held-out dataset is scored with configurations selected on the other datasets; Fixed is the mean rank on the same panel under the configuration selected on the full benchmark. Lower rank is better; rows are ordered by LODO rank within each task. Score is the mean held-out metric under LODO selection. Settings reports the number of distinct selected configurations; Main reports how often the main benchmark configuration is reselected. Ranks are computed within held-out datasets before averaging, so score order need not match rank order. Entries are mean ranks over the panel datasets; the difference between the fixed and LODO columns is the reported sensitivity; no interval is given.

## F.2 Mechanism-matched CIF check

The benchmark ranks cforest by partykit’s out-of-bag permutation importance and CIF by split importance, so the margin between them mixes the importance mechanism with the way the trees are grown. To separate the two, the selected CIF configuration of each task was refit on every training fold of 20 classification and 8 regression datasets and ranked by the cforest mechanism: one permutation of each feature on each tree’s out-of-bag rows, with the error increase averaged over the 100 trees. The rankings were scored with the benchmark protocol. The 20 classification datasets are the 22 on which CIF and cforest are paired, less **gisette** and **letter**, which were not refit.

Table 21 gives the result. In classification the margin over cforest is unchanged, so it is not an importance-mechanism effect. In regression the medians agree (+0.006 over cforest, -0.002 against split-ranked CIF), and the negative means come from one dataset, coepa2 ( $n = 76$ , 5,144 predictors), on which every method has negative  $R^2$ . The conclusion is therefore stated for classification.

Permutation importance computed on the training rows is the wrong comparator. On the 16 classification datasets that completed, it scores 0.10 below cforest and 0.12 below split-ranked CIF, with the loss concentrated on the small- $n$ , high- $p$  datasets. On the high- $p$  datasets the refit’s split ranking also overlaps the stored benchmark ranking poorly in the top ten (mean Jaccard 0.38

| Classification |       |       |       |          |       | Regression |       |       |        |          |      |
|----------------|-------|-------|-------|----------|-------|------------|-------|-------|--------|----------|------|
| Method         | LODO  | Fixed | Score | Settings | Main  | Method     | LODO  | Fixed | Score  | Settings | Main |
| RF-RFE         | 4.19  | 4.19  | 0.837 | 1        | 21/21 | ExtraTrees | 5.00  | 5.00  | 0.353  | 1        | 8/8  |
| XGBoost        | 5.81  | 5.81  | 0.828 | 1        | 21/21 | CIF        | 6.50  | 6.25  | 0.315  | 2        | 7/8  |
| RF             | 5.86  | 5.86  | 0.823 | 1        | 21/21 | CatBoost   | 6.62  | 6.75  | 0.304  | 1        | 8/8  |
| LightGBM       | 6.05  | 6.05  | 0.829 | 1        | 21/21 | RF-RFE     | 6.88  | 6.88  | 0.382  | 1        | 8/8  |
| CIF            | 6.10  | 5.86  | 0.820 | 2        | 20/21 | RF         | 7.50  | 7.63  | 0.327  | 1        | 8/8  |
| Boruta         | 6.57  | 6.62  | 0.816 | 1        | 21/21 | RT         | 8.25  | 8.25  | 0.330  | 1        | 8/8  |
| CatBoost       | 6.71  | 6.76  | 0.822 | 1        | 21/21 | DT         | 9.25  | 9.38  | 0.225  | 1        | 8/8  |
| ExtraTrees     | 7.29  | 7.33  | 0.817 | 1        | 21/21 | Boruta     | 9.38  | 9.50  | 0.221  | 1        | 8/8  |
| cforest        | 8.29  | 8.33  | 0.812 | 1        | 21/21 | cforest    | 9.50  | 8.75  | 0.202  | 2        | 7/8  |
| DT             | 8.62  | 8.62  | 0.799 | 1        | 21/21 | PC filter  | 9.75  | 9.88  | 0.207  | 1        | 8/8  |
| RDC filter     | 11.00 | 11.05 | 0.794 | 1        | 21/21 | XGBoost    | 10.00 | 10.13 | 0.241  | 2        | 7/8  |
| PI             | 11.67 | 11.67 | 0.745 | 1        | 21/21 | LightGBM   | 10.12 | 10.13 | -0.028 | 1        | 8/8  |
| MC filter      | 11.86 | 11.86 | 0.778 | 1        | 21/21 | RDC filter | 10.88 | 11.00 | 0.071  | 1        | 8/8  |
| RT             | 12.81 | 12.81 | 0.780 | 1        | 21/21 | CIT        | 11.25 | 11.13 | -0.023 | 2        | 7/8  |
| ctree          | 12.86 | 12.86 | 0.785 | 1        | 21/21 | ctree      | 11.25 | 11.38 | 0.167  | 1        | 8/8  |
| CIT            | 13.14 | 13.14 | 0.788 | 1        | 21/21 | PI         | 11.75 | 11.75 | 0.112  | 1        | 8/8  |
| CPI            | 14.19 | 14.19 | 0.694 | 1        | 21/21 | DC filter  | 12.12 | 12.25 | 0.126  | 1        | 8/8  |
|                |       |       |       |          |       | CPI        | 15.00 | 15.00 | -0.292 | 1        | 8/8  |

**Table 20:** LODO configuration sensitivity on the all-method panels (21 classification and 8 regression datasets) used by the main table. Columns as in Table 19; the Fixed column repeats the main-table mean ranks.

in classification), because most features never split there and their tied zero importances fall in arbitrary order. On the low- $p$  datasets the overlap is complete.

| Comparison                                  | Datasets | Mean   | Median | Wins-losses |
|---------------------------------------------|----------|--------|--------|-------------|
| <i>Classification (balanced accuracy)</i>   |          |        |        |             |
| CIF (out-of-bag permutation) vs cforest     | 20       | +0.012 | +0.006 | 15-5        |
| CIF (out-of-bag permutation) vs CIF (split) | 20       | +0.001 | -0.001 | 8-12        |
| CIF (split) vs cforest                      | 20       | +0.011 | +0.008 | 16-4        |
| CIF (training-row permutation) vs cforest   | 16       | -0.100 | -0.055 | 6-10        |
| <i>Regression (<math>R^2</math>)</i>        |          |        |        |             |
| CIF (out-of-bag permutation) vs cforest     | 8        | -0.115 | +0.006 | 6-2         |
| CIF (out-of-bag permutation) vs CIF (split) | 8        | -0.136 | -0.002 | 4-4         |
| CIF (split) vs cforest                      | 8        | +0.021 | +0.009 | 6-2         |
| CIF (training-row permutation) vs cforest   | 6        | -0.016 | +0.006 | 4-2         |

**Table 21:** CIF ranked by the importance mechanism of cforest. Directed differences in dataset-mean score (balanced accuracy or  $R^2$  over downstream learners and standard  $k$ ) between the first and second method, summarized over datasets: mean, median, and the number of datasets on which the first method scores higher or lower. Out-of-bag permutation is partykit-style out-of-bag permutation importance computed on the refit CIF; training-row permutation is scikit-learn permutation importance on the training rows (16 and 6 datasets completed). The pendigits dataset enters the out-of-bag rows with four of its five seeds.

### F.3 Breakdowns by downstream learner, top- $k$ value, and seed

The main benchmark averages over downstream learners, standard values of  $k$ , folds, and seeds. The next tables show how method ordering changes when results are split by downstream learner, value of  $k$ , and seed. They use the same selected method configurations as the main benchmark.

For the learner and  $k$  checks, one unit is one downstream learner paired with one standard value of  $k$ . Within each unit, methods are ordered by mean rank among datasets where every benchmark method is available for that learner-by- $k$  combination; ties use average ranks. Tables 22 and 23

show all 15 learner-by- $k$  combinations for each task. Rows follow the main benchmark order. The learner columns report mean position over the five standard values of  $k$  for that learner; lower positions are better. Mean position averages the positions obtained after ordering methods within each learner-by- $k$  combination; mean rank averages the dataset-level ranks directly. Top 3 of 15 and Top 5 of 15 count the learner-by- $k$  combinations where the method ranks in the top 3 or top 5.

| Method     | KNN  | LR   | SVM  | Mean position | Mean rank | Best/worst | Top 3<br>of 15 | Top 5<br>of 15 |
|------------|------|------|------|---------------|-----------|------------|----------------|----------------|
| RF-RFE     | 1.7  | 5.0  | 1.8  | 2.8           | 5.2       | 1.0/8.0    | 10/15          | 13/15          |
| XGBoost    | 5.4  | 2.7  | 3.4  | 3.8           | 5.8       | 2.0/8.0    | 9/15           | 11/15          |
| CIF        | 4.2  | 4.4  | 5.7  | 4.8           | 6.7       | 2.0/7.0    | 3/15           | 10/15          |
| RF         | 3.6  | 5.1  | 5.1  | 4.6           | 6.4       | 1.5/7.0    | 3/15           | 10/15          |
| LightGBM   | 4.2  | 2.2  | 2.0  | 2.8           | 5.5       | 1.0/6.0    | 11/15          | 13/15          |
| Boruta     | 5.2  | 8.6  | 7.8  | 7.2           | 7.5       | 1.0/9.0    | 2/15           | 2/15           |
| CatBoost   | 6.1  | 3.4  | 4.1  | 4.5           | 6.3       | 1.0/8.0    | 5/15           | 10/15          |
| ExtraTrees | 6.8  | 7.6  | 8.8  | 7.7           | 7.7       | 2.0/12.0   | 1/15           | 1/15           |
| cforest    | 9.5  | 7.6  | 9.3  | 8.8           | 8.2       | 5.0/11.0   | 0/15           | 1/15           |
| DT         | 10.4 | 9.2  | 8.4  | 9.3           | 9.5       | 4.0/13.5   | 0/15           | 2/15           |
| RDC filter | 11.2 | 12.0 | 12.6 | 11.9          | 10.8      | 10.0/15.0  | 0/15           | 0/15           |
| PI         | 15.3 | 15.8 | 15.8 | 15.6          | 13.4      | 13.5/16.0  | 0/15           | 0/15           |
| MC filter  | 12.0 | 13.6 | 13.8 | 13.1          | 11.3      | 10.0/17.0  | 0/15           | 0/15           |
| RT         | 15.0 | 13.0 | 13.5 | 13.8          | 11.9      | 10.0/16.0  | 0/15           | 0/15           |
| ctree      | 12.1 | 13.0 | 12.4 | 12.5          | 11.0      | 10.0/15.0  | 0/15           | 0/15           |
| CIT        | 13.3 | 12.8 | 11.7 | 12.6          | 11.0      | 9.0/16.0   | 0/15           | 0/15           |
| CPI        | 17.0 | 17.0 | 16.8 | 16.9          | 14.8      | 16.0/17.0  | 0/15           | 0/15           |

**Table 22:** Classification sensitivity by downstream learner and value of  $k$ . Lower values are better. KNN, LR, and SVM denote downstream learners; Top 3 of 15 and Top 5 of 15 count the learner-by- $k$  combinations where the method ranks in the top 3 or top 5. The learner columns and mean position average the method’s ordinal position among the methods over learner-by- $k$  combinations (the five values of  $k$  for one learner, or all 15 combinations); best and worst are its extreme positions over the 15 combinations; mean rank averages its dataset-level rank over datasets and combinations. The dataset counts at  $k = 5, 10, 25, 50, 100$  are 21, 20, 14, 14, and 13. The spread across learner and  $k$  columns is the reported sensitivity; no interval is given.


In the classification learner-by- $k$  sensitivity table, CIF is top five in 10 of the 15 learner-by- $k$  combinations and top three in 3 of 15. Its mean position is close to RF’s and is better than the single-tree and filter baselines in the mean-position summary. RF-RFE, LightGBM, XGBoost, and CatBoost have lower mean positions.

CIF has the fourth-lowest regression mean position in this breakdown, after ExtraTrees, RF-RFE, and CatBoost, and remains ahead of ctree, cforest, CIT, and most filter and wrapper methods in this summary. The pairwise figures use the datasets available for each comparator.


For the seed checks, each method is ranked separately within each fixed seed. Keeping only datasets with results for every method, downstream learner, standard top- $k$  value, and seed leaves 13 classification datasets and 6 regression datasets complete across all five seeds. These tables summarize seed variation by rank without intervals or tests. In these tables, a seed column is the method’s ordinal position after sorting that seed’s averaged dataset-level ranks, while mean rank is the averaged dataset-level rank value itself. Rows follow the main benchmark order.

| Method     | KNN  | Ridge | SVR  | Mean position | Mean rank | Best/worst | Top 3<br>of 15 | Top 5<br>of 15 |
|------------|------|-------|------|---------------|-----------|------------|----------------|----------------|
| ExtraTrees | 6.2  | 2.4   | 2.6  | 3.7           | 6.8       | 1.0/11.0   | 9/15           | 11/15          |
| CIF        | 4.6  | 9.9   | 2.4  | 5.6           | 7.8       | 1.0/12.0   | 7/15           | 8/15           |
| CatBoost   | 2.0  | 8.9   | 3.2  | 4.7           | 7.3       | 1.0/15.0   | 6/15           | 12/15          |
| RF-RFE     | 3.2  | 3.0   | 5.9  | 4.0           | 7.1       | 1.0/9.0    | 7/15           | 11/15          |
| RF         | 7.8  | 4.2   | 10.0 | 7.3           | 8.3       | 2.0/13.0   | 2/15           | 4/15           |
| RT         | 4.4  | 10.0  | 6.1  | 6.8           | 8.5       | 2.0/17.0   | 3/15           | 7/15           |
| cforest    | 11.4 | 11.7  | 9.9  | 11.0          | 10.1      | 6.0/16.0   | 0/15           | 0/15           |
| DT         | 6.7  | 9.4   | 9.1  | 8.4           | 9.0       | 4.0/16.0   | 0/15           | 2/15           |
| Boruta     | 12.5 | 4.4   | 11.9 | 9.6           | 9.4       | 2.0/16.0   | 2/15           | 2/15           |
| PC filter  | 12.8 | 12.0  | 11.0 | 11.9          | 10.7      | 8.0/16.0   | 0/15           | 0/15           |
| LightGBM   | 9.2  | 10.4  | 9.8  | 9.8           | 9.6       | 1.0/17.0   | 3/15           | 3/15           |
| XGBoost    | 6.5  | 15.9  | 9.3  | 10.6          | 9.9       | 1.5/18.0   | 1/15           | 4/15           |
| RDC filter | 14.3 | 10.1  | 6.5  | 10.3          | 9.8       | 3.0/16.0   | 1/15           | 2/15           |
| CIT        | 14.7 | 12.4  | 14.7 | 13.9          | 11.0      | 8.5/18.0   | 0/15           | 0/15           |
| ctree      | 8.2  | 9.2   | 17.4 | 11.6          | 10.9      | 1.0/18.0   | 2/15           | 4/15           |
| PI         | 12.3 | 7.1   | 14.4 | 11.3          | 10.2      | 3.0/16.0   | 1/15           | 2/15           |
| DC filter  | 16.4 | 13.9  | 9.6  | 13.3          | 11.1      | 7.0/17.0   | 0/15           | 0/15           |
| CPI        | 17.8 | 16.1  | 17.2 | 17.0          | 13.6      | 9.5/18.0   | 0/15           | 0/15           |

**Table 23:** Regression sensitivity by downstream learner and value of  $k$ . Lower values are better. KNN, Ridge, and SVR denote downstream learners; Top 3 of 15 and Top 5 of 15 count the learner-by- $k$  combinations where the method ranks in the top 3 or top 5. The learner columns and mean position average the method’s ordinal position among the methods over learner-by- $k$  combinations (the five values of  $k$  for one learner, or all 15 combinations); best and worst are its extreme positions over the 15 combinations; mean rank averages its dataset-level rank over datasets and combinations. The dataset counts at  $k = 5, 10, 25, 50, 100$  are 8, 8, 7, 7, and 6. The spread across learner and  $k$  columns is the reported sensitivity; no interval is given.

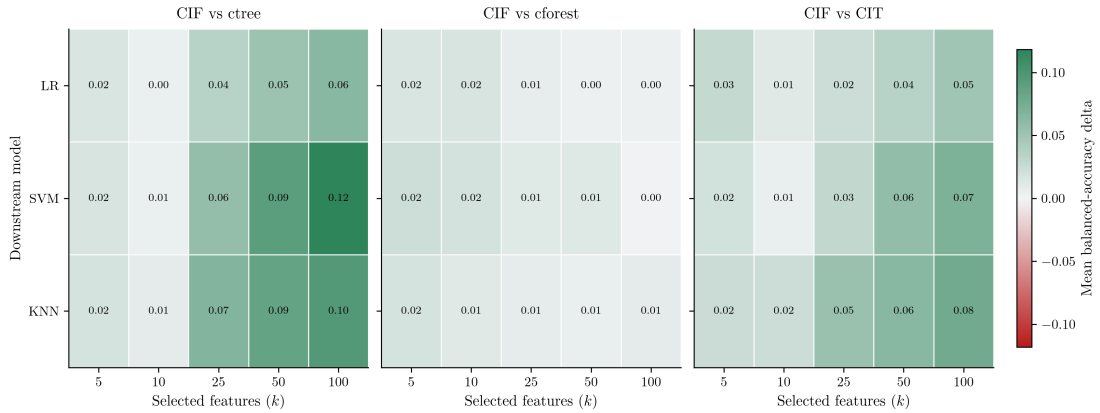

**Figure 6:** Classification CIF margins against ctree, cforest, and CIT by downstream learner and value of  $k$ . Each plotted value is the mean balanced-accuracy difference, CIF minus comparator, for one downstream learner and one value of  $k$ ; positive values favor CIF. Dataset counts by  $k$  are 21, 20, 14, 14, and 13 for ctree, 22, 21, 15, 15, and 14 for cforest, and 23, 22, 16, 16, and 15 for CIT. Values are means over datasets; the bootstrap intervals for the pooled differences are in Table 3.

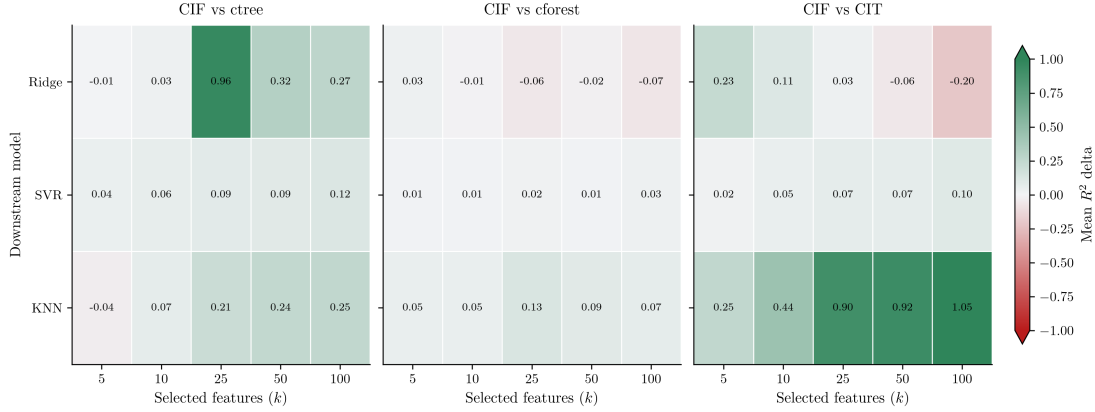

**Figure 7:** Regression CIF margins against ctrees, cforest, and CIT by downstream learner and value of  $k$ . Each plotted value is the mean  $R^2$  difference, CIF minus comparator, for one downstream learner and one value of  $k$ ; positive values favor CIF. Dataset counts by  $k$  are 8, 8, 7, 7, and 6 for each comparison. Large positive plotted values can reflect negative mean  $R^2$  for the comparator. Numeric labels show the unclipped values; the color scale is clipped at  $\pm 1$  for readability. Values are means over datasets; the bootstrap intervals for the pooled differences are in Table 3.

| Method     | Seed 1 | Seed 2 | Seed 3 | Seed 4 | Seed 5 | Mean position | Mean rank |
|------------|--------|--------|--------|--------|--------|---------------|-----------|
| RF-RFE     | 1      | 1      | 1      | 1      | 1      | 1.0           | 4.9       |
| XGBoost    | 2      | 4      | 2      | 3      | 3      | 2.8           | 5.8       |
| CIF        | 6      | 5      | 6      | 5      | 7      | 5.8           | 6.9       |
| RF         | 5      | 6      | 4      | 6      | 4      | 5.0           | 6.6       |
| LightGBM   | 3      | 2      | 3      | 2      | 2      | 2.4           | 5.6       |
| Boruta     | 7      | 7      | 8      | 7      | 8      | 7.4           | 7.6       |
| CatBoost   | 4      | 3      | 5      | 4      | 5      | 4.2           | 6.4       |
| ExtraTrees | 8      | 8      | 7      | 8      | 6      | 7.4           | 7.5       |
| cforest    | 9      | 9      | 9      | 9      | 9      | 9.0           | 8.3       |
| DT         | 10     | 10     | 11     | 10     | 10     | 10.2          | 9.6       |
| RDC filter | 11     | 11     | 12     | 13     | 12     | 11.8          | 10.4      |
| PI         | 16     | 16     | 16     | 16     | 16     | 16.0          | 14.2      |
| MC filter  | 13     | 14     | 14     | 14     | 15     | 14.0          | 11.1      |
| RT         | 15     | 15     | 15     | 15     | 14     | 14.8          | 11.6      |
| ctree      | 14     | 12     | 10     | 12     | 11     | 11.8          | 10.4      |
| CIT        | 12     | 13     | 13     | 11     | 13     | 12.4          | 10.5      |
| CPI        | 17     | 17     | 17     | 17     | 17     | 17.0          | 15.7      |

**Table 24:** Classification seed sensitivity on the 13 datasets complete across all five seeds. Each seed column is the method’s ordinal position after sorting methods by their averaged dataset-level ranks for that seed. Mean position averages those five ordinal positions; mean rank reports the averaged dataset-level rank value itself. Lower values are better. The spread across seed columns is the reported sensitivity; no interval is given.

| Method     | Seed 1 | Seed 2 | Seed 3 | Seed 4 | Seed 5 | Mean position | Mean rank |
|------------|--------|--------|--------|--------|--------|---------------|-----------|
| ExtraTrees | 3      | 2      | 3      | 3      | 3      | 2.8           | 7.4       |
| CIF        | 6      | 5      | 8      | 8      | 4      | 6.2           | 8.6       |
| CatBoost   | 2      | 7      | 4      | 1      | 1      | 3.0           | 7.4       |
| RF-RFE     | 1      | 1      | 1.5    | 4      | 2      | 1.9           | 7.2       |
| RF         | 5      | 3      | 5      | 7      | 7      | 5.4           | 8.5       |
| RT         | 4      | 4      | 1.5    | 5      | 6      | 4.1           | 8.2       |
| cforest    | 15     | 13     | 13     | 12     | 11     | 12.8          | 10.2      |
| DT         | 14     | 6      | 7      | 2      | 5      | 6.8           | 8.6       |
| Boruta     | 9      | 10     | 10     | 11     | 8      | 9.6           | 9.3       |
| PC filter  | 16     | 16     | 15     | 14     | 16     | 15.4          | 11.3      |
| LightGBM   | 8      | 9      | 9      | 10     | 10     | 9.2           | 9.3       |
| XGBoost    | 7      | 8      | 11     | 6      | 12     | 8.8           | 9.2       |
| RDC filter | 10     | 14     | 14     | 13     | 14     | 13.0          | 10.4      |
| CIT        | 12     | 12     | 17     | 17     | 9      | 13.4          | 10.7      |
| ctree      | 13     | 15     | 12     | 15     | 13     | 13.6          | 10.6      |
| PI         | 11     | 11     | 6      | 9      | 15     | 10.4          | 9.7       |
| DC filter  | 17     | 17     | 16     | 16     | 17     | 16.6          | 11.9      |
| CPI        | 18     | 18     | 18     | 18     | 18     | 18.0          | 12.8      |

**Table 25:** Regression seed sensitivity on the 6 datasets complete across all five seeds. Each seed column is the method’s ordinal position after sorting methods by their averaged dataset-level ranks for that seed; fractional positions indicate ties. Mean position averages those five ordinal positions; mean rank reports the averaged dataset-level rank value itself. Lower values are better. The spread across seed columns is the reported sensitivity; no interval is given.

## Appendix G Stage B comparison tables

Tables 26 to 29 give the null calibration, fitting time, real-data, and split-rate results of the Stage B comparison in Section 5.3; the design is in Section 4.7. The entries of Tables 27 and 28 are medians over five seeds.

| Task           | $n$ | Bins | Per-threshold |             | Max-type |             |
|----------------|-----|------|---------------|-------------|----------|-------------|
|                |     |      | Adaptive      | No stopping | Adaptive | No stopping |
| Classification | 100 | 16   | 0.018         | 0.018       | 0.034    | 0.035       |
|                | 100 | 64   | 0.013         | 0.013       | 0.035    | 0.037       |
|                | 100 | 256  | 0.009         | 0.010       | 0.036    | 0.038       |
|                | 200 | 16   | 0.020         | 0.020       | 0.033    | 0.034       |
|                | 200 | 64   | 0.014         | 0.015       | 0.033    | 0.034       |
|                | 200 | 256  | 0.009         | 0.009       | 0.033    | 0.035       |
|                | 500 | 16   | 0.020         | 0.020       | 0.030    | 0.031       |
|                | 500 | 64   | 0.014         | 0.014       | 0.032    | 0.033       |
|                | 500 | 256  | 0.007         | 0.007       | 0.032    | 0.034       |
| Regression     | 100 | 16   | 0.027         | 0.027       | 0.032    | 0.033       |
|                | 100 | 64   | 0.017         | 0.019       | 0.034    | 0.035       |
|                | 100 | 256  | 0.014         | 0.015       | 0.034    | 0.035       |
|                | 200 | 16   | 0.028         | 0.029       | 0.032    | 0.035       |
|                | 200 | 64   | 0.023         | 0.024       | 0.035    | 0.037       |
|                | 200 | 256  | 0.012         | 0.013       | 0.036    | 0.038       |
|                | 500 | 16   | 0.026         | 0.026       | 0.029    | 0.030       |
|                | 500 | 64   | 0.020         | 0.020       | 0.029    | 0.031       |
|                | 500 | 256  | 0.011         | 0.011       | 0.029    | 0.032       |

**Table 26:** False-split rate of a depth-one tree under the global null at level 0.05, by Stage B rule and stopping mode, over 10,000 replicates per cell (five seeds of 2,000). The tree has five independent Gaussian predictors and an independent response, and the rate covers Stage A followed by Stage B. Bins is the histogram setting. Every 95% Clopper-Pearson interval lies below 0.05, with largest upper limit 0.042.

| Task           | $n$    | Bins | Adaptive      |          | No stopping   |       |          |             |
|----------------|--------|------|---------------|----------|---------------|-------|----------|-------------|
|                |        |      | Per-threshold | Max-type | Per-threshold | Fixed | Max-type | Fixed depth |
| Classification | 1,000  | 16   | 0.04          | 0.04     | 0.05          | 0.04  | 0.06     | 5           |
|                | 1,000  | 64   | 0.07          | 0.04     | 0.20          | 0.06  | 0.11     | 0           |
|                | 1,000  | 256  | 0.45          | 0.09     | 3.52          | 0.24  | 0.28     | 0           |
|                | 4,000  | 16   | 0.12          | 0.11     | 0.19          | 0.14  | 0.22     | 6           |
|                | 4,000  | 64   | 0.31          | 0.15     | 0.99          | 0.22  | 0.47     | 0           |
|                | 4,000  | 256  | 1.83          | 0.31     | 14.2          | 0.86  | 1.35     | 0           |
|                | 16,000 | 16   | 0.47          | 0.37     | 0.75          | 0.55  | 0.93     | 8           |
|                | 16,000 | 64   | 1.11          | 0.59     | 3.57          | 0.89  | 2.10     | 0           |
|                | 16,000 | 256  | 9.36          | 1.22     | 59.0          | 3.46  | 6.28     | 0           |
| Regression     | 1,000  | 16   | 0.06          | 0.05     | 0.07          | 0.06  | 0.08     | 6           |
|                | 1,000  | 64   | 0.10          | 0.07     | 0.22          | 0.06  | 0.15     | 0           |
|                | 1,000  | 256  | 0.22          | 0.10     | 0.84          | 0.22  | 0.30     | 0           |
|                | 4,000  | 16   | 0.17          | 0.15     | 0.22          | 0.18  | 0.26     | 8           |
|                | 4,000  | 64   | 0.37          | 0.22     | 1.10          | 0.20  | 0.54     | 0           |
|                | 4,000  | 256  | 1.29          | 0.40     | 8.77          | 0.79  | 1.39     | 0           |
|                | 16,000 | 16   | 0.59          | 0.50     | 0.82          | 0.65  | 1.03     | 10          |
|                | 16,000 | 64   | 1.12          | 0.71     | 3.31          | 0.84  | 2.15     | 0           |
|                | 16,000 | 256  | 7.51          | 1.39     | 54.5          | 3.26  | 6.27     | 0           |

**Table 27:** Fitting time in seconds of one tree on ten Gaussian predictors with a planted linear signal, by Stage B rule and stopping mode. All arms are timed in one run of five seeds; each entry is the median over seeds of the median of three timed fits, and each timed fit follows an untimed identical fit, so compilation is excluded. Bins is the histogram setting. Fixed is the per-threshold rule held at 999 permutations per candidate; it exists only with no stopping because the sequential path raises any budget to the floor  $\lceil K/\alpha \rceil$ , and Fixed depth is its fitted depth (0 where it never splits, because  $\alpha/K < 1/1000$ ). No fit reached the 1,200-second cap.

| Dataset     | $n$   | $p$ | Rule          | Adaptive |         |       | No stopping |         |       |
|-------------|-------|-----|---------------|----------|---------|-------|-------------|---------|-------|
|             |       |     |               | Score    | Seconds | Depth | Score       | Seconds | Depth |
| vowel       | 990   | 10  | Per-threshold | 0.689    | 0.23    | 10.0  | 0.691       | 0.57    | 10.0  |
|             |       |     | Max-type      | 0.705    | 0.15    | 11.2  | 0.717       | 0.40    | 11.4  |
| spam        | 4,601 | 57  | Per-threshold | 0.908    | 0.86    | 11.2  | 0.908       | 3.03    | 11.4  |
|             |       |     | Max-type      | 0.902    | 0.71    | 12.4  | 0.908       | 3.01    | 11.4  |
| page-blocks | 5,473 | 10  | Per-threshold | 0.768    | 0.69    | 10.0  | 0.768       | 5.85    | 10.0  |
|             |       |     | Max-type      | 0.750    | 0.29    | 11.2  | 0.748       | 1.45    | 10.0  |
| imports-85  | 205   | 76  | Per-threshold | 0.638    | 0.07    | 5.4   | 0.638       | 0.17    | 5.4   |
|             |       |     | Max-type      | 0.698    | 0.07    | 4.8   | 0.671       | 0.18    | 5.2   |
| residential | 372   | 107 | Per-threshold | 0.925    | 0.49    | 6.4   | 0.926       | 2.30    | 6.4   |
|             |       |     | Max-type      | 0.933    | 0.57    | 7.2   | 0.931       | 2.53    | 6.6   |
| facebook    | 500   | 21  | Per-threshold | 0.754    | 0.33    | 9.0   | 0.754       | 2.09    | 9.0   |
|             |       |     | Max-type      | 0.803    | 0.15    | 9.8   | 0.780       | 0.25    | 8.6   |

**Table 28:** Five-fold held-out score (balanced accuracy for vowel, spam, and page-blocks;  $R^2$  for imports-85, residential, and facebook), fitting time in seconds, and fitted depth of one tree at the 256-bin histogram setting, by Stage B rule and stopping mode. Each entry is the median over five seeds of the fold assignment. Each time is the second of two identical fits, so compilation is excluded.

| Task           | Effect | $n$ | Per-threshold |       |       | Max-type |       |       |
|----------------|--------|-----|---------------|-------|-------|----------|-------|-------|
|                |        |     | 16            | 64    | 256   | 16       | 64    | 256   |
| Classification | 0.05   | 100 | 0.036         | 0.025 | 0.020 | 0.058    | 0.060 | 0.061 |
|                | 0.05   | 200 | 0.058         | 0.047 | 0.033 | 0.084    | 0.088 | 0.088 |
|                | 0.05   | 500 | 0.159         | 0.148 | 0.107 | 0.192    | 0.193 | 0.193 |
|                | 0.10   | 100 | 0.126         | 0.104 | 0.092 | 0.170    | 0.170 | 0.172 |
|                | 0.10   | 200 | 0.315         | 0.296 | 0.247 | 0.362    | 0.360 | 0.364 |
|                | 0.10   | 500 | 0.820         | 0.813 | 0.786 | 0.828    | 0.830 | 0.832 |
|                | 0.20   | 100 | 0.698         | 0.676 | 0.658 | 0.727    | 0.729 | 0.730 |
|                | 0.20   | 200 | 0.971         | 0.972 | 0.968 | 0.972    | 0.972 | 0.972 |
| Regression     | 0.20   | 500 | 1.000         | 1.000 | 1.000 | 1.000    | 1.000 | 1.000 |
|                | 0.2    | 100 | 0.040         | 0.031 | 0.026 | 0.050    | 0.051 | 0.054 |
|                | 0.2    | 200 | 0.079         | 0.066 | 0.045 | 0.086    | 0.091 | 0.090 |
|                | 0.2    | 500 | 0.178         | 0.167 | 0.118 | 0.184    | 0.189 | 0.189 |
|                | 0.4    | 100 | 0.126         | 0.104 | 0.092 | 0.137    | 0.143 | 0.144 |
|                | 0.4    | 200 | 0.326         | 0.297 | 0.246 | 0.332    | 0.338 | 0.340 |
|                | 0.4    | 500 | 0.809         | 0.797 | 0.774 | 0.809    | 0.814 | 0.811 |
|                | 0.8    | 100 | 0.634         | 0.617 | 0.602 | 0.643    | 0.647 | 0.651 |
|                | 0.8    | 200 | 0.962         | 0.962 | 0.955 | 0.963    | 0.964 | 0.963 |
|                | 0.8    | 500 | 1.000         | 1.000 | 1.000 | 1.000    | 1.000 | 1.000 |


**Table 29:** Split rate at nominal level 0.05 of a depth-one tree with adaptive stopping when the response depends on one of five Gaussian predictors through a step at zero, by Stage B construction and bin setting (columns 16, 64, 256), over 2,500 replicates per cell (five seeds of 500). The two rules have different realized sizes at this level (Table 26), so the columns are not a power comparison; Table 7 matches them at equal size. Effect is the class-probability shift  $\pm\delta$  around one half in classification and the mean shift in standard-deviation units in regression. No stopping agrees within 0.014 in every cell.

## Appendix H Feature use in sampled forests


Figures 8 and 9 extend the feature-use measurement of Section 5.6 to  $p \in \{100, 500, 1,000\}$ , for classification and regression separately. Each forest uses 1,000 trees per fit. For each method and feature dimension  $p$ , each point is the mean over  $n_{\text{informative}} \in \{1, 2, 5, 10\}$ , and the capped bar spans the minimum and maximum over those four sparse settings. The values quoted below for designs with one, two, or five informative features are single-design values from the same runs, not read from the plotted means.

In classification, evaluating all nonconstant features at each split gives the largest informative-feature gains in sparse high- $p$  settings. CIF-all isolates feature subsampling because feature muting and the other tree settings are held fixed. Averaged over the 12 classification designs, CIF uses informative features in 33.2% of splits and CIF-all in 91.7%, and CIF uses more distinct uninformative features, a mean of 265.1 against 93.4, where each count is the number of distinct uninformative features used anywhere in the five pooled fits of a design. With two informative features and  $p=100$ , CIF uses informative features in 40.0% of splits, while CIF-all does so in 100.0%. The corresponding values are 12.2% versus 90.2% at  $p=500$  and 9.0% versus 100.0% at  $p=1,000$ , and in those three designs CIF-all uses 70, 264, and 439 fewer distinct uninformative features than CIF (totals over the pooled fits). With five informative features, the CIF-all minus CIF differences are 25.1, 56.4, and 54.3% at  $p=100$ ,  $p=500$ , and  $p=1,000$ .

Regression shows a similar informative-feature use pattern in the one- and two-informative-feature settings, and there CIF-all uses more distinct uninformative features than CIF. Averaged over the regression designs, CIF-all uses informative features in 42.3% of splits against 27.8% for CIF, and a mean of 528.8 distinct uninformative features against 367.7. With two informative features and  $p=100$ , CIF uses informative features in 39.9% of splits, while CIF-all does so in 58.8%. The corresponding values are 19.7% versus 46.7% at  $p=500$  and 11.6% versus 35.9% at  $p=1,000$ . With one informative feature, the CIF-all minus CIF differences are 29.8, 18.9, and 42.1%.

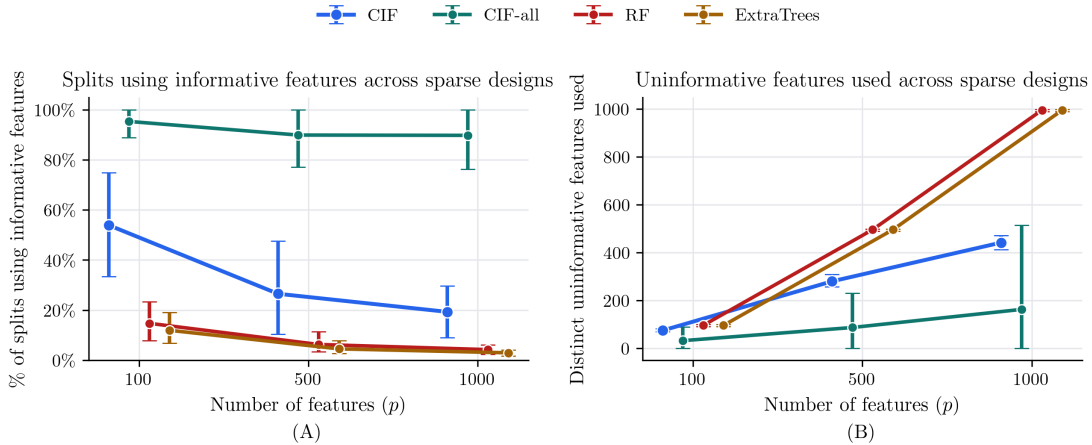

**Figure 8:** Classification forest feature sampling by feature dimension  $p$  with 1,000 trees per fit. Points are means over  $n_{\text{informative}} \in \{1, 2, 5, 10\}$ ; capped bars span the minimum-to-maximum values across those four sparse designs. (A) shows % of splits using informative features; (B) shows the number of distinct uninformative features used.

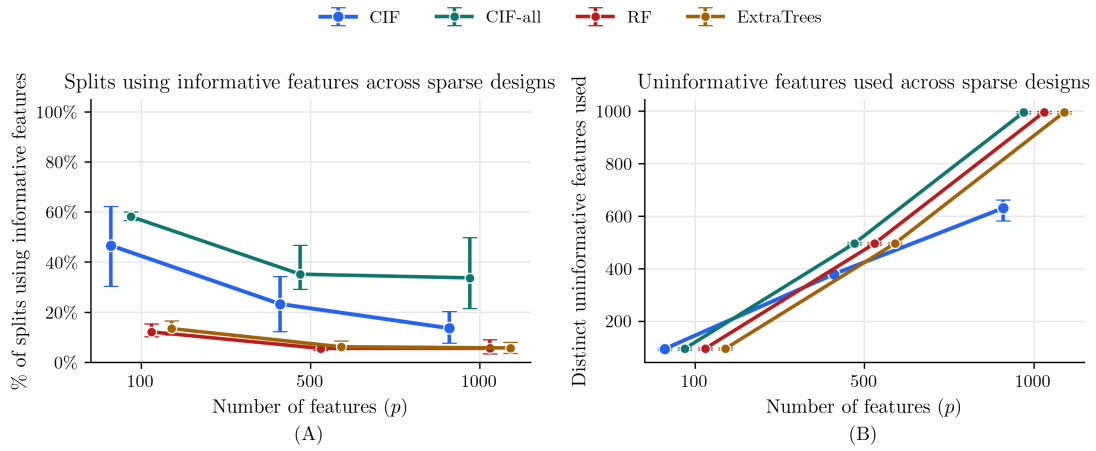

**Figure 9:** Regression forest feature sampling by feature dimension  $p$  with 1,000 trees per fit. Points are means over  $n_{\text{informative}} \in \{1, 2, 5, 10\}$ ; capped bars span the minimum-to-maximum values across those four sparse designs. (A) shows % of splits using informative features; (B) shows the number of distinct uninformative features used.