

# Conditional Inference Trees and Forests for Feature Selection

Robert Milletich, Justin Downes, Steve Goley, Newel Hirst  
Amazon Web Services  
{rmilleti,jusdow,sgoley,nhirst}@amazon.com

## Abstract

Decision trees that choose a feature and a threshold in one search favor features with many possible thresholds. Conditional inference trees (CIT) and forests (CIF) test features before choosing thresholds to reduce this split selection bias, but their repeated permutation tests make them costly. We benchmark CIT and CIF as feature rankers against 15 classification and 16 regression rankers on 31 real datasets and on synthetic designs with known informative features, scoring each ranking by the held-out balanced accuracy or  $R^2$  of fixed learners on its top- $k$  features. CIF ranks features as well as random forests (RF), tied 3rd of 17 in classification and 2nd of 18 in regression, and better than every other conditional inference method, while the remedies for the bias of RF importance rank below RF. On panels where every method completed it is tied 6th and 5th, and the regression ordering is descriptive. CIF recovers the informative features only as well as the middle of the field. The forest rather than the split test carries its ranking: unbiased split selection removes the RF preference for many-valued features without improving recovery or prediction. The split tests set the cost instead: at the minimum budget their Bonferroni corrections cost of order  $m^2/\alpha$  and  $K^2/\alpha$  permutations per node over  $m$  features and  $K$  candidate thresholds. A max-type threshold test keeps the fixed-node guarantee with about 999 $K$  statistic evaluations, loses 0.006 in power at equal realized size, and moves CIF to 5th and 4th. CIF thus matches RF as a feature ranker with valid split tests, and the max-type test makes them affordable.

## 1 Introduction

Conditional inference separates feature selection from threshold optimization to reduce split selection bias. Classification and regression trees (CART) choose both a feature and a threshold from the same label-dependent search, which helps explain the well-documented preference for features with many admissible cutpoints [4, 23, 27, 28, 36, 38, 39]. In the conditional inference framework [18, 19], the Stage A feature test checks features for association with the response at the current node and selects among them; the Stage B threshold test then chooses a threshold for the selected feature. That separation addresses split selection bias, but the classical approach can require substantial computation through large permutation budgets and exhaustive threshold scans at every node. The same conditional inference framework also motivated later work on conditional variable importance [40]. A related line of work uses forests directly for variable screening and ranking, rather than only for final prediction [10].

We evaluate conditional inference trees (CIT) and conditional inference forests (CIF), as implemented in the software of Milletich et al. [30], as feature selection methods, and ask how their rankings compare with established rankers and what the Bonferroni corrections inside their split tests cost and change. The feature correction divides the Stage A level by the number of features tested at a node, and the threshold correction divides the Stage B level by the number of candidate thresholds. Each ranking is judged by how well fixed downstream learners predict from its top- $k$

features, a feature-selection benchmark separate from work on trees and forests as direct predictors or causal estimators [1, 3, 43]. For the second question, the theory shows that each split test controls its level at a fixed node, so the ablations measure the cost of valid tests.

**Contributions.** This paper provides four things.

- (1) A benchmark of the ranking quality of CIT and CIF for downstream prediction on 31 real datasets, with 15 and 16 competing rankers per task and checks that the result is not an artifact of the setup (Section 5.1). CIF matches random forests and outranks the other conditional inference methods, and this holds under configuration reselection, across downstream learners, values of  $k$ , and seeds, and with CIF and cforest ranked by one importance measure; the usual remedies for the random forest’s cardinality bias fall below the forest itself.
- (2) An analysis of how the CIF ranker behaves and where it is weaker (Section 5.2). Where the informative features are known, CIF’s recovery of them ranks mid-field at every list size. Its ranking rests on the ensemble, and in sparse wide data feature sampling keeps informative features out of most splits.
- (3) An account of what the statistical machinery changes and costs (Section 5.3). Unbiased split selection removes the random forest’s preference for many-valued features but improves neither recovery nor prediction, and the two Bonferroni corrections behind it cost of order  $m_t^2/\alpha$  permutations per node in the feature test and  $K^2/\alpha$  in the threshold test.
- (4) A cheaper threshold test with guarantees (Sections 3 and 5.4). Testing all candidate thresholds jointly, the max-type test stays valid at a fixed node for a fraction of the cost; the paper also proves the fixed-node validity of every split test and derives the exact null size of the default adaptive stopping rule.

## 2 Tree-growing method

At each internal node the Stage A feature test chooses a feature and the Stage B threshold test searches thresholds only for that feature; if either test accepts nothing, the node becomes terminal. CIT denotes the resulting single-tree feature selection method, and CIF a bootstrap ensemble of such trees with feature sampling at each node, which ranks features by split importance aggregated across trees. CIF-all disables feature subsampling, so every nonconstant available feature enters Stage A at each node, which tightens the feature correction and raises the per-node cost.

### 2.1 Stage A and Stage B

At a node  $t$ , write  $(X_t, Y_t)$  for the samples reaching it and  $F_{t,\text{avail}}$  for the features carried into it, after any feature muting inherited from ancestors. After features constant on the node samples are dropped and any feature subsampling, Stage A considers a set  $F_t \subseteq F_{t,\text{avail}}$  of size  $m_t = |F_t|$ . Label-independent auxiliary randomness used by a selector, such as the random projections of the randomized dependence coefficient, is denoted by  $U$ .

**Stage A feature test.** Stage A follows the conditional inference trees of Hothorn et al. [19] and calibrates the configured selector statistic by Monte Carlo label permutation. It computes a selector statistic  $T_j^{\text{sel}}(X_{t,j}, Y_t; U)$  and a right-tail permutation  $P$ -value  $P_{t,j}$  for every feature  $j \in F_t$ , then selects the smallest  $P$ -value  $P_t^* := \min_{j \in F_t} P_{t,j}$  and the set  $M_t^* := \{j \in F_t : P_{t,j} = P_t^*\}$  of

features that attain it. The feature correction is the Bonferroni correction over these  $m_t$  tests: let  $\tau_t = \alpha_{\text{sel}}/m_t$  when it is enabled and  $\tau_t = \alpha_{\text{sel}}$  otherwise. Stage A rejects when  $P_t^* < \tau_t$  and then draws the selected feature  $j_t^*$  uniformly from  $M_t^*$ . This full scan at a fixed budget  $B$  is the reference rule of the fixed-node results in Section 3. During tree growing, feature scanning tests the features in order of their observed selector statistic, stops at the first rejection, and returns a score  $q_t^{\text{feat}}$  that grows the tree, and feature muting removes the features whose test does not reject from the descendant pools.

**Stage B threshold test.** Stage B guards against a spurious split on the selected feature; the ctree reference implementation instead places the split at the maximum of a standardized two-sample statistic, without a second test [19]. The candidate thresholds start from the midpoints between ordered unique values of  $X_{t,j_t^*}$ : the exact method uses all of them, and the random, percentile, and histogram methods choose a bounded set of representative thresholds. The histogram method with  $h$  bins returns at most  $h + 1$  bin edges, so the 256-bin setting of the benchmark yields up to 257 candidates. After removing thresholds that would leave either child below the minimum leaf size, it tests each of the remaining  $K$  candidates  $c$  by the weighted child impurity  $(|Y_t^L(c)| H(Y_t^L(c)) + |Y_t^R(c)| H(Y_t^R(c))) / |Y_t|$  in a left-tail test, where  $H$  is the chosen node impurity measure, and returns no split if no candidate remains. The threshold correction is the Bonferroni correction over the  $K$  candidates, and testing each candidate at  $\tau_t^{\text{split}} = \alpha_{\text{split}}/K$ , or at  $\alpha_{\text{split}}$  without the correction, is the per-threshold rule. The full scan chooses the threshold with the smallest Stage B  $P$ -value, with uniform tie breaking, while threshold scanning tests the thresholds in order of weighted child impurity and stops at the first rejection. Algorithm 1 summarizes this flow, including the final check of the minimum required impurity decrease, and stores the returned scores  $q_t^{\text{feat}}$  and  $q_t^{\text{split}}$  at each split.

**Permutation  $P$ -values and budgets.** Both stages use the +1  $P$ -value of Phipson and Smyth [31, 33]. For an observed statistic  $T_{\text{obs}}$  and its values  $T_1, \dots, T_B$  on  $B$  random label permutations, the right-tail  $P$ -value is

$$P_{\text{MC}}^{\geq} := \frac{1 + \sum_{b=1}^B \mathbf{1}\{T_b \geq T_{\text{obs}}\}}{B + 1}, \quad (1)$$

where  $\mathbf{1}\{\cdot\}$  denotes the indicator function, and the left-tail  $P$ -value  $P_{\text{MC}}^{\leq}$  uses  $\leq$  in place of  $\geq$ . Stage A uses the right tail and Stage B the left tail; ties count as exceedances in both. Write  $\alpha_{\text{adj}}$  for the level of a single test,  $\alpha_{\text{sel}}/m_t$  in Stage A and  $\alpha_{\text{split}}/K$  in the per-threshold rule when the corrections are enabled. The minimum budget gives each test  $B = \lceil 1/\alpha_{\text{adj}} \rceil$  permutations, the smallest budget at which a +1  $P$ -value can fall below  $\alpha_{\text{adj}}$ . The auto budget, the library default, gives each test

$$B = \max\left(\left\lceil \frac{1}{\alpha_{\text{adj}}} \right\rceil, \left\lceil \frac{z^2(1 - \alpha_{\text{adj}})}{\alpha_{\text{adj}}} \right\rceil\right), \quad z = \Phi^{-1}(1 - \alpha_{\text{adj}}), \quad (2)$$

permutations, where  $\Phi$  is the standard normal distribution function.

The benchmark uses  $\alpha_{\text{sel}} = \alpha_{\text{split}} = 0.05$  with the minimum budget, so a Stage A test at a node with 20 features receives 400 permutations and a per-threshold test over 257 candidates receives 5,140. A full Stage A scan then costs of order  $m_t^2/\alpha_{\text{sel}}$  statistic evaluations per node, and a full per-threshold scan of order  $K^2/\alpha_{\text{split}}$ . At this budget a test rejects only when no permuted statistic is as extreme as the observed one, so every rejecting feature and every rejecting threshold returns the floor  $P$ -value  $1/(B + 1)$ . The Stage A and Stage B decisions are then an ordering by the raw statistics behind the two corrections, and scanning takes the first rejecting candidate in scan order.

---

**Algorithm 1** Conditional inference tree training skeleton (Stage A  $\rightarrow$  Stage B)

---

**Require:** Training data  $(X, Y)$ , hyperparameters  $\lambda$

**Ensure:** Trained tree  $\mathcal{T}$

```
1:  $p \leftarrow$  number of columns of  $X$ 
2: return GROWNODE( $X, Y, 1, \{1, \dots, p\}, \lambda$ )
3: function GROWNODE( $X_t, Y_t, d, F_{\text{avail}}, \lambda$ )
4:   if STOP( $X_t, Y_t, d, \lambda$ ) then
5:     return LEAF( $Y_t$ )
6:   end if
7:    $(j_t^*, q_t^{\text{feat}}, F'_{\text{avail}}) \leftarrow$  STAGEA( $X_t, Y_t, F_{\text{avail}}, \lambda$ )
8:   if  $j_t^* = \perp$  then
9:     return LEAF( $Y_t$ )
10:  end if
11:   $(c_t^*, q_t^{\text{split}}) \leftarrow$  STAGEB( $X_t, Y_t, j_t^*, \lambda$ )
12:  if  $c_t^* = \perp$  then
13:    return LEAF( $Y_t$ )
14:  end if
15:   $(X_t^L, Y_t^L, X_t^R, Y_t^R) \leftarrow$  PARTITION( $X_t, Y_t, j_t^*, c_t^*$ )
16:   $\Delta_t \leftarrow$  IMPURITYDECREASE( $Y_t, Y_t^L, Y_t^R, \lambda$ )
17:  if  $\Delta_t$  is below the minimum required impurity decrease then
18:    return LEAF( $Y_t$ )
19:  end if
20:  Add  $\Delta_t$  to the feature-importance accumulator for  $j_t^*$ 
21:   $u \leftarrow$  internal node with split  $(j_t^*, c_t^*)$  and stored scores  $(q_t^{\text{feat}}, q_t^{\text{split}})$ 
22:   $u.\text{left} \leftarrow$  GROWNODE( $X_t^L, Y_t^L, d + 1, F'_{\text{avail}}, \lambda$ )
23:   $u.\text{right} \leftarrow$  GROWNODE( $X_t^R, Y_t^R, d + 1, F'_{\text{avail}}, \lambda$ )
24:  return  $u$ 
25: end function
```

---

Adaptive stopping, the default stopping rule, checks a Beta posterior for the exceedance probability every 32 permutations [2, 9]; Proposition 1 gives its exact size.

**Max-type rule for Stage B.** The max-type rule, an opt-in alternative, tests the candidates jointly. Write  $S_{b,c}$  for the weighted child impurity at candidate  $c$  under the observed response ( $b = 0$ ) and under permutation  $b = 1, \dots, B$ . Each column is standardized by the mean  $\mu_c$  and standard deviation  $\sigma_c$  of its  $B + 1$  entries, candidates with  $\sigma_c = 0$  or an empty child are dropped, and

$$T_b := \min_c \frac{S_{b,c} - \mu_c}{\sigma_c}, \quad P_t^{\max} := \frac{1 + \sum_{b=1}^B \mathbf{1}\{T_b \leq T_0\}}{B + 1}. \quad (3)$$

Stage B rejects when  $P_t^{\max} < \alpha_{\text{split}}$ , without division by  $K$ , and places the split at  $\arg \min_c (S_{0,c} - \mu_c) / \sigma_c$ , so the two rules can accept different thresholds on the same feature. The implementation uses  $B = 999$ , so a full scan costs of order  $BK$  evaluations, fewer than the per-threshold rule once  $K > \alpha_{\text{split}} B \approx 50$ , and Corollary 3 gives the fixed-node guarantee. This is the single-step max-T statistic of Westfall and Young [44], with the empirical null standardization of Pollard and van der Laan [34]. Like the ctree split statistic, it standardizes each candidate before optimizing [15, 19, 25], with Monte Carlo column moments in place of the exact conditional moments of Strasser and Weber [37], because impurity is not a linear statistic.

## 2.2 Forests and runtime hyperparameters

CIF grows each tree on a bootstrap sample with the Stage A and Stage B rules of CIT and averages the tree predictions [3, 17]. The CIT and CIF benchmark configurations hold fixed the two corrections, the per-threshold rule, the minimum budget with adaptive stopping, feature muting, feature and threshold scanning, the 256-bin histogram method, and bootstrap sampling for CIF. They vary the selector and honesty, which grows each tree on one half of its training sample and re-estimates the leaf values on the other half [43]. The runtime controls (feature subsampling, feature muting, the histogram method, the two scans, and adaptive stopping) act on the realized work at each node, and Appendix G gives the runtime and memory accounting.

## 2.3 Feature rankings

CIT and CIF rank features by fitted split importance rather than by Stage A  $P$ -values. The importance of feature  $j$  in a fitted CIT is the sum, over internal nodes that split on  $j$ , of the impurity decrease, the parent impurity  $H(Y_t)$  minus the weighted child impurity at the accepted threshold. The decrease carries no weight for the node’s share of the sample, so a deep split counts as much as a root split. A tree with positive total importance normalizes its vector to sum to one, and otherwise the vector remains zero; CIF sums the tree vectors and normalizes the forest vector in the same way. Larger importances are ranked earlier. Features never used by a split receive zero importance and follow in the tie order of the implementation, which is close to ascending column order; every synthetic generator shuffles its planted columns, so this order carries no information.

This ranking differs from random forest impurity importance in how a feature enters threshold search. In CART-style trees, the feature and threshold are chosen together by an impurity search, so a feature with more possible thresholds has more chances to produce a large apparent impurity decrease [39]. In CIT and CIF, Stage A selects the feature by a permutation test before Stage B searches its thresholds, which is designed to reduce that advantage of high-cardinality features. The per-threshold rule works in the opposite direction, a reverse cardinality bias: more candidates mean a stricter level  $\alpha_{\text{split}}/K$  and a lower probability of any split. The max-type rule tests at  $\alpha_{\text{split}}$  whatever  $K$  is.

## 3 Fixed-node control

At a fixed node, the Stage A feature test and both Stage B threshold tests keep their rejection probability under the complete nodewise null at or below the nominal level. The results cover the full-scan fixed- $B$  reference rule of Section 2.1 and condition on the node covariates  $X_t$  and the auxiliary randomness  $U$ ; Appendix A.2 states the assumptions A0.1 to A0.5, and Appendix A.1 gives the scope of each result. They assume that the node responses are exchangeable (A0.2), which holds for subsampled and unsampled fits and fails under bootstrap resampling: duplicated rows carry the same response, so permuting the responses over them does not reproduce the null law of the node sample. Strobl et al. [39] show that sampling with replacement biases variable selection in conditional inference forests, while subsampling without replacement does not.

**Lemma 1** (+1 permutation  $P$ -values are superuniform; 14). *Assume A0.1 through A0.5 from Appendix A.2. Under the nodewise complete permutation null at the fixed node  $t$ , let  $T_{\text{obs}}$  be the observed statistic of one feature,  $T_1, \dots, T_B$  its values under  $B$  independent uniform random permutations of  $Y_t$ , and  $P_{\text{MC}}^{\geq}$  the right-tail +1 Monte Carlo  $P$ -value of Equation (1). Then  $\mathbb{P}(P_{\text{MC}}^{\geq} \leq \alpha \mid X_t, U) \leq \alpha$  for every  $\alpha \in [0, 1]$ .*

This is the standard exchangeable-rank result for Monte Carlo permutation tests [8, 14, 31]; Appendix B gives the proof, and the left-tail version follows by applying it to  $-T$ .

**Corollary 1** (Stage A complete null control at a fixed node). *Assume A0.1 through A0.5 from Appendix A.2. Under the nodewise complete null at  $t$ , let  $F_t$  be nonempty, write  $m_t = |F_t| \geq 1$ , and let Stage A reject when  $\min_{j \in F_t} P_{t,j} \leq \alpha_{\text{sel}}/m_t$ . Then  $\mathbb{P}(\exists j \in F_t : P_{t,j} \leq \alpha_{\text{sel}}/m_t \mid X_t, U) \leq \alpha_{\text{sel}}$ .*

The proof combines Lemma 1 with the Bonferroni union bound over the  $m_t$  tests, and the strict comparison of the tree-growing rule rejects on a subset of this event.

**Corollary 2** (Stage B per-threshold rule at a fixed node). *Assume A0.1 through A0.5 from Appendix A.2 at a fixed node  $t$ , with the tested feature and the finite candidate set  $C$ ,  $K = |C| \geq 1$ , fixed as functions of  $(X_t, U)$  alone. For  $c \in C$  let  $P_{t,c}$  be the left-tail +1 Monte Carlo  $P$ -value of the child impurity at threshold  $c$ , with ties counted with  $\leq$ . Under the nodewise complete permutation null,  $\mathbb{P}(\exists c \in C : P_{t,c} \leq \alpha_{\text{split}}/K \mid X_t, U) \leq \alpha_{\text{split}}$ .*

Each  $P_{t,c}$  is covered by Lemma 1 in its left-tail form, and the union bound over the  $K$  candidates requires no independence among them; threshold scanning leaves the rejection event unchanged.

**Corollary 3** (Stage B max-type control at a fixed node). *Assume A0.1 through A0.5 from Appendix A.2 at a fixed node  $t$ , with the tested feature and the finite candidate set  $C$  fixed as functions of  $(X_t, U)$  alone and left-tail ties counted with  $\leq$ . Let  $P_t^{\max}$  be the max-type Stage B  $P$ -value of Equation (3) with column moments computed over all  $B + 1$  rows. Under the nodewise complete permutation null,  $\mathbb{P}(P_t^{\max} \leq \alpha \mid X_t, U) \leq \alpha$  for every  $\alpha \in [0, 1]$ .*

The proof is in Appendix B.3. The moments must include the observed row, because estimating them from the permuted rows alone singles out that row and can be anti-conservative.

### 3.1 Size of the default adaptive stopping rule

Adaptive stopping runs one permutation test at level  $\alpha$  with budget  $B$ , confidence  $\gamma$ , and batch size  $s$ , drawing permutations independently and uniformly, with replacement, in batches of  $s$ . At each batch boundary  $r$  that is a multiple of  $s$  with  $r \geq \lceil 1/\alpha \rceil$ , and at  $r = B$ , it stops when the Beta( $1 + e$ ,  $1 + r - e$ ) posterior places mass at least  $\gamma$  on either side of  $\alpha$ , where  $e$  counts permuted statistics at least as extreme as the observed one. It then reports  $(e + 1)/(r + 1)$ , and the tree rejects when the reported value is strictly below  $\alpha$ . The library default is  $\gamma = 0.95$  and  $s = 32$ . Let  $\rho(\alpha, \gamma, s, B)$  be the probability of rejection when the same rule is applied to a Pólya urn started from one ball of each color.

**Proposition 1** (Size of the adaptive stopping rule, exact under A0.1 to A0.3 at fixed  $B$ ). *Assume A0.1 through A0.3 at a fixed node for one permutation test whose statistic is a fixed function of each permuted response vector (a Stage A test or a per-threshold Stage B test), run with adaptive stopping at level  $\alpha$ , confidence  $\gamma$ , batch size  $s$ , and fixed budget  $B$ . Suppose that at every reachable stopping state a significance stop reports a value strictly below  $\alpha$  and a futility stop reports a value at least  $\alpha$ . Under the complete nodewise null, conditional on  $(X_t, U)$ , three statements hold. (i) Continuous mixing: if the per-draw probability that a permuted statistic is at least as extreme as the observed one is uniform on  $(0, 1)$ , the size equals  $\rho(\alpha, \gamma, s, B)$  exactly. (ii) Finite orbit: for a statistic without ties on the  $N = n_t!$  permutations, that probability is uniform on  $\{1/N, 2/N, \dots, 1\}$ , and the size lies in  $[\rho - 1/N, \rho]$ . (iii) Ties: counting ties as exceedances can only lower the size, so with ties the size is at most the value in (ii); for a discrete response, where permutations tie, only this bound applies.*

The proof is in Appendix B.4, and Appendix B.5 gives the exact enumeration behind the values below. At  $\alpha = 0.05$  the default rule has  $\rho(0.05, 0.95, 32, 999) = 0.0488$  at 999 permutations and  $\rho(0.05, 0.95, 32, 52) = 0.0377$  at the auto budget of 52 from Equation (2), and  $\rho \leq 0.0496$  for every  $B$  from 20 to 3,000. Under the minimum budget the first stopping check coincides with the full budget, so every Stage A and per-threshold Stage B  $P$ -value in the benchmark is a fixed- $B + 1$  permutation  $P$ -value covered by Lemma 1. The max-type rule with adaptive stopping recomputes its column moments at each check and falls outside Proposition 1; the null simulations of Section 5.4 cover its calibration.

## 4 Experimental design

The experiments judge a ranking by what it does for prediction. The benchmark uses 5 random seeds of 5-fold cross-validation. In each fold, a method ranks the features of the training fold, and fixed downstream learners fitted to its top- $k$  features are scored on the held-out fold. Classification uses logistic regression (LR), a support vector machine (SVM), and k-nearest neighbors (KNN), scored by balanced accuracy, the mean recall across classes; regression uses ridge regression, support vector regression (SVR), and KNN, scored by  $R^2$  (Appendix C gives their settings). The main tables use the standard values  $k \in \{5, 10, 25, 50, 100\}$ ; every dataset is also scored at  $k = p$ , and on datasets with more than 100 features the high- $p$  analysis adds  $k \in \{150, 200, 300, 500, 750, 1,000\}$  and  $[0.25p], [0.5p], [0.75p]$ , up to  $p$ . Scores are averaged in three steps: over folds and seeds, then over downstream learners and the standard  $k$  values available to the compared methods, then over datasets. The other studies hold CIT or CIF fixed except for one part, to measure what that part costs or how it shapes the ranking.

**Datasets and panels.** The benchmark has 23 classification and 8 regression datasets (Appendix D), 15 and 6 of them with more than 100 features, and feature recovery uses 8 synthetic classification and 8 synthetic regression datasets with known informative features (Appendix D). Excluded runs on `gisette`, `isolet`, and `orlraws10P` (Appendix C) leave 21 classification datasets in the all-method panel. A dataset with fewer than  $k$  features drops out at  $k$ , so the all-method counts by  $k$  are 21, 20, 14, 14, and 13 in classification and 8, 8, 7, 7, and 6 in regression. Table 1 lists these panels and those of the other studies.

**Compared methods.** The benchmark includes three types of feature selectors. Permutation-test filters rank features by the permutation  $P$ -values of univariate dependence statistics: multiple correlation (MC) and the randomized dependence coefficient (RDC) for classification, and Pearson correlation (PC), distance correlation (DC) [41], and RDC for regression. The RDC keeps the empirical-CDF random feature map of Lopez-Paz et al. [29] but replaces the canonical-correlation solve with the maximum absolute pairwise correlation across 10 random projections; CIT and CIF use the same MC, PC, and RDC statistics as Stage A selectors. Embedded methods rank features by tree or ensemble importance: CART decision trees (DT), single trees with random split thresholds (RT), CIT, CIF, random forests (RF) [3], ExtraTrees [11], XGBoost [5], LightGBM [21], CatBoost [35], and the partykit reference implementations `ctree` and `cforest` [16, 19, 20]. Wrapper baselines score features through auxiliary random-forest fits: Boruta [24], permutation importance (PI) on a 20% held-out split of the training fold [3, 39], conditional permutation importance (CPI) [6], and random-forest recursive feature elimination (RF-RFE) [12, 32]. `cforest` is ranked by partykit’s out-of-bag permutation importance, the only importance the package provides for forests, while CIF uses split importance, so the two forests differ in importance mechanism as well as in how their trees

| Panel              | Definition                                                                                                                | Classification | Regression | Used for                                        |
|--------------------|---------------------------------------------------------------------------------------------------------------------------|----------------|------------|-------------------------------------------------|
| All-method         | every method present                                                                                                      | 21             | 8          | main rank table, LODO                           |
| Pairwise           | both compared methods present                                                                                             | 21 to 23       | 8          | direct CIF comparisons                          |
| Complete-case      | every method, learner, and $k$ present                                                                                    | 13             | 6          | bootstrap intervals, omnibus tests, LODO        |
| High- $p$          | real datasets with more than 100 features                                                                                 | 15             | 6          | high- $p$ analysis                              |
| Synthetic          | datasets with known informative features                                                                                  | 8              | 8          | feature recovery, support                       |
| Ablation           | real datasets except isolet                                                                                               | 22             | 8          | CIF ranking ablation                            |
| Runtime            | 9 real and 14 synthetic datasets                                                                                          | 15             | 8          | runtime ablations                               |
| Benchmark-size     | classification datasets with at least 500 observations except madelon; regression datasets with at least 200 observations | 9              | 5          | wide-dataset runtime check                      |
| Mechanism-matched  | cforest pairwise panel without gisette and letter                                                                         | 20             | 8          | CIF ranked by out-of-bag permutation importance |
| Max-type extension | every real and synthetic benchmark dataset                                                                                | 31             | 16         | max-type ranking runs                           |
| Head-to-head       | Benchmark-size classification datasets and madelon                                                                        | 10             | 0          | forest timing of the two Stage B rules          |
| Stage B real       | vowel, spam, page-blocks; imports-85, residential, facebook                                                               | 3              | 3          | threshold test comparison                       |

**Table 1:** Dataset panels, with the number of datasets per task. LODO is the leave-one-dataset-out configuration check. The Benchmark-size panel is the set of performance datasets of Milletich et al. [30]. The max-type extension runs on every benchmark dataset and is ranked on the all-method panel.

are grown. A mechanism-matched check ranks CIF by cforest’s importance to separate the two, and the RF ranked by the same out-of-bag permutation importance, which scores every training row, is an added comparator.

**Configuration selection.** For each task and method family, the configuration with the best mean score over the real datasets, downstream learners, and standard values of  $k$  is held fixed across datasets (Table 8 gives the grid sizes). The selected CIT configurations use the MC selector in classification and the RDC selector in regression; the selected CIF configurations use RDC in both tasks with 100 trees and square-root feature sampling, with honesty in regression only. Because configuration selection and reporting use the same benchmark, the reported scores, intervals, and rank summaries are descriptive. Leave-one-dataset-out (LODO) reselection scores each dataset of the complete-case and all-method panels with configurations chosen on the other datasets of its panel. For the synthetic analysis, each method is assigned the configuration with the highest average recovery of the true informative features over  $k = 5, 10, 25, 50$ , and 100.

**Ranking and mechanism studies.** The CIF ranking ablation changes one component of the selected CIF configuration at a time on the ablation panel: split counts replace split importance, feature muting or bootstrap sampling is disabled, or the forest shrinks to one tree. Each variant is scored as in the benchmark and paired with the selected configuration within seed and fold. The support measurement counts, on each synthetic dataset over 25 fits, the features that win at least one split and how many of them are informative. The feature-use study fits CIT, CIF, CIF-all, RF, and ExtraTrees, with 1,000 trees per forest, at  $n = 250$ ,  $p \in \{100, 500, 1,000\}$ , and 1, 2, 5, or 10 informative features. The weak-signal cardinality designs place 10 informative Gaussian



features among 25 noise features with 500 levels, 25 binary noise features, and 10 Gaussian noise features, at  $n = 1,000$  and signal strengths 0.05, 0.10, and 0.20; CIF and CIT use the MC selector in classification and the PC selector in regression there.

**Cost and threshold test studies.** The runtime ablations refit the selected CIT and CIF configurations on the runtime panel with one control changed at a time, and also at the auto budget, with adaptive stopping and with no stopping, because the minimum budget leaves the stopping rule no room to act. The Benchmark-size check refits the tree with adaptive stopping off, with threshold scanning off, and without the two corrections, and the forest with adaptive stopping off. The threshold test comparison runs both Stage B rules under the MC and PC selectors, with adaptive stopping and with no stopping, at the auto budget (999 permutations for the max-type rule), on histogram candidates at 16, 64, and 256 bins. The null calibration measures the false-split rate of the whole node decision, Stage A followed by Stage B, in a depth-one tree with five independent Gaussian predictors and an independent response, at  $n \in \{100, 200, 500\}$ . The power study plants a step in the first predictor. The Stage-B-only study tests one Gaussian predictor with the Stage A level set to 1, compares the power of the two rules at a common realized size, and runs the per-threshold test without the threshold correction as a reference. A scaling study times one tree at  $n$  up to 16,000, and a real-data study fits one tree on the six Stage B real datasets. The head-to-head timing fits 100-tree classification forests with each Stage B rule in the configuration recommended by Millettich et al. [30], and the max-type extension reruns the four CIT and four CIF candidate configurations with the max-type rule in place of the per-threshold rule on every benchmark dataset at the five benchmark seeds, with evaluation, configuration selection, and ranking unchanged. Appendix H gives the replicate counts and remaining settings of these studies.

## 5 Results

### 5.1 Ranking quality

With the selected configurations fixed, CIF ranks tied 3rd of 17 in classification, behind RF-RFE and XGBoost and level with RF, and 2nd of 18 in regression, behind ExtraTrees, on the all-method panels of 21 and 8 datasets (Table 2). The complete-case Friedman test rejects equal ranks in classification ( $\chi^2(16) = 140.46$ ,  $P < 0.001$ , Kendall’s  $W = 0.68$ ) and does not reject in regression ( $\chi^2(17) = 26.15$ ,  $P = 0.072$ ,  $W = 0.26$ ), so the regression ordering is a descriptive summary of 6 datasets. Across datasets, CIF is in the top half on 17 of 21 classification and 5 of 8 regression datasets, and in the top 3 on 4 of 21 and 2 of 8.

Against its conditional inference relatives, CIF is ahead of ctree, cforest, and CIT by both the median and the mean in both tasks (Table 3). In regression the median is the primary summary, because  $R^2$  is unbounded below. On the three `coepra` datasets (76 to 133 observations, about 5,000 features) the comparators reach large negative  $R^2$ , and those three datasets set the ctree and CIT means. On the complete-case panels the classification intervals and the regression ctree interval exclude zero, and the regression intervals for cforest and CIT cross it.

The paired bootstrap intervals of CIF against every other method on the complete-case panels are unadjusted post-hoc contrasts, 16 in classification and 17 in regression, tabulated with the LODO results and breakdowns by downstream learner, value of  $k$ , and seed (Appendix E). In classification they favor RF-RFE, XGBoost, and LightGBM against CIF and include zero for RF, ExtraTrees, CatBoost, and Boruta, so the data do not order CIF among these four, and in regression no interval favors another method over CIF. The complete-case panels rank CIF lower, tied 6th of 17 and tied 5th of 18 (Table 2). LODO reselection moves it to 8th and 6th there, reselecting the benchmark

| Classification |          |            |               | Regression    |          |            |               |
|----------------|----------|------------|---------------|---------------|----------|------------|---------------|
| Method         | Position | Mean rank  |               | Method        | Position | Mean rank  |               |
|                |          | All-method | Complete-case |               |          | All-method | Complete-case |
| RF-RFE         | 1        | 4.19       | 2.54          | ExtraTrees    | 1        | 5.00       | 4.67          |
| XGBoost        | 2        | 5.81       | 4.92          | CIF           | 2        | 6.25       | 7.00          |
| CIF            | 3.5      | 5.86       | 6.38          | CatBoost      | 3        | 6.75       | 6.33          |
| RF             | 3.5      | 5.86       | 5.23          | RF-RFE        | 4        | 6.88       | 6.67          |
| LightGBM       | 5        | 6.05       | 4.46          | RF            | 5        | 7.63       | 7.00          |
| Boruta         | 6        | 6.62       | 6.38          | RT            | 6        | 8.25       | 7.00          |
| CatBoost       | 7        | 6.76       | 5.69          | cforest       | 7        | 8.75       | 9.67          |
| ExtraTrees     | 8        | 7.33       | 6.77          | DT            | 8        | 9.38       | 8.83          |
| cforest        | 9        | 8.33       | 8.46          | Boruta        | 9        | 9.50       | 9.33          |
| DT             | 10       | 8.62       | 9.46          | PC filter     | 10       | 9.88       | 11.83         |
| RDC filter     | 11       | 11.05      | 10.85         | LightGBM      | 11.5     | 10.13      | 10.50         |
| PI             | 12       | 11.67      | 15.73         | XGBoost       | 11.5     | 10.13      | 8.67          |
| MC filter      | 13       | 11.86      | 12.69         | RDC filter    | 13       | 11.00      | 12.67         |
| RT             | 14       | 12.81      | 13.00         | CIT           | 14       | 11.13      | 10.50         |
| ctree          | 15       | 12.86      | 11.77         | ctree         | 15       | 11.38      | 11.50         |
| CIT            | 16       | 13.14      | 12.15         | PI            | 16       | 11.75      | 11.00         |
| CPI            | 17       | 14.19      | 16.50         | DC filter     | 17       | 12.25      | 13.67         |
|                |          |            |               | CPI           | 18       | 15.00      | 14.17         |
| CIF, max-type  | 5        | 6.31       |               | CIF, max-type | 4        | 7.50       |               |
| CIT, max-type  | 16       | 13.00      |               | CIT, max-type | 14       | 10.88      |               |

**Table 2:** Main real-data comparison. Methods are ranked within each dataset on scores averaged over downstream learners and the standard  $k$  values shared by the compared methods, and ranks are averaged across datasets; lower is better. The all-method column uses the 21 classification and 8 regression datasets with results for every method, and Position is the place in that column, fractional for ties. The complete-case column uses the 13 classification and 6 regression datasets with every method, downstream learner, and standard  $k$ . The rows below the rule rank CIT and CIF fitted under the opt-in max-type rule in place of their per-threshold counterparts on the all-method panels (Section 5.4).

configuration in 11 of 13 and 4 of 6 holdouts, and on the all-method panels to 5th in classification and 2nd in regression, reselecting it in 20 of 21 and 7 of 8. The 3rd and 2nd places are therefore properties of the 21- and 8-dataset panels, and configuration reselection moves them by less than half a rank.

Two checks address the importance measure. Ranked by cforest’s own out-of-bag permutation importance, CIF leads cforest in classification by +0.012 mean and +0.006 median balanced accuracy, with 15 wins in 20 datasets, against +0.011 for split-ranked CIF, so the classification margin persists under a common importance mechanism. The standard remedies for the cardinality bias of impurity importance rank below the random forest itself. Ranked by the same out-of-bag permutation importance (RF permutation in Table 3), the benchmark’s 100-tree random forest places 8th of 18 in classification and 6th of 19 in regression, against tied 3rd and 5th for its impurity importance, and cforest, permutation importance, and conditional permutation importance place 9th, 12th, and 17th of 17 in classification and 7th, 16th, and 18th of 18 in regression (Table 2). With RF permutation present, CIF ranks 4th of 18 in classification and stays 2nd in regression (Appendix E).

## 5.2 How the CIF ranker behaves

On synthetic datasets with known informative features, CIF sits in the middle of the methods at every list size (Table 4). By the share of selected features that are informative, it ranks between 8th and 10.5th of 15 in classification and between 8th and 11.5th of 16 in regression at  $k = 1, 5, 10, 25, 50$ , and 100, and 8th and 11th on the average over  $k = 5$  to 100. On the redundant-feature designs,

| Task           | Compared with  | Pairwise panel |        |        |             | Complete-case panel |                 |             |
|----------------|----------------|----------------|--------|--------|-------------|---------------------|-----------------|-------------|
|                |                | Datasets       | Median | Mean   | Wins-losses | Mean                | 95% interval    | Wins-losses |
| Classification | ctree          | 21             | +0.025 | +0.037 | 19-2        | 0.049               | [0.026, 0.073]  | 11-2        |
|                | cforest        | 22             | +0.008 | +0.010 | 17-5        | 0.013               | [0.002, 0.024]  | 9-4         |
|                | CIT            | 23             | +0.022 | +0.032 | 22-1        | 0.044               | [0.027, 0.062]  | 13-0        |
|                | DT             | 23             | +0.006 | +0.017 | 16-7        |                     |                 |             |
|                | RT             | 23             | +0.019 | +0.036 | 21-2        |                     |                 |             |
|                | RF permutation | 23             | +0.003 | +0.002 | 12-11       |                     |                 |             |
| Regression     | ctree          | 8              | +0.031 | +0.157 | 6-2         | 0.202               | [0.029, 0.421]  | 4-2         |
|                | cforest        | 8              | +0.009 | +0.021 | 6-2         | 0.027               | [-0.032, 0.090] | 5-1         |
|                | CIT            | 8              | +0.015 | +0.234 | 7-1         | 0.308               | [-0.002, 0.766] | 5-1         |
|                | DT             | 8              | +0.008 | +0.099 | 5-3         |                     |                 |             |
|                | RT             | 8              | +0.005 | -0.007 | 5-3         |                     |                 |             |
|                | RF permutation | 8              | +0.007 | +0.028 | 5-3         |                     |                 |             |

**Table 3:** Direct comparisons of CIF with the conditional inference and single-tree baselines and with RF permutation, the benchmark random forest ranked by out-of-bag permutation importance. Differences are CIF minus the compared method in balanced accuracy (classification) or  $R^2$  (regression), averaged within each dataset over downstream learners and standard values of  $k$ . The pairwise panel uses every dataset where both methods were run; the complete-case panel uses the 13 classification and 6 regression datasets with every method, learner, and standard  $k$ , with a percentile bootstrap interval over dataset-level differences (20,000 replicates) for the conditional inference comparisons. Wins and losses count datasets; no exact ties occurred.

where correlated copies of informative features count as hits, the measure saturates: up to  $k = 10$  most methods, CIF among them, select only true or redundant features, and from  $k = 50$  every method reaches the ceiling of 60% set by the design’s 30 true and redundant features. The recovery curves by  $k$  for single trees, forests, and boosted trees are in Appendix F.

| Task           | Measure               | Number of selected features $k$ |       |       |      |      |      | Mean, 5 to 100 |
|----------------|-----------------------|---------------------------------|-------|-------|------|------|------|----------------|
|                |                       | 1                               | 5     | 10    | 25   | 50   | 100  |                |
| Classification | Informative (%)       | 65.5                            | 66.6  | 55.9  | 28.5 | 15.9 | 9.6  | 35.3           |
|                | Rank of 15            | 10                              | 9     | 8     | 8    | 8    | 10.5 | 8              |
|                | True or redundant (%) | 100.0                           | 100.0 | 100.0 | 91.8 | 60.0 | 60.0 | 82.4           |
|                | Rank of 15            | 8                               | 6.5   | 6     | 7.5  | 8    | 8    | 7.5            |
| Regression     | Informative (%)       | 84.5                            | 77.1  | 60.4  | 30.1 | 16.9 | 11.2 | 39.1           |
|                | Rank of 16            | 10                              | 10    | 10    | 8    | 11   | 11.5 | 11             |
|                | True or redundant (%) | 100.0                           | 100.0 | 100.0 | 98.9 | 60.0 | 60.0 | 83.8           |
|                | Rank of 16            | 8.5                             | 8.5   | 6.5   | 1    | 8.5  | 8.5  | 1              |


**Table 4:** Synthetic feature recovery for CIF by the number of selected features  $k$ . Informative is the percentage of the top  $k$  features that are truly informative, averaged over the synthetic designs of each task. True or redundant is computed on the redundant-feature design only and also counts the 20 redundant copies; its ceiling is 60% once  $k \geq 50$  because that design has 50 features, 30 of them true or redundant. Ranks are among the 15 classification and 16 regression methods with synthetic runs, with ties averaged, so a rank of 8.5 of 16 or 8 of 15 is a tie among every method. The last column averages the percentage over  $k = 5, 10, 25, 50$ , and 100 and ranks that average.

**Small  $k$  and wide data.** On wide real datasets the scores of CIF peak before the full feature set. Across the 15 classification datasets with more than 100 features, CIF first reaches its best score at an intermediate value of  $k$  ( $100 < k < p$ ) in 29 of 45 dataset-learner combinations and at


the full feature set ( $k = p$ ) in 7 of 45 (Appendix F). The full feature set helps mainly LR, whose score changes by  $+0.026$  on average from  $k = 100$  to  $k = p$  and first peaks at  $k = p$  on 5 of 15 datasets, against mean changes of  $-0.053$  for SVM and  $-0.071$  for KNN. In the 6 regression datasets with more than 100 features, full-feature evaluation is rarely best: 12 of the 18 dataset-learner combinations peak at or below  $k = 100$  and 2 at  $k = p$ , and the change from  $k = 100$  to  $k = p$  has a mean of  $-0.270$  and a median of  $-0.076$ . CIF is also weakest at small  $k$  in classification: ranked separately at each value of  $k$  on the datasets available there, its classification mean rank improves from 6.9 and 8.2 at  $k = 5$  and 10 to 6.6, 6.2, and 5.6 at  $k = 25, 50$ , and 100 (Figure 1), while its regression mean rank stays between 7.1 and 8.3 with no monotone trend (Figure 2).

**What the ranking rests on.** Of four targeted changes to the selected CIF configuration, only reducing the forest to one tree lowers the score on every dataset, in both tasks (Table 5). Split-count ranking, disabling bootstrap sampling, and disabling feature muting change balanced accuracy by at most 0.001 on average, with intervals that include zero. In regression these three changes lower the mean  $R^2$ , two of them with intervals that exclude zero, but the three *coepra* datasets set those means, and the medians stay within 0.007 of zero.

**Support.** The support of a ranker is the set of features that win at least one split. Features outside it tie at zero importance (Section 2.3), so a ranking carries information only within its support. On the synthetic datasets, random forests give every feature nonzero importance on 15 of

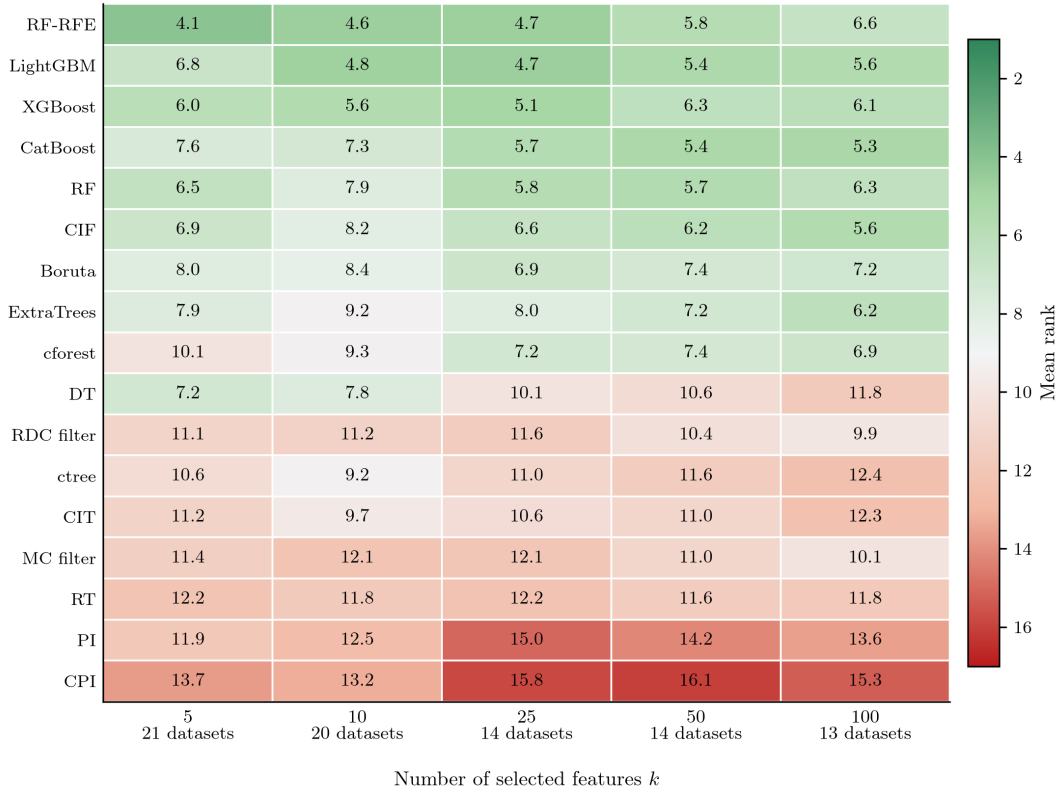

**Figure 1:** Classification mean rank by number of selected features. Rows show all 17 feature selection methods, averaged across downstream models at each value of  $k$ ; lower ranks are better. The columns for  $k = 5, 10, 25, 50, 100$  use 21, 20, 14, 14, and 13 datasets.

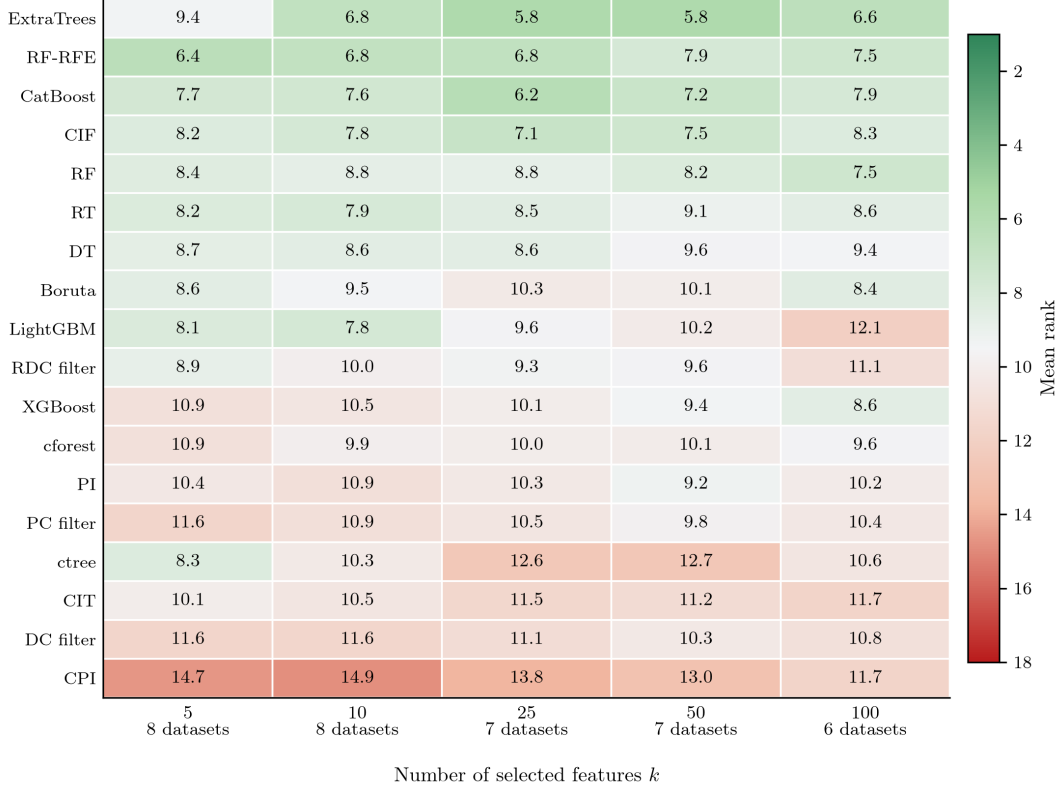

**Figure 2:** Regression mean rank by number of selected features. Rows show all 18 feature selection methods, averaged across downstream models at each value of  $k$ ; lower ranks are better. The columns for  $k = 5, 10, 25, 50, 100$  use 8, 8, 7, 7, and 6 datasets.

the 16 designs, and 800 of 1,000 on the 1,000-feature classification design. On 13 of the 16 designs, CIF’s support keeps 90 to 100% of the planted features, so the support serves as a shortlist. A single CIT splits on few features, so zero-importance filler makes up most of its top- $k$  list: 52, 81, and 90% of its top 10, 25, and 50 features, against 0, 3, and 14% for CIF and none for random

| Task           | CIF change             | Mean difference | Median difference | 95% interval     | Wins-losses |
|----------------|------------------------|-----------------|-------------------|------------------|-------------|
| Classification | Split-count ranking    | −0.001          | 0.000             | [−0.005, +0.002] | 12–9        |
| Classification | Disable bootstrap      | −0.001          | 0.000             | [−0.004, +0.003] | 9–12        |
| Classification | Disable feature muting | +0.001          | 0.000             | [−0.001, +0.002] | 13–5        |
| Classification | Use one tree           | −0.071          | −0.043            | [−0.101, −0.045] | 0–22        |
| Regression     | Split-count ranking    | −0.053          | −0.003            | [−0.142, −0.002] | 2–6         |
| Regression     | Disable bootstrap      | −0.064          | −0.007            | [−0.128, −0.010] | 4–4         |
| Regression     | Disable feature muting | −0.157          | 0.000             | [−0.468, +0.001] | 4–4         |
| Regression     | Use one tree           | −0.658          | −0.059            | [−1.692, −0.054] | 0–8         |

**Table 5:** CIF ablations on the real-data benchmark, 22 classification and 8 regression datasets. Differences are the changed variant minus the selected CIF configuration in balanced accuracy or  $R^2$ , paired within seed and fold and averaged within each dataset over downstream learners, supported standard values of  $k$ , and the 25 paired replicates; positive values favor the variant. Intervals are percentile bootstrap intervals for the mean over datasets (20,000 replicates); wins and losses count datasets, with exact ties omitted.

forests. This is consistent with CIT ranking near the bottom of the benchmark.

**Feature use in sampled forests.** In sparse designs, feature sampling keeps informative features out of most CIF splits (Appendix F.2). CIT, which considers every feature at each node, uses informative features in 100.0% of classification splits and 93.5% of regression splits. Over the 12 classification forest designs, CIF uses them in 33.2% of splits, against 91.7% for CIF-all, 8.4% for RF, and 6.5% for ExtraTrees. RF and ExtraTrees grow to purity, so most of their splits are deep splits on noise, while CIF stops at the permutation test. With 32 of 1,000 features sampled at a node and two informative, an informative feature is a candidate at 6.3% of nodes, and when the sampled subset holds none, Stage A selects from the noise it was given.

### 5.3 What the statistical machinery changes and costs

Unbiased split selection changes which noise features a ranking picks. In the weak-signal designs (Appendix H.1), a ranker indifferent to cardinality would give each of the 500-level and binary noise types 25/60 of the places in its top  $k$  not taken by informative features. At the weakest signal, random forest impurity importance, which prefers features with many possible thresholds, gives 500-level noise 0.29, 0.38, and 0.49 of its top 5, 10, and 25 in classification against references of 0.18, 0.24, and 0.30, the same pattern in regression, and never selects binary noise. Per-threshold CIF stays close to the reference in classification and leans toward binary noise in regression, with binary shares of 0.34, 0.40, and 0.39 against 0.27, 0.31, and 0.33; the max-type rule brings them to 0.30, 0.30, and 0.33. Less cardinality preference does not recover more informative features: at every signal and list size, random forest impurity importance places at least as many informative features in its top  $k$  as CIF, and the downstream scores of the four rankings differ by at most 0.02 in 17 of the 18 signal and list-size cells and by 0.033 in the other.

**Cost of the corrections.** The two corrections set the permutation budget of every Stage A test and every per-threshold Stage B test, and Table 6 measures what that costs by changing one setting at a time; time ratios above 1 are slower. Removing both corrections cuts forest time to 0.03 to 0.34 of the reference, but it changes the statistical rule as well. It deepens single trees from a mean of 6.5 and 7.2 levels to 10.7 and 13.4 in classification and regression, and its effect on CIT recovery depends on the list size: in classification the share of informative features in the top 5 falls from 0.64 to 0.44 and in the top 10 by 0.06, while in the top 25, 50, and 100 it rises by 0.039, 0.019, and 0.003, and in regression it rises at every list size, by 0.004 to 0.040. The CIF downstream score moves by at most 0.004. The selected configuration keeps both corrections. Appendix G gives the work terms each change affects.

Adaptive stopping recovers none of this cost at the minimum budget, where it is inert by construction (Section 3.1). Switching it off leaves every tree unchanged, so the ratios near 1 measure only the cost of the check, and a forest run on one worker with the full thread pool inside each tree gives the same result (0.95 to 1.01). At the auto budget, where the rule can act, adaptive stopping brings the tree to 0.14 to 0.37 and the forest to 0.11 to 0.25 of their time with no stopping, with recovery changes of at most 0.030.

Of the runtime controls, the threshold scan has the largest effect: testing candidates in order of weighted child impurity and stopping at the first rejection saves the most, since the threshold correction gives each of the  $K$  candidates a budget that grows with  $K$ . The candidate count comes next. For the forest, exact threshold search is 1.3 to 19 times slower than the 256-bin histogram, and a 32-bin histogram is 7 to 21 times faster, with downstream changes of at most 0.009. Feature scanning, the Stage A counterpart of the threshold scan, matters most on the real regression

| Change                         | CIT          |                 | CIF          |                   |                 |
|--------------------------------|--------------|-----------------|--------------|-------------------|-----------------|
|                                | Time ratio   | Recovery change | Time ratio   | Downstream change | Recovery change |
| Remove both corrections        | 0.52 to 1.8  | $\leq 0.039$    | 0.03 to 0.34 | $\leq 0.004$      | $\leq 0.011$    |
| Max-type Stage B rule          |              |                 | 0.14 to 0.61 | $\leq 0.005$      | $\leq 0.007$    |
| Disable threshold scanning     | 2.7 to 34    | $\leq 0.017$    | 7.9 to 30    | $\leq 0.003$      | $\leq 0.010$    |
| Disable feature scanning       | 0.81 to 3.0  | $\leq 0.021$    | 1.0 to 5.2   | $\leq 0.003$      | $\leq 0.008$    |
| Disable adaptive stopping      | 0.88 to 0.99 | 0               | 0.96 to 1.00 | 0                 | 0               |
| Auto budget, adaptive stopping | 1.18 to 1.56 | $\leq 0.008$    | 1.30 to 2.0  |                   | $\leq 0.030$    |
| Auto budget, no stopping       | 3.8 to 8.2   | $\leq 0.005$    | 5.8 to 15    |                   | $\leq 0.025$    |
| Exact threshold search         | 0.91 to 1.10 | $\leq 0.005$    | 1.3 to 19    | $\leq 0.009$      | $\leq 0.018$    |
| Histogram with 32 bins         |              |                 | 0.05 to 0.14 | $\leq 0.008$      | $\leq 0.013$    |
| Disable feature muting         | 0.97 to 0.98 | 0               | 0.91 to 1.00 | $\leq 0.001$      | $\leq 0.003$    |
| Disable bootstrap sampling     |              |                 | 0.94 to 1.69 | $\leq 0.012$      | $\leq 0.011$    |

**Table 6:** Runtime ablations of CIT and CIF on the runtime panel of 23 datasets (15 classification and 8 regression; 9 real and 14 synthetic), five seeds per dataset. Time ratios are medians over datasets of the per-dataset ratio to the selected configuration of the same estimator, given as the range over the four task groups (classification and regression, real and synthetic). Recovery is the share of the top  $k$  features that are planted informative features on the synthetic datasets, averaged over  $k = 5, 10, 25, 50$ , and 100. Score columns give the largest absolute change across task groups in recovery for CIT and CIF and in the dataset-mean downstream score for CIF, rounded upward to 0.001; the auto-budget runs record recovery but no downstream score. Empty cells are settings that do not apply to, or were not ablated for, that estimator. Every time is the second of two identical fits, so compilation is excluded.

datasets. The pattern holds on the 14 Benchmark-size datasets, with up to 20,000 observations and 5,000 features (Appendix G.1). The slowest single tree is gisette at 29 minutes, where the feature correction over 5,000 features sets a large minimum budget for each feature test.

## 5.4 The max-type threshold test

In the null calibration both Stage B rules keep the false-split rate below 0.05 in all 36 design cells, but that design cannot expose a failure of the threshold test. Every split must first pass the Stage A test over five predictors, so even without the threshold correction the rate stays between 0.0355 and 0.049 (Appendix H). The Stage-B-only study therefore isolates the threshold test on one predictor fixed without the response, with the Stage A test disabled (Table 7).

Both rules are valid at a fixed node, and they differ in how their size depends on the candidate count. The per-threshold size falls as  $K$  grows, with means 0.018, 0.011, and 0.006 at 16, 64, and 256 bins over both stopping modes, which is the reverse cardinality bias of Section 2.3 at a single node; the max-type size stays near 0.035 (means 0.033, 0.035, and 0.035). Without the threshold correction the size is 0.152 to 0.384, 3 to 8 times the nominal level, and it grows with the candidate count at every sample size in both tasks.

At matched realized size the max-type rule has slightly lower power. The max-type minus per-threshold difference averages  $-0.006$  (95% bootstrap interval over the 18 cells,  $-0.011$  to  $-0.002$ ); the max-type rule is lower in 67 and higher in 25 of the 108 cell and effect combinations, and the mean is  $-0.005$  ( $-0.009$  to  $-0.002$ ) over the 13 cells matched at size 0.05. Two reruns of the matched comparison give  $-0.006$  and  $-0.004$ . At a common nominal level of 0.05 the max-type rule splits more often, by 0.03 on average and up to 0.12 in the power study (0.015, 0.029, and 0.049 at 16, 64, and 256 bins) and by 0.10 in the Stage-B-only study, a gap set by the lower realized size of

| Task           | $n$ | Bins | Size at nominal 0.05 |          |               | Size-matched power |               |          |
|----------------|-----|------|----------------------|----------|---------------|--------------------|---------------|----------|
|                |     |      | Per-threshold        | Max-type | No correction | Match size         | Per-threshold | Max-type |
| Classification | 100 | 16   | 0.013                | 0.032    | 0.156         | 0.050              | 0.390         | 0.379    |
|                | 100 | 64   | 0.007                | 0.036    | 0.218         | 0.044              | 0.385         | 0.354    |
|                | 100 | 256  | 0.007                | 0.036    | 0.226         | 0.034              | 0.335         | 0.318    |
|                | 200 | 16   | 0.010                | 0.037    | 0.152         | 0.050              | 0.643         | 0.618    |
|                | 200 | 64   | 0.008                | 0.035    | 0.242         | 0.050              | 0.630         | 0.615    |
|                | 200 | 256  | 0.003                | 0.039    | 0.298         | 0.031              | 0.562         | 0.538    |
|                | 500 | 16   | 0.015                | 0.032    | 0.172         | 0.050              | 0.958         | 0.953    |
|                | 500 | 64   | 0.007                | 0.029    | 0.270         | 0.050              | 0.961         | 0.964    |
|                | 500 | 256  | 0.000                | 0.023    | 0.314         | 0.034              | 0.958         | 0.952    |
| Regression     | 100 | 16   | 0.019                | 0.023    | 0.210         | 0.050              | 0.292         | 0.281    |
|                | 100 | 64   | 0.013                | 0.029    | 0.282         | 0.050              | 0.305         | 0.285    |
|                | 100 | 256  | 0.011                | 0.031    | 0.286         | 0.050              | 0.317         | 0.299    |
|                | 200 | 16   | 0.027                | 0.033    | 0.230         | 0.050              | 0.591         | 0.581    |
|                | 200 | 64   | 0.017                | 0.033    | 0.298         | 0.050              | 0.619         | 0.598    |
|                | 200 | 256  | 0.008                | 0.041    | 0.324         | 0.050              | 0.632         | 0.579    |
|                | 500 | 16   | 0.026                | 0.031    | 0.236         | 0.050              | 0.947         | 0.942    |
|                | 500 | 64   | 0.015                | 0.029    | 0.334         | 0.050              | 0.966         | 0.952    |
|                | 500 | 256  | 0.005                | 0.026    | 0.384         | 0.046              | 0.963         | 0.951    |

**Table 7:** Stage-B-only study: the threshold test in isolation, with one Gaussian predictor fixed without the response and the Stage A test disabled. Size is the false-split rate of a depth-one tree at nominal level 0.05 under adaptive stopping, over 1,500 null replicates per cell (three seeds of 500) for the two rules, with every 95% Clopper-Pearson upper limit below 0.056, and over 500 for No correction, the per-threshold rule with each candidate tested at 0.05. Sizes under no stopping agree to within 0.010 (exactly for No correction). Size-matched power under adaptive stopping at the middle effect ( $\delta = 0.10$  in classification, 0.4 in regression) is interpolated against realized size over the nominal grid from 0.02 to 0.50 (600 replicates per cell and level) to the match size: 0.05, or the largest realized size both rules reach where the per-threshold rule does not reach 0.05.

the per-threshold rule.

The max-type rule is cheaper once a node has many candidates. With no stopping and 256 bins, one classification tree takes 3.5, 14, and 59 seconds at  $n = 1,000$ , 4,000, and 16,000 under the per-threshold rule (0.8, 8.8, and 54 in regression) and 0.3, 1.4, and 6.3 seconds under the max-type rule. The ratio grows with the bin setting, as the  $K^2/\alpha$  against  $BK$  accounting of Section 2.1 predicts: at 16 bins the max-type rule is 1.1 to 1.3 times slower, because its 999 permutations exceed the 340 the per-threshold rule needs for 17 candidates, and at 64 and 256 bins it is 1.5 to 2.1 and 2.8 to 13 times faster; adaptive stopping shortens the per-threshold test and narrows this advantage. The head-to-head forests, fitted at the minimum budget, show the largest savings: the max-type rule is 10 to 27 times faster at  $n \leq 8,000$  and 21 to 36 times faster at  $n = 32,000$  on the synthetic cells (13 to 36 times on the cells that Milletich et al. [30] tabulate), against 1.6 to 7 times on the runtime panel (Table 6), whose nodes admit fewer candidates.

On the six Stage B real datasets the max-type rule scores higher in 8 of the 12 dataset and stopping-mode cells, equal in one, and lower in the other three, and it fits faster on the four datasets whose nodes admit many candidates (Appendix H). The Spearman agreement of the two rules' feature importances is 0.36 to 0.88, so the max-type rule produces a different ranking rather than the same ranking at lower cost. On the benchmark that different ranking is slightly worse. Standing in for its per-threshold counterpart on the all-method panels, the max-type forest ranks lower in both tasks and the max-type tree keeps its position (max-type rows of Table 2). The paired max-type minus per-threshold score, within each dataset over downstream learners and standard  $k$ , is  $-0.0014$



and  $-0.0001$  for CIF and  $-0.0022$  and  $-0.0085$  for CIT in classification and regression (over 22, 8, 23, and 8 datasets), and the per-threshold rule is the higher of the two on 59 to 63% of datasets. Appendix C accounts for the ranking runs, seven of which were lost to a host fault.

## 6 Discussion

An unbiased split rule and a better feature ranking are different properties, and the benchmark separates them (Sections 5.1 and 5.3). For top- $k$  prediction the preference of impurity importance for many-valued features costs little in these data, because the informative features reach the top of the list either way. An unbiased split rule matters more when the question is which features carry signal, for predictors whose cardinality carries none, as in the clinical application of Milletich et al. [30].

Prediction and recovery ask different things of a ranking, which is how CIF predicts well without leading on recovery (Section 5.2). A top- $k$  list predicts well when it holds informative features or correlated proxies for them, and the small support of CIF keeps most planted features. Its weak points are where the first few places carry the score and where square-root feature sampling hides informative features from most nodes; evaluating every nonconstant feature at each node, as CIF-all does, is the remedy the feature-use study points to.

The corrections set the cost of a fit and the shape of its trees, and where the cost sits depends on the estimator. For forests at 256 bins it sits in the threshold test, because square-root sampling keeps the Stage A feature set small, while a single tree on wide data pays for the feature correction, because every feature is tested at the root. The max-type rule removes most of the threshold cost without giving up the guarantee, but it changes the ranking rather than improving it, which is why it is an option and not the default.

**Guidance.** Judge a CIF ranking through the downstream model that will use its features, choosing  $k$  on held-out data over a few values that include the intended feature budget and, when feasible, the full feature set. Keep random forests, ExtraTrees, and boosted trees in the comparison set, and for variable screening add Boruta, permutation or conditional permutation importance, and RF-RFE [10]. In sparse wide data, monitor feature use through top- $k$  stability across seeds, splits on known positive control or null features, and the change under a larger sampled feature set or a small CIF-all run. When nodes admit many candidate thresholds, consider the max-type rule and compare its ranking downstream.

**Limitations.** The fixed-node results cover one node whose sample, tested features, and permutation budget are fixed independently of the node responses, in subsampled or unsampled fits, and exclude the bootstrap samples that CIF uses. Fitted trees and forests add response-dependent choice of nodes, testing of the Stage A winner at Stage B, feature muting, and aggregation; they are assessed through the benchmark, and their stored Stage B score is a screening statistic rather than a post-selection  $P$ -value. Configurations were selected on the reporting datasets from grids of unequal size (four for CIF, five for XGBoost, one for RF, ExtraTrees, CatBoost, and RF-RFE), so selection optimism favors the tuned families and the order of the tied CIF and RF is not resolved; LODO measures this sensitivity without bounding it. The regression ordering, on 8 datasets, and the complete-case summaries are descriptive, and the three `coepra` datasets drive the regression means. No ablation removes the corrections without also deepening the trees, so their effect on the ranking cannot be separated from that of tree depth, and the comparison of biased and unbiased importance rests on different methods rather than on one switch that removes the split test alone.

The cardinality designs use the linear selectors (MC and PC), while three of the four selected configurations use RDC. CIF-all was not scored downstream. CPI ranks last in both tasks after a correction to its correlation threshold, and its position is provisional. The downstream learners are three untuned models, and the comparator set omits Lasso and mutual-information filters.

## 7 Conclusion

Conditional inference forests rank features for downstream prediction at the level of random forests and ahead of the other conditional inference methods. The classification result holds under the robustness checks of the benchmark, and the regression ordering is descriptive. Their weakness is recovery: they find the truly informative features no better than a typical ranker in the benchmark. What carries the ranking is the forest, not the split test. The unbiased split selection that defines conditional inference changes which noise features enter a ranking, not how well the ranking predicts.

The split tests earn their place in a different way. Each split passes a permutation test that is valid at a fixed node, and the tests set the cost of a fit, which the max-type threshold test cuts to a fraction while keeping the guarantee. A conditional inference forest is therefore a feature ranker that predicts as well as a random forest while every split rests on a valid test, and the max-type test makes it affordable.

## References

- [1] Susan Athey, Julie Tibshirani, and Stefan Wager. Generalized random forests. *The Annals of Statistics*, 47(2):1148–1178, 2019. doi: 10.1214/18-AOS1709.
- [2] Julian Besag and Peter Clifford. Sequential Monte Carlo p-values. *Biometrika*, 78(2):301–304, 1991. doi: 10.1093/biomet/78.2.301.
- [3] Leo Breiman. Random forests. *Machine Learning*, 45(1):5–32, 2001. doi: 10.1023/A:1010933404324.
- [4] Leo Breiman, Jerome H. Friedman, Charles J. Stone, and Richard A. Olshen. *Classification and Regression Trees*. Wadsworth International Group, Belmont, CA, 1984. ISBN 9780412048418.
- [5] Tianqi Chen and Carlos Guestrin. A scalable tree boosting system. In *Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, pages 785–794, 2016. doi: 10.1145/2939672.2939785.
- [6] Dries Debeer and Carolin Strobl. Conditional permutation importance revisited. *BMC Bioinformatics*, 21(1):307, 2020. doi: 10.1186/s12859-020-03622-2.
- [7] Ozgur Demir-Kavuk, Henning Riedesel, and Ernst-Walter Knapp. Exploring classification strategies with the CoEPrA 2006 contest. *Bioinformatics*, 26(5):603–609, 2010. doi: 10.1093/bioinformatics/btq021.
- [8] Michael D. Ernst. Permutation methods: A basis for exact inference. *Statistical Science*, 19(4): 676–685, 2004. doi: 10.1214/088342304000000396.
- [9] Axel Gandy. Sequential implementation of Monte Carlo tests with uniformly bounded resampling risk. *Journal of the American Statistical Association*, 104(488):1504–1511, 2009. doi: 10.1198/jasa.2009.tm08368.

- [10] Robin Genuer, Jean-Michel Poggi, and Christine Tuleau-Malot. Variable selection using random forests. *Pattern Recognition Letters*, 31(14):2225–2236, 2010. doi: 10.1016/j.patrec.2010.03.014.
- [11] Pierre Geurts, Damien Ernst, and Louis Wehenkel. Extremely randomized trees. *Machine Learning*, 63(1):3–42, 2006. doi: 10.1007/s10994-006-6226-1.
- [12] Isabelle Guyon, Jason Weston, Stephen Barnhill, and Vladimir Vapnik. Gene selection for cancer classification using support vector machines. *Machine Learning*, 46(1-3):389–422, 2002. doi: 10.1023/A:1012487302797.
- [13] Isabelle Guyon, Steve Gunn, Asa Ben-Hur, and Gideon Dror. Result analysis of the NIPS 2003 feature selection challenge. In *Advances in Neural Information Processing Systems*, volume 17, 2004. URL [https://proceedings.neurips.cc/paper\\_files/paper/2004/hash/5e751896e527c862bf67251a474b3819-Abstract.html](https://proceedings.neurips.cc/paper_files/paper/2004/hash/5e751896e527c862bf67251a474b3819-Abstract.html).
- [14] Jesse Hemerik and Jelle Goeman. Exact testing with random permutations. *TEST*, 27(4): 811–825, 2018. doi: 10.1007/s11749-017-0571-1.
- [15] Torsten Hothorn and Achim Zeileis. Generalized maximally selected statistics. *Biometrics*, 64(4):1263–1269, 2008. doi: 10.1111/j.1541-0420.2008.00995.x.
- [16] Torsten Hothorn and Achim Zeileis. partykit: A modular toolkit for recursive partytioning in R. *Journal of Machine Learning Research*, 16(118):3905–3909, 2015. URL <https://jmlr.org/papers/v16/hothorn15a.html>.
- [17] Torsten Hothorn, Peter Bühlmann, Sandrine Dudoit, Annette Molinaro, and Mark J. van der Laan. Survival ensembles. *Biostatistics*, 7(3):355–373, 2006. doi: 10.1093/biostatistics/kxj011.
- [18] Torsten Hothorn, Kurt Hornik, Mark A. van de Wiel, and Achim Zeileis. A lego system for conditional inference. *The American Statistician*, 60(3):257–263, 2006. doi: 10.1198/000313006X118430.
- [19] Torsten Hothorn, Kurt Hornik, and Achim Zeileis. Unbiased recursive partitioning: A conditional inference framework. *Journal of Computational and Graphical Statistics*, 15(3):651–674, 2006. doi: 10.1198/106186006X133933.
- [20] Torsten Hothorn, Heidi Seibold, and Achim Zeileis. *partykit: A Toolkit for Recursive Partitioning*, 2026. URL <https://CRAN.R-project.org/package=partykit>. R package version 1.2-27.
- [21] Guolin Ke, Qi Meng, Thomas Finley, Taifeng Wang, Wei Chen, Weidong Ma, Qiwei Ye, and Tie-Yan Liu. A highly efficient gradient boosting decision tree. In *Advances in Neural Information Processing Systems*, volume 30, pages 3146–3154, 2017. URL <https://papers.nips.cc/paper/6907-a-highly-efficient-gradient-boosting-decision-tree>.
- [22] Markelle Kelly, Rachel Longjohn, and Kolby Nottingham. UCI machine learning repository. <https://archive.ics.uci.edu>, n.d. URL <https://archive.ics.uci.edu/>. Accessed 2026-05-04.
- [23] Hyunjoong Kim and Wei-Yin Loh. Classification trees with unbiased multiway splits. *Journal of the American Statistical Association*, 96(454):589–604, 2001. doi: 10.1198/016214501753168271.

- [24] Miron B. Kursa and Witold R. Rudnicki. Feature selection with the Boruta package. *Journal of Statistical Software*, 36(11):1–13, 2010. doi: 10.18637/jss.v036.i11.
- [25] Berthold Lausen and Martin Schumacher. Maximally selected rank statistics. *Biometrics*, 48(1):73–85, 1992. doi: 10.2307/2532740.
- [26] Jundong Li, Kewei Cheng, Suhan Wang, Fred Morstatter, Robert P. Trevino, Jiliang Tang, and Huan Liu. Feature selection: A data perspective. *ACM Computing Surveys*, 50(6):94:1–94:45, 2018. doi: 10.1145/3136625.
- [27] Wei-Yin Loh. Regression trees with unbiased variable selection and interaction detection. *Statistica Sinica*, 12(2):361–386, 2002. URL <https://www3.stat.sinica.edu.tw/statistica/j12n2/j12n21/j12n21.htm>.
- [28] Wei-Yin Loh and Yu-Shan Shih. Split selection methods for classification trees. *Statistica Sinica*, 7(4):815–840, 1997. URL <https://www3.stat.sinica.edu.tw/statistica/j7n4/j7n41/j7n41.htm>.
- [29] David Lopez-Paz, Philipp Hennig, and Bernhard Schölkopf. The randomized dependence coefficient, 2013. arXiv:1304.7717.
- [30] Robert Milletich, Justin Downes, and Newel Hirst. citrees: Conditional inference trees and forests for Python. Submitted to the Journal of Statistical Software, 2026.
- [31] B. V. North, David Curtis, and Pak C. Sham. A note on the calculation of empirical P values from Monte Carlo procedures. *American Journal of Human Genetics*, 71(2):439–441, 2002. doi: 10.1086/341527.
- [32] Fabian Pedregosa, Gaël Varoquaux, Alexandre Gramfort, Vincent Michel, Bertrand Thirion, Olivier Grisel, Mathieu Blondel, Peter Prettenhofer, Ron Weiss, Vincent Dubourg, Jake VanderPlas, Alexandre Passos, David Cournapeau, Matthieu Brucher, Matthieu Perrot, and Édouard Duchesnay. Scikit-learn: Machine learning in Python. *Journal of Machine Learning Research*, 12(85):2825–2830, 2011. URL <https://jmlr.org/papers/v12/pedregosa11a.html>.
- [33] Belinda Phipson and Gordon K. Smyth. Permutation P-values should never be zero: Calculating exact P-values when permutations are randomly drawn. *Statistical Applications in Genetics and Molecular Biology*, 9(1):1–12, 2010. doi: 10.2202/1544-6115.1585.
- [34] Katherine S. Pollard and Mark J. van der Laan. Choice of a null distribution in resampling-based multiple testing. *Journal of Statistical Planning and Inference*, 125(1–2):85–100, 2004. doi: 10.1016/j.jspi.2003.07.019.
- [35] Liudmila Ostroumova Prokhorenkova, Gleb Gusev, Aleksandr Vorobev, Anna Veronika Dorogush, and Andrey Gulin. Unbiased boosting with categorical features. In *Advances in Neural Information Processing Systems*, volume 31, pages 6639–6649, 2018. URL <https://papers.nips.cc/paper/7898-catboost-unbiased-boosting-with-categorical-features>.
- [36] Yu-San Shih. A note on split selection bias in classification trees. *Computational Statistics & Data Analysis*, 45(3):457–466, 2004. doi: 10.1016/S0167-9473(03)00064-1.
- [37] Helmut Strasser and Christian Weber. The asymptotic theory of permutation statistics. *Mathematical Methods of Statistics*, 8(2):220–250, 1999.

- [38] Carolin Strobl, Anne-Laure Boulesteix, and Thomas Augustin. Unbiased split selection for classification trees based on the Gini index. *Computational Statistics & Data Analysis*, 52(1): 483–501, 2007. doi: 10.1016/j.csda.2006.12.030.
- [39] Carolin Strobl, Anne-Laure Boulesteix, Achim Zeileis, and Torsten Hothorn. Bias in random forest variable importance measures: Illustrations, sources and a solution. *BMC Bioinformatics*, 8(1):25, 2007. doi: 10.1186/1471-2105-8-25.
- [40] Carolin Strobl, Anne-Laure Boulesteix, Thomas Kneib, Thomas Augustin, and Achim Zeileis. Conditional variable importance for random forests. *BMC Bioinformatics*, 9(1):307, 2008. doi: 10.1186/1471-2105-9-307.
- [41] Gábor J. Székely, Maria L. Rizzo, and Nail K. Bakirov. Measuring and testing dependence by correlation of distances. *The Annals of Statistics*, 35(6):2769–2794, 2007. doi: 10.1214/009053607000000505.
- [42] Joaquin Vanschoren, Jan N. van Rijn, Bernd Bischl, and Luis Torgo. OpenML: Networked science in machine learning. *ACM SIGKDD Explorations Newsletter*, 15(2):49–60, 2013. doi: 10.1145/2641190.2641198. URL <https://doi.org/10.1145/2641190.2641198>.
- [43] Stefan Wager and Susan Athey. Estimation and inference of heterogeneous treatment effects using random forests. *Journal of the American Statistical Association*, 113(523):1228–1242, 2018. doi: 10.1080/01621459.2017.1319839.
- [44] Peter H. Westfall and S. Stanley Young. *Resampling-Based Multiple Testing: Examples and Methods for P-Value Adjustment*. Wiley, New York, 1993. ISBN 0471557617.

## Appendix A Setup and assumptions

### A.1 Fixed-node setup

Let  $(X_i, Y_i)_{i=1}^n$  be the training data. Fix a node  $t$  with sample index set  $I_t$  and size  $n_t := |I_t|$ . Write  $X_t := (X_i)_{i \in I_t}$  and  $Y_t := (Y_i)_{i \in I_t}$  for the data restricted to that node. Stage A tests features  $F_t$  with  $m_t := |F_t|$ , and Stage B tests a finite set  $C$  of  $K := |C|$  candidate thresholds for one feature. For the Stage A feature test the reference case is full-scan and fixed- $B$ : conditional on the node covariates and label-independent auxiliary randomness  $U$ ,  $F_t$  and  $B$  are fixed, and every feature in  $F_t$  is tested with exactly  $B$  permutations. The variable  $U$  excludes node responses, Monte Carlo permutation draws, permutation statistics, and  $P$ -values. For one test,  $\Pi_b$  is the random permutation of replicate  $b$ , and  $T_{\text{obs}}, T_1, \dots, T_B$  are the observed and permuted statistics;  $P_{t,j}$  and  $P_{t,c}$  are the fixed- $B + 1$   $P$ -values for feature  $j$  and threshold  $c$ . For adaptive stopping,  $\gamma$  and  $s$  are the confidence and batch size,  $r$  and  $e$  the permutations drawn and exceedances counted at a stopping check, and  $\theta$  the per-draw exceedance probability given the observed statistic.

**Scope of the fixed-node results.** Every result holds at a fixed node  $t$ , conditional on  $(X_t, U)$ , under the complete nodewise permutation null, so the corollaries give weak familywise control. Corollary 1 covers a feature set  $F_t$  fixed as a function of  $(X_t, U)$ . Corollaries 2 and 3 cover a tested feature and a finite candidate set fixed as functions of  $(X_t, U)$ ; this includes the exact, random, percentile, and histogram candidate sets and threshold scanning. Proposition 1 covers one Stage A test or one per-threshold Stage B test, and not the adaptive max-type rule. The results do not extend to partial-null familywise control, to response-dependent feature muting, to nodes reached through response-dependent splits, to a Stage B test of the Stage A winner, to honesty, to  $P$ -values reported after selection, or to error control for fitted trees and forests, and bootstrap fits are outside them because A0.2 fails there (Section 3).

### A.2 Assumptions

Lemma 1 and Corollaries 1 to 3 use A0.1 to A0.5. Proposition 1 uses A0.1 to A0.3; it replaces the fixed budget of A0.4 by the adaptive stopping rule it analyzes.

**A0.1 (Fixed node).** The node  $t$  and its sample index set  $I_t$  are held fixed. They are not chosen using node responses or earlier response-dependent splits.

**A0.2 (Complete nodewise permutation null).** Under the complete null at node  $t$ ,  $Y_t$  is exchangeable conditional on  $(X_t, U)$ : its conditional law is unchanged by permuting the node responses. This null does not cover a null feature when any tested or untested node covariate remains associated with  $Y_t$ .

**A0.3 (Features fixed before seeing node responses).** The features in  $F_t$  and the effective nodewise budget  $B$  are measurable functions of  $(X_t, U)$  only. They do not depend on  $Y_t$ , other training responses used to reach the node, Monte Carlo permutation draws or statistics,  $P$ -values, or sequential stopping decisions.

**A0.4 (Fixed- $B$  computation).** Each  $P$ -value is computed with exactly  $B$  random permutations, with no optional stopping. The Monte Carlo permutation draws are additional randomness, independent of  $(X_t, Y_t, U)$ , and are not included in  $U$ .

**A0.5 (Conservative ties).** Right-tail tests count ties as exceedances using  $\mathbf{1}\{T_b \geq T_{\text{obs}}\}$ ; left-tail tests, including both Stage B rules, use  $\mathbf{1}\{T_b \leq T_{\text{obs}}\}$ . If several features tie after testing, any random tie break is label-independent and does not affect the Stage A reject or no-reject event.

## Appendix B Proofs of the fixed-node results

### B.1 Monte Carlo permutation exchangeability

The proof of Lemma 1 separates two facts. First, statistics computed from i.i.d. random permutations are exchangeable. Second, under A0.2 to A0.4, the usual computation with one observed statistic and  $B$  random permutations has the same null rank distribution as a construction with a randomized baseline [14].

Fix a node  $t$ , feature  $j$ , and a statistic  $T(\cdot, \cdot; U)$  taking values in a measurable space  $(\mathcal{S}, \mathcal{A})$ . The space may be the real line, as for a Stage A score or a single threshold score, or a space of vectors, as for the vector of scores over a candidate set that the max-type rule standardizes. When  $T$  is real-valued, larger values are more extreme. Let  $\Pi_0, \Pi_1, \dots, \Pi_B$  be i.i.d. uniform random permutations of  $\{1, \dots, n_t\}$ , independent of the data and of  $U$ , and define

$$T_b := T(X_{t,j}, \Pi_b(Y_t); U) \quad (b = 0, 1, \dots, B). \quad (4)$$

Conditional on  $(X_t, Y_t, U)$ , each  $T_b$  is a measurable function of  $\Pi_b$ , and  $(\Pi_0, \dots, \Pi_B)$  are i.i.d., so  $(T_0, T_1, \dots, T_B)$  is exchangeable. Averaging over  $Y_t$  preserves exchangeability, so the vector is also exchangeable conditional on  $(X_t, U)$ .

**Lemma 2** (The observed statistic has the same null rank distribution). *Assume A0.2 to A0.4, and let  $T$  take values in the measurable space  $(\mathcal{S}, \mathcal{A})$ . Let  $\Pi_1, \dots, \Pi_B$  be i.i.d. uniform random permutations of  $\{1, \dots, n_t\}$ , independent of  $(X_t, Y_t, U)$ , and set*

$$T_{\text{obs}} := T(X_{t,j}, Y_t; U), \quad T_b := T(X_{t,j}, \Pi_b(Y_t); U) \quad (b = 1, \dots, B). \quad (5)$$

*Let  $\Pi_0$  be an additional independent uniform random permutation and set  $T_0 := T(X_{t,j}, \Pi_0(Y_t); U)$ . Under the null, conditional on  $(X_t, U)$ ,*

$$(T_{\text{obs}}, T_1, \dots, T_B) \stackrel{d}{=} (T_0, T_1, \dots, T_B). \quad (6)$$

*In particular, when  $T$  is real-valued, the standard right-tail +1  $P$ -value  $P_{\text{id}} := (1 + \sum_{b=1}^B \mathbf{1}\{T_b \geq T_{\text{obs}}\})/(B+1)$  and its randomized-baseline counterpart  $P_{\text{rnd}} := (1 + \sum_{b=1}^B \mathbf{1}\{T_b \geq T_0\})/(B+1)$  have the same conditional distribution.*

*Proof.* Fix  $(X_t, U)$  and work under the null. By A0.2, permuting the node responses does not change the conditional distribution of  $Y_t$ . Use the permutation-action convention under which  $(\Pi_b \circ \Pi_0^{-1})(\Pi_0(Y_t)) = \Pi_b(Y_t)$ , and set  $Y'_t := \Pi_0(Y_t)$ . Then  $Y'_t \stackrel{d}{=} Y_t$  conditional on  $(X_t, U)$ .

For  $b = 1, \dots, B$ , define  $\Pi'_b := \Pi_b \circ \Pi_0^{-1}$ , so  $\Pi'_b(Y'_t) = \Pi_b(Y_t)$ . Conditional on  $(Y_t, \Pi_0)$ , right composition by  $\Pi_0^{-1}$  maps the independent uniform permutations  $\Pi_b$  to independent uniform permutations  $\Pi'_b$ , and this conditional law does not depend on the conditioning values. Because  $Y'_t$  is a function of  $(Y_t, \Pi_0)$ , the transformed permutations are independent of  $(Y'_t, \Pi_0)$ . Therefore

$$\begin{aligned} (T_{\text{obs}}, T_1, \dots, T_B) &= (T(X_{t,j}, Y_t; U), T(X_{t,j}, \Pi_1(Y_t); U), \dots, T(X_{t,j}, \Pi_B(Y_t); U)) \\ &\stackrel{d}{=} (T(X_{t,j}, Y'_t; U), T(X_{t,j}, \Pi'_1(Y'_t); U), \dots, T(X_{t,j}, \Pi'_B(Y'_t); U)) \\ &= (T_0, T_1, \dots, T_B), \end{aligned} \quad (7)$$

conditional on  $(X_t, U)$ . Applying the same comparison map to these equal-in-distribution vectors gives the claim for  $P_{\text{id}}$  and  $P_{\text{rnd}}$ . No step uses the order structure of  $\mathcal{S}$ , so the identity holds for a statistic in any measurable space.  $\square$

## B.2 Proof of Lemma 1

Fix  $(X_t, U)$  and one feature  $j \in F_t$ , and work under the nodewise complete permutation null. By Lemma 2, it is enough to prove the rank bound for an exchangeable tuple, which we denote by  $(T_{\text{obs}}, T_1, \dots, T_B)$ . Define

$$R := 1 + \sum_{b=1}^B \mathbf{1}\{T_b \geq T_{\text{obs}}\}, \quad P_{\text{MC}}^{\geq} = \frac{R}{B+1}. \quad (8)$$

The left-tail version applies the same argument to  $-T$ .

**No ties.** If the statistics almost surely have no ties,  $R$  is the descending rank of  $T_{\text{obs}}$  among  $(T_{\text{obs}}, T_1, \dots, T_B)$ . Exchangeability gives  $\mathbb{P}(R = r \mid X_t, U) = 1/(B+1)$  for  $r = 1, \dots, B+1$ , so for any  $\alpha \in [0, 1]$ ,

$$\mathbb{P}(P_{\text{MC}}^{\geq} \leq \alpha \mid X_t, U) = \mathbb{P}(R \leq (B+1)\alpha \mid X_t, U) = \frac{\lfloor (B+1)\alpha \rfloor}{B+1} \leq \alpha. \quad (9)$$

**Ties.** Let  $V_{\text{obs}}, V_1, \dots, V_B \stackrel{\text{i.i.d.}}{\sim} \text{Unif}(0, 1)$  be independent of all other randomness, and order the pairs  $(T_b, V_b)$  lexicographically. The augmented tuple is exchangeable and almost surely has no ties, so the no-ties argument gives a superuniform  $P$ -value

$$\tilde{P}_{\text{MC}}^{\geq} := \frac{1 + \sum_{b=1}^B \mathbf{1}\{T_b > T_{\text{obs}} \text{ or } (T_b = T_{\text{obs}} \text{ and } V_b > V_{\text{obs}})\}}{B+1}. \quad (10)$$

Each tie-broken indicator is bounded by  $\mathbf{1}\{T_b \geq T_{\text{obs}}\}$ , so  $P_{\text{MC}}^{\geq} \geq \tilde{P}_{\text{MC}}^{\geq}$  and

$$\mathbb{P}(P_{\text{MC}}^{\geq} \leq \alpha \mid X_t, U) \leq \mathbb{P}(\tilde{P}_{\text{MC}}^{\geq} \leq \alpha \mid X_t, U) \leq \alpha. \quad (11)$$

Taking expectations over  $(X_t, U)$  gives the unconditional bound. The corollaries apply this single-test bound with the Bonferroni union bound; no independence among the tests is required.

## B.3 Proof of Corollary 3

The argument reduces to Lemma 1 in four steps. (1) Under the complete null, the  $B+1$  rows of the impurity matrix  $(S_{b,c})$ , computed from the observed response and from  $B$  independent uniform permutations of it, are exchangeable. This is Lemma 2 applied to the vector-valued statistic  $c \mapsto S_{b,c}$  in  $\mathbb{R}^K$ ; the lemma never uses that the statistic is scalar. (2) Column standardization uses the mean and standard deviation of all  $B+1$  entries of each column, which are symmetric functions of the rows, so the standardized matrix has exchangeable rows as well. The exclusion of candidates with an empty child or zero column variance is likewise a function of the whole column. (3) The row minimum is one fixed function applied to every row, so  $T_0, \dots, T_B$  are exchangeable. (4) The inclusive-rank  $P$ -value of an exchangeable tuple is superuniform by the proof of Lemma 1, applied to  $-T$  for the left tail. The guarantee is weak familywise control over the  $K$  candidates, the probability of declaring any split under the complete nodewise null.



## B.4 Proof of Proposition 1

**Reduction to a function of the exceedance probability.** Write  $\theta$  for the per-draw exceedance probability given the observed statistic and the node data. Given  $\theta$ , the draws are independent, so the exceedance count after  $r$  draws is  $\text{Binomial}(r, \theta)$ . The stop and report decisions are deterministic functions of  $(r, e)$  at the batch boundaries, so the rejection probability  $g(\theta)$  is a fixed function of  $\theta$ .

**Monotonicity.** The function  $g$  is nonincreasing. Flipping one indicator from zero to one raises  $e$  at every later boundary. A futility stop (posterior mass at least  $\gamma$  above  $\alpha$ ) can then only come earlier, and a significance stop (mass at least  $\gamma$  below  $\alpha$ ) only later. At a significance stop or at the full budget, the reported value  $(e + 1)/(r + 1)$  is at least as large on the flipped path. The remaining step, that a significance stop reports a value strictly below  $\alpha$  and a futility stop a value at least  $\alpha$ , is the hypothesis of the proposition.

**From  $g$  to statements (i) to (iii).** Under the complete null the observed statistic is exchangeable with the  $N$  orbit values, so without ties  $\theta$  is uniform on  $\{1/N, \dots, 1\}$ , which is (ii). The continuous idealization (i) replaces that grid by the uniform distribution on  $(0, 1)$ . Under it the binomial mixture is the Pólya urn started from one ball of each color, whose next indicator is one with probability  $(e + 1)/(r + 2)$ , and  $\rho = \int_0^1 g$  by a finite recursion over the stopping states. For nonincreasing  $g$  the grid average  $N^{-1} \sum_{i=1}^N g(i/N)$  is at most  $\int_0^1 g$  and at least  $\int_0^1 g - (g(0) - g(1))/N \geq \rho - 1/N$ , which is the interval in (ii). Counting ties as exceedances raises  $\theta$ , and given  $\theta$  the same nonincreasing  $g$  gives (iii).

## B.5 Exact values of the adaptive stopping size

The finite recursion over stopping states computes  $\rho$  exactly, and an exact enumeration of the reachable stopping states verifies the hypothesis of Proposition 1 on stopping reports at  $\gamma = 0.95$  and  $s = 32$  for every budget from 20 to 3,000 at  $\alpha = 0.05$ . At a lower confidence the size can exceed the level:  $\rho(0.05, 0.80, 32, 999) = 0.0522$ . At the corrected levels of the two benchmark examples of Section 2.1,  $\rho$  stays below the level. At  $\alpha/20$  it is 0.00249 at the minimum budget of 400 and 0.00221 at the auto budget of 3,144, and at  $\alpha/257$  it is 0.000195 at the minimum budget of 5,140 and 0.000181 at the auto budget of 64,669. These values are for the strict rule the implementation uses. Under the nonstrict convention, which rejects when the reported value is at most  $\alpha$ , the bound  $\rho \leq \alpha$  fails at  $B = 79$ , where  $\rho = 0.05001$ .

## Appendix C Benchmark configurations and coverage

Table 8 lists the configuration each method family entered the benchmark with, after the selection rule of Section 4 picked one configuration per family by its mean real-data score. Candidates is the size of the family’s configuration grid. Settings not listed are the library defaults. CIF uses stratified bootstrap sampling in classification and ordinary bootstrap sampling in regression. In the projection-count study of the supplement to Millettich et al. [30], 20 random projections in the RDC instead of the 10 used here took about three times the selector time on four small classification datasets, changed mean balanced accuracy by at most 0.0052, and kept at least 95.4% mean overlap between the selected sets.

The downstream learners are fixed. LR uses balanced class weights and a 1,000-iteration limit; the SVM uses a radial basis function kernel whose width is set by the number and variance of the inputs, unit regularization, and balanced class weights; KNN uses 5 distance-weighted neighbors.

Ridge regression uses unit penalty strength, and SVR the same kernel with unit regularization and  $\epsilon = 0.1$ . Standardization is fitted on the training fold and refitted on the selected columns. Importances rank features in decreasing order, filter  $P$ -values in increasing order with the dependence score as the secondary key, ctree by split-use counts, and Boruta and RF-RFE by fitted rank, with deterministic tie breaking. CPI permutes each feature within five-bin percentile strata of the features whose absolute correlation with it is at least 0.5, and globally when there are none.

## C.1 Benchmark coverage

On `gisette`, `isolet`, and `orlraws10P`, 34 classification runs were excluded (Table 9). Of these, 15 partykit ctree and cforest runs did not complete, 18 RDC-selector CIT and CIF runs were lost to a host fault while the other seeds of the same cells completed, and one run on `orlraws10P` was excluded by author decision. No regression runs are excluded. The max-type extension had 1,880 possible ranking runs; 88 were not run because their per-threshold counterpart had not completed, and 1,785 of the remaining 1,792 completed. The seven runs that did not, CIF with the RDC selector and honesty off on `isolet`, `gisette`, and `letter`, were lost to the same host fault.

| Family              | Task           | Candidates | Selected configuration                                                                                                                             |
|---------------------|----------------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| CIT                 | Classification | 4          | selector MC; minimum budgets with adaptive stopping; histogram with 256 bins (257 candidates); both corrections; no honesty                        |
| CIT                 | Regression     | 4          | selector RDC; otherwise as classification                                                                                                          |
| CIF                 | Classification | 4          | selector RDC; 100 trees; stratified bootstrap; square-root feature sampling; no honesty; otherwise as CIT                                          |
| CIF                 | Regression     | 4          | selector RDC; 100 trees; bootstrap; square-root feature sampling; honesty with a 0.5 split                                                         |
| RF, ExtraTrees      | Both           | 1          | 100 trees, library defaults, impurity importance                                                                                                   |
| XGBoost             | Both           | 5          | 500 rounds, depth 6, learning rate 0.1; importance total gain (classification) or total cover (regression)                                         |
| LightGBM            | Both           | 2          | 500 rounds, depth 6, learning rate 0.1; gain importance                                                                                            |
| CatBoost            | Both           | 1          | 500 iterations, depth 6, learning rate 0.1                                                                                                         |
| partykit ctree      | Both           | 2          | quadratic statistic, Monte Carlo test with 9,999 resamples                                                                                         |
| partykit cforest    | Both           | 4          | as ctree; 100 trees, square-root mtry, unconditional out-of-bag permutation importance, partykit default (one permutation per tree over 100 trees) |
| Permutation filters | Both           | 1          | one permutation test per feature (MC, RDC; PC, DC, RDC)                                                                                            |
| Boruta              | Both           | 1          | 200 iterations on an auto-sized random forest                                                                                                      |
| PI, CPI             | Both           | 1          | 10 permutation repeats on a random forest                                                                                                          |
| RF-RFE              | Both           | 1          | step 1 on a random forest                                                                                                                          |

**Table 8:** Configurations entered in the benchmark, one per family and task, with the size of the grid the selection rule chose from. The minimum budget is  $\lceil 1/\alpha_{\text{adj}} \rceil$  permutations, where  $\alpha_{\text{adj}}$  is the corrected level of one test; the histogram search with 256 bins offers at most 257 candidate thresholds per feature, so the per-threshold rule needs a budget of at least  $\lceil 257/0.05 \rceil = 5,140$  to reject.

| Dataset                 | Method                    | Configurations | Seed runs | Basis           |
|-------------------------|---------------------------|----------------|-----------|-----------------|
| <code>gisette</code>    | CIT with the RDC selector | 2              | 8         | host fault      |
| <code>gisette</code>    | <code>ctree</code>        | 1              | 5         | incomplete      |
| <code>isolet</code>     | CIF with the RDC selector | 2              | 4         | host fault      |
| <code>isolet</code>     | CIT with the RDC selector | 2              | 6         | host fault      |
| <code>isolet</code>     | <code>cforest</code>      | 1              | 5         | incomplete      |
| <code>isolet</code>     | <code>ctree</code>        | 1              | 5         | incomplete      |
| <code>orlraws10P</code> | CIT with the RDC selector | 1              | 1         | author directed |

**Table 9:** Classification benchmark exclusions. Each seed run is one method configuration on one dataset with one seed; 34 runs are excluded in total, and all are operational exclusions. Incomplete rows are partykit `ctree` and `cforest` runs that did not complete; the 18 host-fault runs are RDC-selector CIT and CIF runs lost to a host fault; the single `orlraws10P` run was excluded by author decision. No regression runs are excluded.

## C.2 Randomness and reproducibility

The benchmark configuration fixes the seed schedule used for all reported runs. Interpreted permutation routines draw from local random generators, and compiled parallel loops assign one seed per resample, so no generator state is shared across parallel iterations. The interface to the R implementations was checked by refitting one published `ctree` example in R and through the benchmark with identical splits; the seed schedule, ranking directions, and the CPI correlation threshold are fixed by automated tests.

## Appendix D Datasets

Table 10 reports, for each real-data benchmark dataset, the number of samples  $n$ , the number of features  $p$ , and the source collection. Source labels refer to UCI Machine Learning Repository [22], the NIPS 2003 feature selection challenge [13], ASU/scikit-feature [26], OpenML [42], and CoEPrA molecular-property benchmarks [7]. ASU/SF abbreviates ASU/scikit-feature. Slash-separated labels indicate original benchmark provenance and OpenML availability or hosting.

The synthetic datasets are controlled recovery problems with known informative features (Table 11). The classification designs cover redundant features, high-cardinality noise, nonlinear signal, standard and weak signal, Toeplitz correlation, correlated-noise features, and sparse high- $p$  structure; the regression designs replace the high-cardinality and nonlinear classification designs with heteroscedastic noise and Friedman 1. Each task includes one high-dimensional, small-sample design. In classification, the class separation and the label-flip probability set the strength of the signal; in regression, the noise scale is the scale of the response noise, and in the heteroscedastic design the heteroscedastic scale controls the feature-dependent noise multiplier.

## Appendix E Benchmark robustness

Table 12 gives the paired intervals behind the interval statements of Section 5.1. Beyond the directions reported there, the classification intervals favor CIF against CIT, `ctree`, `cforest`, the single trees, the permutation filters, PI, and CPI, and the regression intervals exclude zero against the filters, PI, CPI, LightGBM, and `ctree`. Every analysis in this section uses the configurations selected for the main benchmark (Section 4).

| Classification |        |        |           | Regression      |       |       |               |
|----------------|--------|--------|-----------|-----------------|-------|-------|---------------|
| Dataset        | $n$    | $p$    | Source    | Dataset         | $n$   | $p$   | Source        |
| gamma          | 19,020 | 9      | UCI       | facebook        | 500   | 21    | UCI/OpenML    |
| glass          | 214    | 10     | UCI       | imports-85      | 205   | 76    | UCI           |
| page-blocks    | 5,473  | 10     | UCI       | residential     | 372   | 107   | UCI/OpenML    |
| vowel-context  | 990    | 10     | UCI       | community_crime | 1,994 | 1,954 | UCI/OpenML    |
| wine           | 178    | 13     | UCI       | comm_violence   | 2,215 | 2,210 | UCI/OpenML    |
| letter         | 20,000 | 16     | UCI       | coepra2         | 76    | 5,144 | CoEPrA/OpenML |
| pendigits      | 10,992 | 16     | UCI       | coepra1         | 89    | 5,787 | CoEPrA/OpenML |
| spam           | 4,601  | 57     | UCI       | coepra3         | 133   | 5,787 | CoEPrA/OpenML |
| musk           | 6,597  | 166    | UCI       |                 |       |       |               |
| madelon        | 2,000  | 500    | NIPS 2003 |                 |       |       |               |
| isolet         | 7,797  | 616    | UCI       |                 |       |       |               |
| ORL            | 400    | 1,024  | ASU/SF    |                 |       |       |               |
| Yale           | 165    | 1,024  | ASU/SF    |                 |       |       |               |
| warpAR10P      | 130    | 2,400  | ASU/SF    |                 |       |       |               |
| warpPIE10P     | 210    | 2,420  | ASU/SF    |                 |       |       |               |
| gisette        | 6,000  | 5,000  | NIPS 2003 |                 |       |       |               |
| TOX_171        | 171    | 5,748  | ASU/SF    |                 |       |       |               |
| ALLAML         | 72     | 7,129  | ASU/SF    |                 |       |       |               |
| arcene         | 100    | 10,000 | NIPS 2003 |                 |       |       |               |
| pixraw10P      | 100    | 10,000 | ASU/SF    |                 |       |       |               |
| orlraws10P     | 100    | 10,304 | ASU/SF    |                 |       |       |               |
| CLL_SUB_111    | 111    | 11,340 | ASU/SF    |                 |       |       |               |
| dexter         | 300    | 20,000 | NIPS 2003 |                 |       |       |               |

**Table 10:** Real-data benchmark datasets, 23 for classification and 8 for regression, ordered by the number of features  $p$ .

## E.1 LODO configuration sensitivity

These tables support the leave-one-dataset-out (LODO) positions of CIF in Section 5.1. Each LODO run selects configurations on all but one dataset of the panel, scores the held-out dataset, and averages scores and ranks over downstream learners and standard values of  $k$ . Tables 13 and 14 report the complete-case and all-method panels. Every single-configuration family keeps its held-out score exactly, as it must, since reselection changes only the tuned families. Its mean rank moves only as the tuned families are reselected around it, by at most 0.05 in classification and 0.125

| Task           | Design                          | Setting                                                          | $n$   | $p$   |
|----------------|---------------------------------|------------------------------------------------------------------|-------|-------|
| Classification | Redundant features              | 10 informative, 20 redundant features                            | 1,000 | 50    |
|                | High-cardinality noise          | 10 informative, 50 high-cardinality noise features, 500 levels   | 1,000 | 100   |
|                | Nonlinear signal                | binarized Friedman 1, 5 informative                              | 1,000 | 100   |
|                | Standard classification         | 10 informative, class separation 2.0                             | 1,000 | 100   |
|                | Toeplitz correlation            | 10 informative, $\rho = 0.95$                                    | 1,000 | 100   |
|                | Weak signal classification      | 10 informative, class separation 0.1, label-flip probability 0.1 | 1,000 | 100   |
|                | Correlated noise                | 10 informative, 20 added correlated-noise features, $\rho = 0.9$ | 1,000 | 120   |
|                | Sparse high- $p$ classification | 5 informative, class separation 0.5                              | 200   | 1,000 |
| Regression     | Heteroscedastic regression      | heteroscedastic scale 4.0, noise scale 5.0                       | 1,000 | 50    |
|                | Redundant features              | 10 informative, 20 redundant features                            | 1,000 | 50    |
|                | Friedman 1                      | 5 informative, noise scale 1.0                                   | 1,000 | 100   |
|                | Standard regression             | 10 informative, noise scale 1.0                                  | 1,000 | 100   |
|                | Toeplitz correlation            | 10 informative, $\rho = 0.95$                                    | 1,000 | 100   |
|                | Weak signal regression          | 10 informative, noise scale 50.0                                 | 1,000 | 100   |
|                | Correlated noise                | 10 informative, 20 added correlated-noise features, $\rho = 0.9$ | 1,000 | 120   |
|                | Sparse high- $p$ regression     | 5 informative, noise scale 10.0                                  | 200   | 500   |

**Table 11:** Synthetic designs used in the feature-recovery analysis, with the setting, sample size  $n$ , and number of features  $p$  of each design.

| Classification |        |                  |             | Regression    |        |                 |             |
|----------------|--------|------------------|-------------|---------------|--------|-----------------|-------------|
| Compared with  | Mean   | 95% interval     | Wins-losses | Compared with | Mean   | 95% interval    | Wins-losses |
| RF-RFE         | -0.027 | [-0.038, -0.016] | 1-12        | ExtraTrees    | -0.039 | [-0.124, 0.042] | 2-4         |
| XGBoost        | -0.012 | [-0.022, -0.004] | 4-9         | CatBoost      | 0.024  | [-0.001, 0.049] | 4-2         |
| RF             | -0.004 | [-0.013, 0.006]  | 5-8         | RF-RFE        | -0.080 | [-0.181, 0.019] | 2-4         |
| LightGBM       | -0.015 | [-0.024, -0.006] | 3-10        | RF            | -0.007 | [-0.043, 0.023] | 3-3         |
| Boruta         | 0.007  | [-0.014, 0.031]  | 7-6         | RT            | -0.013 | [-0.054, 0.030] | 3-3         |
| CatBoost       | -0.003 | [-0.015, 0.010]  | 5-8         | cforest       | 0.027  | [-0.032, 0.090] | 5-1         |
| ExtraTrees     | 0.006  | [-0.007, 0.020]  | 7-6         | DT            | 0.129  | [-0.001, 0.304] | 3-3         |
| cforest        | 0.013  | [0.002, 0.024]   | 9-4         | Boruta        | 0.135  | [-0.006, 0.368] | 3-3         |
| DT             | 0.035  | [0.012, 0.060]   | 12-1        | PC filter     | 0.154  | [0.028, 0.333]  | 5-1         |
| RDC filter     | 0.034  | [0.016, 0.053]   | 10-3        | LightGBM      | 0.467  | [0.003, 1.227]  | 4-2         |
| PI             | 0.122  | [0.079, 0.170]   | 13-0        | XGBoost       | 0.066  | [-0.012, 0.164] | 4-2         |
| MC filter      | 0.062  | [0.027, 0.102]   | 12-1        | RDC filter    | 0.335  | [0.032, 0.814]  | 5-1         |
| RT             | 0.061  | [0.038, 0.086]   | 13-0        | CIT           | 0.308  | [-0.002, 0.766] | 5-1         |
| ctree          | 0.049  | [0.026, 0.073]   | 11-2        | ctree         | 0.202  | [0.029, 0.421]  | 4-2         |
| CIT            | 0.044  | [0.027, 0.062]   | 13-0        | PI            | 0.277  | [0.018, 0.731]  | 4-2         |
| CPI            | 0.198  | [0.135, 0.262]   | 13-0        | DC filter     | 0.262  | [0.031, 0.543]  | 5-1         |
|                |        |                  |             | CPI           | 0.808  | [0.035, 2.197]  | 5-1         |

**Table 12:** Paired differences of CIF against every other method on the complete-case panels, 13 classification and 6 regression datasets. Mean is the mean over datasets of CIF minus the compared method in dataset-mean score, balanced accuracy in classification and  $R^2$  in regression, averaged over downstream learners and standard values of  $k$ . The 95% interval is a percentile bootstrap interval over the dataset-level differences from 20,000 replicates with a fixed seed; the intervals are unadjusted post-hoc contrasts. Wins and losses count datasets; no exact ties occurred. Rows follow the order of Table 2.

in regression. On the all-method panels CIF loses 0.002 balanced accuracy and 0.008  $R^2$  under reselection, and XGBoost loses 0.03  $R^2$  (0.270 against 0.241). The one large reselection effect is cforest in regression, whose alternative configuration is chosen on one holdout and scores far lower there (mean  $R^2$  0.30 against 0.20).

## E.2 Mechanism-matched CIF check

This check supports the statement in Section 5.1 that the classification margin of CIF over cforest persists under a common importance mechanism. The benchmark ranks cforest by partykit’s out-of-bag permutation importance and CIF by split importance, so the margin between them mixes the importance mechanism with the way the trees are grown. To separate the two, the selected CIF configuration of each task was refit on every training fold of 20 classification and 8 regression datasets and ranked by the cforest mechanism: one permutation of each feature on each tree’s out-of-bag rows, with the error increase averaged over the 100 trees. The rankings were scored with the benchmark protocol. The 20 classification datasets are the 22 on which CIF and cforest are paired, less `gisette` and `letter`, which were not refit.

Table 15 gives the result. In classification the margin over cforest is unchanged. In regression the medians agree (+0.006 over cforest, -0.002 against split-ranked CIF), and the negative means come from one dataset, `coepa2` ( $n = 76$ , 5,144 predictors), on which every method has negative  $R^2$ . The conclusion is therefore stated for classification.

Permutation importance computed on the training rows scores well below both rankings. On the 16 classification datasets that completed, it scores 0.10 below cforest and 0.12 below split-ranked CIF, with the loss concentrated on the small- $n$ , high- $p$  datasets. On the high- $p$  datasets the refit’s split ranking also overlaps the stored benchmark ranking poorly in the top ten (mean Jaccard 0.38 in classification), because most features never split there and their tied zero importances fall in

| Classification |       |       |       |          |       | Regression |       |       |        |          |      |
|----------------|-------|-------|-------|----------|-------|------------|-------|-------|--------|----------|------|
| Method         | LODO  | Fixed | Score | Settings | Main  | Method     | LODO  | Fixed | Score  | Settings | Main |
| RF-RFE         | 2.54  | 2.54  | 0.825 | 1        | 13/13 | ExtraTrees | 4.67  | 4.67  | 0.292  | 1        | 6/6  |
| LightGBM       | 4.31  | 4.46  | 0.813 | 1        | 13/13 | CatBoost   | 6.17  | 6.33  | 0.229  | 1        | 6/6  |
| RF             | 5.08  | 5.23  | 0.802 | 1        | 13/13 | RF-RFE     | 6.67  | 6.67  | 0.333  | 1        | 6/6  |
| CatBoost       | 5.54  | 5.69  | 0.801 | 1        | 13/13 | RF         | 6.83  | 7.00  | 0.260  | 1        | 6/6  |
| XGBoost        | 5.69  | 4.92  | 0.808 | 2        | 11/13 | RT         | 7.00  | 7.00  | 0.266  | 1        | 6/6  |
| Boruta         | 6.23  | 6.38  | 0.791 | 1        | 13/13 | CIF        | 7.33  | 7.00  | 0.240  | 2        | 4/6  |
| ExtraTrees     | 6.62  | 6.77  | 0.792 | 1        | 13/13 | XGBoost    | 8.50  | 8.67  | 0.149  | 2        | 5/6  |
| CIF            | 6.85  | 6.38  | 0.793 | 2        | 11/13 | DT         | 8.67  | 8.83  | 0.124  | 1        | 6/6  |
| cforest        | 8.23  | 8.46  | 0.785 | 1        | 13/13 | Boruta     | 9.17  | 9.33  | 0.118  | 1        | 6/6  |
| DT             | 9.38  | 9.46  | 0.763 | 1        | 13/13 | LightGBM   | 10.50 | 10.50 | -0.214 | 1        | 6/6  |
| RDC filter     | 10.69 | 10.85 | 0.764 | 1        | 13/13 | CIT        | 10.67 | 10.50 | -0.206 | 2        | 5/6  |
| ctree          | 11.77 | 11.77 | 0.749 | 1        | 13/13 | cforest    | 10.67 | 9.67  | 0.092  | 2        | 5/6  |
| CIT            | 12.15 | 12.15 | 0.754 | 1        | 13/13 | PI         | 11.00 | 11.00 | -0.024 | 1        | 6/6  |
| MC filter      | 12.69 | 12.69 | 0.737 | 1        | 13/13 | ctree      | 11.33 | 11.50 | 0.051  | 1        | 6/6  |
| RT             | 13.00 | 13.00 | 0.737 | 1        | 13/13 | PC filter  | 11.67 | 11.83 | 0.099  | 1        | 6/6  |
| PI             | 15.73 | 15.73 | 0.676 | 1        | 13/13 | RDC filter | 12.50 | 12.67 | -0.082 | 1        | 6/6  |
| CPI            | 16.50 | 16.50 | 0.600 | 1        | 13/13 | DC filter  | 13.50 | 13.67 | -0.009 | 1        | 6/6  |
|                |       |       |       |          |       | CPI        | 14.17 | 14.17 | -0.554 | 1        | 6/6  |

**Table 13:** LODO configuration sensitivity on the complete-case panels (13 classification and 6 regression datasets). LODO is the mean rank when each held-out dataset is scored with configurations selected on the other datasets; Fixed is the mean rank on the same panel under the configuration selected on the full benchmark. Lower rank is better; rows are ordered by LODO rank within each task. Score is the mean held-out metric under LODO selection. Settings reports the number of distinct selected configurations; Main reports how often the main benchmark configuration is reselected. Ranks are computed within held-out datasets before averaging, so score order need not match rank order. Entries are mean ranks over the panel datasets; the difference between the fixed and LODO columns is the reported sensitivity.

arbitrary order. On the low- $p$  datasets the overlap is complete.

| Classification |       |       |       |          |       | Regression |       |       |        |          |      |
|----------------|-------|-------|-------|----------|-------|------------|-------|-------|--------|----------|------|
| Method         | LODO  | Fixed | Score | Settings | Main  | Method     | LODO  | Fixed | Score  | Settings | Main |
| RF-RFE         | 4.19  | 4.19  | 0.837 | 1        | 21/21 | ExtraTrees | 5.00  | 5.00  | 0.353  | 1        | 8/8  |
| XGBoost        | 5.81  | 5.81  | 0.828 | 1        | 21/21 | CIF        | 6.50  | 6.25  | 0.315  | 2        | 7/8  |
| RF             | 5.86  | 5.86  | 0.823 | 1        | 21/21 | CatBoost   | 6.62  | 6.75  | 0.304  | 1        | 8/8  |
| LightGBM       | 6.05  | 6.05  | 0.829 | 1        | 21/21 | RF-RFE     | 6.88  | 6.88  | 0.382  | 1        | 8/8  |
| CIF            | 6.10  | 5.86  | 0.820 | 2        | 20/21 | RF         | 7.50  | 7.63  | 0.327  | 1        | 8/8  |
| Boruta         | 6.57  | 6.62  | 0.816 | 1        | 21/21 | RT         | 8.25  | 8.25  | 0.330  | 1        | 8/8  |
| CatBoost       | 6.71  | 6.76  | 0.822 | 1        | 21/21 | DT         | 9.25  | 9.38  | 0.225  | 1        | 8/8  |
| ExtraTrees     | 7.29  | 7.33  | 0.817 | 1        | 21/21 | Boruta     | 9.38  | 9.50  | 0.221  | 1        | 8/8  |
| cforest        | 8.29  | 8.33  | 0.812 | 1        | 21/21 | cforest    | 9.50  | 8.75  | 0.202  | 2        | 7/8  |
| DT             | 8.62  | 8.62  | 0.799 | 1        | 21/21 | PC filter  | 9.75  | 9.88  | 0.207  | 1        | 8/8  |
| RDC filter     | 11.00 | 11.05 | 0.794 | 1        | 21/21 | XGBoost    | 10.00 | 10.13 | 0.241  | 2        | 7/8  |
| PI             | 11.67 | 11.67 | 0.745 | 1        | 21/21 | LightGBM   | 10.12 | 10.13 | -0.028 | 1        | 8/8  |
| MC filter      | 11.86 | 11.86 | 0.778 | 1        | 21/21 | RDC filter | 10.88 | 11.00 | 0.071  | 1        | 8/8  |
| RT             | 12.81 | 12.81 | 0.780 | 1        | 21/21 | CIT        | 11.25 | 11.13 | -0.023 | 2        | 7/8  |
| ctree          | 12.86 | 12.86 | 0.785 | 1        | 21/21 | ctree      | 11.25 | 11.38 | 0.167  | 1        | 8/8  |
| CIT            | 13.14 | 13.14 | 0.788 | 1        | 21/21 | PI         | 11.75 | 11.75 | 0.112  | 1        | 8/8  |
| CPI            | 14.19 | 14.19 | 0.694 | 1        | 21/21 | DC filter  | 12.12 | 12.25 | 0.126  | 1        | 8/8  |
|                |       |       |       |          |       | CPI        | 15.00 | 15.00 | -0.292 | 1        | 8/8  |

**Table 14:** LODO configuration sensitivity on the all-method panels (21 classification and 8 regression datasets) used by the main table. Columns as in Table 13; the Fixed column repeats the main-table mean ranks.

| Comparison                                  | Datasets | Mean   | Median | Wins-losses |
|---------------------------------------------|----------|--------|--------|-------------|
| <i>Classification (balanced accuracy)</i>   |          |        |        |             |
| CIF (out-of-bag permutation) vs cforest     | 20       | +0.012 | +0.006 | 15–5        |
| CIF (out-of-bag permutation) vs CIF (split) | 20       | +0.001 | −0.001 | 8–12        |
| CIF (split) vs cforest                      | 20       | +0.011 | +0.008 | 16–4        |
| CIF (training-row permutation) vs cforest   | 16       | −0.100 | −0.055 | 6–10        |
| <i>Regression (<math>R^2</math>)</i>        |          |        |        |             |
| CIF (out-of-bag permutation) vs cforest     | 8        | −0.115 | +0.006 | 6–2         |
| CIF (out-of-bag permutation) vs CIF (split) | 8        | −0.136 | −0.002 | 4–4         |
| CIF (split) vs cforest                      | 8        | +0.021 | +0.009 | 6–2         |
| CIF (training-row permutation) vs cforest   | 6        | −0.016 | +0.006 | 4–2         |

**Table 15:** CIF ranked by the importance mechanism of cforest. Directed differences in dataset-mean score (balanced accuracy or  $R^2$  over downstream learners and standard  $k$ ) between the first and second method, summarized over datasets: mean, median, and the number of datasets on which the first method scores higher or lower. Out-of-bag permutation is partykit-style out-of-bag permutation importance computed on the refit CIF; training-row permutation is scikit-learn permutation importance on the training rows (16 and 6 datasets completed). The pendigits dataset enters the out-of-bag rows with four of its five seeds.

### E.3 Random forest ranked by out-of-bag permutation importance

Table 16 supports the positions of RF permutation and of CIF reported in Section 5.1. Here the benchmark’s 100-tree random forest is ranked by one permutation of each column on each tree’s out-of-bag rows, the mechanism cforest uses. It ranks below the impurity-ranked forest and below CIF in both tasks, and above cforest in classification. With it present, CIF ranks 4th of 18 in classification (mean rank 6.38, behind RF at 6.19 and XGBoost at 6.24) and stays 2nd in regression. The permutation step takes a median 29 seconds per fold in classification and 127 in regression, against 0.2 seconds for the forest fit, and 43 and 32 minutes per fold on **gisette** and **dexter**.

### E.4 Breakdowns by downstream learner, top- $k$ value, and seed

These breakdowns support the ranking of Table 2 and its variation with  $k$  in Section 5.1, by showing how the method ordering changes when results are split by downstream learner, value of  $k$ , and seed. For the learner and  $k$  checks, one unit is one downstream learner paired with one standard value of  $k$ . Within each unit, methods are ordered by mean rank among datasets where every

| Task           | Compared with | Datasets | Position | Median difference | Mean difference | Wins-losses |
|----------------|---------------|----------|----------|-------------------|-----------------|-------------|
| Classification | CIF           | 23       | 8 of 18  | −0.003            | −0.002          | 11–12       |
| Classification | RF            | 23       |          | −0.004            | −0.004          | 8–15        |
| Classification | cforest       | 22       |          | +0.005            | +0.009          | 16–6        |
| Regression     | CIF           | 8        | 6 of 19  | −0.007            | −0.028          | 3–5         |
| Regression     | RF            | 8        |          | −0.002            | −0.032          | 3–5         |
| Regression     | cforest       | 8        |          | +0.002            | −0.007          | 5–3         |

**Table 16:** Random forest ranked by out-of-bag permutation importance (RF permutation in Table 3) as an added comparator. Position is its mean-rank position when it joins the all-method panels of 21 and 8 datasets (18 classification and 19 regression methods). Differences are the new ranker minus the compared method after averaging within each dataset over downstream learners and standard  $k$ , summarized by median and mean over the datasets both completed; balanced accuracy in classification,  $R^2$  in regression. Wins and losses count datasets where the new ranker is higher or lower.

benchmark method is available for that learner-by- $k$  combination; ties use average ranks. Tables 17 and 18 show all 15 learner-by- $k$  combinations for each task. Rows follow the main benchmark order. The learner columns report mean position over the five standard values of  $k$  for that learner; lower positions are better. Mean position averages the positions obtained after ordering methods within each learner-by- $k$  combination; mean rank averages the dataset-level ranks directly. Top 3 of 15 and Top 5 of 15 count the learner-by- $k$  combinations where the method ranks in the top 3 or top 5.

In the classification learner-by- $k$  sensitivity table, CIF is top five in 10 of the 15 learner-by- $k$  combinations and top three in 3 of 15. Its mean position is close to RF’s and is better than the single-tree and filter baselines in the mean-position summary. RF-RFE, LightGBM, XGBoost, and CatBoost have lower mean positions.

CIF has the fourth-lowest regression mean position in this breakdown, after ExtraTrees, RF-RFE, and CatBoost, and remains ahead of ctrees, cforest, CIT, and most filter and wrapper methods in this summary. Figure 3 shows the classification margins of CIF over ctrees, cforest, and CIT by downstream learner and value of  $k$ , and Figure 4 the regression margins, where a negative mean  $R^2$  for the comparator can produce a large positive margin; both use the datasets available for each comparator.

For the seed checks, each method is ranked separately within each fixed seed. Keeping only datasets with results for every method, downstream learner, standard top- $k$  value, and seed leaves 13 classification datasets and 6 regression datasets complete across all five seeds. These tables summarize seed variation by rank without intervals or tests. In these tables, a seed column is the method’s ordinal position after sorting that seed’s averaged dataset-level ranks, while mean rank is the averaged dataset-level rank value itself. Rows follow the main benchmark order. In classification

| Method     | KNN  | LR   | SVM  | Mean position | Mean rank | Best/worst | Top 3<br>of 15 | Top 5<br>of 15 |
|------------|------|------|------|---------------|-----------|------------|----------------|----------------|
| RF-RFE     | 1.7  | 5.0  | 1.8  | 2.8           | 5.2       | 1.0/8.0    | 10/15          | 13/15          |
| XGBoost    | 5.4  | 2.7  | 3.4  | 3.8           | 5.8       | 2.0/8.0    | 9/15           | 11/15          |
| CIF        | 4.2  | 4.4  | 5.7  | 4.8           | 6.7       | 2.0/7.0    | 3/15           | 10/15          |
| RF         | 3.6  | 5.1  | 5.1  | 4.6           | 6.4       | 1.5/7.0    | 3/15           | 10/15          |
| LightGBM   | 4.2  | 2.2  | 2.0  | 2.8           | 5.5       | 1.0/6.0    | 11/15          | 13/15          |
| Boruta     | 5.2  | 8.6  | 7.8  | 7.2           | 7.5       | 1.0/9.0    | 2/15           | 2/15           |
| CatBoost   | 6.1  | 3.4  | 4.1  | 4.5           | 6.3       | 1.0/8.0    | 5/15           | 10/15          |
| ExtraTrees | 6.8  | 7.6  | 8.8  | 7.7           | 7.7       | 2.0/12.0   | 1/15           | 1/15           |
| cfoster    | 9.5  | 7.6  | 9.3  | 8.8           | 8.2       | 5.0/11.0   | 0/15           | 1/15           |
| DT         | 10.4 | 9.2  | 8.4  | 9.3           | 9.5       | 4.0/13.5   | 0/15           | 2/15           |
| RDC filter | 11.2 | 12.0 | 12.6 | 11.9          | 10.8      | 10.0/15.0  | 0/15           | 0/15           |
| PI         | 15.3 | 15.8 | 15.8 | 15.6          | 13.4      | 13.5/16.0  | 0/15           | 0/15           |
| MC filter  | 12.0 | 13.6 | 13.8 | 13.1          | 11.3      | 10.0/17.0  | 0/15           | 0/15           |
| RT         | 15.0 | 13.0 | 13.5 | 13.8          | 11.9      | 10.0/16.0  | 0/15           | 0/15           |
| ctree      | 12.1 | 13.0 | 12.4 | 12.5          | 11.0      | 10.0/15.0  | 0/15           | 0/15           |
| CIT        | 13.3 | 12.8 | 11.7 | 12.6          | 11.0      | 9.0/16.0   | 0/15           | 0/15           |
| CPI        | 17.0 | 17.0 | 16.8 | 16.9          | 14.8      | 16.0/17.0  | 0/15           | 0/15           |


**Table 17:** Classification sensitivity by downstream learner and value of  $k$ . Lower values are better. KNN, LR, and SVM denote downstream learners; Top 3 of 15 and Top 5 of 15 count the learner-by- $k$  combinations where the method ranks in the top 3 or top 5. The learner columns and mean position average the method’s ordinal position among the methods over learner-by- $k$  combinations (the five values of  $k$  for one learner, or all 15 combinations); best and worst are its extreme positions over the 15 combinations; mean rank averages its dataset-level rank over datasets and combinations. The dataset counts at  $k = 5, 10, 25, 50, 100$  are 21, 20, 14, 14, and 13. The spread across learner and  $k$  columns is the reported sensitivity.




| Method     | KNN  | Ridge | SVR  | Mean position | Mean rank | Best/worst | Top 3 of 15 | Top 5 of 15 |
|------------|------|-------|------|---------------|-----------|------------|-------------|-------------|
| ExtraTrees | 6.2  | 2.4   | 2.6  | 3.7           | 6.8       | 1.0/11.0   | 9/15        | 11/15       |
| CIF        | 4.6  | 9.9   | 2.4  | 5.6           | 7.8       | 1.0/12.0   | 7/15        | 8/15        |
| CatBoost   | 2.0  | 8.9   | 3.2  | 4.7           | 7.3       | 1.0/15.0   | 6/15        | 12/15       |
| RF-RFE     | 3.2  | 3.0   | 5.9  | 4.0           | 7.1       | 1.0/9.0    | 7/15        | 11/15       |
| RF         | 7.8  | 4.2   | 10.0 | 7.3           | 8.3       | 2.0/13.0   | 2/15        | 4/15        |
| RT         | 4.4  | 10.0  | 6.1  | 6.8           | 8.5       | 2.0/17.0   | 3/15        | 7/15        |
| cforest    | 11.4 | 11.7  | 9.9  | 11.0          | 10.1      | 6.0/16.0   | 0/15        | 0/15        |
| DT         | 6.7  | 9.4   | 9.1  | 8.4           | 9.0       | 4.0/16.0   | 0/15        | 2/15        |
| Boruta     | 12.5 | 4.4   | 11.9 | 9.6           | 9.4       | 2.0/16.0   | 2/15        | 2/15        |
| PC filter  | 12.8 | 12.0  | 11.0 | 11.9          | 10.7      | 8.0/16.0   | 0/15        | 0/15        |
| LightGBM   | 9.2  | 10.4  | 9.8  | 9.8           | 9.6       | 1.0/17.0   | 3/15        | 3/15        |
| XGBoost    | 6.5  | 15.9  | 9.3  | 10.6          | 9.9       | 1.5/18.0   | 1/15        | 4/15        |
| RDC filter | 14.3 | 10.1  | 6.5  | 10.3          | 9.8       | 3.0/16.0   | 1/15        | 2/15        |
| CIT        | 14.7 | 12.4  | 14.7 | 13.9          | 11.0      | 8.5/18.0   | 0/15        | 0/15        |
| ctree      | 8.2  | 9.2   | 17.4 | 11.6          | 10.9      | 1.0/18.0   | 2/15        | 4/15        |
| PI         | 12.3 | 7.1   | 14.4 | 11.3          | 10.2      | 3.0/16.0   | 1/15        | 2/15        |
| DC filter  | 16.4 | 13.9  | 9.6  | 13.3          | 11.1      | 7.0/17.0   | 0/15        | 0/15        |
| CPI        | 17.8 | 16.1  | 17.2 | 17.0          | 13.6      | 9.5/18.0   | 0/15        | 0/15        |

**Table 18:** Regression sensitivity by downstream learner and value of  $k$ . Lower values are better. KNN, Ridge, and SVR denote downstream learners; Top 3 of 15 and Top 5 of 15 count the learner-by- $k$  combinations where the method ranks in the top 3 or top 5. The learner columns and mean position average the method’s ordinal position among the methods over learner-by- $k$  combinations (the five values of  $k$  for one learner, or all 15 combinations); best and worst are its extreme positions over the 15 combinations; mean rank averages its dataset-level rank over datasets and combinations. The dataset counts at  $k = 5, 10, 25, 50, 100$  are 8, 8, 7, 7, and 6. The spread across learner and  $k$  columns is the reported sensitivity.

CIF is 5th to 7th in every seed (Table 19), and in regression its position ranges from 4th to 8th (Table 20).

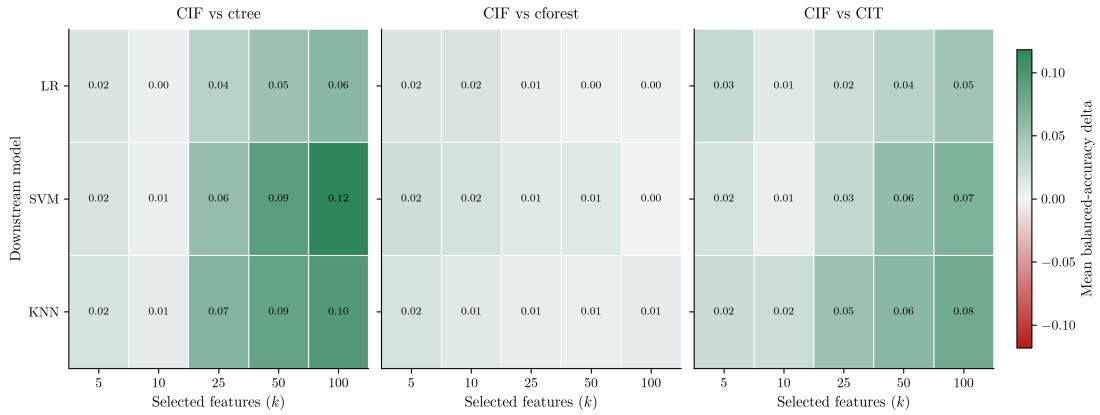

**Figure 3:** Classification CIF margins against ctree, cforest, and CIT by downstream learner and value of  $k$ . Each plotted value is the mean balanced-accuracy difference, CIF minus comparator, for one downstream learner and one value of  $k$ ; positive values favor CIF. Dataset counts by  $k$  are 21, 20, 14, 14, and 13 for ctree, 22, 21, 15, 15, and 14 for cforest, and 23, 22, 16, 16, and 15 for CIT. Values are means over datasets; the bootstrap intervals for the pooled differences are in Table 3.

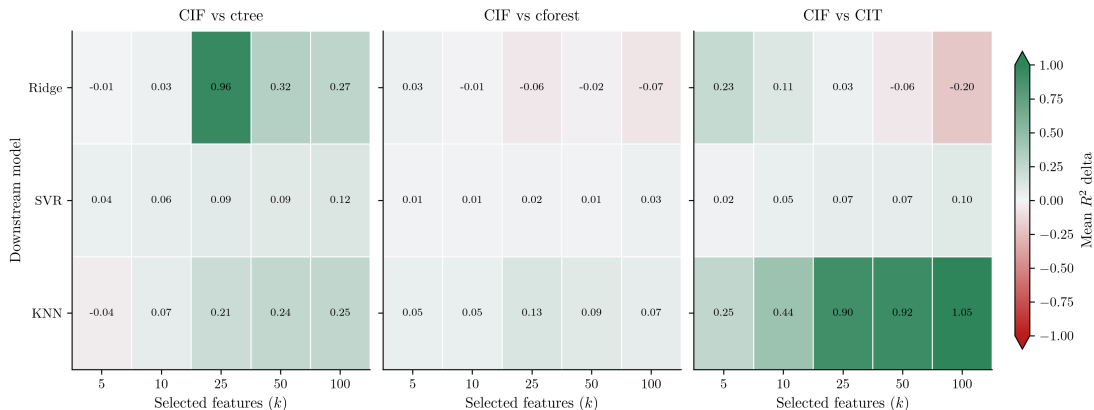

**Figure 4:** Regression CIF margins against ctrees, cforest, and CIT by downstream learner and value of  $k$ . Each plotted value is the mean  $R^2$  difference, CIF minus comparator, for one downstream learner and one value of  $k$ ; positive values favor CIF. Dataset counts by  $k$  are 8, 8, 7, 7, and 6 for each comparison. Large positive plotted values can reflect negative mean  $R^2$  for the comparator. Numeric labels show the unclipped values; the color scale is clipped at  $\pm 1$  for readability. Values are means over datasets; the bootstrap intervals for the pooled differences are in Table 3.

## Appendix F Where CIF is weaker

Figure 5 shows, by downstream learner, where the classification scores of CIF peak on the 15 datasets with more than 100 features, the pattern summarized in Section 5.2. Scores peak at intermediate  $k$  ( $100 < k < p$ ) on 8 of 15 LR datasets, 12 of 15 SVM datasets, and 9 of 15 KNN datasets.

| Method     | Seed 1 | Seed 2 | Seed 3 | Seed 4 | Seed 5 | Mean position | Mean rank |
|------------|--------|--------|--------|--------|--------|---------------|-----------|
| RF-RFE     | 1      | 1      | 1      | 1      | 1      | 1.0           | 4.9       |
| XGBoost    | 2      | 4      | 2      | 3      | 3      | 2.8           | 5.8       |
| CIF        | 6      | 5      | 6      | 5      | 7      | 5.8           | 6.9       |
| RF         | 5      | 6      | 4      | 6      | 4      | 5.0           | 6.6       |
| LightGBM   | 3      | 2      | 3      | 2      | 2      | 2.4           | 5.6       |
| Boruta     | 7      | 7      | 8      | 7      | 8      | 7.4           | 7.6       |
| CatBoost   | 4      | 3      | 5      | 4      | 5      | 4.2           | 6.4       |
| ExtraTrees | 8      | 8      | 7      | 8      | 6      | 7.4           | 7.5       |
| cforest    | 9      | 9      | 9      | 9      | 9      | 9.0           | 8.3       |
| DT         | 10     | 10     | 11     | 10     | 10     | 10.2          | 9.6       |
| RDC filter | 11     | 11     | 12     | 13     | 12     | 11.8          | 10.4      |
| PI         | 16     | 16     | 16     | 16     | 16     | 16.0          | 14.2      |
| MC filter  | 13     | 14     | 14     | 14     | 15     | 14.0          | 11.1      |
| RT         | 15     | 15     | 15     | 15     | 14     | 14.8          | 11.6      |
| ctree      | 14     | 12     | 10     | 12     | 11     | 11.8          | 10.4      |
| CIT        | 12     | 13     | 13     | 11     | 13     | 12.4          | 10.5      |
| CPI        | 17     | 17     | 17     | 17     | 17     | 17.0          | 15.7      |


**Table 19:** Classification seed sensitivity on the 13 datasets complete across all five seeds. Each seed column is the method’s ordinal position after sorting methods by their averaged dataset-level ranks for that seed. Mean position averages those five ordinal positions; mean rank reports the averaged dataset-level rank value itself. Lower values are better. The spread across seed columns is the reported sensitivity.

| Method     | Seed 1 | Seed 2 | Seed 3 | Seed 4 | Seed 5 | Mean position | Mean rank |
|------------|--------|--------|--------|--------|--------|---------------|-----------|
| ExtraTrees | 3      | 2      | 3      | 3      | 3      | 2.8           | 7.4       |
| CIF        | 6      | 5      | 8      | 8      | 4      | 6.2           | 8.6       |
| CatBoost   | 2      | 7      | 4      | 1      | 1      | 3.0           | 7.4       |
| RF-RFE     | 1      | 1      | 1.5    | 4      | 2      | 1.9           | 7.2       |
| RF         | 5      | 3      | 5      | 7      | 7      | 5.4           | 8.5       |
| RT         | 4      | 4      | 1.5    | 5      | 6      | 4.1           | 8.2       |
| cforest    | 15     | 13     | 13     | 12     | 11     | 12.8          | 10.2      |
| DT         | 14     | 6      | 7      | 2      | 5      | 6.8           | 8.6       |
| Boruta     | 9      | 10     | 10     | 11     | 8      | 9.6           | 9.3       |
| PC filter  | 16     | 16     | 15     | 14     | 16     | 15.4          | 11.3      |
| LightGBM   | 8      | 9      | 9      | 10     | 10     | 9.2           | 9.3       |
| XGBoost    | 7      | 8      | 11     | 6      | 12     | 8.8           | 9.2       |
| RDC filter | 10     | 14     | 14     | 13     | 14     | 13.0          | 10.4      |
| CIT        | 12     | 12     | 17     | 17     | 9      | 13.4          | 10.7      |
| ctree      | 13     | 15     | 12     | 15     | 13     | 13.6          | 10.6      |
| PI         | 11     | 11     | 6      | 9      | 15     | 10.4          | 9.7       |
| DC filter  | 17     | 17     | 16     | 16     | 17     | 16.6          | 11.9      |
| CPI        | 18     | 18     | 18     | 18     | 18     | 18.0          | 12.8      |


**Table 20:** Regression seed sensitivity on the 6 datasets complete across all five seeds. Each seed column is the method’s ordinal position after sorting methods by their averaged dataset-level ranks for that seed; fractional positions indicate ties. Mean position averages those five ordinal positions; mean rank reports the averaged dataset-level rank value itself. Lower values are better. The spread across seed columns is the reported sensitivity.

## F.1 Synthetic recovery by $k$

Figure 6 shows synthetic recovery as  $k$  grows for the single trees, forests, and boosted trees, the curves behind the averages over  $k$  in Table 4.

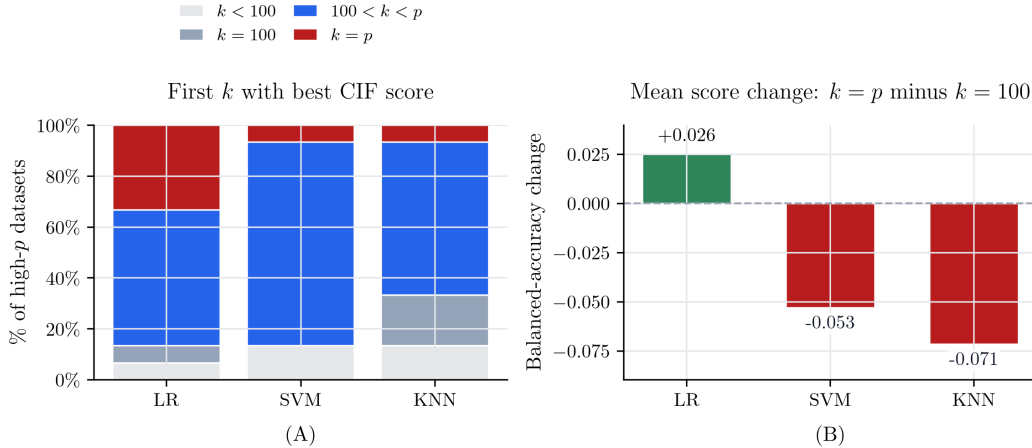

**Figure 5:** Where CIF’s classification scores peak as  $k$  increases, by downstream learner. (A) shows, for each learner, the percentage of 15 datasets where the first evaluated  $k$  attaining the best observed CIF score falls below 100, at 100, between 100 and  $p$ , or at  $k = p$ . (B) shows the mean balanced accuracy change from  $k = 100$  to  $k = p$ .

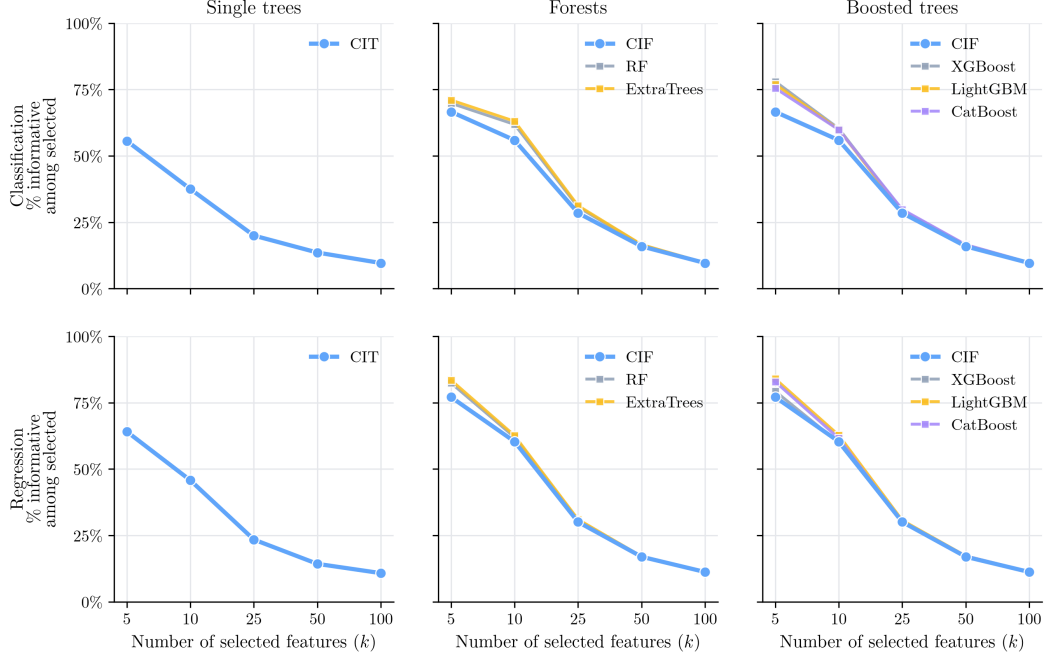


**Figure 6:** Synthetic top- $k$  recovery curves. Columns compare single trees, forests, and boosted trees; rows show classification and regression. Each value is the percentage of selected features that are truly informative.

## F.2 Feature use in sampled forests

Section 5.2 measures feature use by comparing CIF with CIF-all, which keeps feature muting and the other tree settings unchanged while removing feature subsampling. Figure 7 shows how many trees use each feature in the design with two informative features among 1,000. CIF-all splits on one informative feature in every tree and on no uninformative feature, while CIF, RF, and ExtraTrees spread their splits over the uninformative columns; in that design CIF uses an informative feature in 9.0% of splits, RF in 2.7%, ExtraTrees in 2.0%, and CIF-all in 100.0%. Across  $p \in \{100, 500, 1,000\}$  with 1,000 trees per fit, evaluating all nonconstant features raises the share of splits on informative features most in the sparse high- $p$  classification settings: with two informative features, CIF uses informative features in 40.0, 12.2, and 9.0% of splits at  $p = 100, 500$ , and 1,000, against 100.0, 90.2, and 100.0% for CIF-all. Regression shows a similar pattern when one or two features are informative, with a smaller average gain, 42.3% of splits on informative features for CIF-all against 27.8% for CIF. The curves by  $p$ , with the counts of distinct uninformative features each forest uses, follow in Appendix F.3.

## F.3 Feature use by feature dimension

Figure 8 gives the feature-use curves behind Appendix F.2, for  $p \in \{100, 500, 1,000\}$  with 1,000 trees per fit. Each point is the mean over  $n_{\text{informative}} \in \{1, 2, 5, 10\}$ , and the capped bar spans the minimum and maximum over those four sparse settings; the values quoted below for one, two, or five informative features come from single designs in the same runs. In classification, evaluating all nonconstant features also narrows the set of uninformative features used: over the 12 designs CIF-all uses a mean of 93.4 distinct uninformative features against 265.1 for CIF, each counted over the five pooled fits of a design. With two informative features, CIF-all uses 70, 264, and 439 fewer distinct uninformative features than CIF at  $p = 100, 500$ , and 1,000 (totals over the pooled fits), and with

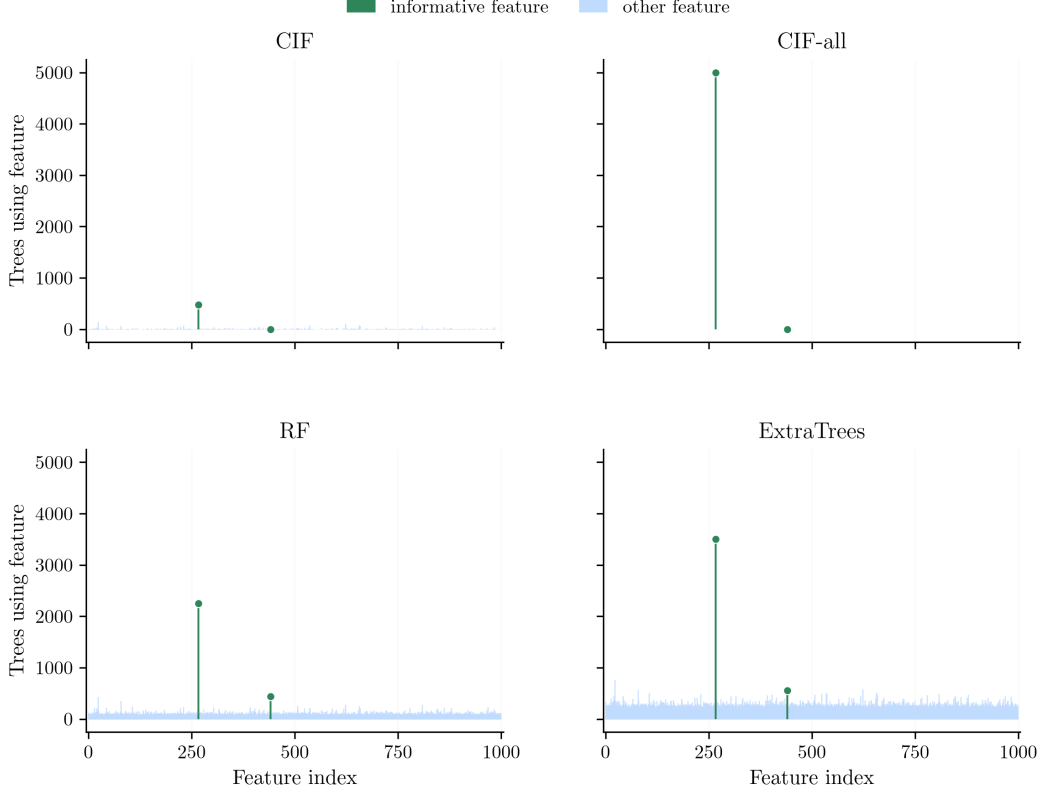


**Figure 7:** Tree-level feature use in one sparse classification forest design ( $n = 250$ ,  $p = 1,000$ , two informative features). Counts are the number of trees using each feature in at least one split, pooled over five fits of 1,000 trees each, so the shared vertical axis runs to 5,000. CIF samples a subset of features at each node; CIF-all evaluates all nonconstant features.

five informative features the CIF-all minus CIF differences in the share of informative splits are 25.1, 56.4, and 54.3%. In regression, CIF-all uses more distinct uninformative features than CIF, a mean of 528.8 against 367.7. With two informative features, CIF uses informative features in 39.9, 19.7, and 11.6% of regression splits at the three values of  $p$ , against 58.8, 46.7, and 35.9% for CIF-all, and with one informative feature the CIF-all minus CIF differences are 29.8, 18.9, and 42.1%.

## Appendix G Runtime and memory accounting

**Notation.** The runtime of a fit is the sum, over realized nodes, of the scans, copies, and tests each node reaches. Let  $n$  be the training sample count and  $p$  the number of features. At node  $t$ ,  $n_t$  samples arrive,  $a_t = |F_{t,\text{avail}}|$  features are available,  $d_t^{\text{const}}$  of them are constant, Stage A considers  $m_t = |F_t|$  features, and feature muting removes  $d_t^{\text{mute}}$  tested features from the descendant pool. Stage B generates  $\hat{K}_t$  thresholds for  $j_t^*$ , of which  $K_t$  remain after the minimum leaf size filter. Let  $C_j^{\text{sel}}(n_t)$  be the cost of one Stage A statistic and  $C^{\text{split}}(n_t)$  that of one weighted child impurity, excluding label copies, shuffles, and masks. Both are linear in  $n_t$  for the MC and PC selectors with Gini and MSE splitting; the RDC costs  $O(n_t \log n_t)$  for fixed projection count, and distance correlation  $O(n_t \log n_t)$  or  $O(n_t^2)$  depending on the backend.

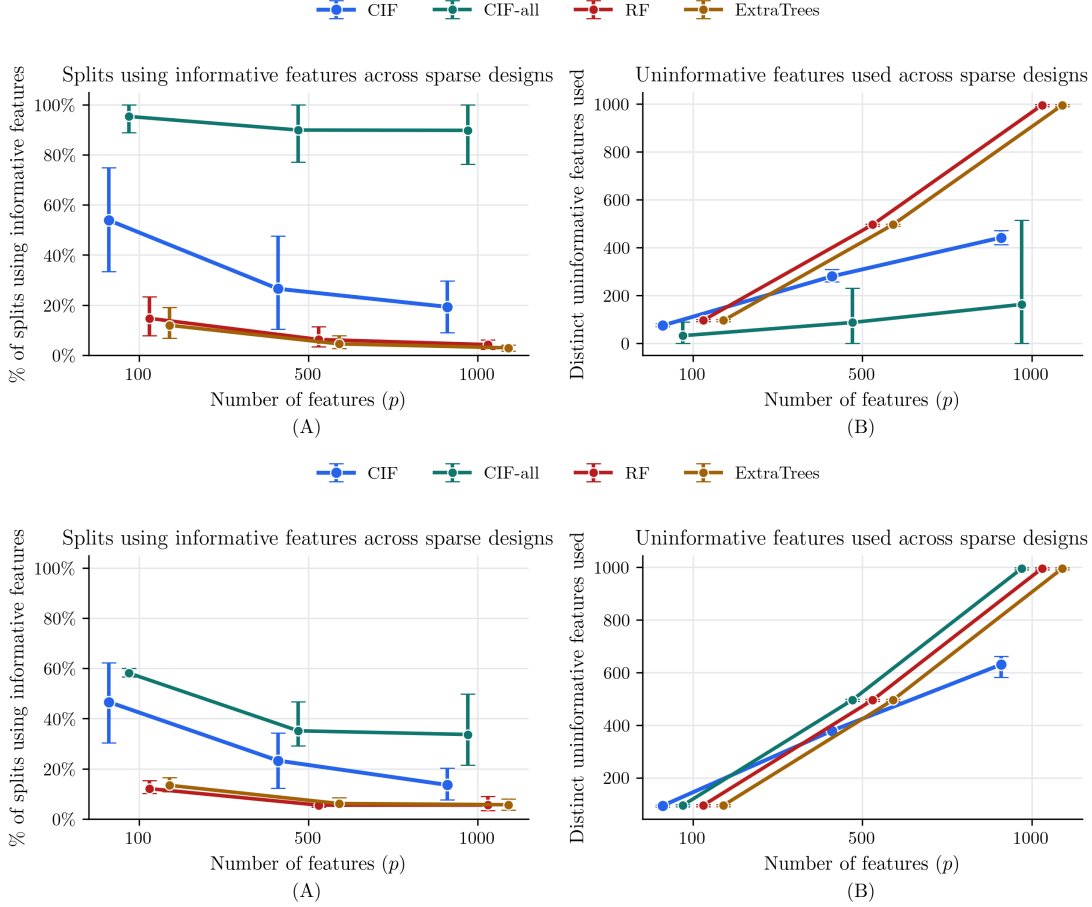

**Figure 8:** Forest feature use by feature dimension  $p$ , for classification (top row) and regression (bottom row), with 1,000 trees per fit. Points are means over  $n_{\text{informative}} \in \{1, 2, 5, 10\}$ ; capped bars span the minimum and maximum over those four sparse designs. In each row, (A) shows the percentage of splits using informative features and (B) the number of distinct uninformative features used. CIF samples a subset of features at each node; CIF-all evaluates all nonconstant features.

**Per-node work.** Every node pays  $O(n_t)$  for the stopping checks and leaf value. A node that can split pays  $O(a_t n_t)$  to find constant features,  $O(a_t d_t^{\text{const}})$  to remove them, and  $O(a_t d_t^{\text{mute}})$  for muting, so feature subsampling caps  $m_t$  but not this pass. With  $\mathcal{J}_t$  the Stage A features tested before the scan stops and  $b_{t,j}^{\text{sel}}$  the permutations drawn for feature  $j$ , the Stage A work is

$$S_t^A = O \left( \sum_{j \in \mathcal{J}_t} (b_{t,j}^{\text{sel}} + 1) (C_j^{\text{sel}}(n_t) + n_t) \right), \quad (12)$$

where the  $+1$  is the observed statistic and the  $n_t$  term covers label copies and shuffles; feature scanning adds  $O(\sum_{j \in F_t} C_j^{\text{sel}}(n_t) + m_t \log m_t)$  for the prescan and sort. Stage B builds its thresholds in  $O(n_t \log n_t)$ , because unique values are sorted before any cap applies; exact search and features with at most four unique values keep all midpoints. With  $C_t^{\text{eval}}$  the thresholds tested before the scan stops and  $b_{t,c}^{\text{split}}$  the permutations drawn at threshold  $c$ , the Stage B work has the form of  $S_t^A$  with  $C_t^{\text{split}}(n_t)$  in place of  $C_j^{\text{sel}}(n_t)$ . At the minimum budget the per-threshold rule draws  $\lceil K_t / \alpha_{\text{split}} \rceil$  permutations for each threshold, and the max-type rule draws one set of  $B$  permutations for all  $K_t$

candidates, so

$$\begin{aligned} \text{per-threshold rule: } S_t^B &= O\left(|\mathcal{C}_t^{\text{eval}}| \lceil K_t / \alpha_{\text{split}} \rceil (C^{\text{split}}(n_t) + n_t)\right), \\ \text{max-type rule: } S_t^B &= O\left((B + 1) K_t (C^{\text{split}}(n_t) + n_t)\right), \end{aligned}$$

where the  $n_t$  term covers masks, child-label slices, copies, and shuffles. The first is quadratic in the candidate count when every threshold is tested, and the second is linear at fixed  $B$ . Threshold scanning adds  $O(K_t(C^{\text{split}}(n_t) + n_t) + K_t \log K_t)$  for ordering, and an accepted split copies the node data into two child matrices with all  $p$  columns, at  $O(n_t p)$ . Adaptive stopping and the two scans reduce work only when they shorten the realized path, so the worst case is still every feature, every threshold, and the full budget. Under the corrections a stage of  $n_{\text{tests}}$  tests at nominal level  $\alpha_{\text{stage}}$  has a maximum budget of about  $n_{\text{tests}}^2 / (4\alpha_{\text{stage}}^2)$  per test, and an explicit integer budget is multiplied by  $n_{\text{tests}}$ .

**Trees and forests.** With  $W_t$  the work at node  $t$ , a tree costs  $T_{\text{tree}} = \sum_{t \in \mathcal{V}(\mathcal{T})} W_t$  over its realized nodes, leaves included, and a binary tree has  $|\mathcal{V}(\mathcal{T})| = 2|\mathcal{I}(\mathcal{T})| + 1$  nodes for  $|\mathcal{I}(\mathcal{T})|$  internal splits. Honesty computes the node sum on the structure subsample and adds  $O(np)$  for the partition plus a leaf re-estimation pass. A forest of  $M$  trees, with  $s_r$  samples for tree  $r$  after bootstrap sampling, costs

$$T_{\text{forest}} = O(np) + \sum_{r=1}^M (O(s_r p) + T_{\text{tree},r}) + O(Mp), \quad (13)$$

plus the honesty and out-of-bag scoring passes when they are requested; this is total work, and wall-clock time also depends on the worker count and load balance across trees.

**Memory.** The dense matrices dominate the node-local workspaces of  $O(a_t + m_t + n_t + \tilde{K}_t)$  and the permutation buffers, of which a fixed-budget test without stopping may store its  $B$  permuted statistics. Validation materializes an  $O(np)$  matrix, and each accepted split materializes children of combined size  $O(n_t p)$ . Because the parent keeps the sibling child alive during depth-first recursion, peak single-tree memory is  $O(np + p \sum_{u \in \mathcal{P}} n_u)$  over the accepted splits  $\mathcal{P}$  on the active recursion stack, which is  $O(np)$  for balanced growth. A forest runs up to  $w = \min(M, n_{\text{jobs}})$  trees at once, so its peak holds  $w$  such workspaces, and fitted storage holds the node records of all trees and  $O(Mp)$  per-tree arrays.

## G.1 Measured scaling in $n$ and $p$

Table 21 reports fit-only time for one CIT and one 100-tree CIF on Gaussian predictors with a weak planted signal, under the fixed benchmark settings of Section 2.2 at  $\alpha_{\text{sel}} = \alpha_{\text{split}} = 0.05$ , with the MC selector and Gini splitting in classification and the PC selector and MSE splitting in regression; the forest adds square-root feature sampling. With at most 257 candidates and at most 5,140 permutations per threshold, the per-node cost is linear in  $n_t$ . A 64-fold increase in  $n$  at  $p = 20$  costs the tree about 68 times in classification and 110 times in regression, and the forest 65 to 77 times. A 25-fold increase in  $p$  at  $n = 2,000$  costs the tree 21 and 44 times, because every predictor is scored at the root and muting removes only failed predictors, while the forest is flat or falling under square-root feature sampling.

The adaptive stopping checks never end a test early at the minimum budget (Section 3.1), so the ratio of the time with adaptive stopping to the time with no stopping measures their cost. It is 1.02 to 1.28 for the tree (median 1.07) and 0.95 to 1.18 for the forest (median 0.99), in line with the

| $n$    | $p$ | Classification |      |          |       | Regression |      |          |      |
|--------|-----|----------------|------|----------|-------|------------|------|----------|------|
|        |     | CIT            |      | CIF      |       | CIT        |      | CIF      |      |
|        |     | Adaptive       | None | Adaptive | None  | Adaptive   | None | Adaptive | None |
| 500    | 20  | 0.17           | 0.16 | 13.1     | 13.2  | 0.08       | 0.08 | 12.2     | 12.2 |
| 500    | 100 | 0.21           | 0.19 | 13.0     | 13.3  | 0.25       | 0.22 | 12.5     | 12.3 |
| 500    | 500 | 4.2            | 3.5  | 13.8     | 13.4  | 4.3        | 3.3  | 12.2     | 12.1 |
| 2,000  | 20  | 0.61           | 0.57 | 53.7     | 54.8  | 0.38       | 0.36 | 54.9     | 46.3 |
| 2,000  | 100 | 0.87           | 0.81 | 45.6     | 46.1  | 1.0        | 0.92 | 42.9     | 43.0 |
| 2,000  | 500 | 12.6           | 11.0 | 48.6     | 49.7  | 16.4       | 13.2 | 45.5     | 45.7 |
| 8,000  | 20  | 2.8            | 2.7  | 216      | 211   | 1.7        | 1.6  | 191      | 193  |
| 8,000  | 100 | 3.2            | 3.0  | 180      | 182   | 3.9        | 3.5  | 163      | 163  |
| 32,000 | 20  | 11.3           | 10.7 | 988      | 1,015 | 8.5        | 8.1  | 788      | 797  |
| 32,000 | 100 | 11.3           | 10.7 | 655      | 688   | 13.2       | 12.1 | 705      | 685  |

**Table 21:** Fit-only wall-clock seconds for one CIT and one 100-tree CIF in the configuration of Appendix G.1, with adaptive stopping (Adaptive) and with no stopping (None), on Gaussian predictors with a weak planted signal in five of them. Each entry is the median of two timed fits, each preceded by one untimed identical fit. The cells with  $n \geq 8,000$  and  $p = 500$  were not run. Tree depth is unbounded, so the forest times are not comparable with the depth-3 forests of the head-to-head timing.

runtime ablations of Table 6. Each test pays a fixed cost for the checks, and a single tree runs one Stage A test per predictor at every node, so the tree ratio grows with  $p$ , from 1.02 to 1.07 at  $p = 20$  to 1.15 to 1.28 at  $p = 500$ . On the 14 Benchmark-size datasets of Section 5.3, switching adaptive stopping off changes tree time by 0.80 to 1.01 (medians 0.97 in classification and 0.88 in regression) and forest time by 0.99 to 1.34 (medians 1.00 and 1.03). For the tree, threshold scanning saves a median 17 times in classification and 45 times on spam, and removing the corrections gives 0.01 to 1.26 of the reference time.

## Appendix H Threshold test comparison and cardinality designs

The threshold test comparison of Section 4 caps the histogram candidates at the number of distinct values in the node and runs five seeds unless stated otherwise. The null calibration uses 2,000 replicates per cell and seed. The power study makes the response depend on the first predictor through a step at zero, with class-probability shift  $\delta \in \{0.05, 0.10, 0.20\}$  or mean shift  $\delta \in \{0.2, 0.4, 0.8\}$  and 500 replicates per cell and seed, and records the rates of any split and of a split on the planted predictor and the error of the chosen threshold. The Stage-B-only study runs nominal Stage B levels from 0.02 to 0.50, with 500 null replicates per cell, level, and seed over three seeds and 200 replicates of the planted step, and interpolates power within each cell to a common realized size of 0.05, or to the largest size both rules reach; its per-threshold test without the threshold correction runs at nominal 0.05 with 500 null replicates per cell. Two reruns check the matched comparison, one with a fourth seed of 1,500 null and 1,000 alternative replicates and one with the step moved from the median to the 85th percentile of the predictor. The scaling study times one tree on ten Gaussian predictors with a planted linear signal in three of them, at  $n \in \{1,000, 4,000, 16,000\}$ , as the median of three fits with a 1,200-second cap. The real-data study fits one tree on the six Stage B real datasets at 256 bins with five-fold cross-validation, recording held-out score, tree depth, fitting time, and the Spearman agreement of the two rules' feature importances. The head-to-head timing fits each 100-tree forest once, with the MC selector, the minimum budget, the two corrections, scanning, muting, the 256-bin histogram, and depth at most 3, on the ten head-to-head datasets



and a synthetic grid of Gaussian predictors with a weak or strong planted signal, from  $n = 500$  to 32,000 and  $p = 20$  to 500.

Table 22 gives the null calibration of the threshold test comparison in Section 5.4, whose design is in Section 4, and supports its statement that both Stage B rules keep the false-split rate of the whole node decision below 0.05 in every cell. The rates of 0.0355 to 0.049 without the threshold correction quoted there come from the same design at 2,000 replicates per cell, where every split must still pass the Stage A test first.

Table 23 extends Table 7 with the sizes under no stopping, which support the statement in its caption that they agree with the sizes under adaptive stopping. Over both modes the per-threshold size is 0.000 to 0.027 and the max-type size 0.023 to 0.044. Over the 108 cell and effect combinations the size-matched difference in power ranges from  $-0.054$  to  $+0.034$  and has no trend in the bin setting. In five cells the per-threshold rule does not reach size 0.05 even at nominal 0.50, and the match is at the largest size both rules reach. The two reruns give size-matched differences of  $-0.006$  ( $-0.008$  to  $-0.003$ ) at the fourth seed and  $-0.004$  ( $-0.008$  to  $0.000$ ) with the step at the 85th percentile, with standard errors of about 0.017 and 0.038 on each difference. The standard errors come from a parametric bootstrap of the whole matching procedure and put the smallest detectable difference at about 0.03 for the fourth seed and 0.08 for the step at the 85th percentile; the sizes in both reruns stay in the ranges above. The max-type rule also places the threshold less precisely: on each rule’s own detections its threshold sits a median 0.19 standard deviations from the planted cut against 0.15, and 87% of its detections fall on the planted predictor against 90%.

Table 24 gives the split rates at a common nominal level, whose gap between the rules Section 5.4 attributes to the lower realized size of the per-threshold rule. Table 25 gives the single-tree fitting times behind its cost comparison. Adaptive stopping shortens the per-threshold test by 1.2 to 1.6, 2.2 to 3.2, and 3.8 to 7.8 times at 16, 64, and 256 bins, which narrows the max-type advantage to 1.0 to 1.3, 1.4 to 2.1, and 2.2 to 7.7. Held at 999 permutations per candidate instead, the per-threshold rule never splits at 64 or 256 bins, because  $\alpha/K$  falls below the resolution  $1/(B + 1)$ . Fitted depths barely differ, 5.0 to 10.7 levels for the max-type rule against 4.0 to 10.0. On the ten head-to-head datasets the max-type forest reduces madelon from 21 to 2.6 seconds, gamma from 44 to 21, and isolet from 18 to 9.1, and changes the other seven by at most 1.6 seconds.

Table 26 gives the held-out scores, fitting times, and depths behind the real-data comparison. The max-type rule scores higher by 0.016 and 0.026 balanced accuracy on vowel, 0.049 and 0.026  $R^2$  on facebook, 0.060 and 0.033 on imports-85, and 0.008 and 0.005 on residential, and lower by 0.018 and 0.020 on page-blocks and by 0.006 on spam with adaptive stopping. It fits 1.2 to 2.4 times faster with adaptive stopping and 1.0 to 8.3 times faster with no stopping on the four datasets whose nodes admit many candidates, and 16% and 10% slower on residential. Fitted depths agree within about one level (4.8 to 12.4 levels for the max-type rule against 5.4 to 11.4).

## H.1 Weak-signal cardinality designs

Tables 27 and 28 give the composition of the top 5, 10, and 25 features, the support, and the downstream score of each ranking in the weak-signal designs behind the cardinality comparison of Section 5.4. The random forest ranked by out-of-bag permutation importance keeps a 500-level share above the cardinality-neutral reference at every list size and signal; at the two weaker signals that share is above the one of impurity importance in the top 5 and 10 and below it in the top 25.

| Task           | $n$ | Bins | Per-threshold |             | Max-type |             |
|----------------|-----|------|---------------|-------------|----------|-------------|
|                |     |      | Adaptive      | No stopping | Adaptive | No stopping |
| Classification | 100 | 16   | 0.018         | 0.018       | 0.034    | 0.035       |
|                | 100 | 64   | 0.013         | 0.013       | 0.035    | 0.037       |
|                | 100 | 256  | 0.009         | 0.010       | 0.036    | 0.038       |
|                | 200 | 16   | 0.020         | 0.020       | 0.033    | 0.034       |
|                | 200 | 64   | 0.014         | 0.015       | 0.033    | 0.034       |
|                | 200 | 256  | 0.009         | 0.009       | 0.033    | 0.035       |
|                | 500 | 16   | 0.020         | 0.020       | 0.030    | 0.031       |
|                | 500 | 64   | 0.014         | 0.014       | 0.032    | 0.033       |
|                | 500 | 256  | 0.007         | 0.007       | 0.032    | 0.034       |
| Regression     | 100 | 16   | 0.027         | 0.027       | 0.032    | 0.033       |
|                | 100 | 64   | 0.017         | 0.019       | 0.034    | 0.035       |
|                | 100 | 256  | 0.014         | 0.015       | 0.034    | 0.035       |
|                | 200 | 16   | 0.028         | 0.029       | 0.032    | 0.035       |
|                | 200 | 64   | 0.023         | 0.024       | 0.035    | 0.037       |
|                | 200 | 256  | 0.012         | 0.013       | 0.036    | 0.038       |
|                | 500 | 16   | 0.026         | 0.026       | 0.029    | 0.030       |
|                | 500 | 64   | 0.020         | 0.020       | 0.029    | 0.031       |
|                | 500 | 256  | 0.011         | 0.011       | 0.029    | 0.032       |

**Table 22:** False-split rate of a depth-one tree under the global null at level 0.05, by Stage B rule and stopping mode, over 10,000 replicates per cell (five seeds of 2,000). The tree has five independent Gaussian predictors and an independent response, and the rate covers Stage A followed by Stage B. Bins is the histogram setting. Every 95% Clopper-Pearson interval lies below 0.05, with largest upper limit 0.042.

| Task           | n   | Bins | Size at nominal 0.05 |       |          |       | Match size | Size-matched power |          |
|----------------|-----|------|----------------------|-------|----------|-------|------------|--------------------|----------|
|                |     |      | Per-threshold        |       | Max-type |       |            | Per-threshold      | Max-type |
|                |     |      | Adaptive             | None  | Adaptive | None  |            |                    |          |
| Classification | 100 | 16   | 0.013                | 0.013 | 0.032    | 0.033 | 0.050      | 0.390              | 0.379    |
|                | 100 | 64   | 0.007                | 0.007 | 0.036    | 0.039 | 0.044      | 0.385              | 0.354    |
|                | 100 | 256  | 0.007                | 0.007 | 0.036    | 0.042 | 0.034      | 0.335              | 0.318    |
|                | 200 | 16   | 0.010                | 0.011 | 0.037    | 0.039 | 0.050      | 0.643              | 0.618    |
|                | 200 | 64   | 0.008                | 0.009 | 0.035    | 0.039 | 0.050      | 0.630              | 0.615    |
|                | 200 | 256  | 0.003                | 0.003 | 0.039    | 0.039 | 0.031      | 0.562              | 0.538    |
|                | 500 | 16   | 0.015                | 0.015 | 0.032    | 0.037 | 0.050      | 0.958              | 0.953    |
|                | 500 | 64   | 0.007                | 0.007 | 0.029    | 0.035 | 0.050      | 0.961              | 0.964    |
|                | 500 | 256  | 0.000                | 0.001 | 0.023    | 0.032 | 0.034      | 0.958              | 0.952    |
| Regression     | 100 | 16   | 0.019                | 0.019 | 0.023    | 0.031 | 0.050      | 0.292              | 0.281    |
|                | 100 | 64   | 0.013                | 0.013 | 0.029    | 0.035 | 0.050      | 0.305              | 0.285    |
|                | 100 | 256  | 0.011                | 0.010 | 0.031    | 0.037 | 0.050      | 0.317              | 0.299    |
|                | 200 | 16   | 0.027                | 0.026 | 0.033    | 0.038 | 0.050      | 0.591              | 0.581    |
|                | 200 | 64   | 0.017                | 0.017 | 0.033    | 0.043 | 0.050      | 0.619              | 0.598    |
|                | 200 | 256  | 0.008                | 0.009 | 0.041    | 0.044 | 0.050      | 0.632              | 0.579    |
|                | 500 | 16   | 0.026                | 0.026 | 0.031    | 0.032 | 0.050      | 0.947              | 0.942    |
|                | 500 | 64   | 0.015                | 0.016 | 0.029    | 0.033 | 0.050      | 0.966              | 0.952    |
|                | 500 | 256  | 0.005                | 0.006 | 0.026    | 0.034 | 0.046      | 0.963              | 0.951    |

**Table 23:** Stage-B-only study: the threshold test in isolation, with one Gaussian predictor fixed without the response and the Stage A test disabled. Size is the false-split rate of a depth-one tree at nominal level 0.05 over 1,500 null replicates per cell (three seeds of 500) under adaptive stopping and no stopping (None); every 95% Clopper-Pearson upper limit is below 0.056. Size-matched power, shown for adaptive stopping at the middle effect ( $\delta = 0.10$  in classification, 0.4 in regression), is interpolated against realized size over the nominal grid from 0.02 to 0.50 (600 replicates per cell and level) to the match size: 0.05, or the largest realized size both rules reach where the per-threshold rule does not reach 0.05.

| Task           | Effect | $n$ | Per-threshold |       |       | Max-type |       |       |
|----------------|--------|-----|---------------|-------|-------|----------|-------|-------|
|                |        |     | 16            | 64    | 256   | 16       | 64    | 256   |
| Classification | 0.05   | 100 | 0.036         | 0.025 | 0.020 | 0.058    | 0.060 | 0.061 |
|                | 0.05   | 200 | 0.058         | 0.047 | 0.033 | 0.084    | 0.088 | 0.088 |
|                | 0.05   | 500 | 0.159         | 0.148 | 0.107 | 0.192    | 0.193 | 0.193 |
|                | 0.10   | 100 | 0.126         | 0.104 | 0.092 | 0.170    | 0.170 | 0.172 |
|                | 0.10   | 200 | 0.315         | 0.296 | 0.247 | 0.362    | 0.360 | 0.364 |
|                | 0.10   | 500 | 0.820         | 0.813 | 0.786 | 0.828    | 0.830 | 0.832 |
|                | 0.20   | 100 | 0.698         | 0.676 | 0.658 | 0.727    | 0.729 | 0.730 |
|                | 0.20   | 200 | 0.971         | 0.972 | 0.968 | 0.972    | 0.972 | 0.972 |
| Regression     | 0.20   | 500 | 1.000         | 1.000 | 1.000 | 1.000    | 1.000 | 1.000 |
|                | 0.2    | 100 | 0.040         | 0.031 | 0.026 | 0.050    | 0.051 | 0.054 |
|                | 0.2    | 200 | 0.079         | 0.066 | 0.045 | 0.086    | 0.091 | 0.090 |
|                | 0.2    | 500 | 0.178         | 0.167 | 0.118 | 0.184    | 0.189 | 0.189 |
|                | 0.4    | 100 | 0.126         | 0.104 | 0.092 | 0.137    | 0.143 | 0.144 |
|                | 0.4    | 200 | 0.326         | 0.297 | 0.246 | 0.332    | 0.338 | 0.340 |
|                | 0.4    | 500 | 0.809         | 0.797 | 0.774 | 0.809    | 0.814 | 0.811 |
|                | 0.8    | 100 | 0.634         | 0.617 | 0.602 | 0.643    | 0.647 | 0.651 |
|                | 0.8    | 200 | 0.962         | 0.962 | 0.955 | 0.963    | 0.964 | 0.963 |
|                | 0.8    | 500 | 1.000         | 1.000 | 1.000 | 1.000    | 1.000 | 1.000 |

**Table 24:** Split rate at nominal level 0.05 of a depth-one tree with adaptive stopping when the response depends on one of five Gaussian predictors through a step at zero, by Stage B construction and bin setting (columns 16, 64, 256), over 2,500 replicates per cell (five seeds of 500). The two rules have different realized sizes at this level (Table 22), so the columns compare split rates rather than power; Table 7 compares power at equal size. Effect is the class-probability shift  $\pm\delta$  around one half in classification and the mean shift in standard-deviation units in regression. No stopping agrees within 0.014 in every cell.

| Task           | $n$    | Bins | Adaptive      |          | No stopping   |       |          |             |
|----------------|--------|------|---------------|----------|---------------|-------|----------|-------------|
|                |        |      | Per-threshold | Max-type | Per-threshold | Fixed | Max-type | Fixed depth |
| Classification | 1,000  | 16   | 0.04          | 0.04     | 0.05          | 0.04  | 0.06     | 5           |
|                | 1,000  | 64   | 0.07          | 0.04     | 0.20          | 0.06  | 0.11     | 0           |
|                | 1,000  | 256  | 0.45          | 0.09     | 3.52          | 0.24  | 0.28     | 0           |
|                | 4,000  | 16   | 0.12          | 0.11     | 0.19          | 0.14  | 0.22     | 6           |
|                | 4,000  | 64   | 0.31          | 0.15     | 0.99          | 0.22  | 0.47     | 0           |
|                | 4,000  | 256  | 1.83          | 0.31     | 14.2          | 0.86  | 1.35     | 0           |
|                | 16,000 | 16   | 0.47          | 0.37     | 0.75          | 0.55  | 0.93     | 8           |
|                | 16,000 | 64   | 1.11          | 0.59     | 3.57          | 0.89  | 2.10     | 0           |
| Regression     | 16,000 | 256  | 9.36          | 1.22     | 59.0          | 3.46  | 6.28     | 0           |
|                | 1,000  | 16   | 0.06          | 0.05     | 0.07          | 0.06  | 0.08     | 6           |
|                | 1,000  | 64   | 0.10          | 0.07     | 0.22          | 0.06  | 0.15     | 0           |
|                | 1,000  | 256  | 0.22          | 0.10     | 0.84          | 0.22  | 0.30     | 0           |
|                | 4,000  | 16   | 0.17          | 0.15     | 0.22          | 0.18  | 0.26     | 8           |
|                | 4,000  | 64   | 0.37          | 0.22     | 1.10          | 0.20  | 0.54     | 0           |
|                | 4,000  | 256  | 1.29          | 0.40     | 8.77          | 0.79  | 1.39     | 0           |
|                | 16,000 | 16   | 0.59          | 0.50     | 0.82          | 0.65  | 1.03     | 10          |
|                | 16,000 | 64   | 1.12          | 0.71     | 3.31          | 0.84  | 2.15     | 0           |
|                | 16,000 | 256  | 7.51          | 1.39     | 54.5          | 3.26  | 6.27     | 0           |

**Table 25:** Fitting time in seconds of one tree on ten Gaussian predictors with a planted linear signal, by Stage B rule and stopping mode. All arms are timed in one run of five seeds; each entry is the median over seeds of the median of three timed fits, and each timed fit follows an untimed identical fit, so compilation is excluded. Bins is the histogram setting. Fixed is the per-threshold rule held at 999 permutations per candidate; it exists only with no stopping because the sequential path raises any budget to the floor  $\lceil K/\alpha \rceil$ , and Fixed depth is its fitted depth (0 where it never splits, because  $\alpha/K < 1/1000$ ). No fit reached the 1,200-second cap.

| Dataset     | $n$   | $p$ | Rule          | Adaptive |         |       | No stopping |         |       |
|-------------|-------|-----|---------------|----------|---------|-------|-------------|---------|-------|
|             |       |     |               | Score    | Seconds | Depth | Score       | Seconds | Depth |
| vowel       | 990   | 10  | Per-threshold | 0.689    | 0.23    | 10.0  | 0.691       | 0.57    | 10.0  |
|             |       |     | Max-type      | 0.705    | 0.15    | 11.2  | 0.717       | 0.40    | 11.4  |
| spam        | 4,601 | 57  | Per-threshold | 0.908    | 0.86    | 11.2  | 0.908       | 3.03    | 11.4  |
|             |       |     | Max-type      | 0.902    | 0.71    | 12.4  | 0.908       | 3.01    | 11.4  |
| page-blocks | 5,473 | 10  | Per-threshold | 0.768    | 0.69    | 10.0  | 0.768       | 5.85    | 10.0  |
|             |       |     | Max-type      | 0.750    | 0.29    | 11.2  | 0.748       | 1.45    | 10.0  |
| imports-85  | 205   | 76  | Per-threshold | 0.638    | 0.07    | 5.4   | 0.638       | 0.17    | 5.4   |
|             |       |     | Max-type      | 0.698    | 0.07    | 4.8   | 0.671       | 0.18    | 5.2   |
| residential | 372   | 107 | Per-threshold | 0.925    | 0.49    | 6.4   | 0.926       | 2.30    | 6.4   |
|             |       |     | Max-type      | 0.933    | 0.57    | 7.2   | 0.931       | 2.53    | 6.6   |
| facebook    | 500   | 21  | Per-threshold | 0.754    | 0.33    | 9.0   | 0.754       | 2.09    | 9.0   |
|             |       |     | Max-type      | 0.803    | 0.15    | 9.8   | 0.780       | 0.25    | 8.6   |

**Table 26:** Five-fold held-out score (balanced accuracy for vowel, spam, and page-blocks;  $R^2$  for imports-85, residential, and facebook), fitting time in seconds, and fitted depth of one tree at the 256-bin histogram setting, by Stage B rule and stopping mode. Each entry is the median over five seeds of the fold assignment. Each time is the second of two identical fits, so compilation is excluded.

| Task           | Signal | Ranking        | Top 5   |           |        | Top 10  |           |        | Top 25  |           |        | Support |
|----------------|--------|----------------|---------|-----------|--------|---------|-----------|--------|---------|-----------|--------|---------|
|                |        |                | Inform. | 500-level | Binary | Inform. | 500-level | Binary | Inform. | 500-level | Binary |         |
| Classification | 0.05   | CIF            | 0.48    | 0.19      | 0.21   | 0.31    | 0.26      | 0.31   | 0.21    | 0.33      | 0.31   | 37      |
|                |        | CIF, max-type  | 0.49    | 0.24      | 0.18   | 0.34    | 0.28      | 0.26   | 0.23    | 0.33      | 0.29   | 46      |
|                |        | RF impurity    | 0.57    | 0.29      | 0.00   | 0.42    | 0.38      | 0.00   | 0.28    | 0.49      | 0.00   | 70      |
|                |        | RF permutation | 0.37    | 0.42      | 0.02   | 0.30    | 0.47      | 0.06   | 0.20    | 0.37      | 0.28   | 34      |
|                | 0.10   | CIF            | 0.86    | 0.06      | 0.03   | 0.64    | 0.16      | 0.13   | 0.32    | 0.30      | 0.27   | 45      |
|                |        | CIF, max-type  | 0.87    | 0.06      | 0.03   | 0.66    | 0.20      | 0.06   | 0.33    | 0.32      | 0.22   | 53      |
|                |        | RF impurity    | 0.90    | 0.06      | 0.00   | 0.72    | 0.19      | 0.00   | 0.36    | 0.44      | 0.00   | 70      |
|                |        | RF permutation | 0.73    | 0.20      | 0.01   | 0.49    | 0.36      | 0.02   | 0.27    | 0.37      | 0.20   | 36      |
|                | 0.20   | CIF            | 1.00    | 0.00      | 0.00   | 0.95    | 0.04      | 0.01   | 0.40    | 0.31      | 0.19   | 59      |
|                |        | CIF, max-type  | 1.00    | 0.00      | 0.00   | 0.96    | 0.04      | 0.00   | 0.40    | 0.32      | 0.16   | 65      |
|                |        | RF impurity    | 1.00    | 0.00      | 0.00   | 0.99    | 0.01      | 0.00   | 0.40    | 0.43      | 0.00   | 70      |
|                |        | RF permutation | 0.99    | 0.01      | 0.00   | 0.87    | 0.09      | 0.00   | 0.39    | 0.34      | 0.15   | 39      |
| Regression     | 0.05   | CIF            | 0.36    | 0.18      | 0.34   | 0.26    | 0.24      | 0.40   | 0.20    | 0.29      | 0.39   | 17      |
|                |        | CIF, max-type  | 0.45    | 0.14      | 0.30   | 0.34    | 0.22      | 0.30   | 0.23    | 0.30      | 0.33   | 21      |
|                |        | RF impurity    | 0.58    | 0.25      | 0.00   | 0.43    | 0.38      | 0.00   | 0.29    | 0.49      | 0.00   | 70      |
|                |        | RF permutation | 0.52    | 0.33      | 0.02   | 0.37    | 0.43      | 0.05   | 0.21    | 0.38      | 0.26   | 34      |
|                | 0.10   | CIF            | 0.86    | 0.00      | 0.12   | 0.64    | 0.11      | 0.20   | 0.33    | 0.26      | 0.31   | 24      |
|                |        | CIF, max-type  | 0.93    | 0.01      | 0.05   | 0.65    | 0.13      | 0.15   | 0.34    | 0.26      | 0.28   | 28      |
|                |        | RF impurity    | 0.95    | 0.04      | 0.00   | 0.73    | 0.17      | 0.00   | 0.37    | 0.44      | 0.00   | 70      |
|                |        | RF permutation | 0.79    | 0.15      | 0.00   | 0.57    | 0.27      | 0.01   | 0.30    | 0.37      | 0.18   | 37      |
|                | 0.20   | CIF            | 1.00    | 0.00      | 0.00   | 0.95    | 0.03      | 0.02   | 0.40    | 0.27      | 0.27   | 36      |
|                |        | CIF, max-type  | 1.00    | 0.00      | 0.00   | 0.95    | 0.02      | 0.02   | 0.40    | 0.26      | 0.24   | 44      |
|                |        | RF impurity    | 1.00    | 0.00      | 0.00   | 0.99    | 0.01      | 0.00   | 0.40    | 0.41      | 0.00   | 70      |
|                |        | RF permutation | 1.00    | 0.00      | 0.00   | 0.95    | 0.03      | 0.00   | 0.40    | 0.35      | 0.13   | 39      |

**Table 27:** Weak-signal designs with mixed-cardinality noise,  $n = 1,000$ : composition of each ranking’s top 5, 10, and 25 features. Ten informative standard normal features have marginal correlation with the response given by the Signal column; the noise is 25 columns of integer codes on 500 levels, 25 binary columns, and 10 Gaussian columns. Shares are means over 25 fits (5 seeds by 5 folds; standard errors 0.01 to 0.03) of the fraction of the top  $k$  that is informative (Inform.), 500-level noise, or binary noise; the remainder is Gaussian noise. A ranking indifferent to cardinality would give each of the 500-level and binary noise types 25/60 of the places not taken by informative features. Support is the mean number of features with nonzero importance. CIF is the selected configuration with the MC selector in classification and the PC selector in regression; CIF, max-type adds the max-type Stage B rule; RF permutation is the same random forest ranked by out-of-bag permutation importance.

| Task           | Signal | Ranking        | Downstream score |        |        |
|----------------|--------|----------------|------------------|--------|--------|
|                |        |                | Top 5            | Top 10 | Top 25 |
| Classification | 0.05   | CIF            | 0.512            | 0.519  | 0.526  |
|                |        | CIF, max-type  | 0.508            | 0.514  | 0.518  |
|                |        | RF impurity    | 0.519            | 0.519  | 0.516  |
|                |        | RF permutation | 0.504            | 0.509  | 0.510  |
|                | 0.10   | CIF            | 0.559            | 0.557  | 0.553  |
|                |        | CIF, max-type  | 0.556            | 0.553  | 0.555  |
|                |        | RF impurity    | 0.557            | 0.563  | 0.562  |
|                |        | RF permutation | 0.552            | 0.558  | 0.555  |
|                | 0.20   | CIF            | 0.632            | 0.683  | 0.673  |
|                |        | CIF, max-type  | 0.630            | 0.686  | 0.671  |
|                |        | RF impurity    | 0.634            | 0.690  | 0.673  |
|                |        | RF permutation | 0.632            | 0.674  | 0.674  |
| Regression     | 0.05   | CIF            | −0.103           | −0.114 | −0.105 |
|                |        | CIF, max-type  | −0.102           | −0.106 | −0.105 |
|                |        | RF impurity    | −0.092           | −0.107 | −0.102 |
|                |        | RF permutation | −0.096           | −0.104 | −0.118 |
|                | 0.10   | CIF            | −0.054           | −0.048 | −0.036 |
|                |        | CIF, max-type  | −0.055           | −0.037 | −0.032 |
|                |        | RF impurity    | −0.050           | −0.038 | −0.013 |
|                |        | RF permutation | −0.052           | −0.056 | −0.046 |
|                | 0.20   | CIF            | 0.115            | 0.282  | 0.260  |
|                |        | CIF, max-type  | 0.116            | 0.276  | 0.260  |
|                |        | RF impurity    | 0.117            | 0.290  | 0.258  |
|                |        | RF permutation | 0.122            | 0.276  | 0.253  |

**Table 28:** Weak-signal designs: held-out balanced accuracy (classification) or  $R^2$  (regression) of the downstream learners fitted to each ranking’s top 5, 10, and 25 features, averaged over the 25 fits. Rankings as in Table 27.