

Knowledge Base - Common Issues and Fixes

Cross-platform symptoms, fixes and escalation.



Summary

This document explains the subject in straightforward professional English, then adds the engineering detail needed to build, operate, troubleshoot or review it. Claims are based on the repository evidence snapshot; missing source details are called out instead of guessed.

Document details

Edition 2.0 | Evidence date: 14 August 2026 | Repository:
rmorampudi09-arch/Craves-Build-platform | Product evidence snapshot: main @
3225f7fa531a6b07185fb5e034f7930f8bd8b571

Summary and how to use this document

Cross-platform symptoms, fixes and escalation. The purpose is to make the system understandable to a new team member while still giving engineers enough detail to trace ownership, data flow, deployment impact and failure handling.

Current implementation

Direct code, README, migration, pipeline or commit evidence exists on the reviewed main snapshot.

Foundation / partial

Useful groundwork exists, but the repository does not prove a complete production runtime for every part.

Legacy / reference

Older implementation is retained for history or compatibility and is not treated as the preferred runtime.

Needs source confirmation

A referenced artifact or exact value could not be verified and is therefore not invented.

Reading order

- Start with the summary to understand the responsibility in normal language.
- Use process diagrams to follow requests across client, APIM, services, data and providers.
- Use the troubleshooting sections to diagnose by evidence rather than by retrying blindly.
- Use deployment and validation sections before or after changing a component.
- Use evidence status to separate proven behavior from gaps and future work.

Cannot sign in


Summary

This article explains what to do when you need help with cannot sign in. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

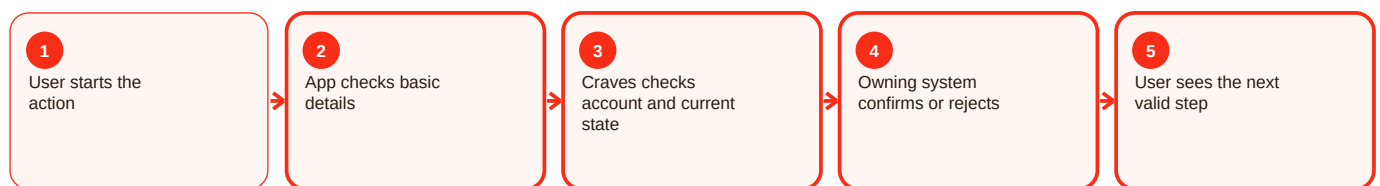

Common problem

401 Unauthorized. This usually means: Authentication is missing/expired/invalid. What to do: Use supported identity/refresh flow and capture request ID.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Cannot sign in

Summary

This article explains what to do when you need help with cannot sign in. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/order-service/README.md](#); [services/notification-service/README.md](#); [apps/customer-web-next/README.md](#).

OTP not received


Summary

This article explains what to do when you need help with otp not received. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

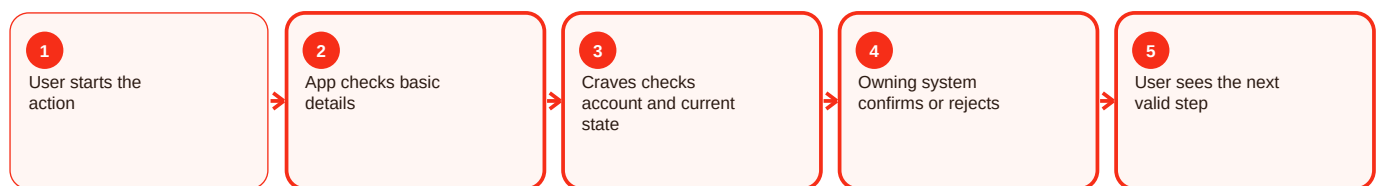

Common problem

Sign-in fails. This usually means: OTP/session/token is invalid, expired or misconfigured. What to do: Use the supported sign-in or refresh path and check issuer/audience/configuration.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

OTP not received

Summary

This article explains what to do when you need help with otp not received. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/customer-web-next/README.md](#); [services/user-chef-service/README.md](#); [services/order-service/README.md](#); [docs/handover/2026-07-30-customer-mobile-auth-foundation.md](#).

Session expired


Summary

This article explains what to do when you need help with session expired. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

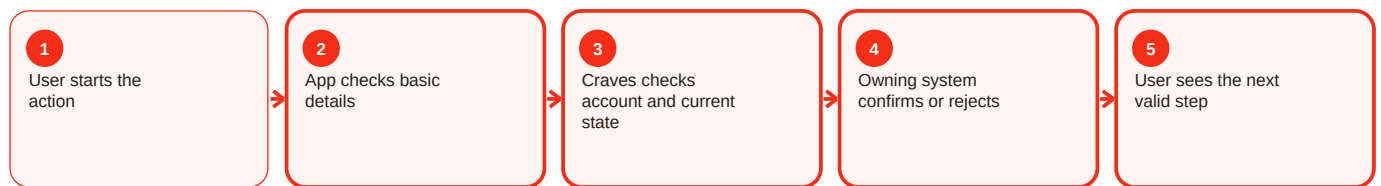

Common problem

Sign-in fails. This usually means: OTP/session/token is invalid, expired or misconfigured. What to do: Use the supported sign-in or refresh path and check issuer/audience/configuration.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Session expired

Summary

This article explains what to do when you need help with session expired. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/customer-web-next/README.md](#); [services/user-chef-service/README.md](#); [services/order-service/README.md](#); [docs/handover/2026-07-30-customer-mobile-auth-foundation.md](#).

Profile will not save


Summary

This article explains what to do when you need help with profile will not save. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

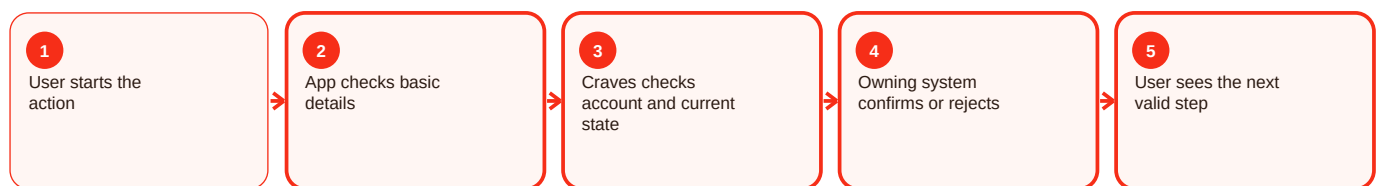

Common problem

401 Unauthorized. This usually means: Authentication is missing/expired/invalid. What to do: Use supported identity/refresh flow and capture request ID.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Profile will not save

Summary

This article explains what to do when you need help with profile will not save. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/order-service/README.md](#); [services/notification-service/README.md](#); [apps/customer-web-next/README.md](#).

Current location unavailable


Summary

This article explains what to do when you need help with current location unavailable. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

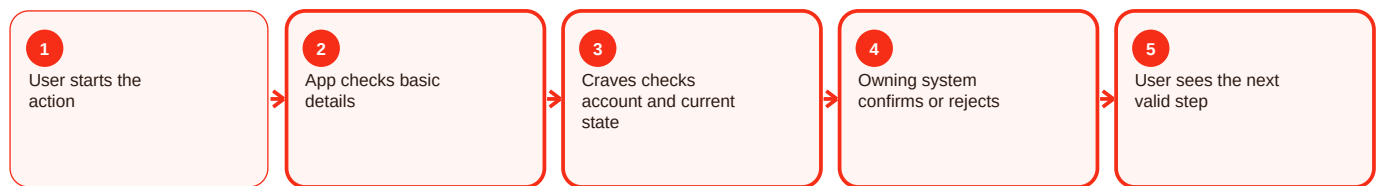

Common problem

Current location unavailable. This usually means: Permission/device/geocoder failed.
What to do: Allow manual saved-address entry and keep checkout dependent on a valid saved address.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Current location unavailable

Summary

This article explains what to do when you need help with current location unavailable. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/customer-web-next/src/components/location/](#); [apps/customer-web-next/src/components/maps/](#); [apps/customer-web-next/src/lib/location/](#); [docs/handover/2026-08-06-customer-chef-precise-ui-address-dialog.md](#).

Address will not save


Summary

This article explains what to do when you need help with address will not save. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

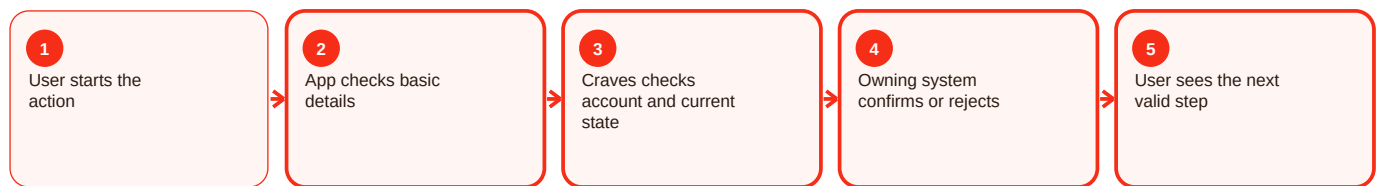

Common problem

Current location unavailable. This usually means: Permission/device/geocoder failed.
What to do: Allow manual saved-address entry and keep checkout dependent on a valid saved address.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Address will not save

Summary

This article explains what to do when you need help with address will not save. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/customer-web-next/src/components/location/](#); [apps/customer-web-next/src/components/maps/](#); [apps/customer-web-next/src/lib/location/](#); [docs/handover/2026-08-06-customer-chef-precise-ui-address-dialog.md](#).

No meals nearby


Summary

This article explains what to do when you need help with no meals nearby. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

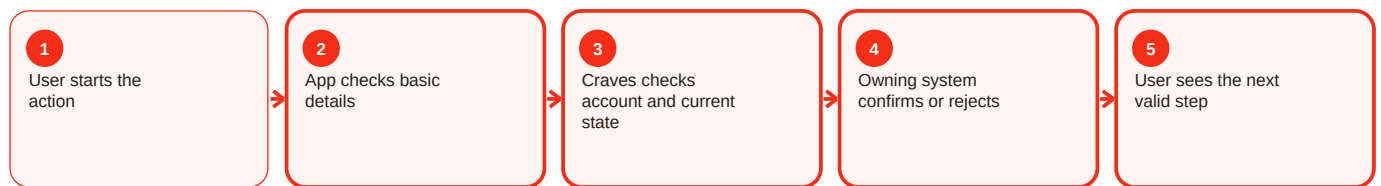

Common problem

Nearby results empty. This usually means: No active geocoded kitchen with sellable items in query radius. What to do: Confirm kitchen coordinates, active menu items and caller radius.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

No meals nearby

Summary

This article explains what to do when you need help with no meals nearby. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/catalog-service/README.md](#); [apps/customer-web-next/src/components/discovery/](#); [apps/customer-web-next/src/components/meals/](#); [infra/apim/README.md](#).

Cart is empty after reload


Summary

This article explains what to do when you need help with cart is empty after reload. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

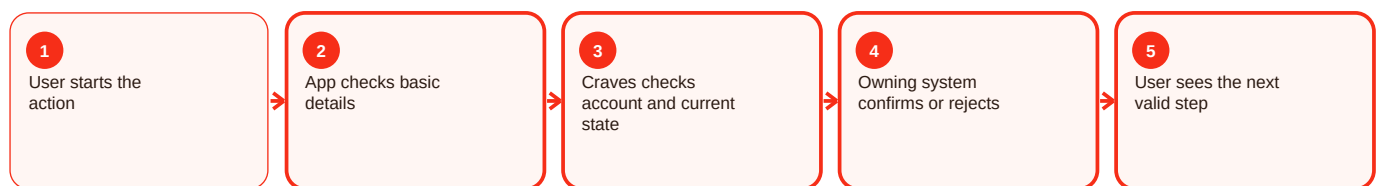

Common problem

Checkout rejected. This usually means: Saved address, cart or catalog state is not valid. What to do: Reload authoritative cart/address/catalog state and correct the failing condition.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Cart is empty after reload

Summary

This article explains what to do when you need help with cart is empty after reload. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/customer-web-next/README.md](#); [apps/customer-web-next/src/components/cart/](#); [apps/customer-web-next/src/components/checkout/](#); [services/order-service/README.md](#).

Cart validation failed


Summary

This article explains what to do when you need help with cart validation failed. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

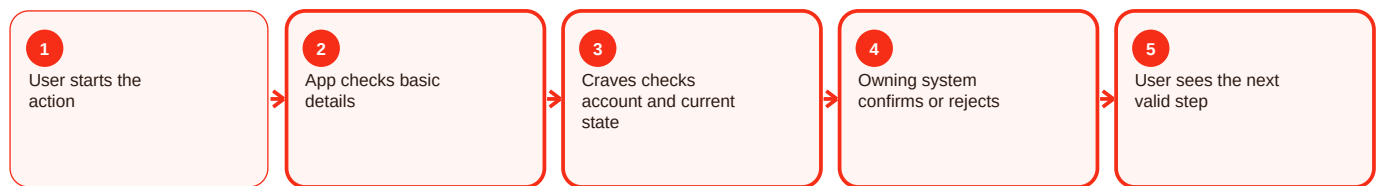

Common problem

Checkout rejected. This usually means: Saved address, cart or catalog state is not valid. What to do: Reload authoritative cart/address/catalog state and correct the failing condition.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Cart validation failed

Summary

This article explains what to do when you need help with cart validation failed. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/customer-web-next/README.md](#); [apps/customer-web-next/src/components/cart/](#); [apps/customer-web-next/src/components/checkout/](#); [services/order-service/README.md](#).

Checkout says address required


Summary

This article explains what to do when you need help with checkout says address required. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

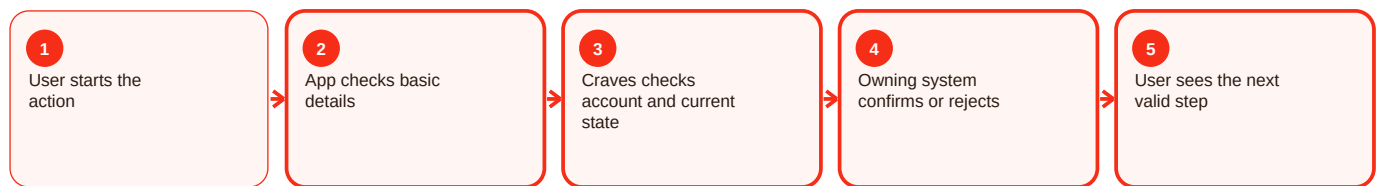

Common problem

Checkout rejected. This usually means: Saved address, cart or catalog state is not valid. What to do: Reload authoritative cart/address/catalog state and correct the failing condition.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Checkout says address required

Summary

This article explains what to do when you need help with checkout says address required. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/customer-web-next/README.md](#); [apps/customer-web-next/src/components/cart/](#); [apps/customer-web-next/src/components/checkout/](#); [services/order-service/README.md](#).

Checkout total changed


Summary

This article explains what to do when you need help with checkout total changed. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

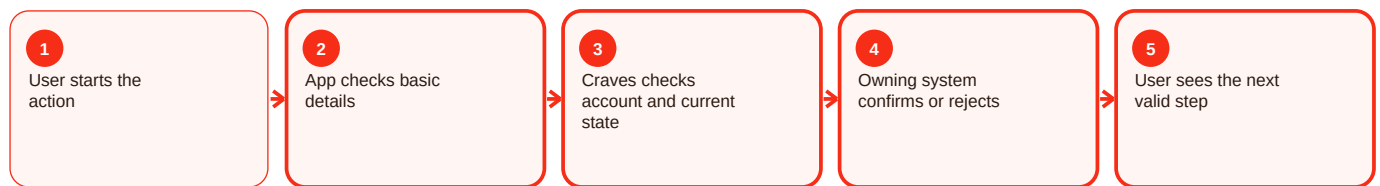

Common problem

Checkout rejected. This usually means: Saved address, cart or catalog state is not valid. What to do: Reload authoritative cart/address/catalog state and correct the failing condition.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Checkout total changed

Summary

This article explains what to do when you need help with checkout total changed. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/customer-web-next/README.md](#); [apps/customer-web-next/src/components/cart/](#); [apps/customer-web-next/src/components/checkout/](#); [services/order-service/README.md](#).

Payment page failed


Summary

This article explains what to do when you need help with payment page failed. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

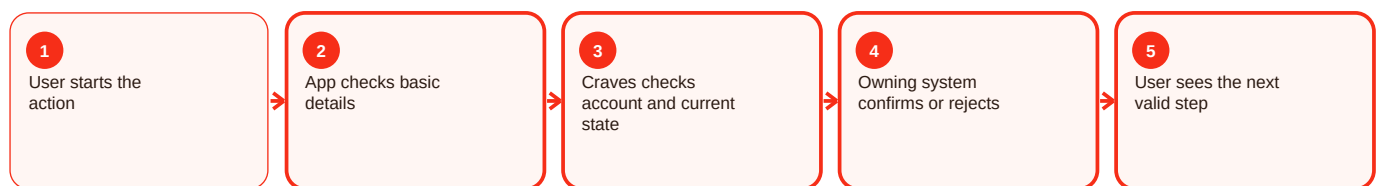

Common problem

Payment result is unclear. This usually means: Provider status/callback is delayed or ambiguous. What to do: Verify through the backend/provider reconciliation path before retrying.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Payment page failed

Summary

This article explains what to do when you need help with payment page failed. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/customer-web-next/README.md](#); [apps/customer-web-next/src/lib/cashfree/](#); [services/order-service/README.md](#); [services/integration-service/README.md](#).

Payment status unclear


Summary

This article explains what to do when you need help with payment status unclear. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

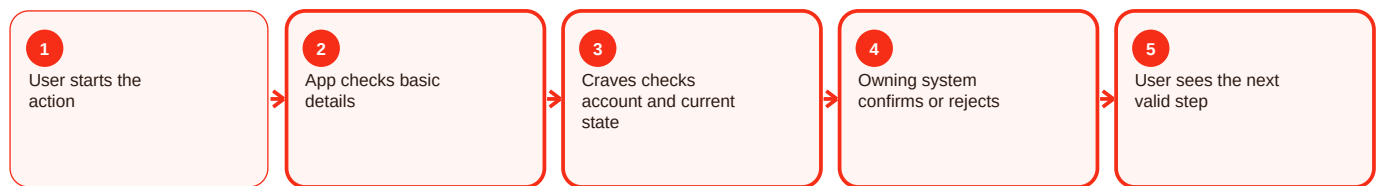

Common problem

Payment result is unclear. This usually means: Provider status/callback is delayed or ambiguous. What to do: Verify through the backend/provider reconciliation path before retrying.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Payment status unclear

Summary

This article explains what to do when you need help with payment status unclear. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/customer-web-next/README.md](#); [apps/customer-web-next/src/lib/cashfree/](#); [services/order-service/README.md](#); [services/integration-service/README.md](#).

Order not visible


Summary

This article explains what to do when you need help with order not visible. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

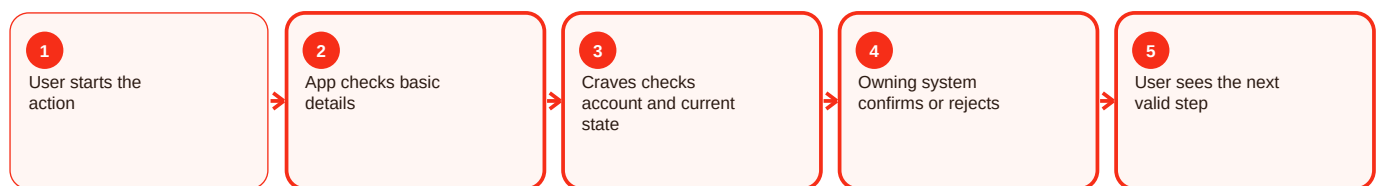

Common problem

Order not found. This usually means: Wrong ID or ownership mismatch. What to do: Verify ID and caller context; never expose another user's order.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Order not visible

Summary

This article explains what to do when you need help with order not visible. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/order-service/README.md](#); [apps/customer-web-next/src/components/order-history/](#); [apps/customer-web-next/src/components/order-tracking/](#).

Order cannot change status


Summary

This article explains what to do when you need help with order cannot change status. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

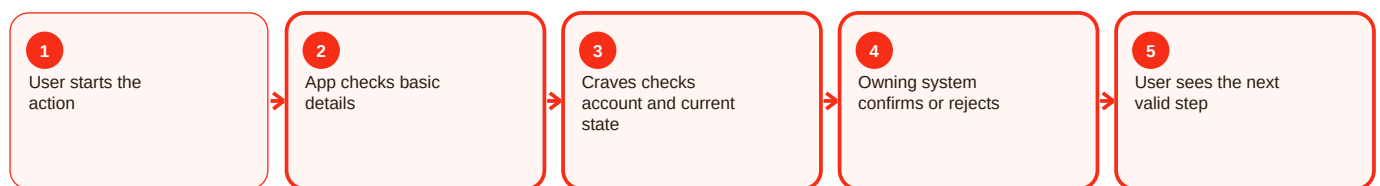

Common problem

Order not found. This usually means: Wrong ID or ownership mismatch. What to do: Verify ID and caller context; never expose another user's order.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Order cannot change status

Summary

This article explains what to do when you need help with order cannot change status. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/order-service/README.md](#); [apps/customer-web-next/src/components/order-history/](#); [apps/customer-web-next/src/components/order-tracking/](#).

Delivery tracking not available


Summary

This article explains what to do when you need help with delivery tracking not available. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

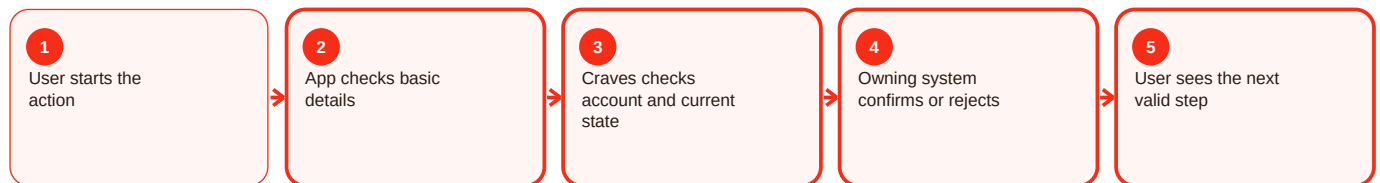

Common problem

Order not found. This usually means: Wrong ID or ownership mismatch. What to do: Verify ID and caller context; never expose another user's order.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Delivery tracking not available

Summary

This article explains what to do when you need help with delivery tracking not available. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/order-service/README.md](#); [apps/customer-web-next/src/components/order-history/](#); [apps/customer-web-next/src/components/order-tracking/](#).

Notification not received


Summary

This article explains what to do when you need help with notification not received. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

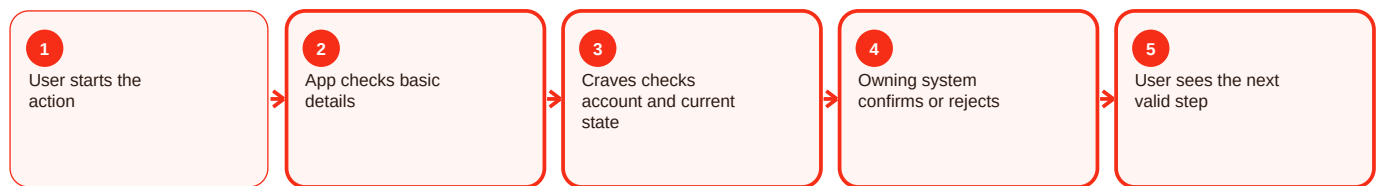

Common problem

External channel stays pending. This usually means: Provider adapter is disabled or unavailable. What to do: Check channel configuration and delivery-attempt state.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Notification not received

Summary

This article explains what to do when you need help with notification not received. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/notification-service/README.md](#); [apps/customer-web-next/src/components/notifications/](#).

Chef application cannot submit


Summary

This article explains what to do when you need help with chef application cannot submit. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

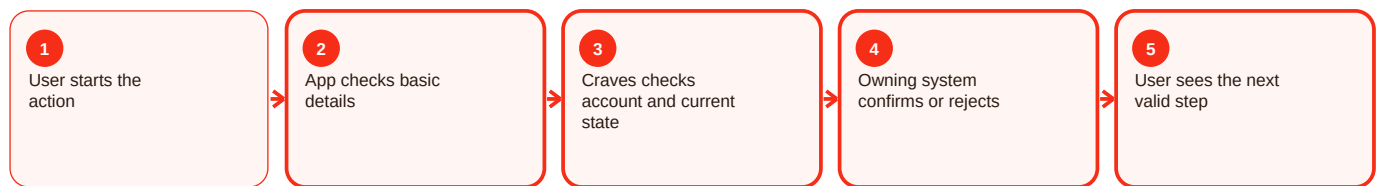

Common problem

User sees stale state. This usually means: Client cache/local state differs from backend. What to do: Reload from the owning service.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Chef application cannot submit

Summary

This article explains what to do when you need help with chef application cannot submit. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/user-chef-service/README.md](#); [apps/customer-web-next/src/components/chef/](#); [apps/customer-web-next/src/components/chef-mode/](#).

Chef feature is unavailable


Summary

This article explains what to do when you need help with chef feature is unavailable. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

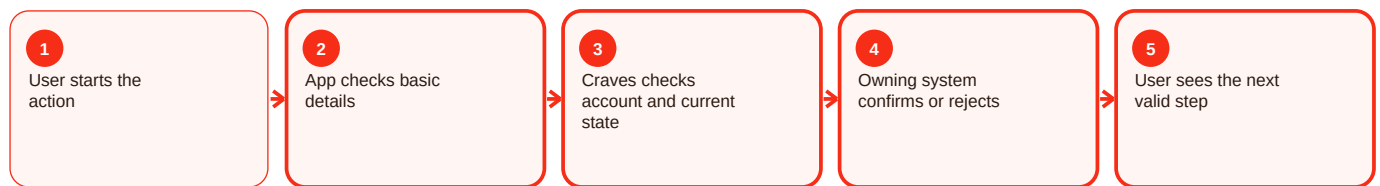

Common problem

User sees stale state. This usually means: Client cache/local state differs from backend. What to do: Reload from the owning service.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Chef feature is unavailable

Summary

This article explains what to do when you need help with chef feature is unavailable. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/user-chef-service/README.md](#); [apps/customer-web-next/src/components/chef/](#); [apps/customer-web-next/src/components/chef-mode/](#).

Subscription action rejected


Summary

This article explains what to do when you need help with subscription action rejected. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

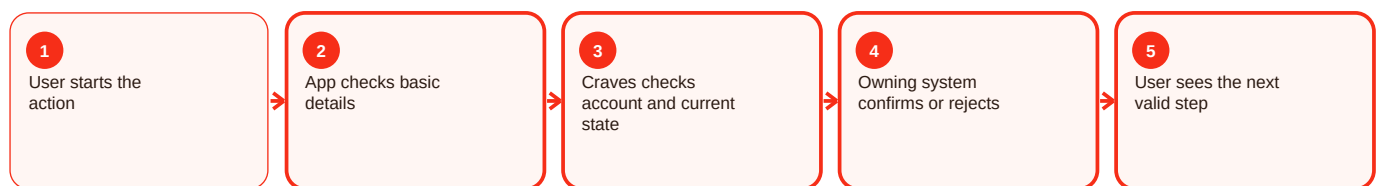

Common problem

Lifecycle action rejected. This usually means: Current subscription state does not allow it. What to do: Reload current state and use a supported transition.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Subscription action rejected

Summary

This article explains what to do when you need help with subscription action rejected. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/subscription-service/README.md](#); [apps/customer-web-next/src/components/plans/](#); [apps/customer-web-next/src/components/subscriptions/](#); commit 3225f7fa.

401 Unauthorized


Summary

This article explains what to do when you need help with 401 unauthorized. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

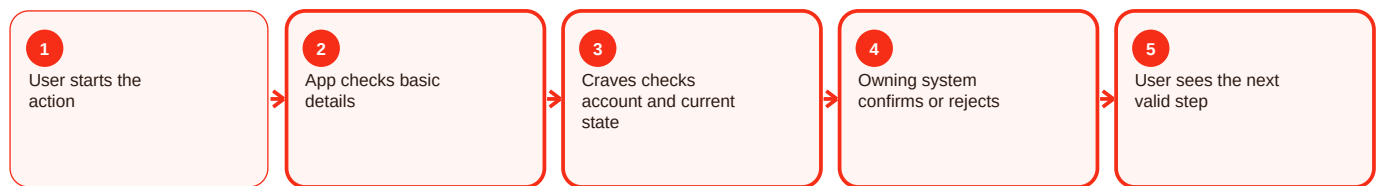

Common problem

Sign-in fails. This usually means: OTP/session/token is invalid, expired or misconfigured. What to do: Use the supported sign-in or refresh path and check issuer/audience/configuration.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

401 Unauthorized

Summary

This article explains what to do when you need help with 401 unauthorized. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/customer-web-next/README.md](#); [services/user-chef-service/README.md](#); [services/order-service/README.md](#); [docs/handover/2026-07-30-customer-mobile-auth-foundation.md](#).

403 Forbidden


Summary

This article explains what to do when you need help with 403 forbidden. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

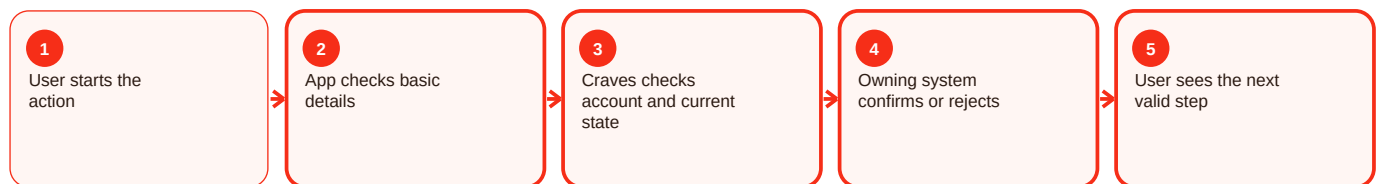

Common problem

401 Unauthorized. This usually means: Authentication is missing/expired/invalid. What to do: Use supported identity/refresh flow and capture request ID.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

403 Forbidden

Summary

This article explains what to do when you need help with 403 forbidden. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/order-service/README.md](#); [services/notification-service/README.md](#); [apps/customer-web-next/README.md](#).

5xx service error


Summary

This article explains what to do when you need help with 5xx service error. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

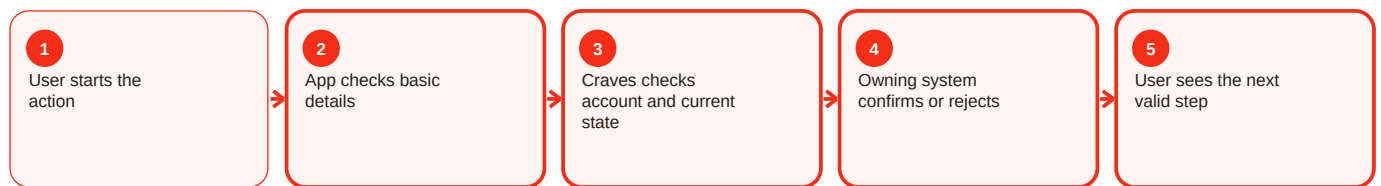

Common problem

401 Unauthorized. This usually means: Authentication is missing/expired/invalid. What to do: Use supported identity/refresh flow and capture request ID.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

5xx service error

Summary

This article explains what to do when you need help with 5xx service error. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/order-service/README.md](#); [services/notification-service/README.md](#); [apps/customer-web-next/README.md](#).

Slow/new-device loading


Summary

This article explains what to do when you need help with slow/new-device loading. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

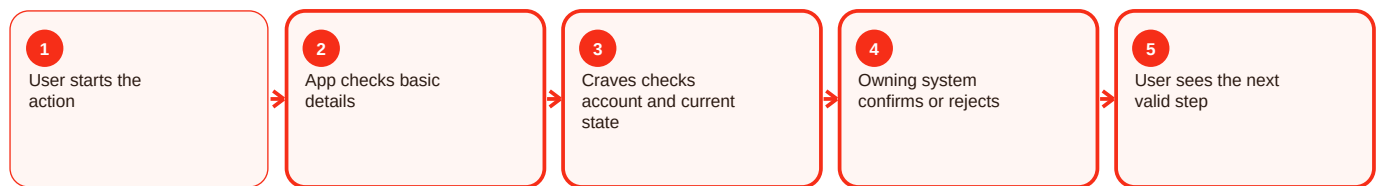

Common problem

401 Unauthorized. This usually means: Authentication is missing/expired/invalid. What to do: Use supported identity/refresh flow and capture request ID.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Slow/new-device loading

Summary

This article explains what to do when you need help with slow/new-device loading. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/order-service/README.md](#); [services/notification-service/README.md](#); [apps/customer-web-next/README.md](#).

Provider outage


Summary

This article explains what to do when you need help with provider outage. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

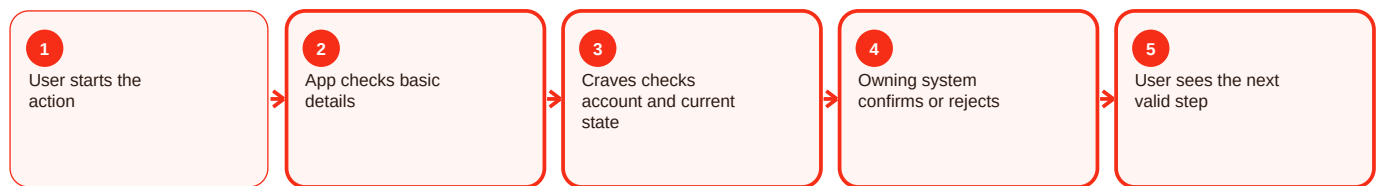

Common problem

Provider is unavailable. This usually means: External dependency or credential/config problem. What to do: Keep Craves state consistent and retry only when safe/idempotent.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Provider outage

Summary

This article explains what to do when you need help with provider outage. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/integration-service/README.md](#); [services/integration-service/**/README.md](#).

After a deployment


Summary

This article explains what to do when you need help with after a deployment. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

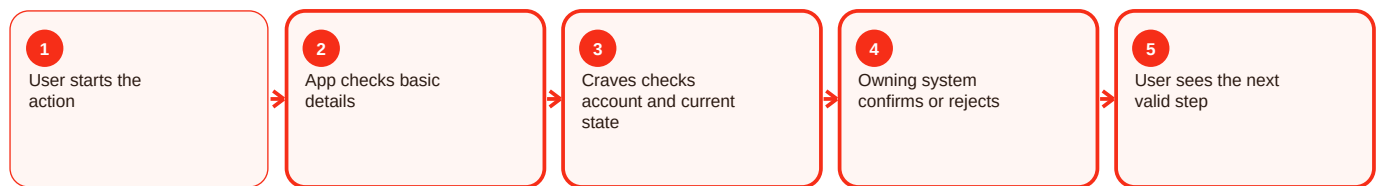

Common problem

Pipeline succeeds but app is not ready. This usually means: Revision is still starting or readiness was not awaited. What to do: Check the actual revision and health/readiness after deployment.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

After a deployment

Summary

This article explains what to do when you need help with after a deployment. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/customer-web-next/README.md](#); [repository YAML search](#); [docs/handover/](#).

What evidence support needs


Summary

This article explains what to do when you need help with what evidence support needs. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

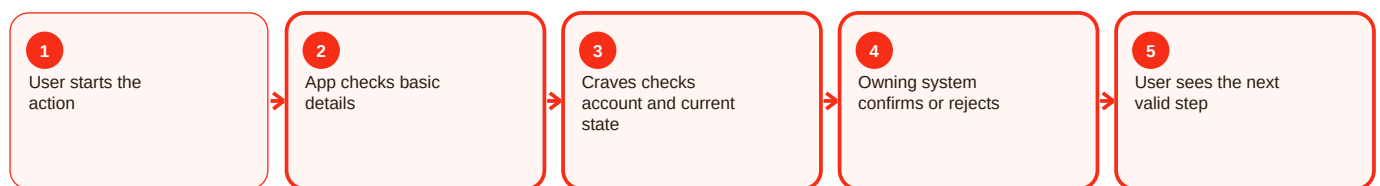

Common problem

Admin action denied. This usually means: Caller lacks admin role/product permission.
What to do: Use approved staff access process and least privilege.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

What evidence support needs

Summary

This article explains what to do when you need help with what evidence support needs. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/admin/README.md](#); [apps/customer-web-next/src/features/admin/](#); [apps/customer-web-next/src/features/chef-review/](#); [infra/apim/README.md](#).

Operational checklist and documented gaps

Before making a change

- Confirm the intended actor and environment.
- Confirm the current authoritative state before changing anything.
- Capture HTTP status, stable error code and request/correlation ID without secrets.
- Validate the owning component health and required dependency/configuration.
- After the action, reload the state from the backend and confirm the expected result.

Repository gaps that must stay visible

- APIM README cites `infra/apim/craves-openapi.yaml`, but that literal artifact was not resolvable on main during this evidence snapshot.
- `customer-web-next` README names `azure-pipelines-customer-web-next.yml`, but that literal root path was not resolvable; deployment behavior described by the README is retained while trigger/variable details are not invented.
- Native mobile has strong milestone identity/API/CI evidence, but a clearly complete runnable React Native application was not established on the reviewed main snapshot.
- Legacy preview URLs prove historical deployment references rather than current production routing.
- Commercial values such as commissions, payout percentages, subscription pricing, catering thresholds and SLAs are not fabricated where source is silent.

Definition of done

A change is complete only when the intended behavior works, authorization still fails closed, authoritative data is correct, health/readiness are good, monitoring or correlation evidence is available, the rollback path remains valid, and the documentation has been updated if the contract or operating procedure changed.