

Knowledge Base - Customer and Chef App

Plain-language customer/chef support articles.



Summary

This document explains the subject in straightforward professional English, then adds the engineering detail needed to build, operate, troubleshoot or review it. Claims are based on the repository evidence snapshot; missing source details are called out instead of guessed.

Document details

Edition 2.0 | Evidence date: 14 August 2026 | Repository:
rmorampudi09-arch/Craves-Build-platform | Product evidence snapshot: main @
3225f7fa531a6b07185fb5e034f7930f8bd8b571

Summary and how to use this document

Plain-language customer/chef support articles. The purpose is to make the system understandable to a new team member while still giving engineers enough detail to trace ownership, data flow, deployment impact and failure handling.

Current implementation

Direct code, README, migration, pipeline or commit evidence exists on the reviewed main snapshot.

Foundation / partial

Useful groundwork exists, but the repository does not prove a complete production runtime for every part.

Legacy / reference

Older implementation is retained for history or compatibility and is not treated as the preferred runtime.

Needs source confirmation

A referenced artifact or exact value could not be verified and is therefore not invented.

Reading order

- Start with the summary to understand the responsibility in normal language.
- Use process diagrams to follow requests across client, APIM, services, data and providers.
- Use the troubleshooting sections to diagnose by evidence rather than by retrying blindly.
- Use deployment and validation sections before or after changing a component.
- Use evidence status to separate proven behavior from gaps and future work.

Phone sign-in / OTP


Summary

This article explains what to do when you need help with phone sign-in / otp. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

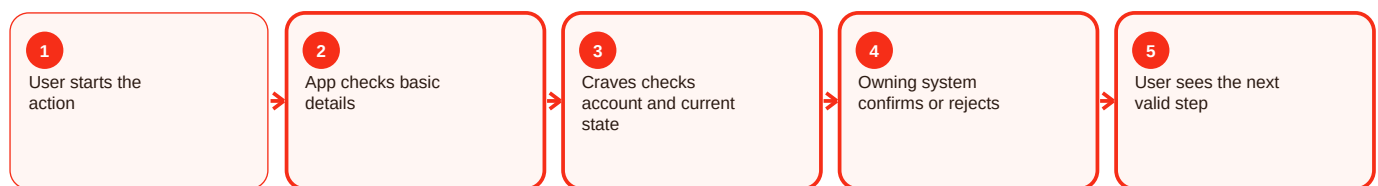

Common problem

Sign-in fails. This usually means: OTP/session/token is invalid, expired or misconfigured. What to do: Use the supported sign-in or refresh path and check issuer/audience/configuration.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Phone sign-in / OTP

Summary

This article explains what to do when you need help with phone sign-in / otp. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/customer-web-next/README.md](#); [services/user-chef-service/README.md](#); [services/order-service/README.md](#); [docs/handover/2026-07-30-customer-mobile-auth-foundation.md](#).

Profile details


Summary

This article explains what to do when you need help with profile details. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

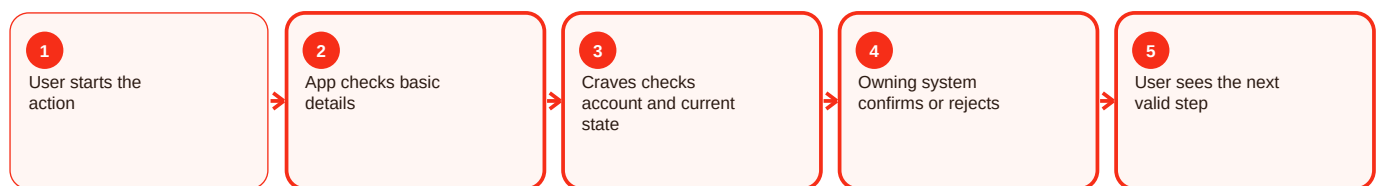

Common problem

Order not found. This usually means: Wrong ID or ownership mismatch. What to do: Verify ID and caller context; never expose another user's order.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Profile details

Summary

This article explains what to do when you need help with profile details. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/order-service/README.md](#); [apps/customer-web-next/src/components/order-history/](#); [apps/customer-web-next/src/components/order-tracking/](#).

Save a delivery address


Summary

This article explains what to do when you need help with save a delivery address. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

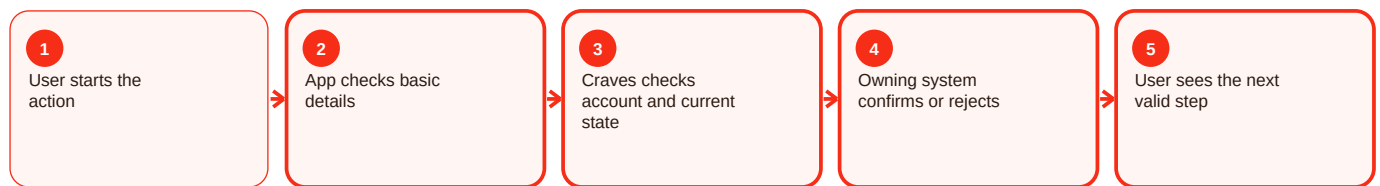

Common problem

Order not found. This usually means: Wrong ID or ownership mismatch. What to do: Verify ID and caller context; never expose another user's order.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Save a delivery address

Summary

This article explains what to do when you need help with save a delivery address. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/order-service/README.md](#); [apps/customer-web-next/src/components/order-history/](#); [apps/customer-web-next/src/components/order-tracking/](#).

Use current location


Summary

This article explains what to do when you need help with use current location. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

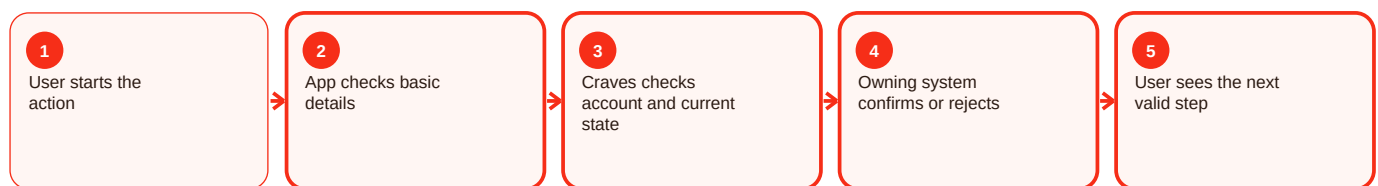

Common problem

Current location unavailable. This usually means: Permission/device/geocoder failed.
What to do: Allow manual saved-address entry and keep checkout dependent on a valid saved address.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Use current location

Summary

This article explains what to do when you need help with use current location. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/customer-web-next/src/components/location/](#); [apps/customer-web-next/src/components/maps/](#); [apps/customer-web-next/src/lib/location/](#); [docs/handover/2026-08-06-customer-chef-precise-ui-address-dialog.md](#).

Nearby meals are empty


Summary

This article explains what to do when you need help with nearby meals are empty. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

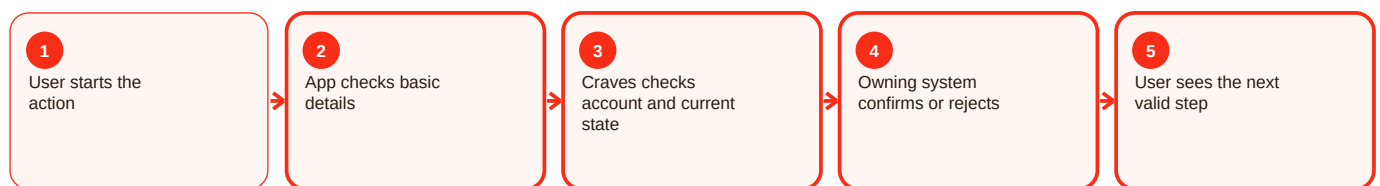

Common problem

Nearby results empty. This usually means: No active geocoded kitchen with sellable items in query radius. What to do: Confirm kitchen coordinates, active menu items and caller radius.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Nearby meals are empty

Summary

This article explains what to do when you need help with nearby meals are empty. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/catalog-service/README.md](#); [apps/customer-web-next/src/components/discovery/](#); [apps/customer-web-next/src/components/meals/](#); [infra/apim/README.md](#).

Search and meal details


Summary

This article explains what to do when you need help with search and meal details. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

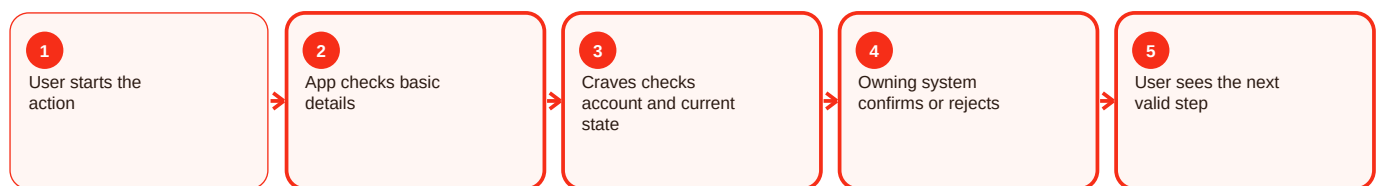

Common problem

Nearby results empty. This usually means: No active geocoded kitchen with sellable items in query radius. What to do: Confirm kitchen coordinates, active menu items and caller radius.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Search and meal details

Summary

This article explains what to do when you need help with search and meal details. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/catalog-service/README.md](#); [apps/customer-web-next/src/components/discovery/](#); [apps/customer-web-next/src/components/meals/](#); [infra/apim/README.md](#).

Add or remove cart items


Summary

This article explains what to do when you need help with add or remove cart items. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

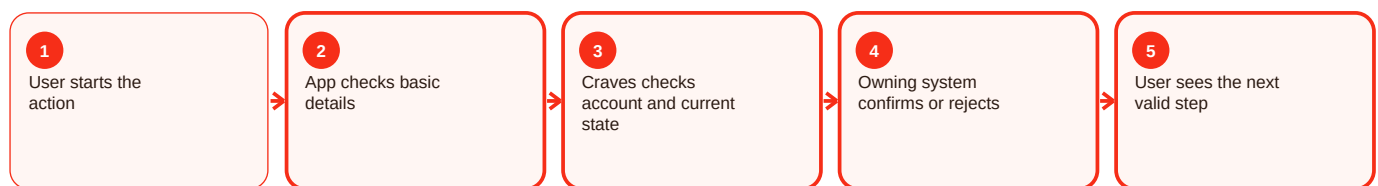

Common problem

Checkout rejected. This usually means: Saved address, cart or catalog state is not valid. What to do: Reload authoritative cart/address/catalog state and correct the failing condition.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Add or remove cart items

Summary

This article explains what to do when you need help with add or remove cart items. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/customer-web-next/README.md](#); [apps/customer-web-next/src/components/cart/](#); [apps/customer-web-next/src/components/checkout/](#); [services/order-service/README.md](#).

Checkout needs a saved address


Summary

This article explains what to do when you need help with checkout needs a saved address. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

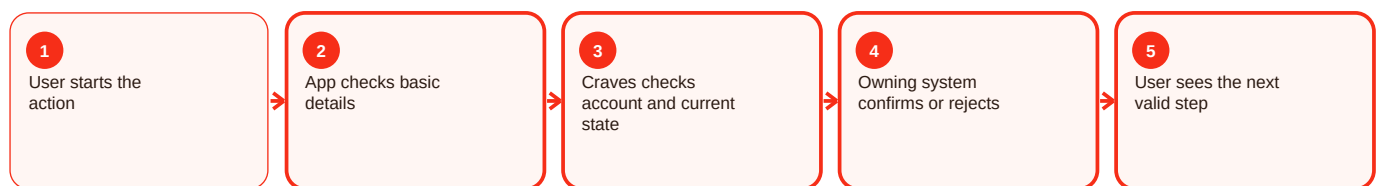

Common problem

Checkout rejected. This usually means: Saved address, cart or catalog state is not valid. What to do: Reload authoritative cart/address/catalog state and correct the failing condition.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Checkout needs a saved address

Summary

This article explains what to do when you need help with checkout needs a saved address. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/customer-web-next/README.md](#); [apps/customer-web-next/src/components/cart/](#); [apps/customer-web-next/src/components/checkout/](#); [services/order-service/README.md](#).

Payment page does not open


Summary

This article explains what to do when you need help with payment page does not open. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

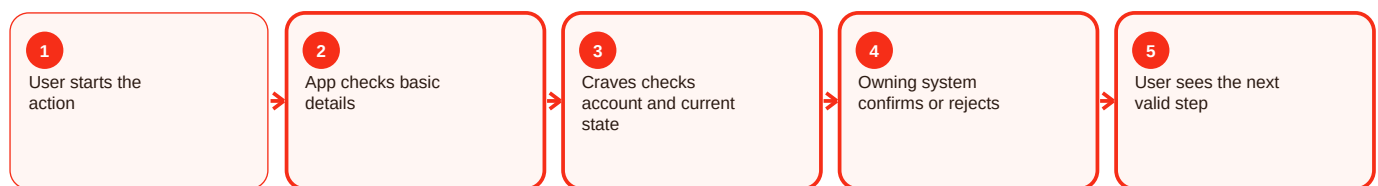

Common problem

Payment result is unclear. This usually means: Provider status/callback is delayed or ambiguous. What to do: Verify through the backend/provider reconciliation path before retrying.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Payment page does not open

Summary

This article explains what to do when you need help with payment page does not open. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/customer-web-next/README.md](#); [apps/customer-web-next/src/lib/cashfree/](#); [services/order-service/README.md](#); [services/integration-service/README.md](#).

Payment completed but order is unclear


Summary

This article explains what to do when you need help with payment completed but order is unclear. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

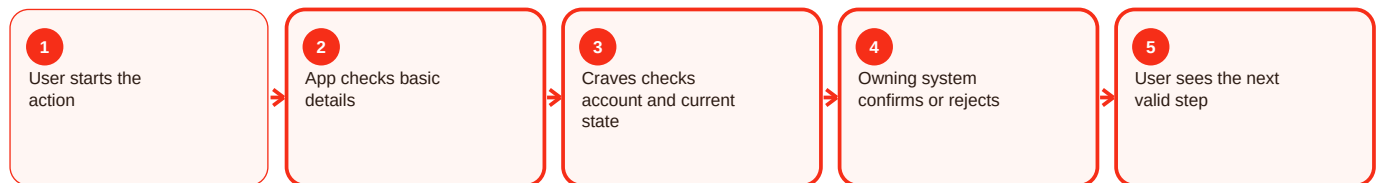

Common problem

Payment result is unclear. This usually means: Provider status/callback is delayed or ambiguous. What to do: Verify through the backend/provider reconciliation path before retrying.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Payment completed but order is unclear

Summary

This article explains what to do when you need help with payment completed but order is unclear. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/customer-web-next/README.md](#); [apps/customer-web-next/src/lib/cashfree/](#); [services/order-service/README.md](#); [services/integration-service/README.md](#).

Order history


Summary

This article explains what to do when you need help with order history. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

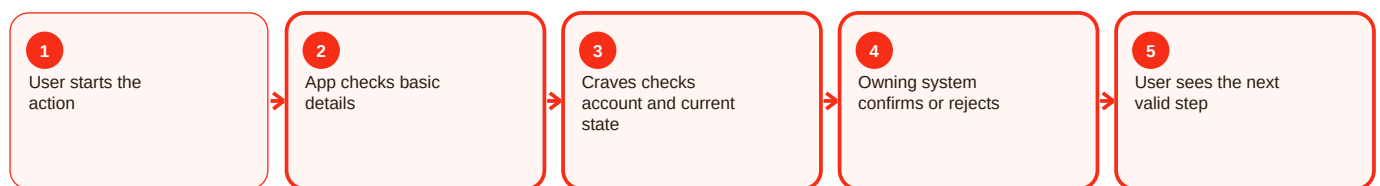

Common problem

Order not found. This usually means: Wrong ID or ownership mismatch. What to do: Verify ID and caller context; never expose another user's order.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Order history

Summary

This article explains what to do when you need help with order history. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/order-service/README.md](#); [apps/customer-web-next/src/components/order-history/](#); [apps/customer-web-next/src/components/order-tracking/](#).

Order tracking


Summary

This article explains what to do when you need help with order tracking. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

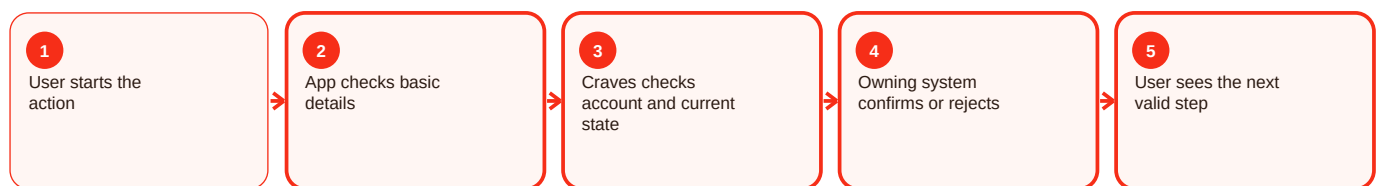

Common problem

Order not found. This usually means: Wrong ID or ownership mismatch. What to do: Verify ID and caller context; never expose another user's order.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Order tracking

Summary

This article explains what to do when you need help with order tracking. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/order-service/README.md](#); [apps/customer-web-next/src/components/order-history/](#); [apps/customer-web-next/src/components/order-tracking/](#).

Cancel or refund question


Summary

This article explains what to do when you need help with cancel or refund question. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

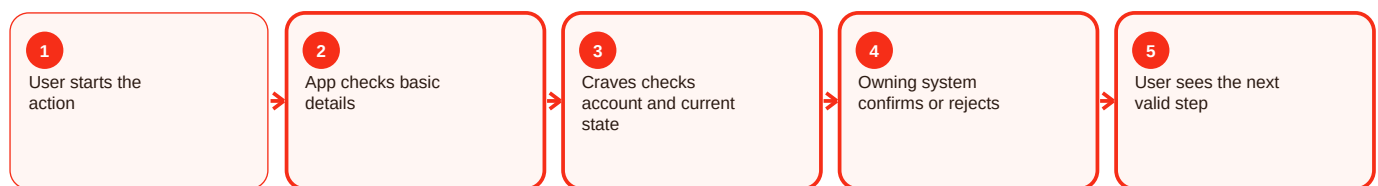

Common problem

Payment result is unclear. This usually means: Provider status/callback is delayed or ambiguous. What to do: Verify through the backend/provider reconciliation path before retrying.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Cancel or refund question

Summary

This article explains what to do when you need help with cancel or refund question. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/customer-web-next/README.md](#); [apps/customer-web-next/src/lib/cashfree/](#); [services/order-service/README.md](#); [services/integration-service/README.md](#).

Notifications


Summary

This article explains what to do when you need help with notifications. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

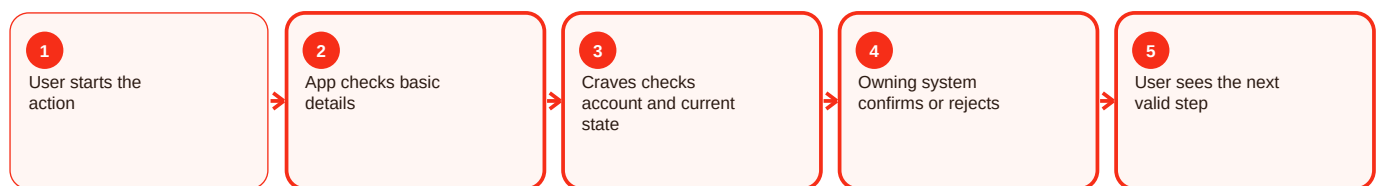

Common problem

External channel stays pending. This usually means: Provider adapter is disabled or unavailable. What to do: Check channel configuration and delivery-attempt state.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Notifications

Summary

This article explains what to do when you need help with notifications. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/notification-service/README.md](#); [apps/customer-web-next/src/components/notifications/](#).

Chef account choice


Summary

This article explains what to do when you need help with chef account choice. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

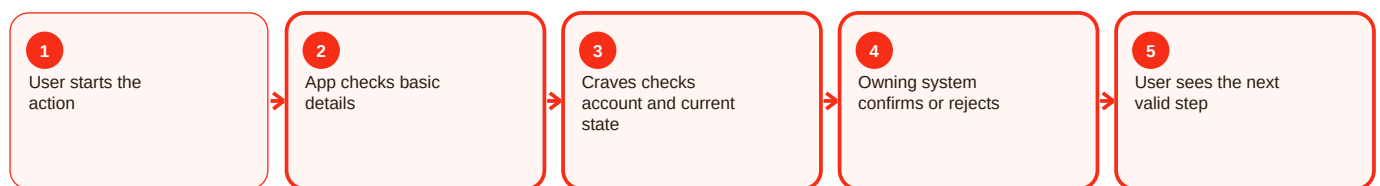

Common problem

User sees stale state. This usually means: Client cache/local state differs from backend. What to do: Reload from the owning service.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Chef account choice

Summary

This article explains what to do when you need help with chef account choice. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/user-chef-service/README.md](#); [apps/customer-web-next/src/components/chef/](#); [apps/customer-web-next/src/components/chef-mode/](#).

Chef application


Summary

This article explains what to do when you need help with chef application. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

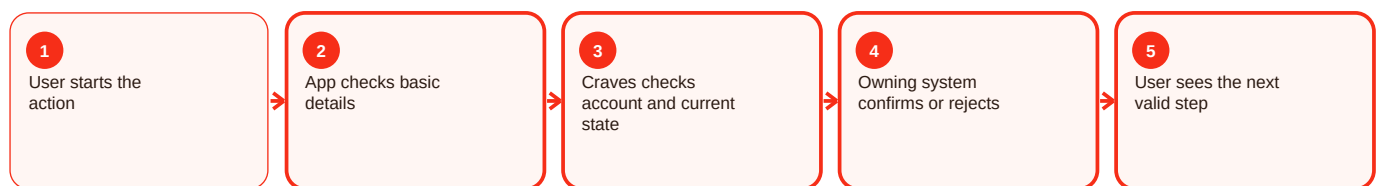

Common problem

User sees stale state. This usually means: Client cache/local state differs from backend. What to do: Reload from the owning service.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Chef application

Summary

This article explains what to do when you need help with chef application. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/user-chef-service/README.md](#); [apps/customer-web-next/src/components/chef/](#); [apps/customer-web-next/src/components/chef-mode/](#).

Chef proof upload


Summary

This article explains what to do when you need help with chef proof upload. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

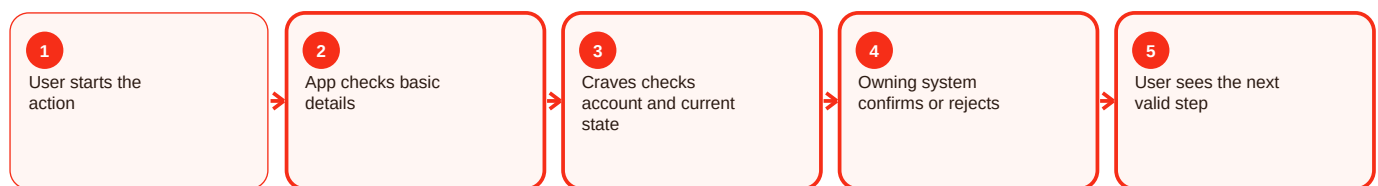

Common problem

User sees stale state. This usually means: Client cache/local state differs from backend. What to do: Reload from the owning service.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Chef proof upload

Summary

This article explains what to do when you need help with chef proof upload. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/user-chef-service/README.md](#); [apps/customer-web-next/src/components/chef/](#); [apps/customer-web-next/src/components/chef-mode/](#).

Chef approval state


Summary

This article explains what to do when you need help with chef approval state. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

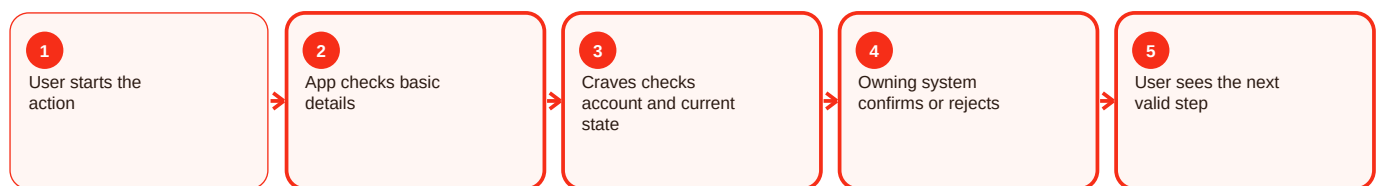

Common problem

User sees stale state. This usually means: Client cache/local state differs from backend. What to do: Reload from the owning service.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Chef approval state

Summary

This article explains what to do when you need help with chef approval state. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/user-chef-service/README.md](#); [apps/customer-web-next/src/components/chef/](#); [apps/customer-web-next/src/components/chef-mode/](#).

Chef menu


Summary

This article explains what to do when you need help with chef menu. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

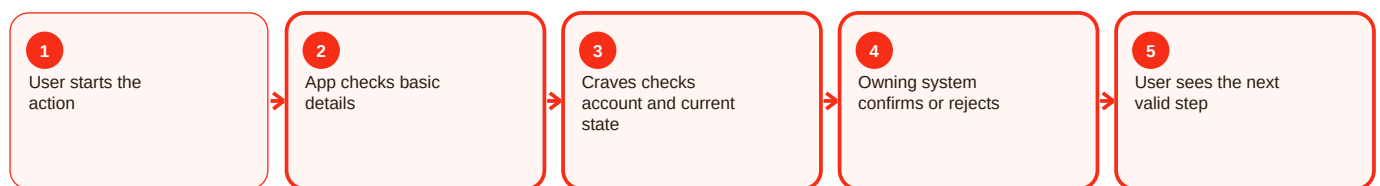

Common problem

User sees stale state. This usually means: Client cache/local state differs from backend. What to do: Reload from the owning service.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Chef menu

Summary

This article explains what to do when you need help with chef menu. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/user-chef-service/README.md](#); [apps/customer-web-next/src/components/chef/](#); [apps/customer-web-next/src/components/chef-mode/](#).

Chef order acceptance


Summary

This article explains what to do when you need help with chef order acceptance. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

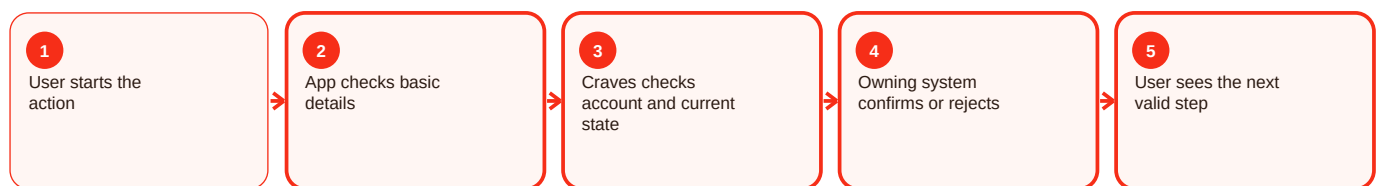

Common problem

User sees stale state. This usually means: Client cache/local state differs from backend. What to do: Reload from the owning service.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Chef order acceptance

Summary

This article explains what to do when you need help with chef order acceptance. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/user-chef-service/README.md](#); [apps/customer-web-next/src/components/chef/](#); [apps/customer-web-next/src/components/chef-mode/](#).

Subscriptions and plans


Summary

This article explains what to do when you need help with subscriptions and plans. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

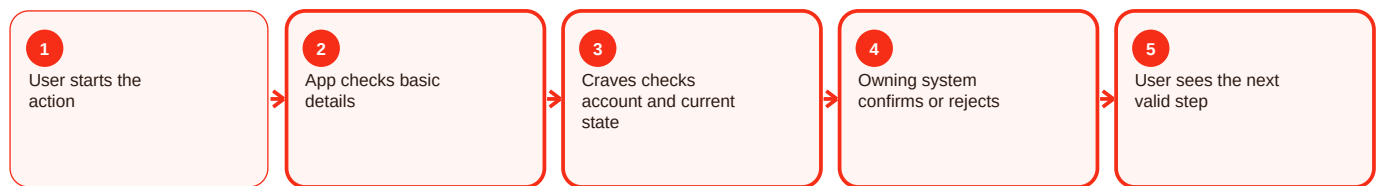

Common problem

Lifecycle action rejected. This usually means: Current subscription state does not allow it. What to do: Reload current state and use a supported transition.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Subscriptions and plans

Summary

This article explains what to do when you need help with subscriptions and plans. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/subscription-service/README.md](#); [apps/customer-web-next/src/components/plans/](#); [apps/customer-web-next/src/components/subscriptions/](#); commit 3225f7fa.

Pause a subscription


Summary

This article explains what to do when you need help with pause a subscription. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

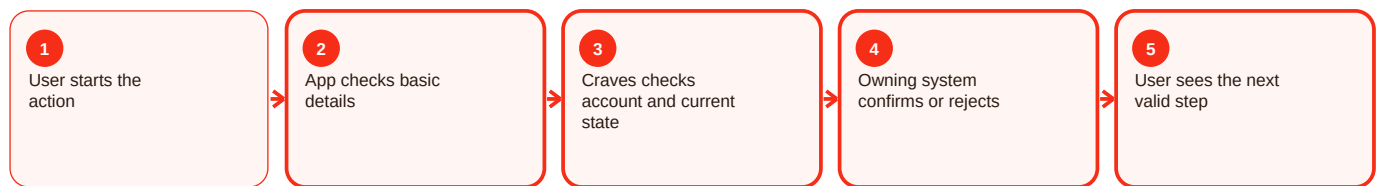

Common problem

Lifecycle action rejected. This usually means: Current subscription state does not allow it. What to do: Reload current state and use a supported transition.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Pause a subscription

Summary

This article explains what to do when you need help with pause a subscription. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/subscription-service/README.md](#); [apps/customer-web-next/src/components/plans/](#); [apps/customer-web-next/src/components/subscriptions/](#); commit 3225f7fa.

Cancel a subscription


Summary

This article explains what to do when you need help with cancel a subscription. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

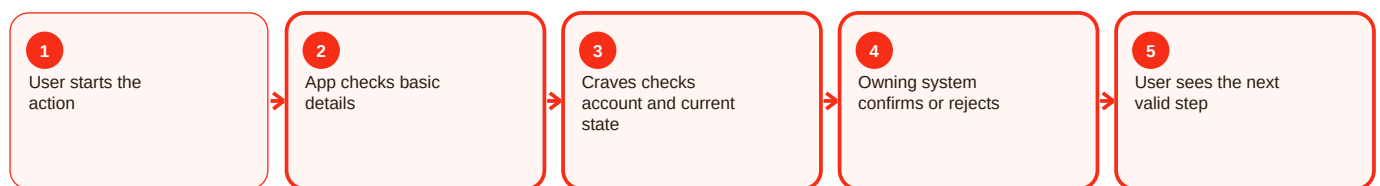

Common problem

Lifecycle action rejected. This usually means: Current subscription state does not allow it. What to do: Reload current state and use a supported transition.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Cancel a subscription

Summary

This article explains what to do when you need help with cancel a subscription. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/subscription-service/README.md](#); [apps/customer-web-next/src/components/plans/](#); [apps/customer-web-next/src/components/subscriptions/](#); commit 3225f7fa.

Sign out


Summary

This article explains what to do when you need help with sign out. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

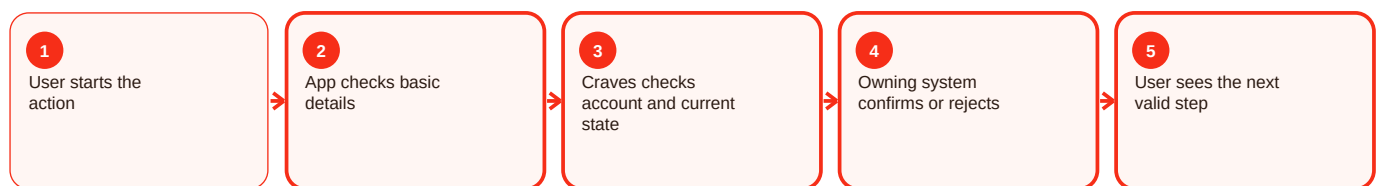

Common problem

Generic upstream error. This usually means: BFF rejected malformed/unexpected backend response. What to do: Use request ID and compare the current response contract.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Sign out

Summary

This article explains what to do when you need help with sign out. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/customer-web-next/README.md](#); [apps/customer-web-next/src/app/](#); [apps/customer-web-next/src/components/](#); [apps/customer-web-next/src/features/](#).

Page keeps loading


Summary

This article explains what to do when you need help with page keeps loading. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

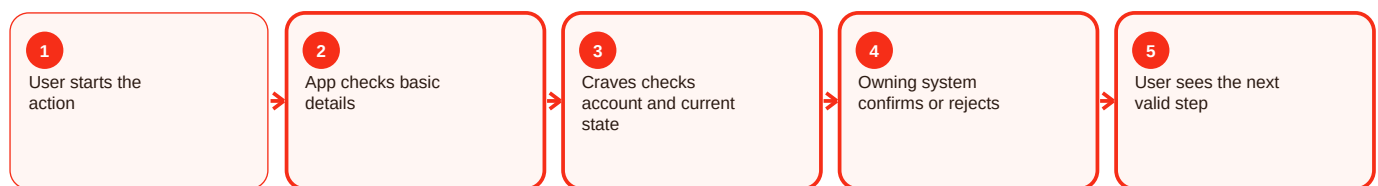

Common problem

Generic upstream error. This usually means: BFF rejected malformed/unexpected backend response. What to do: Use request ID and compare the current response contract.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Page keeps loading

Summary

This article explains what to do when you need help with page keeps loading. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/customer-web-next/README.md](#); [apps/customer-web-next/src/app/](#); [apps/customer-web-next/src/components/](#); [apps/customer-web-next/src/features/](#).

Generic error message


Summary

This article explains what to do when you need help with generic error message. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

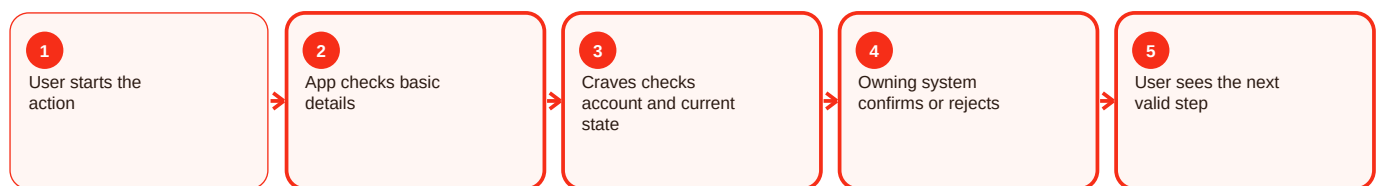

Common problem

401 Unauthorized. This usually means: Authentication is missing/expired/invalid. What to do: Use supported identity/refresh flow and capture request ID.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

Generic error message

Summary

This article explains what to do when you need help with generic error message. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [services/order-service/README.md](#); [services/notification-service/README.md](#); [apps/customer-web-next/README.md](#).

When to contact support


Summary

This article explains what to do when you need help with when to contact support. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

What to do

- Read the message on screen and note the time.
- Retry the supported action once after refreshing the current page/state.
- Confirm the expected account, address, order or subscription is selected.
- If the problem remains, capture the safe support details listed below.
- Support checks the owning service/gateway state and gives the user the next valid action.

Step-by-step flow

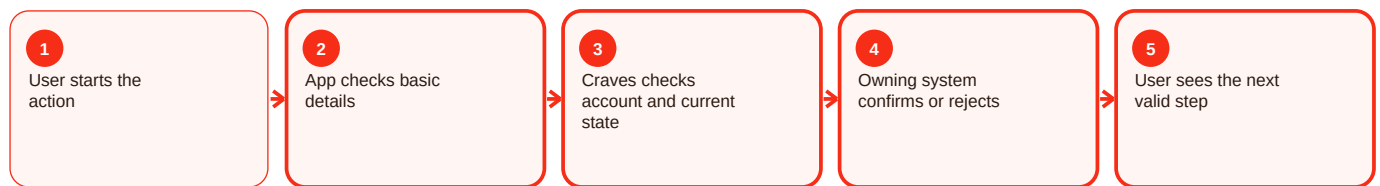

Common problem

Admin action denied. This usually means: Caller lacks admin role/product permission.
What to do: Use approved staff access process and least privilege.

Safety

Never send an OTP, password, access token, refresh token, full card number, CVV, UPI PIN, banking password or provider secret to support. Support can diagnose with time, safe IDs, the screen/message and a request/reference ID when available.

When to contact support

Summary

This article explains what to do when you need help with when to contact support. It uses simple steps first. The system checks happen behind the scenes, so the user should not need to understand API names or internal services to follow the guidance.

If it still does not work

- Check that the user is on the correct account and environment.
- Check the current record from the backend rather than trusting a stale screen.
- Use the request/reference ID and time to inspect the correct service or gateway.
- Check recent deployment/configuration changes only after user/state causes are ruled out.
- Escalate with facts: expected result, actual result, safe identifiers, time and request/correlation evidence.

How to confirm the fix

- Repeat the original user action from a refreshed screen.
- Confirm the expected state persists after reload.
- Confirm the same issue does not affect an equivalent test record when appropriate.
- Close the case only after the user-facing result and backend state agree.

Support note

The technical evidence for this area is maintained in the engineering documents. Source: [apps/admin/README.md](#); [apps/customer-web-next/src/features/admin/](#); [apps/customer-web-next/src/features/chef-review/](#); [infra/apim/README.md](#).

Operational checklist and documented gaps

Before making a change

- Confirm the intended actor and environment.
- Confirm the current authoritative state before changing anything.
- Capture HTTP status, stable error code and request/correlation ID without secrets.
- Validate the owning component health and required dependency/configuration.
- After the action, reload the state from the backend and confirm the expected result.

Repository gaps that must stay visible

- APIM README cites `infra/apim/craves-openapi.yaml`, but that literal artifact was not resolvable on main during this evidence snapshot.
- `customer-web-next` README names `azure-pipelines-customer-web-next.yml`, but that literal root path was not resolvable; deployment behavior described by the README is retained while trigger/variable details are not invented.
- Native mobile has strong milestone identity/API/CI evidence, but a clearly complete runnable React Native application was not established on the reviewed main snapshot.
- Legacy preview URLs prove historical deployment references rather than current production routing.
- Commercial values such as commissions, payout percentages, subscription pricing, catering thresholds and SLAs are not fabricated where source is silent.

Definition of done

A change is complete only when the intended behavior works, authorization still fails closed, authoritative data is correct, health/readiness are good, monitoring or correlation evidence is available, the rollback path remains valid, and the documentation has been updated if the contract or operating procedure changed.